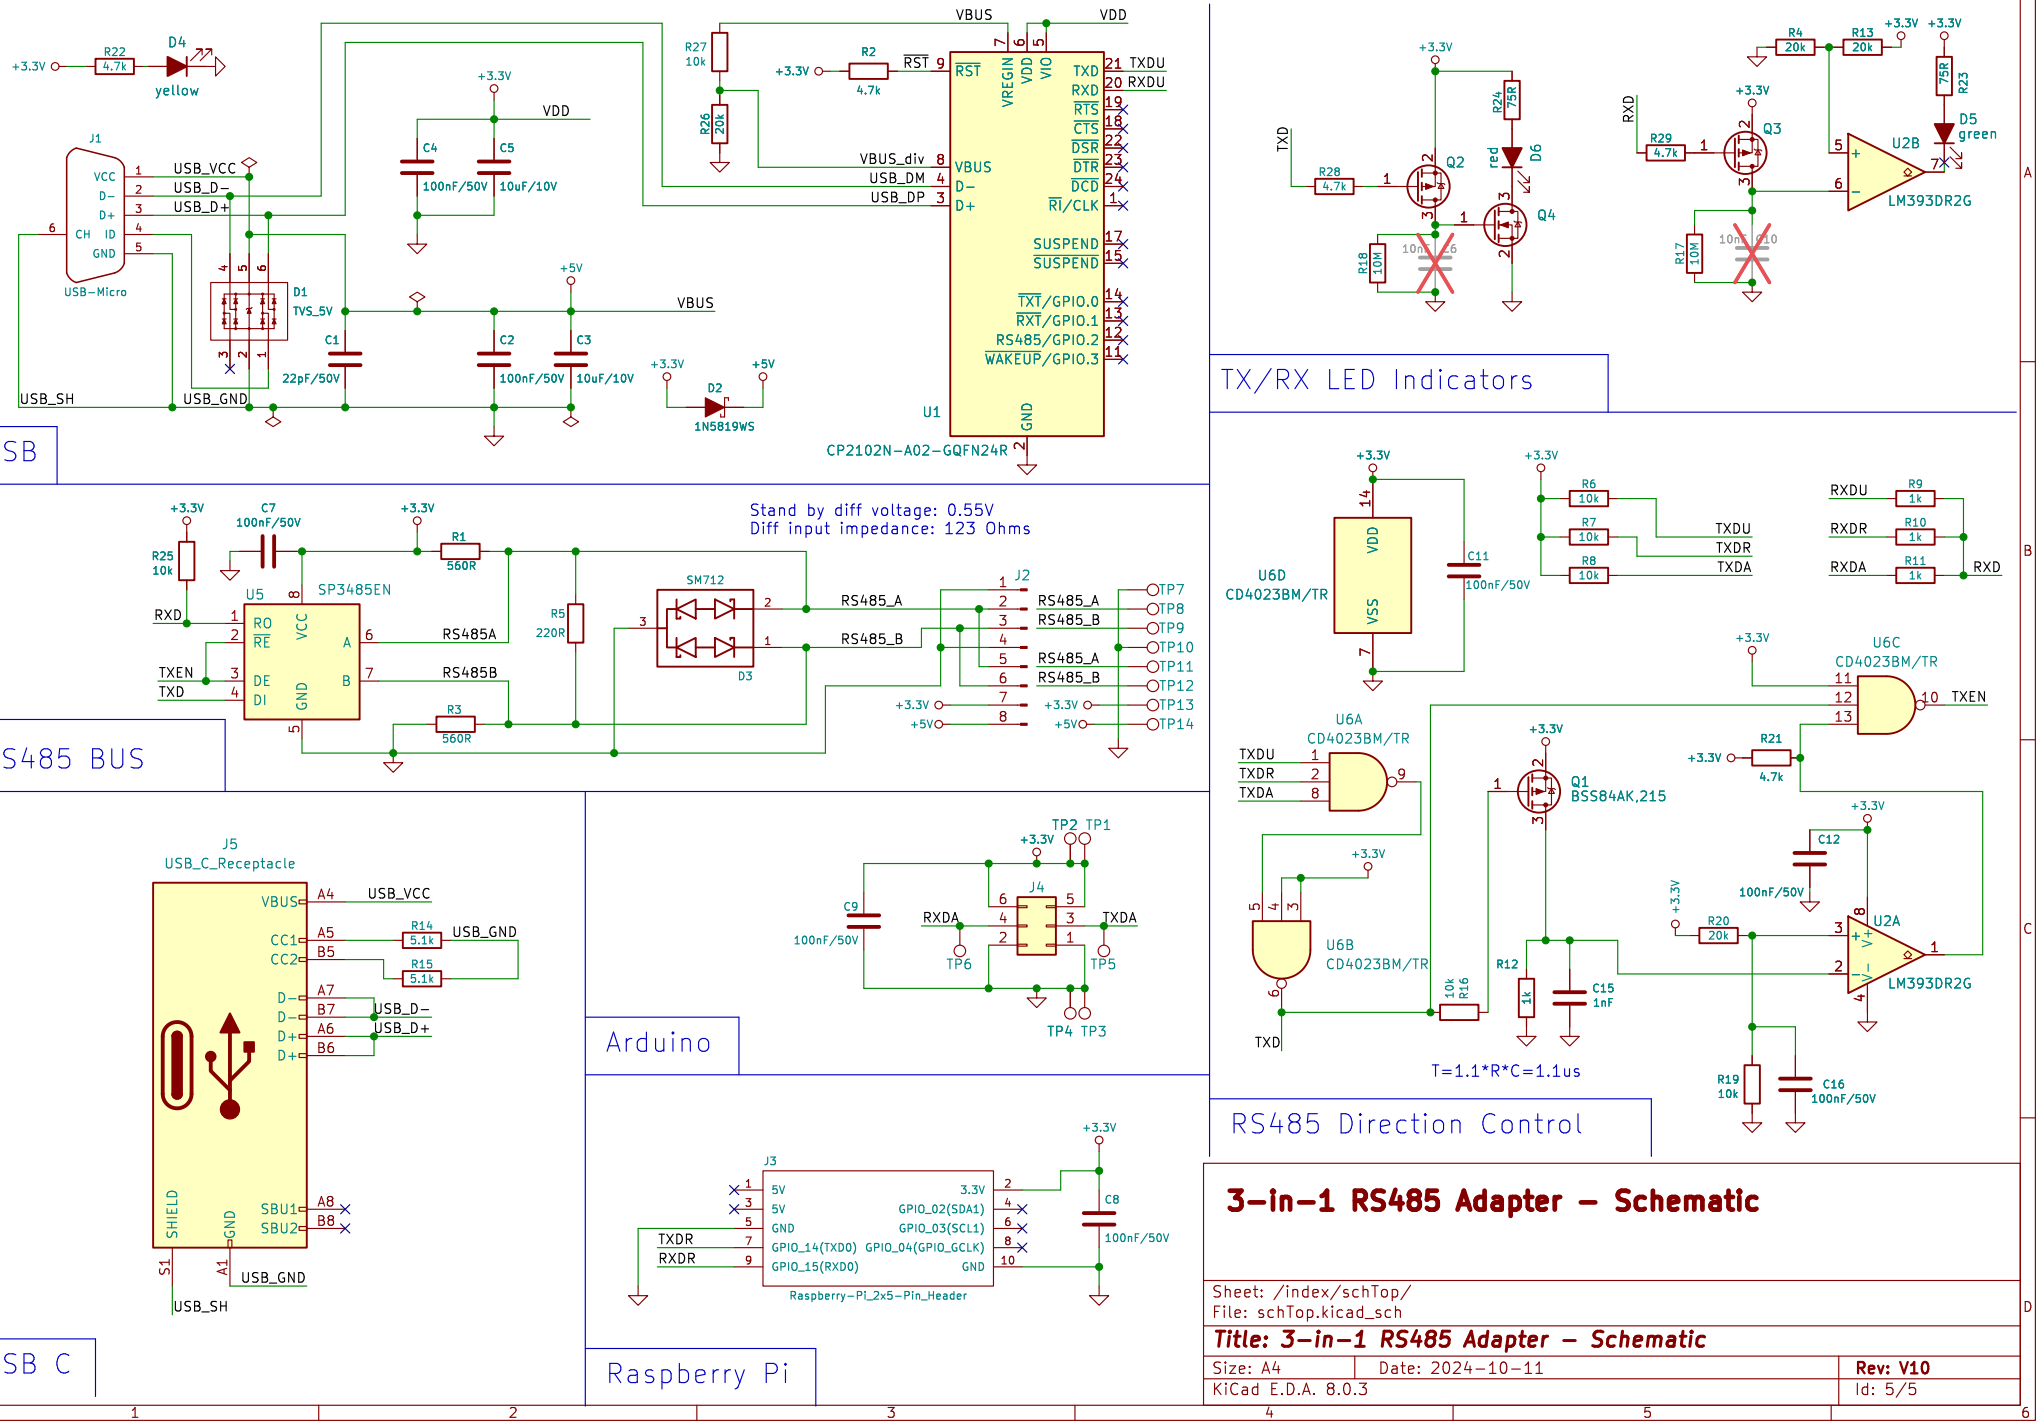

USB
RS485 BUS
USB C
Arduino
Raspberry Pi
TX/RX LED Indicators
RS485 Direction Control
Stand by diff voltage: 0.55V
Diff input impedance: 123 Ohms
T=1.1*R*C=1.1us
3-in-1 RS485 Adapter - Schematic
Sheet: /index/schTop/
File: schTop.kicad_sch
Title: 3-in-1 RS485 Adapter - Schematic
Size: A4
Date: 2024-10-11
Rev: V10
KiCad E.D.A. 8.0.3
Id: 5/5