

POWER PATH: PACK, FUSE, CHG/DSG FETs (BQ76922EVM topology), SERVO-RAIL SWITCH (TPS48111-Q1), SERVO HEADERS

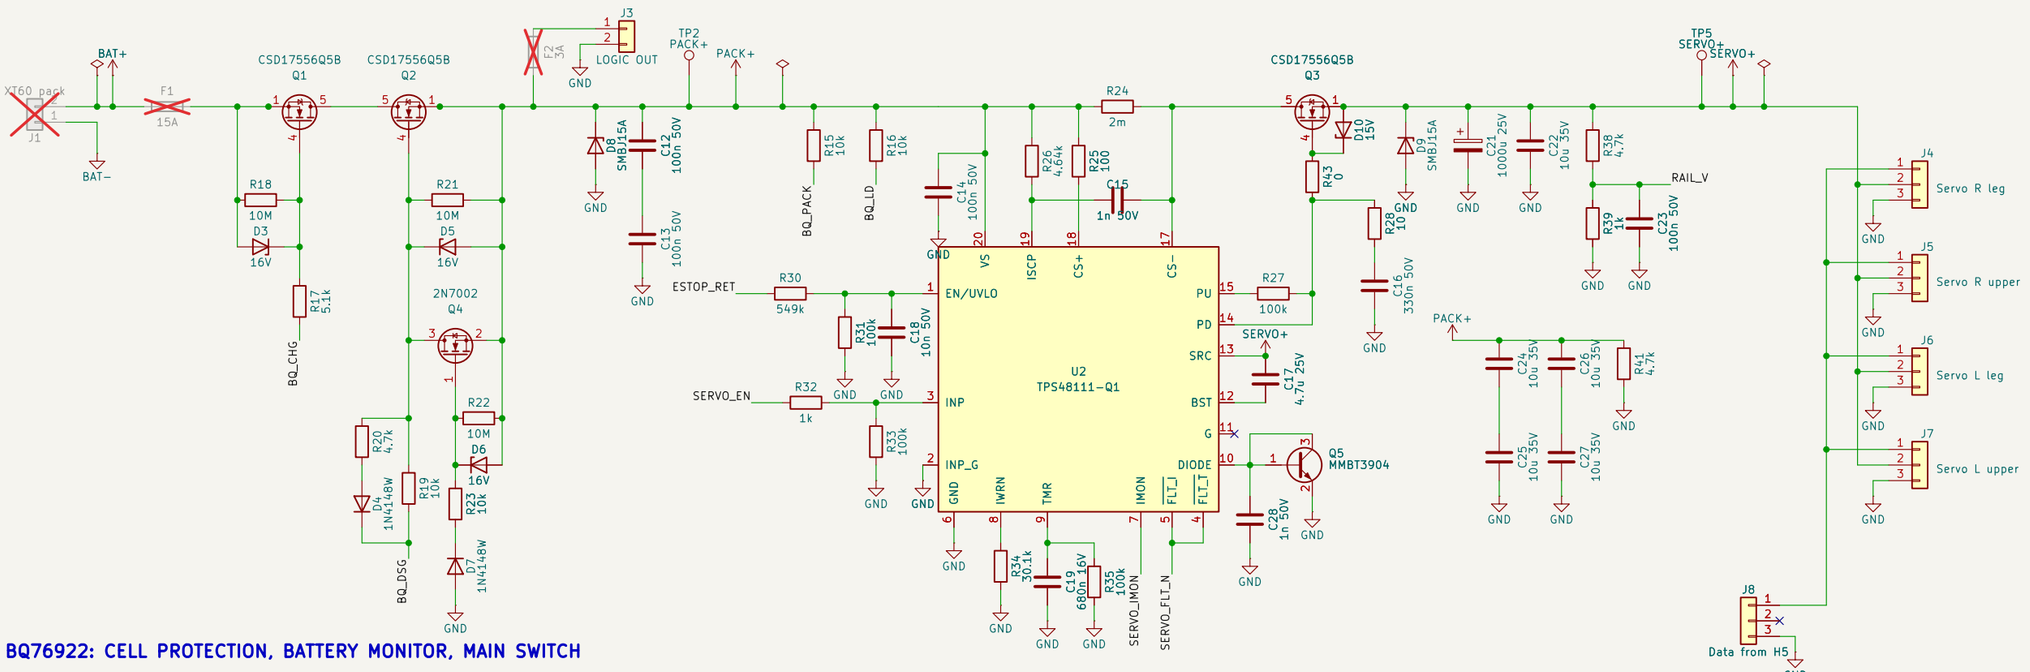

BQ76922: CELL PROTECTION, BATTERY MONITOR, MAIN SWITCH

CONTROL (to the ESP32), PULL-UPS, TEST POINTS, E-STOP

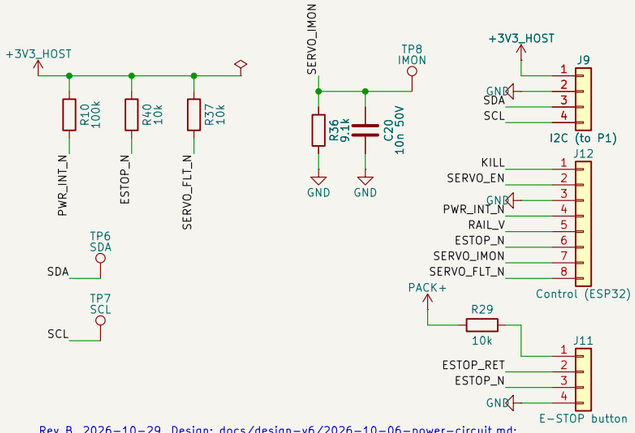

Rev B, 2026-10-29. Design: docs/design-v6/2026-10-06-power-circuit.md;
checks: docs/design-v6/2026-10-07-power-board-verification.md and the 2026-10-24 records
(full simulation, pin audit, layout review). J1, F1 and F2 are soldered by hand (DNP).
Kelvin-route SRP/SRN (R7, R8) to the pads of R1, and CS+, CS-, ISCP to R24. Q5 against Q3, RT1 by Q1/Q2.
Check against the real parts before ordering: XT60 polarity (J1), balance-lead order (J2),
servo-header orientation (J4-J8 must mate like the General Driver's H5: D V G).
The BQ76922 protects without the host only after its OTP is programmed (BAT 10-12 V).

BQ76922 protection and main switch; TPS48111-Q1 servo-rail E-stop switch
Design: docs/design-v6/2026-10-06-power-circuit.md

biped-robot

Sheet: /
File: power-board.kicad_sch

Title: Power board

Size: A3	Date: 2026-10-29	**Rev: B**
KiCad E.D.A. 10.0.6		Id: 1/1