



# Bluetooth Software API Reference Manual

---



This document contains the full API reference for the Silicon Labs Bluetooth Software, version 2.12.1.

The Blue Gecko family of the Silicon Labs' Bluetooth chipsets deliver a high performance, low energy and easy-to-use Bluetooth solution integrated into a small form factor package.

The ultra-low power operating modes and fast wake-up times of the Silicon Labs' energy friendly 32-bit MCUs, combined with the low transmit and receive power consumption of the Bluetooth radio, result in a solution optimized for battery powered applications.

# Table of Contents

<b>1. Data types</b>	<b>4</b>
<b>2. API Reference</b>	<b>5</b>
2.1 Coexistence interface (coex)	6
2.1.1 coex commands	6
2.1.2 coex enumerations	7
2.2 CTE Receiver (cte_receiver)	9
2.2.1 cte_receiver commands	9
2.2.2 cte_receiver events	12
2.3 CTE Transmitter (cte_transmitter)	14
2.3.1 cte_transmitter commands	14
2.4 Device Firmware Upgrade (dfu)	18
2.4.1 dfu commands	18
2.4.2 dfu events	22
2.5 Persistent Store (flash)	24
2.5.1 flash commands	24
2.6 Generic Attribute Profile (gatt)	28
2.6.1 gatt commands	28
2.6.2 gatt events	55
2.6.3 gatt enumerations	62
2.7 Generic Attribute Profile Server (gatt_server)	64
2.7.1 gatt_server commands	64
2.7.2 gatt_server events	73
2.7.3 gatt_server enumerations	78
2.8 Hardware (hardware)	79
2.8.1 hardware commands	79
2.8.2 hardware events	83
2.9 Connection management (le_connection)	84
2.9.1 le_connection commands	84
2.9.2 le_connection events	92
2.9.3 le_connection enumerations	97
2.10 Generic Access Profile (le_gap)	98
2.10.1 le_gap commands	98
2.10.2 le_gap events	146
2.10.3 le_gap enumerations	152
2.11 Security Manager (sm)	155
2.11.1 sm commands	155
2.11.2 sm events	172
2.11.3 sm enumerations	179
2.12 Periodic Advertising Synchronization (sync)	181
2.12.1 sync commands	181
2.12.2 sync events	184
2.12.3 sync enumerations	186

2.13 System (system)	188
2.13.1 system commands	188
2.13.2 system events	200
2.14 testing commands (test)	205
2.14.1 test commands	205
2.14.2 test events	208
2.14.3 test enumerations	208
2.15 User messaging (user)	210
2.15.1 user commands	210
2.15.2 user events	210
2.16 Error codes	211
<b>3. Document Revision History</b>	<b>220</b>

## 1. Data types

Data types used in the documentation are shown in the table below. Unless otherwise noted, all multi-byte fields are in little endian format.

**Table 1.1. Data types**

Name	Length	Description
errorcode	2 bytes	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>
int16	2 bytes	Signed 16-bit integer
bd_addr	6 bytes	Bluetooth address
uint16	2 bytes	Unsigned 16-bit integer
int32	4 bytes	Signed 32-bit integer
uint32	4 bytes	Unsigned 32-bit integer
link_id_t	2 bytes	Link ID
int8	1 byte	Signed 8-bit integer
uint8	1 byte	Unsigned 8-bit integer
uint8array	1 - 256 bytes	Variable length byte array. The first byte defines the length of the data that follows, 0 - 255 bytes.
ser_name	16 bytes	Service name, 16-byte array
dbm	1 byte	Signal strength
connection	1 byte	Connection handle
service	4 bytes	GATT service handle This value is normally received from the gatt_service event.
characteristic	2 bytes	GATT characteristic handle This value is normally received from the gatt_characteristic event.
descriptor	2 bytes	GATT characteristic descriptor handle
uuid	3 or 17 bytes	uint8array containing a 2 or 16 bytes Universal Unique Identifier (UUID)
att_errorcode	1 byte	Attribute protocol error code <ul style="list-style-type: none"><li>• <b>0</b>: No error</li><li>• <b>Non-zero</b>: See Bluetooth specification, Host volume, Attribute Protocol, Error Codes table.</li></ul>
att_opcode	1 byte	Attribute opcode which informs the procedure from which attribute the value was received
uuid_128	16 bytes	128-bit UUID
aes_key_128	16 bytes	128-bit AES Key

## 2. API Reference

This section describes all commands, enumerations, responses, events and errors. Commands with related enumerations, responses and events are grouped according to command classes.

### BGAPI Payload

The parameters of a BGAPI command, response or event are passed between the application and firmware in a payload. For example, a parameter of uint32 type uses 4 bytes of the payload space. A byte array parameter uses one byte to describe the length of the array and the actual data in array is copied into the remaining free payload space.

### Maximum BGAPI Payload Size

The maximum BGAPI payload size is 256 bytes for both NCP and SoC modes. When an application calls a BGAPI command, BGAPI checks the payload length and will return error code 0x018a (command\_too\_long) if the payload will cause an overflow.

### Deprecation Notice

Note that some commands, enumerations and events are marked as deprecated. The usage of those commands is not recommended anymore as they will be removed in the future releases.

### Sensitive Data Handling

Some commands in the Mesh classes read or write security-critical material. In Secure NCP applications the BGAPI communication between the host and the target must be encrypted, or the commands will return the error code 0x0a0e mismatched\_or\_insufficient\_security. This feature does not affect SoC or non-secure NCP applications.

## 2.1 Coexistence interface (coex)

Coexistence BGAPI class. Coexistence interface is enabled and initialized with `gecko_initCoexHAL()` function.

### 2.1.1 coex commands

#### 2.1.1.1 cmd\_coex\_get\_counters

This command is used to read coexistence statistic counters from the device. Response contains the list of uint32 type counter values. Counters in the list are in following order: low priority requested, high priority requested, low priority denied, high priority denied, low priority tx aborted, high priority tx aborted.

**Table 2.1. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x01	lolen	Minimum payload length
2	0x20	class	Message class: Coexistence interface
3	0x01	method	Message ID
4	uint8	reset	Reset counter values

**Table 2.2. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x03	lolen	Minimum payload length
2	0x20	class	Message class: Coexistence interface
3	0x01	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>
6	uint8array	counters	Variable length byte array. The first byte defines the length of the data that follows, 0 - 255 bytes.

### BGLIB C API

```
/* Function */
struct gecko_msg_coex_get_counters_rsp_t *gecko_cmd_coex_get_counters(uint8 reset);

/* Response id */
gecko_rsp_coex_get_counters_id

/* Response structure */
struct gecko_msg_coex_get_counters_rsp_t
{
    uint16 result;
    uint8array counters;
};
```

### 2.1.1.2 cmd\_coex\_set\_options

This command is used to configure coexistence options at runtime.

**Table 2.3. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x08	lolen	Minimum payload length
2	0x20	class	Message class: Coexistence interface
3	0x00	method	Message ID
4-7	uint32	<a href="#">mask</a>	Mask defines which coexistence options are changed.
8-11	uint32	<a href="#">options</a>	Value of options to be changed. This parameter is used together with mask parameter.

**Table 2.4. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x20	class	Message class: Coexistence interface
3	0x00	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```
/* Function */
struct gecko_msg_coex_set_options_rsp_t *gecko_cmd_coex_set_options(uint32 mask, uint32 options);

/* Response id */
gecko_rsp_coex_set_options_id

/* Response structure */
struct gecko_msg_coex_set_options_rsp_t
{
    uint16 result;
};
```

### 2.1.2 coex enumerations

### 2.1.2.1 enum\_coex\_option

Coexistence configuration options

**Table 2.5. Enumerations**

Value	Name	Description
256	coex_option_enable	Enable coexistence feature
1024	coex_option_tx_abort	Abort transmission if grant is denied
2048	coex_option_high_priority	Enable priority signal



## 2.2 CTE Receiver (cte\_receiver)

Commands and events in this class can be used to manage Constant Tone Extension (CTE) receiving.

CTE feature is only supported by specific devices. Commands from this class will return `bg_err_not_supported` on devices that do not support CTE.

### 2.2.1 cte\_receiver commands

#### 2.2.1.1 cmd\_cte\_receiver\_clear\_dtm\_parameters

This command can be used to clear CTE related parameters that were previously set for LE receiver test. Default values will be re-stored for these parameters.

Table 2.6. Command

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x00	lolen	Minimum payload length
2	0x45	class	Message class: CTE Receiver
3	0x06	method	Message ID

Table 2.7. Response

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x45	class	Message class: CTE Receiver
3	0x06	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

## BGLIB C API

```
/* Function */
struct gecko_msg_cte_receiver_clear_dtm_parameters_rsp_t *gecko_cmd_cte_receiver_clear_dtm_parameters();

/* Response id */
gecko_rsp_cte_receiver_clear_dtm_parameters_id

/* Response structure */
struct gecko_msg_cte_receiver_clear_dtm_parameters_rsp_t
{
    uint16 result;
};
```

### 2.2.1.2 cmd\_cte\_receiver\_set\_dtm\_parameters

This command can be used to set CTE related parameters of LE receiver test.

**Table 2.8. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x04	lolen	Minimum payload length
2	0x45	class	Message class: CTE Receiver
3	0x05	method	Message ID
4	uint8	cte_length	Expected length of the Constant Tone Extension in 8 us units
5	uint8	cte_type	Expected CTE type <ul style="list-style-type: none"> <li>• <b>0</b>: Expect AoA CTE</li> <li>• <b>1</b>: Expect AoD CTE with 1 us slots</li> <li>• <b>2</b>: Expect AoD CTE with 2 us slots</li> </ul>
6	uint8	slot_durations	Slot durations <ul style="list-style-type: none"> <li>• <b>1</b>: Switching and sampling slots are 1 us each</li> <li>• <b>2</b>: Switching and sampling slots are 2 us each</li> </ul>
7	uint8array	switching_pattern	Antenna switching pattern

**Table 2.9. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x45	class	Message class: CTE Receiver
3	0x05	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_cte_receiver_set_dtm_parameters_rsp_t *gecko_cmd_cte_receiver_set_dtm_parameters(uint8
cte_length, uint8 cte_type, uint8 slot_durations, uint8 switching_pattern_len, const uint8
*switching_pattern_data);

/* Response id */
gecko_rsp_cte_receiver_set_dtm_parameters_id

/* Response structure */
struct gecko_msg_cte_receiver_set_dtm_parameters_rsp_t
{
    uint16 result;
};

```

### 2.2.1.3 cmd\_cte\_receiver\_start\_iq\_sampling

This command can be used to start IQ samplings on a connection.

**Table 2.10. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x07	lolen	Minimum payload length
2	0x45	class	Message class: CTE Receiver
3	0x01	method	Message ID
4	uint8	connection	Connection handle
5-6	uint16	interval	Measurement interval <ul style="list-style-type: none"> <li>• <b>0</b>: No interval. The request is initiated only once.</li> <li>• <b>Other values N</b>: Initiate the request every N-th connection events</li> </ul>
7	uint8	cte_length	Minimum length of the CTE being requested in 8 us units
8	uint8	cte_type	Requested CTE type <ul style="list-style-type: none"> <li>• <b>0</b>: AoA CTE</li> <li>• <b>1</b>: AoD CTE with 1 us slots</li> <li>• <b>2</b>: AoD CTE with 2 us slots</li> </ul>
9	uint8	slot_durations	Slot durations <ul style="list-style-type: none"> <li>• <b>1</b>: Switching and sampling slots are 1 us each</li> <li>• <b>2</b>: Switching and sampling slots are 2 us each</li> </ul>
10	uint8array	switching_pattern	Antenna switching pattern

**Table 2.11. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x45	class	Message class: CTE Receiver
3	0x01	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_cte_receiver_start_iq_sampling_rsp_t *gecko_cmd_cte_receiver_start_iq_sampling(uint8
connection, uint16 interval, uint8 cte_length, uint8 cte_type, uint8 slot_durations, uint8
switching_pattern_len, const uint8 *switching_pattern_data);

/* Response id */
gecko_rsp_cte_receiver_start_iq_sampling_id

/* Response structure */
struct gecko_msg_cte_receiver_start_iq_sampling_rsp_t

```

```
{
    uint16 result;
};
```

**Table 2.12. Events Generated**

Event	Description
<a href="#">cte_receiver_iq_report</a>	Triggered when IQ samples have been received.

#### 2.2.1.4 cmd\_cte\_receiver\_stop\_iq\_sampling

This command can be used to stop the IQ sampling on a connection.

**Table 2.13. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x01	lolen	Minimum payload length
2	0x45	class	Message class: CTE Receiver
3	0x02	method	Message ID
4	uint8	connection	Connection handle

**Table 2.14. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x45	class	Message class: CTE Receiver
3	0x02	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```
/* Function */
struct gecko_msg_cte_receiver_stop_iq_sampling_rsp_t *gecko_cmd_cte_receiver_stop_iq_sampling(uint8
connection);

/* Response id */
gecko_rsp_cte_receiver_stop_iq_sampling_id

/* Response structure */
struct gecko_msg_cte_receiver_stop_iq_sampling_rsp_t
{
    uint16 result;
};
```

#### 2.2.2 cte\_receiver events

### 2.2.2.1 evt\_cte\_receiver\_iq\_report

IQ samples report from connection or connectionless CTE packets.

**Table 2.15. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x07	lolen	Minimum payload length
2	0x45	class	Message class: CTE Receiver
3	0x00	method	Message ID
4-5	uint16	status	Status of CTE IQ sampling
6	uint8	packet_type	CTE packet type <ul style="list-style-type: none"><li>• <b>0</b>: Connection</li><li>• <b>1</b>: Connectionless</li><li>• <b>2</b>: DTM. This value is possible only in some testing circumstances</li></ul>
7	uint8	handle	Connection handle or periodic advertising synchronization handle
8	int8	rssi	RSSI in the received CTE packet. Unit: dBm
9	uint8	channel	The channel on which the CTE packet was received
10	uint8array	samples	IQ samples in received CTE packet

### C Functions

```
/* Event id */
gecko_evt_cte_receiver_iq_report_id

/* Event structure */
struct gecko_msg_cte_receiver_iq_report_evt_t
{
    uint16 status;
    uint8 packet_type;
    uint8 handle;
    int8 rssi;
    uint8 channel;
    uint8array samples;
};
```

## 2.3 CTE Transmitter (cte\_transmitter)

Commands and events in this class can be used to manage Constant Tone Extension (CTE) transmission.

CTE feature is only supported by specific devices. Commands from this class will return `bg_err_not_supported` on devices that do not support CTE.

### 2.3.1 cte\_transmitter commands

#### 2.3.1.1 cmd\_cte\_transmitter\_clear\_dtm\_parameters

This command can be used to clear CTE related parameters that were previously set for LE transmitter test. Default values will be re-stored for these parameters.

Table 2.16. Command

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x00	lolen	Minimum payload length
2	0x44	class	Message class: CTE Transmitter
3	0x05	method	Message ID

Table 2.17. Response

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x44	class	Message class: CTE Transmitter
3	0x05	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

## BGLIB C API

```
/* Function */
struct gecko_msg_cte_transmitter_clear_dtm_parameters_rsp_t *gecko_cmd_cte_transmitter_clear_dtm_parameters();

/* Response id */
gecko_rsp_cte_transmitter_clear_dtm_parameters_id

/* Response structure */
struct gecko_msg_cte_transmitter_clear_dtm_parameters_rsp_t
{
    uint16 result;
};
```

### 2.3.1.2 cmd\_cte\_transmitter\_disable\_cte\_response

This command can be used to disable CTE responses on a connection.

**Table 2.18. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x01	lolen	Minimum payload length
2	0x44	class	Message class: CTE Transmitter
3	0x01	method	Message ID
4	uint8	connection	Connection handle

**Table 2.19. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x44	class	Message class: CTE Transmitter
3	0x01	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```
/* Function */
struct                                gecko_msg_cte_transmitter_disable_cte_response_rsp_t
*gecko_cmd_cte_transmitter_disable_cte_response(uint8 connection);

/* Response id */
gecko_rsp_cte_transmitter_disable_cte_response_id

/* Response structure */
struct gecko_msg_cte_transmitter_disable_cte_response_rsp_t
{
    uint16 result;
};
```

### 2.3.1.3 cmd\_cte\_transmitter\_enable\_cte\_response

This command can be used to enable CTE responses on a connection.

**Table 2.20. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x03	lolen	Minimum payload length
2	0x44	class	Message class: CTE Transmitter
3	0x00	method	Message ID
4	uint8	connection	Connection handle
5	uint8	cte_types	CTE types. Bitmask of followings, <ul style="list-style-type: none"> <li>• <b>Bit 0:</b> AoA CTE response</li> <li>• <b>Bit 1:</b> AoD CTE response with 1us slots</li> <li>• <b>Bit 2:</b> AoD CTE response with 2us slots</li> </ul>
6	uint8array	switching_pattern	Antenna switching pattern

**Table 2.21. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x44	class	Message class: CTE Transmitter
3	0x00	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0:</b> success</li> <li>• <b>Non-zero:</b> an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct          gecko_msg_cte_transmitter_enable_cte_response_rsp_t
*gecko_cmd_cte_transmitter_enable_cte_response(uint8 connection, uint8 cte_types, uint8 switching_pattern_len,
const uint8 *switching_pattern_data);

/* Response id */
gecko_rsp_cte_transmitter_enable_cte_response_id

/* Response structure */
struct gecko_msg_cte_transmitter_enable_cte_response_rsp_t
{
    uint16 result;
};

```



### 2.3.1.4 cmd\_cte\_transmitter\_set\_dtm\_parameters

This command can be used to set CTE related parameters of LE transmitter test.

**Table 2.22. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x03	lolen	Minimum payload length
2	0x44	class	Message class: CTE Transmitter
3	0x04	method	Message ID
4	uint8	cte_length	Expected length of the Constant Tone Extension in 8 us units
5	uint8	cte_type	CTE type <ul style="list-style-type: none"> <li>• <b>0</b>: AoA CTE</li> <li>• <b>1</b>: AoD CTE with 1 us slots</li> <li>• <b>2</b>: AoD CTE with 2 us slots</li> </ul>
6	uint8array	switching_pattern	Antenna switching pattern

**Table 2.23. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x44	class	Message class: CTE Transmitter
3	0x04	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_cte_transmitter_set_dtm_parameters_rsp_t *gecko_cmd_cte_transmitter_set_dtm_parameters(uint8
cte_length, uint8 cte_type, uint8 switching_pattern_len, const uint8 *switching_pattern_data);

/* Response id */
gecko_rsp_cte_transmitter_set_dtm_parameters_id

/* Response structure */
struct gecko_msg_cte_transmitter_set_dtm_parameters_rsp_t
{
    uint16 result;
};

```

## 2.4 Device Firmware Upgrade (dfu)

These commands and events are related to controlling firmware update over the configured host interface and are available only when the device has been booted into DFU mode. **The DFU process:**

1. Boot device to DFU mode with [DFU reset command](#)
2. Wait for [DFU boot event](#)
3. Send command [Flash Set Address](#) to start the firmware update
4. Upload the firmware with [Flash Upload commands](#) until all the data has been uploaded
5. Send when all the data has been uploaded
6. Finalize the DFU firmware update with [Reset command](#).

DFU mode is using UART baudrate from hardware configuration of firmware. Default baudrate 115200 is used if firmware is missing or firmware content does not match with CRC checksum.

### 2.4.1 dfu commands

### 2.4.1.1 cmd\_dfu\_flash\_set\_address

After re-booting the local device into DFU mode, this command can be used to define the starting address on the flash to where the new firmware will be written in.

**Table 2.24. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x04	lolen	Minimum payload length
2	0x00	class	Message class: Device Firmware Upgrade
3	0x01	method	Message ID
4-7	uint32	address	The offset in the flash where the new firmware is uploaded to. Always use the value 0x00000000.

**Table 2.25. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x00	class	Message class: Device Firmware Upgrade
3	0x01	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```
/* Function */
struct gecko_msg_dfu_flash_set_address_rsp_t *gecko_cmd_dfu_flash_set_address(uint32 address);

/* Response id */
gecko_rsp_dfu_flash_set_address_id

/* Response structure */
struct gecko_msg_dfu_flash_set_address_rsp_t
{
    uint16 result;
};
```

### 2.4.1.2 cmd\_dfu\_flash\_upload

This command can be used to upload the whole firmware image file into the Bluetooth device. The passed data length must be a multiple of 4 bytes. As the BGAPI command payload size is limited, multiple commands need to be issued one after the other until the whole .bin firmware image file is uploaded to the device. The next address of the flash sector in memory to write to is automatically updated by the bootloader after each individual command.

**Table 2.26. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x01	lolen	Minimum payload length
2	0x00	class	Message class: Device Firmware Upgrade
3	0x02	method	Message ID
4	uint8array	data	An array of data which will be written onto the flash.

**Table 2.27. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x00	class	Message class: Device Firmware Upgrade
3	0x02	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_dfu_flash_upload_rsp_t *gecko_cmd_dfu_flash_upload(uint8 data_len, const uint8 *data_data);

/* Response id */
gecko_rsp_dfu_flash_upload_id

/* Response structure */
struct gecko_msg_dfu_flash_upload_rsp_t
{
    uint16 result;
};

```

### 2.4.1.3 cmd\_dfu\_flash\_upload\_finish

This command can be used to tell to the device that the DFU file has been fully uploaded. To return the device back to normal mode the command [DFU Reset](#) must be issued next.

**Table 2.28. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x00	lolen	Minimum payload length
2	0x00	class	Message class: Device Firmware Upgrade
3	0x03	method	Message ID

**Table 2.29. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x00	class	Message class: Device Firmware Upgrade
3	0x03	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```
/* Function */
struct gecko_msg_dfu_flash_upload_finish_rsp_t *gecko_cmd_dfu_flash_upload_finish();

/* Response id */
gecko_rsp_dfu_flash_upload_finish_id

/* Response structure */
struct gecko_msg_dfu_flash_upload_finish_rsp_t
{
    uint16 result;
};
```

#### 2.4.1.4 cmd\_dfu\_reset

This command can be used to reset the system. This command does not have a response, but it triggers one of the boot events (normal reset or boot to DFU mode) after re-boot.

**Table 2.30. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x01	lolen	Minimum payload length
2	0x00	class	Message class: Device Firmware Upgrade
3	0x00	method	Message ID
4	uint8	dfu	Boot mode: <ul style="list-style-type: none"><li>• <b>0</b>: Normal reset</li><li>• <b>1</b>: Boot to UART DFU mode</li><li>• <b>2</b>: Boot to OTA DFU mode</li></ul>

#### BGLIB C API

```
/* Function */  
void *gecko_cmd_dfu_reset(uint8 dfu);  
  
/* Command does not have a response */
```

**Table 2.31. Events Generated**

Event	Description
<a href="#">system_boot</a>	Sent after the device has booted into normal mode
<a href="#">dfu_boot</a>	Sent after the device has booted into UART DFU mode

#### 2.4.2 dfu events

### 2.4.2.1 evt\_dfu\_boot

This event indicates that the device booted into DFU mode, and is now ready to receive commands related to device firmware upgrade (DFU).

**Table 2.32. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x04	lolen	Minimum payload length
2	0x00	class	Message class: Device Firmware Upgrade
3	0x00	method	Message ID
4-7	uint32	version	The version of the bootloader

### C Functions

```
/* Event id */
gecko_evt_dfu_boot_id

/* Event structure */
struct gecko_msg_dfu_boot_evt_t
{
    uint32 version;
};
```

### 2.4.2.2 evt\_dfu\_boot\_failure

This event indicates that there has been error in bootloader, which prevents the device from booting.

**Table 2.33. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x02	lolen	Minimum payload length
2	0x00	class	Message class: Device Firmware Upgrade
3	0x01	method	Message ID
4-5	uint16	reason	The reason for boot failure, refer to the <a href="#">Error codes</a>

### C Functions

```
/* Event id */
gecko_evt_dfu_boot_failure_id

/* Event structure */
struct gecko_msg_dfu_boot_failure_evt_t
{
    uint16 reason;
};
```

## 2.5 Persistent Store (flash)

Persistent Store commands can be used to manage user data in PS keys in the flash memory of the Bluetooth device. User data stored within the flash memory is persistent across reset and power cycling of the device. The persistent store size is 2048 bytes. As Bluetooth bondings are also stored in this area, the space available for user data additionally depends on the number of bondings the device has at the time. The size of a Bluetooth bonding is around 150 bytes.

The maximum user data size associated to a PS key is 56 bytes.

### 2.5.1 flash commands

#### 2.5.1.1 cmd\_flash\_ps\_erase

This command can be used to erase a single PS key and its value from the persistent store.

**Table 2.34. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x02	lolen	Minimum payload length
2	0x0d	class	Message class: Persistent Store
3	0x04	method	Message ID
4-5	uint16	key	PS key to erase

**Table 2.35. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x0d	class	Message class: Persistent Store
3	0x04	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0:</b> success</li> <li>• <b>Non-zero:</b> an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_flash_ps_erase_rsp_t *gecko_cmd_flash_ps_erase(uint16 key);

/* Response id */
gecko_rsp_flash_ps_erase_id

/* Response structure */
struct gecko_msg_flash_ps_erase_rsp_t
{
    uint16 result;
};

```



### 2.5.1.2 cmd\_flash\_ps\_erase\_all

This command can be used to erase all PS keys and their corresponding values.

**Table 2.36. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x00	lolen	Minimum payload length
2	0x0d	class	Message class: Persistent Store
3	0x01	method	Message ID

**Table 2.37. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x0d	class	Message class: Persistent Store
3	0x01	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

#### BGLIB C API

```
/* Function */
struct gecko_msg_flash_ps_erase_all_rsp_t *gecko_cmd_flash_ps_erase_all();

/* Response id */
gecko_rsp_flash_ps_erase_all_id

/* Response structure */
struct gecko_msg_flash_ps_erase_all_rsp_t
{
    uint16 result;
};
```

### 2.5.1.3 cmd\_flash\_ps\_load

This command can be used for retrieving the value of the specified PS key.

**Table 2.38. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x02	lolen	Minimum payload length
2	0x0d	class	Message class: Persistent Store
3	0x03	method	Message ID
4-5	uint16	key	PS key of the value to be retrieved

**Table 2.39. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x03	lolen	Minimum payload length
2	0x0d	class	Message class: Persistent Store
3	0x03	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>
6	uint8array	value	The returned value of the specified PS key.

### BGLIB C API

```
/* Function */
struct gecko_msg_flash_ps_load_rsp_t *gecko_cmd_flash_ps_load(uint16 key);

/* Response id */
gecko_rsp_flash_ps_load_id

/* Response structure */
struct gecko_msg_flash_ps_load_rsp_t
{
    uint16 result;,
    uint8array value;
};
```

### 2.5.1.4 cmd\_flash\_ps\_save

This command can be used to store a value into the specified PS key. Allowed PS keys are in range from 0x4000 to 0x407F. At most 56 bytes user data can be stored in one PS key. Error code 0x018a (command\_too\_long) will be returned if more than 56 bytes data is passed in.

**Table 2.40. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x03	lolen	Minimum payload length
2	0x0d	class	Message class: Persistent Store
3	0x02	method	Message ID
4-5	uint16	key	PS key
6	uint8array	value	Value to store into the specified PS key.

**Table 2.41. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x0d	class	Message class: Persistent Store
3	0x02	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```
/* Function */
struct gecko_msg_flash_ps_save_rsp_t *gecko_cmd_flash_ps_save(uint16 key, uint8 value_len, const uint8
*value_data);

/* Response id */
gecko_rsp_flash_ps_save_id

/* Response structure */
struct gecko_msg_flash_ps_save_rsp_t
{
    uint16 result;
};
```

## 2.6 Generic Attribute Profile (gatt)

The commands and events in this class can be used to browse and manage attributes in a remote GATT server.

### 2.6.1 gatt commands

### 2.6.1.1 cmd\_gatt\_discover\_characteristics

This command can be used to discover all characteristics of the defined GATT service from a remote GATT database. This command generates a unique `gatt_characteristic` event for every discovered characteristic. Received `gatt_procedure_completed` event indicates that this GATT procedure has successfully completed or failed with error.

**Table 2.42. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x05	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x03	method	Message ID
4	uint8	connection	Connection handle
5-8	uint32	service	GATT service handle This value is normally received from the <code>gatt_service</code> event.

**Table 2.43. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x03	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_gatt_discover_characteristics_rsp_t *gecko_cmd_gatt_discover_characteristics(uint8
connection, uint32 service);

/* Response id */
gecko_rsp_gatt_discover_characteristics_id

/* Response structure */
struct gecko_msg_gatt_discover_characteristics_rsp_t
{
    uint16 result;
};

```

**Table 2.44. Events Generated**

Event	Description
<a href="#">gatt_characteristic</a>	Discovered characteristic from remote GATT database.
<a href="#">gatt_procedure_completed</a>	Procedure has been successfully completed or failed with error.

### 2.6.1.2 cmd\_gatt\_discover\_characteristics\_by\_uuid

This command can be used to discover all the characteristics of the specified GATT service in a remote GATT database having the specified UUID. This command generates a unique gatt\_characteristic event for every discovered characteristic having the specified UUID. Received [gatt\\_procedure\\_completed](#) event indicates that this GATT procedure has successfully completed or failed with error.

**Table 2.45. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x06	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x04	method	Message ID
4	uint8	connection	Connection handle
5-8	uint32	service	GATT service handle This value is normally received from the gatt_service event.
9	uint8array	uuid	Characteristic UUID

**Table 2.46. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x04	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct                                gecko_msg_gatt_discover_characteristics_by_uuid_rsp_t
*gecko_cmd_gatt_discover_characteristics_by_uuid(uint8 connection, uint32 service, uint8 uuid_len, const uint8
*uuid_data);

/* Response id */
gecko_rsp_gatt_discover_characteristics_by_uuid_id

/* Response structure */
struct gecko_msg_gatt_discover_characteristics_by_uuid_rsp_t
{
    uint16 result;
};

```

**Table 2.47. Events Generated**

Event	Description
<a href="#">gatt_characteristic</a>	Discovered characteristic from remote GATT database.

Event	Description
<a href="#">gatt_procedure_completed</a>	Procedure has been successfully completed or failed with error.

### 2.6.1.3 cmd\_gatt\_discover\_descriptors

This command can be used to discover all the descriptors of the specified remote GATT characteristics in a remote GATT database. This command generates a unique gatt\_descriptor event for every discovered descriptor. Received [gatt\\_procedure\\_completed](#) event indicates that this GATT procedure has successfully completed or failed with error.

**Table 2.48. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x03	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x06	method	Message ID
4	uint8	connection	Connection handle
5-6	uint16	characteristic	GATT characteristic handle This value is normally received from the gatt_characteristic event.

**Table 2.49. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x06	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_gatt_discover_descriptors_rsp_t *gecko_cmd_gatt_discover_descriptors(uint8 connection, uint16
characteristic);

/* Response id */
gecko_rsp_gatt_discover_descriptors_id

/* Response structure */
struct gecko_msg_gatt_discover_descriptors_rsp_t
{
    uint16 result;
};

```

**Table 2.50. Events Generated**

Event	Description
<a href="#">gatt_descriptor</a>	Discovered descriptor from remote GATT database.
<a href="#">gatt_procedure_completed</a>	Procedure has been successfully completed or failed with error.



### 2.6.1.4 cmd\_gatt\_discover\_primary\_services

This command can be used to discover all the primary services of a remote GATT database. This command generates a unique `gatt_service` event for every discovered primary service. Received `gatt_procedure_completed` event indicates that this GATT procedure has successfully completed or failed with error.

**Table 2.51. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x01	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x01	method	Message ID
4	uint8	connection	Connection handle

**Table 2.52. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x01	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```
/* Function */
struct gecko_msg_gatt_discover_primary_services_rsp_t *gecko_cmd_gatt_discover_primary_services(uint8
connection);

/* Response id */
gecko_rsp_gatt_discover_primary_services_id

/* Response structure */
struct gecko_msg_gatt_discover_primary_services_rsp_t
{
    uint16 result;
};
```

**Table 2.53. Events Generated**

Event	Description
<a href="#">gatt_service</a>	Discovered service from remote GATT database
<a href="#">gatt_procedure_completed</a>	Procedure has been successfully completed or failed with error.

### 2.6.1.5 cmd\_gatt\_discover\_primary\_services\_by\_uuid

This command can be used to discover primary services with the specified UUID in a remote GATT database. This command generates unique `gatt_service` event for every discovered primary service. Received `gatt_procedure_completed` event indicates that this GATT procedure has successfully completed or failed with error.

**Table 2.54. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x02	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x02	method	Message ID
4	uint8	connection	Connection handle
5	uint8array	uuid	Service UUID

**Table 2.55. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x02	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct                                gecko_msg_gatt_discover_primary_services_by_uuid_rsp_t
*gecko_cmd_gatt_discover_primary_services_by_uuid(uint8 connection, uint8 uuid_len, const uint8 *uuid_data);

/* Response id */
gecko_rsp_gatt_discover_primary_services_by_uuid_id

/* Response structure */
struct gecko_msg_gatt_discover_primary_services_by_uuid_rsp_t
{
    uint16 result;
};

```

**Table 2.56. Events Generated**

Event	Description
<a href="#">gatt_service</a>	Discovered service from remote GATT database.
<a href="#">gatt_procedure_completed</a>	Procedure has been successfully completed or failed with error.

### 2.6.1.6 cmd\_gatt\_execute\_characteristic\_value\_write

This command can be used to commit or cancel previously queued writes to a long characteristic of a remote GATT server. Writes are sent to queue with [prepare\\_characteristic\\_value\\_write](#) command. Content, offset and length of queued values are validated by this procedure. A received [gatt\\_procedure\\_completed](#) event indicates that all data has been written successfully or that an error response has been received.

**Table 2.57. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x02	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x0c	method	Message ID
4	uint8	connection	Connection handle
5	uint8	<a href="#">flags</a>	Unsigned 8-bit integer

**Table 2.58. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x0c	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct                                gecko_msg_gatt_execute_characteristic_value_write_rsp_t
*gecko_cmd_gatt_execute_characteristic_value_write(uint8 connection, uint8 flags);

/* Response id */
gecko_rsp_gatt_execute_characteristic_value_write_id

/* Response structure */
struct gecko_msg_gatt_execute_characteristic_value_write_rsp_t
{
    uint16 result;
};

```

**Table 2.59. Events Generated**

Event	Description
<a href="#">gatt_procedure_completed</a>	Procedure has been successfully completed or failed with error.

### 2.6.1.7 cmd\_gatt\_find\_included\_services

This command can be used to find out if a service of a remote GATT database includes one or more other services. This command generates a unique `gatt_service_completed` event for each included service. This command generates a unique `gatt_service` event for every discovered service. Received `gatt_procedure_completed` event indicates that this GATT procedure has successfully completed or failed with error.

**Table 2.60. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x05	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x10	method	Message ID
4	uint8	connection	Connection handle
5-8	uint32	service	GATT service handle This value is normally received from the <code>gatt_service</code> event.

**Table 2.61. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x10	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_gatt_find_included_services_rsp_t *gecko_cmd_gatt_find_included_services(uint8 connection,
uint32 service);

/* Response id */
gecko_rsp_gatt_find_included_services_id

/* Response structure */
struct gecko_msg_gatt_find_included_services_rsp_t
{
    uint16 result;
};

```

**Table 2.62. Events Generated**

Event	Description
<a href="#">gatt_service</a>	Discovered service from remote GATT database.
<a href="#">gatt_procedure_completed</a>	Procedure has been successfully completed or failed with error.

### 2.6.1.8 cmd\_gatt\_prepare\_characteristic\_value\_reliable\_write

This command can be used to add a characteristic value to the write queue of a remote GATT server and verify if the value was correctly received by the server. Received [gatt\\_procedure\\_completed](#) event indicates that this GATT procedure has successfully completed or failed with error. Specifically, error code 0x0194 (data\_corrupted) will be returned if the value received from the GATT server's response failed to pass the reliable write verification. At most ATT\_MTU - 5 amount of data can be sent once. Writes are executed or cancelled with the [execute\\_characteristic\\_value\\_write](#) command. Whether the writes succeeded or not are indicated in the response of the [execute\\_characteristic\\_value\\_write](#) command.

**Table 2.63. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x06	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x13	method	Message ID
4	uint8	connection	Connection handle
5-6	uint16	characteristic	GATT characteristic handle This value is normally received from the <a href="#">gatt_characteristic</a> event.
7-8	uint16	offset	Offset of the characteristic value
9	uint8array	value	Value to write into the specified characteristic of the remote GATT database

**Table 2.64. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x04	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x13	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>
6-7	uint16	sent_len	The length of data sent to the remote GATT server

### BGLIB C API

```

/* Function */
struct gecko_msg_gatt_prepare_characteristic_value_reliable_write_rsp_t
*gecko_cmd_gatt_prepare_characteristic_value_reliable_write(uint8 connection, uint16 characteristic, uint16
offset, uint8 value_len, const uint8 *value_data);

/* Response id */
gecko_rsp_gatt_prepare_characteristic_value_reliable_write_id

/* Response structure */
struct gecko_msg_gatt_prepare_characteristic_value_reliable_write_rsp_t
{
    uint16 result;

```

```
uint16 sent_len;  
};
```

**Table 2.65. Events Generated**

Event	Description
<a href="#">gatt_procedure_completed</a>	Procedure has been successfully completed or failed with error.

### 2.6.1.9 cmd\_gatt\_prepare\_characteristic\_value\_write

This command can be used to add a characteristic value to the write queue of a remote GATT server. This command can be used in cases where very long attributes need to be written, or a set of values needs to be written atomically. At most ATT\_MTU - 5 amount of data can be sent once. Writes are executed or cancelled with the [execute\\_characteristic\\_value\\_write](#) command. Whether the writes succeeded or not are indicated in the response of the [execute\\_characteristic\\_value\\_write](#) command.

In all cases where the amount of data to transfer fits into the BGAPI payload the command [gatt\\_write\\_characteristic\\_value](#) is recommended for writing long values since it transparently performs the prepare\_write and execute\_write commands.

**Table 2.66. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x06	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x0b	method	Message ID
4	uint8	connection	Connection handle
5-6	uint16	characteristic	GATT characteristic handle This value is normally received from the gatt_characteristic event.
7-8	uint16	offset	Offset of the characteristic value
9	uint8array	value	Value to write into the specified characteristic of the remote GATT database

**Table 2.67. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x04	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x0b	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>
6-7	uint16	sent_len	The length of data sent to the remote GATT server

### BGLIB C API

```

/* Function */
struct                                gecko_msg_gatt_prepare_characteristic_value_write_rsp_t
*gecko_cmd_gatt_prepare_characteristic_value_write(uint8 connection, uint16 characteristic, uint16 offset,
uint8 value_len, const uint8 *value_data);

/* Response id */
gecko_rsp_gatt_prepare_characteristic_value_write_id

/* Response structure */
struct gecko_msg_gatt_prepare_characteristic_value_write_rsp_t
{
    uint16 result;

```

```
uint16 sent_len;  
};
```

**Table 2.68. Events Generated**

Event	Description
<a href="#">gatt_procedure_completed</a>	Procedure has been successfully completed or failed with error.



### 2.6.1.10 cmd\_gatt\_read\_characteristic\_value

This command can be used to read the value of a characteristic from a remote GATT database. A single [gatt\\_characteristic\\_value](#) event is generated if the characteristic value fits in one ATT PDU. Otherwise more than one [gatt\\_characteristic\\_value](#) events are generated because the firmware will automatically use the "read long" GATT procedure. A received [gatt\\_procedure\\_completed](#) event indicates that all data has been read successfully or that an error response has been received.

Note that the GATT client does not verify if the requested attribute is a characteristic value. Thus before calling this command the application should make sure the attribute handle is for a characteristic value in some means, for example, by performing characteristic discovery.

Table 2.69. Command

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x03	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x07	method	Message ID
4	uint8	connection	Connection handle
5-6	uint16	characteristic	GATT characteristic handle This value is normally received from the <a href="#">gatt_characteristic</a> event.

Table 2.70. Response

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x07	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0:</b> success</li><li>• <b>Non-zero:</b> an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```
/* Function */
struct gecko_msg_gatt_read_characteristic_value_rsp_t *gecko_cmd_gatt_read_characteristic_value(uint8
connection, uint16 characteristic);

/* Response id */
gecko_rsp_gatt_read_characteristic_value_id

/* Response structure */
struct gecko_msg_gatt_read_characteristic_value_rsp_t
{
    uint16 result;
};
```

**Table 2.71. Events Generated**

Event	Description
<a href="#">gatt_characteristic_value</a>	This event contains the data belonging to a characteristic sent by the GATT Server.
<a href="#">gatt_procedure_completed</a>	Procedure has been successfully completed or failed with error.

### 2.6.1.11 cmd\_gatt\_read\_characteristic\_value\_by\_uuid

This command can be used to read the characteristic value of a service from a remote GATT database by giving the UUID of the characteristic and the handle of the service containing this characteristic. A single [gatt\\_characteristic\\_value](#) event is generated if the characteristic value fits in one ATT PDU. Otherwise more than one [gatt\\_characteristic\\_value](#) events are generated because the firmware will automatically use the "read long" GATT procedure. A received [gatt\\_procedure\\_completed](#) event indicates that all data has been read successfully or that an error response has been received.

**Table 2.72. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x06	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x08	method	Message ID
4	uint8	connection	Connection handle
5-8	uint32	service	GATT service handle This value is normally received from the <a href="#">gatt_service</a> event.
9	uint8array	uuid	Characteristic UUID

**Table 2.73. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x08	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0:</b> success</li> <li>• <b>Non-zero:</b> an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct                                gecko_msg_gatt_read_characteristic_value_by_uuid_rsp_t
*gecko_cmd_gatt_read_characteristic_value_by_uuid(uint8 connection, uint32 service, uint8 uuid_len, const
uint8 *uuid_data);

/* Response id */
gecko_rsp_gatt_read_characteristic_value_by_uuid_id

/* Response structure */
struct gecko_msg_gatt_read_characteristic_value_by_uuid_rsp_t
{
    uint16 result;
};

```

**Table 2.74. Events Generated**

Event	Description
<a href="#">gatt_characteristic_value</a>	This event contains the data belonging to a characteristic sent by the GATT Server.
<a href="#">gatt_procedure_completed</a>	Procedure has been successfully completed or failed with error.

### 2.6.1.12 cmd\_gatt\_read\_characteristic\_value\_from\_offset

This command can be used to read a partial characteristic value with specified offset and maximum length from a remote GATT database. It is equivalent to [gatt\\_read\\_characteristic\\_value](#) if both the offset and maximum length parameters are 0. A single [gatt\\_characteristic\\_value](#) event is generated if the value to read fits in one ATT PDU. Otherwise more than one [gatt\\_characteristic\\_value](#) events are generated because the firmware will automatically use the "read long" GATT procedure. A received [gatt\\_procedure\\_completed](#) event indicates that all data has been read successfully or that an error response has been received.

**Table 2.75. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x07	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x12	method	Message ID
4	uint8	connection	Connection handle
5-6	uint16	characteristic	GATT characteristic handle This value is normally received from the <a href="#">gatt_characteristic</a> event.
7-8	uint16	offset	Offset of the characteristic value
9-10	uint16	maxlen	Maximum bytes to read. If this parameter is 0 all characteristic value starting at given offset will be read.

**Table 2.76. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x12	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct                gecko_msg_gatt_read_characteristic_value_from_offset_rsp_t
*gecko_cmd_gatt_read_characteristic_value_from_offset(uint8 connection, uint16 characteristic, uint16 offset,
uint16 maxlen);

/* Response id */
gecko_rsp_gatt_read_characteristic_value_from_offset_id

/* Response structure */
struct gecko_msg_gatt_read_characteristic_value_from_offset_rsp_t
{
    uint16 result;
};

```

**Table 2.77. Events Generated**

Event	Description
<a href="#">gatt_characteristic_value</a>	This event contains the data belonging to a characteristic sent by the GATT Server.
<a href="#">gatt_procedure_completed</a>	Procedure has been successfully completed or failed with error.

### 2.6.1.13 cmd\_gatt\_read\_descriptor\_value

This command can be used to read the descriptor value of a characteristic in a remote GATT database. A single [gatt\\_descriptor\\_value](#) event is generated if the descriptor value fits in one ATT PDU. Otherwise more than one [gatt\\_descriptor\\_value](#) events are generated because the firmware will automatically use the "read long" GATT procedure. A received [gatt\\_procedure\\_completed](#) event indicates that all data has been read successfully or that an error response has been received.

**Table 2.78. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x03	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x0e	method	Message ID
4	uint8	connection	Connection handle
5-6	uint16	descriptor	GATT characteristic descriptor handle

**Table 2.79. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x0e	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_gatt_read_descriptor_value_rsp_t *gecko_cmd_gatt_read_descriptor_value(uint8 connection,
uint16 descriptor);

/* Response id */
gecko_rsp_gatt_read_descriptor_value_id

/* Response structure */
struct gecko_msg_gatt_read_descriptor_value_rsp_t
{
    uint16 result;
};

```

**Table 2.80. Events Generated**

Event	Description
<a href="#">gatt_descriptor_value</a>	Descriptor value received from the remote GATT server.
<a href="#">gatt_procedure_completed</a>	Procedure has been successfully completed or failed with error.

### 2.6.1.14 cmd\_gatt\_read\_multiple\_characteristic\_values

This command can be used to read the values of multiple characteristics from a remote GATT database at once. The GATT server will return the values in one ATT PDU as the response. If the total set of values is greater than (ATT\_MTU - 1) bytes in length, only the first (ATT\_MTU - 1) bytes are included. A single [gatt\\_characteristic\\_value](#) event is generated, in which the characteristic is set to 0 and the data in value parameter is a concatenation of characteristic values in the order they were requested. Received [gatt\\_procedure\\_completed](#) event indicates that this GATT procedure has successfully completed or failed with error.

This command should be used only for characteristics values that have known fixed size, except the last one that could have variable length.

**Table 2.81. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x02	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x11	method	Message ID
4	uint8	connection	Connection handle
5	uint8array	characteristic_list	Little endian encoded uint16 list of characteristics to be read.

**Table 2.82. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x11	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0:</b> success</li><li>• <b>Non-zero:</b> an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```
/* Function */
struct                                gecko_msg_gatt_read_multiple_characteristic_values_rsp_t
*gecko_cmd_gatt_read_multiple_characteristic_values(uint8 connection, uint8 characteristic_list_len, const
uint8 *characteristic_list_data);

/* Response id */
gecko_rsp_gatt_read_multiple_characteristic_values_id

/* Response structure */
struct gecko_msg_gatt_read_multiple_characteristic_values_rsp_t
{
    uint16 result;
};
```



Table 2.83. Events Generated

Event	Description
<a href="#">gatt_characteristic_value</a>	A concatenation of characteristic values in the order they were requested
<a href="#">gatt_procedure_completed</a>	Procedure has been successfully completed or failed with error.

### 2.6.1.15 cmd\_gatt\_send\_characteristic\_confirmation

This command must be used to send a characteristic confirmation to a remote GATT server after receiving an indication. The [gatt\\_characteristic\\_value\\_event](#) carries the att\_opcode containing handle\_value\_indication (0x1d) which reveals that an indication has been received and this must be confirmed with this command. Confirmation needs to be sent within 30 seconds, otherwise the GATT transactions between the client and the server are discontinued.

Table 2.84. Command

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x01	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x0d	method	Message ID
4	uint8	connection	Connection handle

Table 2.85. Response

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x0d	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

## BGLIB C API

```

/* Function */
struct                                gecko_msg_gatt_send_characteristic_confirmation_rsp_t
*gecko_cmd_gatt_send_characteristic_confirmation(uint8 connection);

/* Response id */
gecko_rsp_gatt_send_characteristic_confirmation_id

/* Response structure */
struct gecko_msg_gatt_send_characteristic_confirmation_rsp_t
{
    uint16 result;
};

```

### 2.6.1.16 cmd\_gatt\_set\_characteristic\_notification

This command can be used to enable or disable the notifications and indications being sent from a remote GATT server. This procedure discovers a characteristic client configuration descriptor and writes the related configuration flags to a remote GATT database. A received [gatt\\_procedure\\_completed](#) event indicates that this GATT procedure has successfully completed or that it has failed with an error.

**Table 2.86. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x04	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x05	method	Message ID
4	uint8	connection	Connection handle
5-6	uint16	characteristic	GATT characteristic handle This value is normally received from the <a href="#">gatt_characteristic</a> event.
7	uint8	<a href="#">flags</a>	Characteristic client configuration flags

**Table 2.87. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x05	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct                                gecko_msg_gatt_set_characteristic_notification_rsp_t
*gecko_cmd_gatt_set_characteristic_notification(uint8 connection, uint16 characteristic, uint8 flags);

/* Response id */
gecko_rsp_gatt_set_characteristic_notification_id

/* Response structure */
struct gecko_msg_gatt_set_characteristic_notification_rsp_t
{
    uint16 result;
};

```

**Table 2.88. Events Generated**

Event	Description
<a href="#">gatt_procedure_completed</a>	Procedure has been successfully completed or failed with error.

Event	Description
<a href="#">gatt_characteristic_value</a>	If an indication or notification has been enabled for a characteristic, this event is triggered whenever an indication or notification is sent by the remote GATT server. The triggering conditions on the GATT server side are defined by an upper level, for example by a profile; <b>so it is possible that no values are ever received, or that it may take time, depending on how the server is configured.</b>

### 2.6.1.17 cmd\_gatt\_set\_max\_mtu

This command can be used to set the maximum size of ATT Message Transfer Units (MTU). Functionality is the same as [gatt\\_server\\_set\\_max\\_mtu](#), and this setting applies to both GATT client and server. If the given value is too large according to the maximum BGAPI payload size, the system will select the maximal possible value as the maximum ATT\_MTU. If maximum ATT\_MTU is larger than 23, the GATT client in stack will automatically send an MTU exchange request after a Bluetooth connection has been established.

**Table 2.89. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x02	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x00	method	Message ID
4-5	uint16	max_mtu	Maximum size of Message Transfer Units (MTU) allowed <ul style="list-style-type: none"><li>• Range: 23 to 250</li><li>• Default: 247</li></ul>

**Table 2.90. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x04	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x00	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>
6-7	uint16	max_mtu	The maximum ATT_MTU selected by the system if this command succeeded

### BGLIB C API

```
/* Function */
struct gecko_msg_gatt_set_max_mtu_rsp_t *gecko_cmd_gatt_set_max_mtu(uint16 max_mtu);

/* Response id */
gecko_rsp_gatt_set_max_mtu_id

/* Response structure */
struct gecko_msg_gatt_set_max_mtu_rsp_t
{
    uint16 result;
    uint16 max_mtu;
};
```

### 2.6.1.18 cmd\_gatt\_write\_characteristic\_value

This command can be used to write the value of a characteristic in a remote GATT database. If the given value does not fit in one ATT PDU, "write long" GATT procedure is used automatically. Received [gatt\\_procedure\\_completed](#) event indicates that all data has been written successfully or that an error response has been received.

**Table 2.91. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x04	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x09	method	Message ID
4	uint8	connection	Connection handle
5-6	uint16	characteristic	GATT characteristic handle This value is normally received from the <code>gatt_characteristic</code> event.
7	uint8array	value	Characteristic value

**Table 2.92. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x09	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_gatt_write_characteristic_value_rsp_t *gecko_cmd_gatt_write_characteristic_value(uint8
connection, uint16 characteristic, uint8 value_len, const uint8 *value_data);

/* Response id */
gecko_rsp_gatt_write_characteristic_value_id

/* Response structure */
struct gecko_msg_gatt_write_characteristic_value_rsp_t
{
    uint16 result;
};

```

**Table 2.93. Events Generated**

Event	Description
<a href="#">gatt_procedure_completed</a>	Procedure has been successfully completed or failed with error.

### 2.6.1.19 cmd\_gatt\_write\_characteristic\_value\_without\_response

This command can be used to write the value of a characteristic in a remote GATT server. This command does not generate any event. All failures on the server are ignored silently. For example, if an error is generated in the remote GATT server and the given value is not written into database no error message will be reported to the local GATT client. Note that this command cannot be used to write long values. At most ATT\_MTU - 3 amount of data can be sent once.

**Table 2.94. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x04	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x0a	method	Message ID
4	uint8	connection	Connection handle
5-6	uint16	characteristic	GATT characteristic handle This value is normally received from the gatt_characteristic event.
7	uint8array	value	Characteristic value

**Table 2.95. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x04	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x0a	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>
6-7	uint16	sent_len	The length of data sent to the remote GATT server

### BGLIB C API

```

/* Function */
struct                gecko_msg_gatt_write_characteristic_value_without_response_rsp_t
*gecko_cmd_gatt_write_characteristic_value_without_response(uint8 connection, uint16 characteristic, uint8
value_len, const uint8 *value_data);

/* Response id */
gecko_rsp_gatt_write_characteristic_value_without_response_id

/* Response structure */
struct gecko_msg_gatt_write_characteristic_value_without_response_rsp_t
{
    uint16 result;,
    uint16 sent_len;
};

```

### 2.6.1.20 cmd\_gatt\_write\_descriptor\_value

This command can be used to write the value of a characteristic descriptor in a remote GATT database. If the given value does not fit in one ATT PDU, "write long" GATT procedure is used automatically. Received [gatt\\_procedure\\_completed](#) event indicates that all data has been written successfully or that an error response has been received.

**Table 2.96. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x04	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x0f	method	Message ID
4	uint8	connection	Connection handle
5-6	uint16	descriptor	GATT characteristic descriptor handle
7	uint8array	value	Descriptor value

**Table 2.97. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x0f	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_gatt_write_descriptor_value_rsp_t *gecko_cmd_gatt_write_descriptor_value(uint8 connection,
uint16 descriptor, uint8 value_len, const uint8 *value_data);

/* Response id */
gecko_rsp_gatt_write_descriptor_value_id

/* Response structure */
struct gecko_msg_gatt_write_descriptor_value_rsp_t
{
    uint16 result;
};

```

**Table 2.98. Events Generated**

Event	Description
<a href="#">gatt_procedure_completed</a>	Procedure has been successfully completed or failed with error.

### 2.6.2 gatt events

### 2.6.2.1 evt\_gatt\_characteristic

This event indicates that a GATT characteristic in the remote GATT database was discovered. This event is generated after issuing either the [gatt\\_discover\\_characteristics](#) or command.

**Table 2.99. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x05	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x02	method	Message ID
4	uint8	connection	Connection handle
5-6	uint16	characteristic	GATT characteristic handle
7	uint8	properties	Characteristic properties
8	uint8array	uuid	Characteristic UUID

### C Functions

```
/* Event id */
gecko_evt_gatt_characteristic_id

/* Event structure */
struct gecko_msg_gatt_characteristic_evt_t
{
    uint8 connection;,
    uint16 characteristic;,
    uint8 properties;,
    uint8array uuid;
};
```



### 2.6.2.2 evt\_gatt\_characteristic\_value

This event indicates that the value of one or several characteristics in the remote GATT server was received. This event is triggered as a result of several commands: [gatt\\_read\\_characteristic\\_value](#), , , [gatt\\_read\\_multiple\\_characteristic\\_values](#); and when the remote GATT server sends indications or notifications after enabling notifications with [gatt\\_set\\_characteristic\\_notification](#). The parameter `att_opcode` reveals which type of GATT transaction triggered this event. In particular, if the `att_opcode` type is `handle_value_indication` (0x1d), the application needs to confirm the indication with [gatt\\_send\\_characteristic\\_confirmation](#).

**Table 2.100. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x07	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x04	method	Message ID
4	uint8	connection	Connection handle
5-6	uint16	characteristic	GATT characteristic handle This value is normally received from the <code>gatt_characteristic</code> event.
7	uint8	<a href="#">att_opcode</a>	Attribute opcode which informs the GATT transaction used
8-9	uint16	offset	Value offset
10	uint8array	value	Characteristic value

### C Functions

```
/* Event id */
gecko_evt_gatt_characteristic_value_id

/* Event structure */
struct gecko_msg_gatt_characteristic_value_evt_t
{
    uint8 connection;,
    uint16 characteristic;,
    uint8 att_opcode;,
    uint16 offset;,
    uint8array value;
};
```

### 2.6.2.3 evt\_gatt\_descriptor

This event indicates that a GATT characteristic descriptor in the remote GATT database was discovered. This event is generated after issuing the [gatt\\_discover\\_descriptors](#) command.

**Table 2.101. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x04	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x03	method	Message ID
4	uint8	connection	Connection handle
5-6	uint16	descriptor	GATT characteristic descriptor handle
7	uint8array	uuid	Descriptor UUID

### C Functions

```
/* Event id */
gecko_evt_gatt_descriptor_id

/* Event structure */
struct gecko_msg_gatt_descriptor_evt_t
{
    uint8 connection;,
    uint16 descriptor;,
    uint8array uuid;
};
```

### 2.6.2.4 evt\_gatt\_descriptor\_value

This event indicates that the value of a descriptor in the remote GATT server was received. This event is generated by the [gatt\\_read\\_descriptor\\_value](#) command.

**Table 2.102. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x06	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x05	method	Message ID
4	uint8	connection	Connection handle
5-6	uint16	descriptor	GATT characteristic descriptor handle
7-8	uint16	offset	Value offset
9	uint8array	value	Descriptor value

### C Functions

```
/* Event id */
gecko_evt_gatt_descriptor_value_id

/* Event structure */
struct gecko_msg_gatt_descriptor_value_evt_t
{
    uint8 connection;,
    uint16 descriptor;,
    uint16 offset;,
    uint8array value;
};
```

### 2.6.2.5 evt\_gatt\_mtu\_exchanged

This event indicates that an ATT\_MTU exchange procedure has been completed. Parameter mtu describes new MTU size. MTU size 23 is used before this event is received.

**Table 2.103. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x03	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x00	method	Message ID
4	uint8	connection	Connection handle
5-6	uint16	mtu	Exchanged ATT_MTU

### C Functions

```
/* Event id */
gecko_evt_gatt_mtu_exchanged_id

/* Event structure */
struct gecko_msg_gatt_mtu_exchanged_evt_t
{
    uint8 connection;,
    uint16 mtu;
};
```

### 2.6.2.6 evt\_gatt\_procedure\_completed

This event indicates that the current GATT procedure has been completed successfully or that it has failed with an error. All GATT commands excluding [gatt\\_write\\_characteristic\\_value\\_without\\_response](#) and [gatt\\_send\\_characteristic\\_confirmation](#) will trigger this event, so the application must wait for this event before issuing another GATT command (excluding the two aforementioned exceptions).

**Table 2.104. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x03	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x06	method	Message ID
4	uint8	connection	Connection handle
5-6	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### C Functions

```
/* Event id */
gecko_evt_gatt_procedure_completed_id

/* Event structure */
struct gecko_msg_gatt_procedure_completed_evt_t
{
    uint8 connection;,
    uint16 result;
};
```

### 2.6.2.7 evt\_gatt\_service

This event indicates that a GATT service in the remote GATT database was discovered. This event is generated after issuing either the [gatt\\_discover\\_primary\\_services](#) or command.

**Table 2.105. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x06	lolen	Minimum payload length
2	0x09	class	Message class: Generic Attribute Profile
3	0x01	method	Message ID
4	uint8	connection	Connection handle
5-8	uint32	service	GATT service handle
9	uint8array	uuid	Service UUID

### C Functions

```
/* Event id */
gecko_evt_gatt_service_id

/* Event structure */
struct gecko_msg_gatt_service_evt_t
{
    uint8 connection;,
    uint32 service;,
    uint8array uuid;
};
```

### 2.6.3 gatt enumerations

### 2.6.3.1 enum\_gatt\_att\_opcode

These values indicate which attribute request or response has caused the event.

**Table 2.106. Enumerations**

Value	Name	Description
8	<code>gatt_read_by_type_request</code>	Read by type request
9	<code>gatt_read_by_type_response</code>	Read by type response
10	<code>gatt_read_request</code>	Read request
11	<code>gatt_read_response</code>	Read response
12	<code>gatt_read_blob_request</code>	Read blob request
13	<code>gatt_read_blob_response</code>	Read blob response
14	<code>gatt_read_multiple_request</code>	Read multiple request
15	<code>gatt_read_multiple_response</code>	Read multiple response
18	<code>gatt_write_request</code>	Write request
19	<code>gatt_write_response</code>	Write response
82	<code>gatt_write_command</code>	Write command
22	<code>gatt_prepare_write_request</code>	Prepare write request
23	<code>gatt_prepare_write_response</code>	Prepare write response
24	<code>gatt_execute_write_request</code>	Execute write request
25	<code>gatt_execute_write_response</code>	Execute write response
27	<code>gatt_handle_value_notification</code>	Notification
29	<code>gatt_handle_value_indication</code>	Indication

### 2.6.3.2 enum\_gatt\_client\_config\_flag

These values define whether the client is to receive notifications or indications from a remote GATT server.

**Table 2.107. Enumerations**

Value	Name	Description
0	<code>gatt_disable</code>	Disable notifications and indications
1	<code>gatt_notification</code>	Notification
2	<code>gatt_indication</code>	Indication

### 2.6.3.3 enum\_gatt\_execute\_write\_flag

These values define whether the GATT server is to cancel all queued writes or commit all queued writes to a remote database.

**Table 2.108. Enumerations**

Value	Name	Description
0	<code>gatt_cancel</code>	Cancel all queued writes
1	<code>gatt_commit</code>	Commit all queued writes

## 2.7 Generic Attribute Profile Server (gatt\_server)

These commands and events are used by the local GATT server to manage the local GATT database.

### 2.7.1 gatt\_server commands

#### 2.7.1.1 cmd\_gatt\_server\_find\_attribute

This command can be used to find attributes of certain type from a local GATT database. Type is usually given as 16-bit or 128-bit UUID.

**Table 2.109. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x03	lolen	Minimum payload length
2	0x0a	class	Message class: Generic Attribute Profile Server
3	0x06	method	Message ID
4-5	uint16	start	Search start handle
6	uint8array	type	Variable length byte array. The first byte defines the length of the data that follows, 0 - 255 bytes.

**Table 2.110. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x04	lolen	Minimum payload length
2	0x0a	class	Message class: Generic Attribute Profile Server
3	0x06	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>
6-7	uint16	attribute	Attribute handle

## BGLIB C API

```
/* Function */
struct gecko_msg_gatt_server_find_attribute_rsp_t *gecko_cmd_gatt_server_find_attribute(uint16 start, uint8
type_len, const uint8 *type_data);

/* Response id */
gecko_rsp_gatt_server_find_attribute_id

/* Response structure */
struct gecko_msg_gatt_server_find_attribute_rsp_t
{
    uint16 result;,
    uint16 attribute;
};
```



### 2.7.1.2 cmd\_gatt\_server\_read\_attribute\_type

This command can be used to read the type of an attribute from a local GATT database. The type is a UUID, usually 16 or 128 bits long.

**Table 2.111. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x02	lolen	Minimum payload length
2	0x0a	class	Message class: Generic Attribute Profile Server
3	0x01	method	Message ID
4-5	uint16	attribute	Attribute handle

**Table 2.112. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x03	lolen	Minimum payload length
2	0x0a	class	Message class: Generic Attribute Profile Server
3	0x01	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>
6	uint8array	type	Variable length byte array. The first byte defines the length of the data that follows, 0 - 255 bytes.

#### BGLIB C API

```
/* Function */
struct gecko_msg_gatt_server_read_attribute_type_rsp_t *gecko_cmd_gatt_server_read_attribute_type(uint16
attribute);

/* Response id */
gecko_rsp_gatt_server_read_attribute_type_id

/* Response structure */
struct gecko_msg_gatt_server_read_attribute_type_rsp_t
{
    uint16 result;,
    uint8array type;
};
```

### 2.7.1.3 cmd\_gatt\_server\_read\_attribute\_value

This command can be used to read the value of an attribute from a local GATT database. Only (maximum BGAPI payload size - 3) amount of data can be read once. The application can continue reading with increased offset value if it receives (maximum BGAPI payload size - 3) amount of data.

**Table 2.113. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x04	lolen	Minimum payload length
2	0x0a	class	Message class: Generic Attribute Profile Server
3	0x00	method	Message ID
4-5	uint16	attribute	Attribute handle
6-7	uint16	offset	Value offset

**Table 2.114. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x03	lolen	Minimum payload length
2	0x0a	class	Message class: Generic Attribute Profile Server
3	0x00	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>
6	uint8array	value	Variable length byte array. The first byte defines the length of the data that follows, 0 - 255 bytes.

### BGLIB C API

```
/* Function */
struct gecko_msg_gatt_server_read_attribute_value_rsp_t *gecko_cmd_gatt_server_read_attribute_value(uint16
attribute, uint16 offset);

/* Response id */
gecko_rsp_gatt_server_read_attribute_value_id

/* Response structure */
struct gecko_msg_gatt_server_read_attribute_value_rsp_t
{
    uint16 result;,
    uint8array value;
};
```

### 2.7.1.4 cmd\_gatt\_server\_send\_characteristic\_notification

This command can be used to send notifications or indications to one or more remote GATT clients. At most ATT\_MTU - 3 amount of data can be sent once.

A notification or indication is sent only if the client has enabled it by setting the corresponding flag to the Client Characteristic Configuration descriptor. In case the Client Characteristic Configuration descriptor supports both notification and indication, the stack will always send a notification even when the client has enabled both.

A new indication to a GATT client cannot be sent until an outstanding indication procedure with the same client has completed. The procedure is completed when a confirmation from the client has been received. The confirmation is indicated by [gatt\\_server\\_characteristic\\_status event](#).

Error `bg_err_wrong_state` is returned if the characteristic does not have notification property, or if the client has not enabled the notification. The same applies to indication property, and in addition, `bg_err_wrong_state` is returned if an indication procedure with the same client is outstanding.

**Table 2.115. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x04	lolen	Minimum payload length
2	0x0a	class	Message class: Generic Attribute Profile Server
3	0x05	method	Message ID
4	uint8	connection	Handle of the connection over which the notification or indication is sent. Values: <ul style="list-style-type: none"> <li>• <b>0xff</b>: Sends notification or indication to all connected devices.</li> <li>• <b>Other</b>: Connection handle</li> </ul>
5-6	uint16	characteristic	Characteristic handle
7	uint8array	value	Value to be notified or indicated

**Table 2.116. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x04	lolen	Minimum payload length
2	0x0a	class	Message class: Generic Attribute Profile Server
3	0x05	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>
6-7	uint16	sent_len	The length of data sent out if only one connected device is the receiver; otherwise unused value

### BGLIB C API

```
/* Function */
struct gecko_msg_gatt_server_send_characteristic_notification_rsp_t
*gecko_cmd_gatt_server_send_characteristic_notification(uint8 connection, uint16 characteristic, uint8
value_len, const uint8 *value_data);

/* Response id */
```

```
gecko_rsp_gatt_server_send_characteristic_notification_id

/* Response structure */
struct gecko_msg_gatt_server_send_characteristic_notification_rsp_t
{
    uint16 result;,
    uint16 sent_len;
};
```

### 2.7.1.5 cmd\_gatt\_server\_send\_user\_read\_response

This command must be used to send a response to a [user\\_read\\_request](#) event. The response needs to be sent within 30 second, otherwise no more GATT transactions are allowed by the remote side. If attr\_errorcode is set to 0 the characteristic value is sent to the remote GATT client in the normal way. Other attr\_errorcode values will cause the local GATT server to send an attribute protocol error response instead of the actual data. At most ATT\_MTU - 1 amount of data can be sent once. Client will continue reading by sending new read request with increased offset value if it receives ATT\_MTU - 1 amount of data.

**Table 2.117. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x05	lolen	Minimum payload length
2	0x0a	class	Message class: Generic Attribute Profile Server
3	0x03	method	Message ID
4	uint8	connection	Connection handle
5-6	uint16	characteristic	GATT characteristic handle This value is normally received from the gatt_characteristic event.
7	uint8	att_errorcode	Attribute protocol error code <ul style="list-style-type: none"> <li>• <b>0:</b> No error</li> <li>• <b>Non-zero:</b> See Bluetooth specification, Host volume, Attribute Protocol, Error Codes table.</li> </ul>
8	uint8array	value	Characteristic value to send to the GATT client. Ignored if att_errorcode is not 0.

**Table 2.118. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x04	lolen	Minimum payload length
2	0x0a	class	Message class: Generic Attribute Profile Server
3	0x03	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0:</b> success</li> <li>• <b>Non-zero:</b> an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>
6-7	uint16	sent_len	The length of data sent to the remote GATT client

### BGLIB C API

```

/* Function */
struct                                gecko_msg_gatt_server_send_user_read_response_rsp_t
*gecko_cmd_gatt_server_send_user_read_response(uint8 connection, uint16 characteristic, uint8 att_errorcode,
uint8 value_len, const uint8 *value_data);

/* Response id */
gecko_rsp_gatt_server_send_user_read_response_id

/* Response structure */
struct gecko_msg_gatt_server_send_user_read_response_rsp_t
{
    uint16 result;

```

```
uint16 sent_len;
};
```

### 2.7.1.6 cmd\_gatt\_server\_send\_user\_write\_response

This command must be used to send a response to a [gatt\\_server\\_user\\_write\\_request](#) event when parameter `att_opcode` in the event is Write Request (see [att\\_opcode](#)). The response needs to be sent within 30 seconds, otherwise no more GATT transactions are allowed by the remote side. If `attr_errorcode` is set to 0 the ATT protocol's write response is sent to indicate to the remote GATT client that the write operation was processed successfully. Other values will cause the local GATT server to send an ATT protocol error response.

**Table 2.119. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x04	lolen	Minimum payload length
2	0x0a	class	Message class: Generic Attribute Profile Server
3	0x04	method	Message ID
4	uint8	connection	Connection handle
5-6	uint16	characteristic	GATT characteristic handle This value is normally received from the <code>gatt_characteristic</code> event.
7	uint8	att_errorcode	Attribute protocol error code <ul style="list-style-type: none"> <li>• <b>0:</b> No error</li> <li>• <b>Non-zero:</b> See Bluetooth specification, Host volume, Attribute Protocol, Error Codes table.</li> </ul>

**Table 2.120. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x0a	class	Message class: Generic Attribute Profile Server
3	0x04	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0:</b> success</li> <li>• <b>Non-zero:</b> an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

## BGLIB C API

```
/* Function */
struct                gecko_msg_gatt_server_send_user_write_response_rsp_t
*gecko_cmd_gatt_server_send_user_write_response(uint8 connection, uint16 characteristic, uint8 att_errorcode);

/* Response id */
gecko_rsp_gatt_server_send_user_write_response_id

/* Response structure */
struct gecko_msg_gatt_server_send_user_write_response_rsp_t
{
    uint16 result;
};
```

### 2.7.1.7 cmd\_gatt\_server\_set\_capabilities

This command can be used to set which capabilities should be enabled in the local GATT database. A service is visible to remote GATT clients if at least one of its capabilities has been enabled. The same applies to a characteristic and its attributes. Capability identifiers and their corresponding bit flag values can be found in the auto-generated database header file. See UG118 for how to declare capabilities in GATT database.

Changing the capabilities of a database effectively causes a database change (attributes being added or removed) from a remote GATT client point of view. If the database has a Generic Attribute service and Service Changed characteristic, the stack will monitor local database change status and manage service changed indications for a GATT client that has enabled the indication configuration of the Service Changed characteristic.

**Table 2.121. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x08	lolen	Minimum payload length
2	0x0a	class	Message class: Generic Attribute Profile Server
3	0x08	method	Message ID
4-7	uint32	caps	Bit flags of capabilities to enable. Value 0 sets the default database capabilities.
8-11	uint32	reserved	Value 0 should be used on this reserved field. None-zero values are reserved for future, do not use now.

**Table 2.122. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x0a	class	Message class: Generic Attribute Profile Server
3	0x08	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```
/* Function */
struct gecko_msg_gatt_server_set_capabilities_rsp_t *gecko_cmd_gatt_server_set_capabilities(uint32 caps,
uint32 reserved);

/* Response id */
gecko_rsp_gatt_server_set_capabilities_id

/* Response structure */
struct gecko_msg_gatt_server_set_capabilities_rsp_t
{
    uint16 result;
};
```

### 2.7.1.8 cmd\_gatt\_server\_set\_max\_mtu

This command can be used to set the maximum size of ATT Message Transfer Units (MTU). Functionality is the same as [gatt\\_set\\_max\\_mtu](#), and this setting applies to both GATT client and server. If the given value is too large according to the maximum BGAPI payload size, the system will select the maximal possible value as the maximum ATT\_MTU. If maximum ATT\_MTU is larger than 23, the GATT client in stack will automatically send an MTU exchange request after a Bluetooth connection has been established.

**Table 2.123. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x02	lolen	Minimum payload length
2	0x0a	class	Message class: Generic Attribute Profile Server
3	0x0a	method	Message ID
4-5	uint16	max_mtu	Maximum size of Message Transfer Units (MTU) allowed <ul style="list-style-type: none"> <li>• Range: 23 to 250</li> <li>• Default: 247</li> </ul>

**Table 2.124. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x04	lolen	Minimum payload length
2	0x0a	class	Message class: Generic Attribute Profile Server
3	0x0a	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>
6-7	uint16	max_mtu	The maximum ATT_MTU selected by the system if this command succeeded

### BGLIB C API

```

/* Function */
struct gecko_msg_gatt_server_set_max_mtu_rsp_t *gecko_cmd_gatt_server_set_max_mtu(uint16 max_mtu);

/* Response id */
gecko_rsp_gatt_server_set_max_mtu_id

/* Response structure */
struct gecko_msg_gatt_server_set_max_mtu_rsp_t
{
    uint16 result;
    uint16 max_mtu;
};

```



### 2.7.1.9 cmd\_gatt\_server\_write\_attribute\_value

This command can be used to write the value of an attribute in the local GATT database. Writing the value of a characteristic of the local GATT database will not trigger notifications or indications to the remote GATT client in case such characteristic has property of indicate or notify and the client has enabled notification or indication. Notifications and indications are sent to the remote GATT client using [gatt\\_server\\_send\\_characteristic\\_notification](#) command.

**Table 2.125. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x05	lolen	Minimum payload length
2	0x0a	class	Message class: Generic Attribute Profile Server
3	0x02	method	Message ID
4-5	uint16	attribute	Attribute handle
6-7	uint16	offset	Value offset
8	uint8array	value	Value

**Table 2.126. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x0a	class	Message class: Generic Attribute Profile Server
3	0x02	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_gatt_server_write_attribute_value_rsp_t *gecko_cmd_gatt_server_write_attribute_value(uint16
attribute, uint16 offset, uint8 value_len, const uint8 *value_data);

/* Response id */
gecko_rsp_gatt_server_write_attribute_value_id

/* Response structure */
struct gecko_msg_gatt_server_write_attribute_value_rsp_t
{
    uint16 result;
};

```

### 2.7.2 gatt\_server events

### 2.7.2.1 evt\_gatt\_server\_attribute\_value

This event indicates that the value of an attribute in the local GATT database has been changed by a remote GATT client. Parameter `att_opcode` describes which GATT procedure was used to change the value.

**Table 2.127. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x07	lolen	Minimum payload length
2	0x0a	class	Message class: Generic Attribute Profile Server
3	0x00	method	Message ID
4	uint8	connection	Connection handle
5-6	uint16	attribute	Attribute Handle
7	uint8	<a href="#">att_opcode</a>	Attribute opcode which informs the procedure from which attribute the value was received
8-9	uint16	offset	Value offset
10	uint8array	value	Value

### C Functions

```
/* Event id */
gecko_evt_gatt_server_attribute_value_id

/* Event structure */
struct gecko_msg_gatt_server_attribute_value_evt_t
{
    uint8 connection;,
    uint16 attribute;,
    uint8 att\_opcode;,
    uint16 offset;,
    uint8array value;
};
```

### 2.7.2.2 evt\_gatt\_server\_characteristic\_status

This event indicates either that a local Client Characteristic Configuration descriptor has been changed by the remote GATT client, or that a confirmation from the remote GATT client was received upon a successful reception of the indication. Confirmation by the remote GATT client should be received within 30 seconds after an indication has been sent with the [gatt\\_server\\_send\\_characteristic\\_notification](#) command, otherwise further GATT transactions over this connection are disabled by the stack.

**Table 2.128. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x06	lolen	Minimum payload length
2	0x0a	class	Message class: Generic Attribute Profile Server
3	0x03	method	Message ID
4	uint8	connection	Connection handle
5-6	uint16	characteristic	GATT characteristic handle This value is normally received from the gatt_characteristic event.
7	uint8	<a href="#">status_flags</a>	Describes whether Client Characteristic Configuration was changed or if confirmation was received.
8-9	uint16	<a href="#">client_config_flags</a>	This field carries the new value of the Client Characteristic Configuration. If the status_flags is 0x2 (confirmation received), the value of this field can be ignored.

### C Functions

```
/* Event id */
gecko_evt_gatt_server_characteristic_status_id

/* Event structure */
struct gecko_msg_gatt_server_characteristic_status_evt_t
{
    uint8 connection;,
    uint16 characteristic;,
    uint8 status_flags;,
    uint16 client_config_flags;
};
```

### 2.7.2.3 evt\_gatt\_server\_execute\_write\_completed

Execute write completed event indicates that the execute write command from a remote GATT client has completed with the given result.

**Table 2.129. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x03	lolen	Minimum payload length
2	0x0a	class	Message class: Generic Attribute Profile Server
3	0x04	method	Message ID
4	uint8	connection	Connection handle
5-6	uint16	result	Execute write result

## C Functions

```
/* Event id */
gecko_evt_gatt_server_execute_write_completed_id

/* Event structure */
struct gecko_msg_gatt_server_execute_write_completed_evt_t
{
    uint8 connection;,
    uint16 result;
};
```

### 2.7.2.4 evt\_gatt\_server\_user\_read\_request

This event indicates that a remote GATT client is attempting to read a value of an attribute from the local GATT database, where the attribute was defined in the GATT XML firmware configuration file to have type="user". Parameter att\_opcode informs which GATT procedure was used to read the value. The application needs to respond to this request by using the [gatt\\_server\\_send\\_user\\_read\\_response](#) command within 30 seconds, otherwise this GATT connection is dropped by remote side.

**Table 2.130. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x06	lolen	Minimum payload length
2	0x0a	class	Message class: Generic Attribute Profile Server
3	0x01	method	Message ID
4	uint8	connection	Connection handle
5-6	uint16	characteristic	GATT characteristic handle This value is normally received from the gatt_characteristic event.
7	uint8	<a href="#">att_opcode</a>	Attribute opcode which informs the procedure from which attribute the value was received
8-9	uint16	offset	Value offset

### C Functions

```
/* Event id */
gecko_evt_gatt_server_user_read_request_id

/* Event structure */
struct gecko_msg_gatt_server_user_read_request_evt_t
{
    uint8 connection;,
    uint16 characteristic;,
    uint8 att\_opcode;,
    uint16 offset;
};
```

### 2.7.2.5 evt\_gatt\_server\_user\_write\_request

This event indicates that a remote GATT client is attempting to write a value of an attribute in to the local GATT database, where the attribute was defined in the GATT XML firmware configuration file to have type="user". Parameter att\_opcode informs which attribute procedure was used to write the value. If the att\_opcode is Write Request (see [att\\_opcode](#)), the application needs to respond to this request by using the [gatt\\_server\\_send\\_user\\_write\\_response](#) command within 30 seconds, otherwise this GATT connection is dropped by the remote side. If the value of att\_opcode is Execute Write Request, it indicates that this is a queued prepare write request received earlier and now the GATT server is processing the execute write. The event [gatt\\_server\\_execute\\_write\\_completed](#) will be emitted after all queued requests have been processed.

**Table 2.131. Event**

Byte	Type	Name	Description
0	0xa0	hilen	Message type: Event
1	0x07	lolen	Minimum payload length
2	0x0a	class	Message class: Generic Attribute Profile Server
3	0x02	method	Message ID
4	uint8	connection	Connection handle
5-6	uint16	characteristic	GATT characteristic handle This value is normally received from the gatt_characteristic event.
7	uint8	<a href="#">att_opcode</a>	Attribute opcode which informs the procedure from which attribute the value was received
8-9	uint16	offset	Value offset
10	uint8array	value	Value

## C Functions

```

/* Event id */
gecko_evt_gatt_server_user_write_request_id

/* Event structure */
struct gecko_msg_gatt_server_user_write_request_evt_t
{
    uint8 connection;,
    uint16 characteristic;,
    uint8 att_opcode;,
    uint16 offset;,
    uint8array value;
};

```

### 2.7.3 gatt\_server enumerations

#### 2.7.3.1 enum\_gatt\_server\_characteristic\_status\_flag

These values describe whether characteristic client configuration was changed or whether a characteristic confirmation was received.

**Table 2.132. Enumerations**

Value	Name	Description
1	<a href="#">gatt_server_client_config</a>	Characteristic client configuration has been changed.
2	<a href="#">gatt_server_confirmation</a>	Characteristic confirmation has been received.

## 2.8 Hardware (hardware)

The commands and events in this class can be used to access and configure the system hardware and peripherals.

### 2.8.1 hardware commands

#### 2.8.1.1 cmd\_hardware\_get\_time

Deprecated. Get elapsed time since last reset of RTCC

**Table 2.133. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x00	lolen	Minimum payload length
2	0x0c	class	Message class: Hardware
3	0x0b	method	Message ID

**Table 2.134. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x06	lolen	Minimum payload length
2	0x0c	class	Message class: Hardware
3	0x0b	method	Message ID
4-7	uint32	seconds	seconds since last reset
8-9	uint16	ticks	Subsecond ticks of hardware clock, range 0-32767

## BGLIB C API

```
/* Function */
struct gecko_msg_hardware_get_time_rsp_t *gecko_cmd_hardware_get_time();

/* Response id */
gecko_rsp_hardware_get_time_id

/* Response structure */
struct gecko_msg_hardware_get_time_rsp_t
{
    uint32 seconds;
    uint16 ticks;
};
```

### 2.8.1.2 cmd\_hardware\_set\_lazy\_soft\_timer

This command can be used to start a software timer with some slack. Slack parameter allows stack to optimize wake ups and save power. Timer event is triggered between time and time + slack. See also description of [hardware\\_set\\_soft\\_timer](#) command.

**Table 2.135. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x0a	lolen	Minimum payload length
2	0x0c	class	Message class: Hardware
3	0x0c	method	Message ID
4-7	uint32	time	Interval between how often to send events, in hardware clock ticks (1 second is equal to 32768 ticks).  The smallest interval value supported is 328 which is around 10 milliseconds, any parameters between 0 and 328 will be rounded up to 328. The maximum value is 2147483647, which corresponds to about 18.2 hours. If time is 0, removes the scheduled timer with the same handle.
8-11	uint32	slack	Slack time in hardware clock ticks
12	uint8	handle	Timer handle to use, is returned in timeout event
13	uint8	single_shot	Timer mode. Values: <ul style="list-style-type: none"> <li>• <b>0</b>: false (timer is repeating)</li> <li>• <b>1</b>: true (timer runs only once)</li> </ul>

**Table 2.136. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x0c	class	Message class: Hardware
3	0x0c	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_hardware_set_lazy_soft_timer_rsp_t *gecko_cmd_hardware_set_lazy_soft_timer(uint32 time,
uint32 slack, uint8 handle, uint8 single_shot);

/* Response id */
gecko_rsp_hardware_set_lazy_soft_timer_id

/* Response structure */
struct gecko_msg_hardware_set_lazy_soft_timer_rsp_t
{
    uint16 result;
};

```



**Table 2.137. Events Generated**

Event	Description
<a href="#">hardware_soft_timer</a>	Sent after specified interval

### 2.8.1.3 cmd\_hardware\_set\_soft\_timer

This command can be used to start a software timer. Multiple concurrent timers can be running simultaneously. There are 256 unique timer IDs available. The maximum number of concurrent timers is configurable at device initialization. Up to 16 concurrent timers can be configured. The default configuration is 4. As the RAM for storing timer data is pre-allocated at initialization, an application should not configure the amount more than it needs for minimizing RAM usage.

**Table 2.138. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x06	lolen	Minimum payload length
2	0x0c	class	Message class: Hardware
3	0x00	method	Message ID
4-7	uint32	time	Interval between how often to send events, in hardware clock ticks (1 second is equal to 32768 ticks).  The smallest interval value supported is 328 which is around 10 milliseconds, any parameters between 0 and 328 will be rounded up to 328. The maximum value is 2147483647, which corresponds to about 18.2 hours. If time is 0, removes the scheduled timer with the same handle.
8	uint8	handle	Timer handle to use, is returned in timeout event
9	uint8	single_shot	Timer mode. Values: <ul style="list-style-type: none"> <li>• <b>0</b>: false (timer is repeating)</li> <li>• <b>1</b>: true (timer runs only once)</li> </ul>

**Table 2.139. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x0c	class	Message class: Hardware
3	0x00	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_hardware_set_soft_timer_rsp_t *gecko_cmd_hardware_set_soft_timer(uint32 time, uint8 handle,
uint8 single_shot);

/* Response id */
gecko_rsp_hardware_set_soft_timer_id

/* Response structure */
struct gecko_msg_hardware_set_soft_timer_rsp_t
{
    uint16 result;
};

```

Table 2.140. Events Generated

Event	Description
<a href="#">hardware_soft_timer</a>	Sent after specified interval

## 2.8.2 hardware events

### 2.8.2.1 evt\_hardware\_soft\_timer

This event indicates that the soft timer has lapsed.

Table 2.141. Event

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x01	lolen	Minimum payload length
2	0x0c	class	Message class: Hardware
3	0x00	method	Message ID
4	uint8	handle	Timer Handle

## C Functions

```
/* Event id */
gecko_evt_hardware_soft_timer_id

/* Event structure */
struct gecko_msg_hardware_soft_timer_evt_t
{
    uint8 handle;
};
```

## 2.9 Connection management (le\_connection)

The commands and events in this class are related to managing connection establishment, parameter setting, and disconnection procedures.

### 2.9.1 le\_connection commands

#### 2.9.1.1 cmd\_le\_connection\_close

This command can be used to close a Bluetooth connection or cancel an ongoing connection establishment process. The parameter is a connection handle which is reported in [le\\_connection\\_opened](#) event or [le\\_gap\\_connect](#) response.

**Table 2.142. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x01	lolen	Minimum payload length
2	0x08	class	Message class: Connection management
3	0x04	method	Message ID
4	uint8	connection	Handle of the connection to be closed

**Table 2.143. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x08	class	Message class: Connection management
3	0x04	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_le_connection_close_rsp_t *gecko_cmd_le_connection_close(uint8 connection);

/* Response id */
gecko_rsp_le_connection_close_id

/* Response structure */
struct gecko_msg_le_connection_close_rsp_t
{
    uint16 result;
};

```

**Table 2.144. Events Generated**

Event	Description
<a href="#">le_connection_closed</a>	This event indicates that a connection was closed.

### 2.9.1.2 cmd\_le\_connection\_disable\_slave\_latency

This command temporarily enables or disables slave latency. Used only when Bluetooth device is in slave role.

**Table 2.145. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x02	lolen	Minimum payload length
2	0x08	class	Message class: Connection management
3	0x02	method	Message ID
4	uint8	connection	Connection Handle
5	uint8	disable	0 enable, 1 disable slave latency

**Table 2.146. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x08	class	Message class: Connection management
3	0x02	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```
/* Function */
struct                                gecko_msg_le_connection_disable_slave_latency_rsp_t
*gecko_cmd_le_connection_disable_slave_latency(uint8 connection, uint8 disable);

/* Response id */
gecko_rsp_le_connection_disable_slave_latency_id

/* Response structure */
struct gecko_msg_le_connection_disable_slave_latency_rsp_t
{
    uint16 result;
};
```

### 2.9.1.3 cmd\_le\_connection\_get\_rssi

This command can be used to get the latest RSSI value of a Bluetooth connection.

**Table 2.147. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x01	lolen	Minimum payload length
2	0x08	class	Message class: Connection management
3	0x01	method	Message ID
4	uint8	connection	Connection handle

**Table 2.148. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x08	class	Message class: Connection management
3	0x01	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```
/* Function */
struct gecko_msg_le_connection_get_rssi_rsp_t *gecko_cmd_le_connection_get_rssi(uint8 connection);

/* Response id */
gecko_rsp_le_connection_get_rssi_id

/* Response structure */
struct gecko_msg_le_connection_get_rssi_rsp_t
{
    uint16 result;
};
```

**Table 2.149. Events Generated**

Event	Description
<a href="#">le_connection_rssi</a>	Triggered when this command has completed.

### 2.9.1.4 (deprecated) cmd\_le\_connection\_set\_parameters

**Deprecated.** Replacement is [le\\_connection\\_set\\_timing\\_parameters](#) command for setting timing parameters.

This command can be used to request a change in the connection parameters of a Bluetooth connection.

**Table 2.150. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x09	lolen	Minimum payload length
2	0x08	class	Message class: Connection management
3	0x00	method	Message ID
4	uint8	connection	Connection Handle
5-6	uint16	min_interval	Minimum value for the connection event interval. This must be set be less than or equal to max_interval. <ul style="list-style-type: none"> <li>Time = Value x 1.25 ms</li> <li>Range: 0x0006 to 0x0c80</li> <li>Time Range: 7.5 ms to 4 s</li> </ul>
7-8	uint16	max_interval	Maximum value for the connection event interval. This must be set greater than or equal to min_interval. <ul style="list-style-type: none"> <li>Time = Value x 1.25 ms</li> <li>Range: 0x0006 to 0x0c80</li> <li>Time Range: 7.5 ms to 4 s</li> </ul>
9-10	uint16	latency	Slave latency. This parameter defines how many connection intervals the slave can skip if it has no data to send <ul style="list-style-type: none"> <li>Range: 0x0000 to 0x01f4</li> </ul> Use 0x0000 for default value
11-12	uint16	timeout	Supervision timeout. The supervision timeout defines for how long the connection is maintained despite the devices being unable to communicate at the currently configured connection intervals. <ul style="list-style-type: none"> <li>Range: 0x000a to 0x0c80</li> <li>Time = Value x 10 ms</li> <li>Time Range: 100 ms to 32 s</li> <li>The value in milliseconds must be larger than <math>(1 + \text{latency}) * \text{max\_interval} * 2</math>, where max_interval is given in milliseconds</li> </ul> It is recommended that the supervision timeout is set at a value which allows communication attempts over at least a few connection intervals.

**Table 2.151. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x08	class	Message class: Connection management
3	0x00	method	Message ID

Byte	Type	Name	Description
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

## BGLIB C API

```
/* Function */
struct gecko_msg_le_connection_set_parameters_rsp_t *gecko_cmd_le_connection_set_parameters(uint8 connection,
uint16 min_interval, uint16 max_interval, uint16 latency, uint16 timeout);

/* Response id */
gecko_rsp_le_connection_set_parameters_id

/* Response structure */
struct gecko_msg_le_connection_set_parameters_rsp_t
{
    uint16 result;
};
```

**Table 2.152. Events Generated**

Event	Description
<a href="#">le_connection_parameters</a>	This event is triggered after new connection parameters has been applied on the connection.



### 2.9.1.5 cmd\_le\_connection\_set\_phy

This command can be used to set preferred PHYs for connection. Preferred PHYs are connection specific. Event [le\\_connection\\_phy\\_status](#) is received when PHY update procedure has been completed. Other than preferred PHY can also be set if remote device does not accept any of the preferred PHYs.

**NOTE:** 2 Mbit and Coded PHYs are not supported by all devices.

**Table 2.153. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x02	lolen	Minimum payload length
2	0x08	class	Message class: Connection management
3	0x03	method	Message ID
4	uint8	connection	
5	uint8	phy	Preferred PHYs for connection. This parameter is bitfield and multiple PHYs can be preferred by setting multiple bits. <ul style="list-style-type: none"> <li>• <b>0x01:</b> 1 Mbit PHY</li> <li>• <b>0x02:</b> 2 Mbit PHY</li> <li>• <b>0x04:</b> 125 kbit Coded PHY (S=8)</li> <li>• <b>0x08:</b> 500 kbit Coded PHY (S=2)</li> </ul>

**Table 2.154. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x08	class	Message class: Connection management
3	0x03	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0:</b> success</li> <li>• <b>Non-zero:</b> an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_le_connection_set_phy_rsp_t *gecko_cmd_le_connection_set_phy(uint8 connection, uint8 phy);

/* Response id */
gecko_rsp_le_connection_set_phy_id

/* Response structure */
struct gecko_msg_le_connection_set_phy_rsp_t
{
    uint16 result;
};

```

**Table 2.155. Events Generated**

Event	Description
<a href="#">le_connection_phy_status</a>	This event indicates that PHY update procedure has been completed.

### 2.9.1.6 cmd\_le\_connection\_set\_timing\_parameters

This command can be used to request a change in the connection parameters of a Bluetooth connection.

**Table 2.156. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x0d	lolen	Minimum payload length
2	0x08	class	Message class: Connection management
3	0x05	method	Message ID
4	uint8	connection	Connection Handle
5-6	uint16	min_interval	Minimum value for the connection event interval. This must be set be less than or equal to max_interval. <ul style="list-style-type: none"> <li>Time = Value x 1.25 ms</li> <li>Range: 0x0006 to 0x0c80</li> <li>Time Range: 7.5 ms to 4 s</li> </ul>
7-8	uint16	max_interval	Maximum value for the connection event interval. This must be set greater than or equal to min_interval. <ul style="list-style-type: none"> <li>Time = Value x 1.25 ms</li> <li>Range: 0x0006 to 0x0c80</li> <li>Time Range: 7.5 ms to 4 s</li> </ul>
9-10	uint16	latency	Slave latency. This parameter defines how many connection intervals the slave can skip if it has no data to send <ul style="list-style-type: none"> <li>Range: 0x0000 to 0x01f4</li> </ul> Use 0x0000 for default value
11-12	uint16	timeout	Supervision timeout. The supervision timeout defines for how long the connection is maintained despite the devices being unable to communicate at the currently configured connection intervals. <ul style="list-style-type: none"> <li>Range: 0x000a to 0x0c80</li> <li>Time = Value x 10 ms</li> <li>Time Range: 100 ms to 32 s</li> <li>The value in milliseconds must be larger than <math>(1 + \text{latency}) * \text{max\_interval} * 2</math>, where max_interval is given in milliseconds</li> </ul> It is recommended that the supervision timeout is set at a value which allows communication attempts over at least a few connection intervals.
13-14	uint16	min_ce_length	Minimum value for the connection event length. This must be set be less than or equal to max_ce_length. <ul style="list-style-type: none"> <li>Time = Value x 0.625 ms</li> <li>Range: 0x0000 to 0xffff</li> </ul> Value is not currently used and is reserved for future. It should be set to 0.
15-16	uint16	max_ce_length	Maximum value for the connection event length. This must be set greater than or equal to min_ce_length. <ul style="list-style-type: none"> <li>Time = Value x 0.625 ms</li> <li>Range: 0x0000 to 0xffff</li> </ul>

Table 2.157. Response

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x08	class	Message class: Connection management
3	0x05	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

## BGLIB C API

```
/* Function */
struct                                gecko_msg_le_connection_set_timing_parameters_rsp_t
*gecko_cmd_le_connection_set_timing_parameters(uint8 connection, uint16 min_interval, uint16 max_interval,
uint16 latency, uint16 timeout, uint16 min_ce_length, uint16 max_ce_length);

/* Response id */
gecko_rsp_le_connection_set_timing_parameters_id

/* Response structure */
struct gecko_msg_le_connection_set_timing_parameters_rsp_t
{
    uint16 result;
};
```

Table 2.158. Events Generated

Event	Description
<a href="#">le_connection_parameters</a>	This event is triggered after new connection parameters has been applied on the connection.

### 2.9.2 le\_connection events

### 2.9.2.1 evt\_le\_connection\_closed

This event indicates that a connection was closed.

**Table 2.159. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x03	lolen	Minimum payload length
2	0x08	class	Message class: Connection management
3	0x01	method	Message ID
4-5	uint16	reason	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>
6	uint8	connection	Handle of the closed connection

### C Functions

```
/* Event id */
gecko_evt_le_connection_closed_id

/* Event structure */
struct gecko_msg_le_connection_closed_evt_t
{
    uint16 reason;,
    uint8 connection;
};
```

### 2.9.2.2 evt\_le\_connection\_opened

This event indicates that a new connection was opened, whether the devices are already bonded, and what is the role of the Bluetooth device (Slave or Master). An open connection can be closed with the [le\\_connection\\_close](#) command by giving the connection handle ID obtained from this event.

**Table 2.160. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x0b	lolen	Minimum payload length
2	0x08	class	Message class: Connection management
3	0x00	method	Message ID
4-9	bd_addr	address	Remote device address
10	uint8	<a href="#">address_type</a>	Remote device address type
11	uint8	master	Device role in connection. Values: <ul style="list-style-type: none"><li>• <b>0</b>: Slave</li><li>• <b>1</b>: Master</li></ul>
12	uint8	connection	Handle for new connection
13	uint8	bonding	Bonding handle. Values: <ul style="list-style-type: none"><li>• <b>0xff</b>: No bonding</li><li>• <b>Other</b>: Bonding handle</li></ul>
14	uint8	advertiser	The local advertising set this connection was opened to. Values: <ul style="list-style-type: none"><li>• <b>0xff</b>: Invalid value or not applicable, and this field should be ignored</li><li>• <b>Other</b>: The advertising set handle</li></ul>

### C Functions

```
/* Event id */
gecko_evt_le_connection_opened_id

/* Event structure */
struct gecko_msg_le_connection_opened_evt_t
{
    bd_addr address;,
    uint8 address_type;,
    uint8 master;,
    uint8 connection;,
    uint8 bonding;,
    uint8 advertiser;
};
```

### 2.9.2.3 evt\_le\_connection\_parameters

This event is triggered whenever the connection parameters are changed and at any time a connection is established.

**Table 2.161. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x0a	lolen	Minimum payload length
2	0x08	class	Message class: Connection management
3	0x02	method	Message ID
4	uint8	connection	Connection handle
5-6	uint16	interval	Connection interval
7-8	uint16	latency	Slave latency
9-10	uint16	timeout	Supervision timeout
11	uint8	<a href="#">security_mode</a>	Connection security mode
12-13	uint16	txsize	Maximum Data Channel PDU Payload size the controller can send in an air packet

### C Functions

```
/* Event id */
gecko_evt_le_connection_parameters_id

/* Event structure */
struct gecko_msg_le_connection_parameters_evt_t
{
    uint8 connection;,
    uint16 interval;,
    uint16 latency;,
    uint16 timeout;,
    uint8 security\_mode;,
    uint16 txsize;
};
```

### 2.9.2.4 evt\_le\_connection\_phy\_status

This event indicates that PHY update procedure has been completed.

**Table 2.162. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x02	lolen	Minimum payload length
2	0x08	class	Message class: Connection management
3	0x04	method	Message ID
4	uint8	connection	Connection handle
5	uint8	phy	Current active PHY. See values from <a href="#">le_connection_set_phy</a> command.

### C Functions

```
/* Event id */
gecko_evt_le_connection_phy_status_id

/* Event structure */
struct gecko_msg_le_connection_phy_status_evt_t
{
    uint8 connection;,
    uint8 phy;
};
```



### 2.9.2.5 evt\_le\_connection\_rssi

This event is triggered when an `le_connection_get_rssi` command has completed.

**Table 2.163. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x03	lolen	Minimum payload length
2	0x08	class	Message class: Connection management
3	0x03	method	Message ID
4	uint8	connection	Connection handle
5	uint8	status	Command complete status: <ul style="list-style-type: none"> <li>• <b>0x00</b>: The command succeeded</li> <li>• <b>0x01-0xFF</b>: The command failed. See Bluetooth Core specification v5.0 [Vol 2] Part D, Error Codes</li> </ul>
6	int8	rssi	RSSI in the latest received packet of the connection. Units: dBm. Range: -127 to +20. This parameter should be ignored if the command failed.

## C Functions

```
/* Event id */
gecko_evt_le_connection_rssi_id

/* Event structure */
struct gecko_msg_le_connection_rssi_evt_t
{
    uint8 connection;
    uint8 status;
    int8 rssi;
};
```

## 2.9.3 le\_connection enumerations

### 2.9.3.1 enum\_le\_connection\_security

These values indicate the Bluetooth Security Mode.

**Table 2.164. Enumerations**

Value	Name	Description
0	<code>le_connection_mode1_level1</code>	No security
1	<code>le_connection_mode1_level2</code>	Unauthenticated pairing with encryption
2	<code>le_connection_mode1_level3</code>	Authenticated pairing with encryption
3	<code>le_connection_mode1_level4</code>	Authenticated Secure Connections pairing with encryption using a 128-bit strength encryption key

## 2.10 Generic Access Profile (le\_gap)

The commands and events in this class are related to Generic Access Profile (GAP) in Bluetooth.

### 2.10.1 le\_gap commands

### 2.10.1.1 cmd\_le\_gap\_bt5\_set\_adv\_data

This command can be used to set user defined data in advertising packets, scan response packets or periodic advertising packets. Maximum 253 bytes of data can be set for extended advertising. For setting longer advertising data, use command [le\\_gap\\_set\\_long\\_advertising\\_data](#).

If advertising mode is currently enabled the new advertising data will be used immediately. Advertising mode can be enabled using command [le\\_gap\\_start\\_advertising](#). Periodic advertising mode can be enabled using command [le\\_gap\\_start\\_periodic\\_advertising](#).

The maximum data length is 31 bytes for legacy advertising. For extended advertising, the maximum length is 1650 bytes, but advertising parameters may limit the amount of data that can be sent in a single advertisement.

The invalid parameter error will be returned in following situations:

- The data length is more than 31 bytes but the advertiser can only advertise using legacy advertising PDUs;
- The data is too long to fit into a single advertisement.
- Set the data of advertising data packet when the advertiser is advertising in scannable mode using extended advertising PDUs;
- Set the data of scan response data packet when the advertiser is advertising in connectable mode using extended advertising PDUs.

Note that the user defined data may be overwritten by the system when the advertising is later enabled in other discoverable mode than user\_data.

**Table 2.165. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x03	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x0c	method	Message ID
4	uint8	handle	Advertising set handle, number of sets available is defined in stack configuration
5	uint8	scan_rsp	This value selects if the data is intended for advertising packets, scan response packets, periodic advertising packets or advertising packet in OTA. Values: <ul style="list-style-type: none"> <li>• <b>0:</b> Advertising packets</li> <li>• <b>1:</b> Scan response packets</li> <li>• <b>2:</b> OTA advertising packets</li> <li>• <b>4:</b> OTA scan response packets</li> <li>• <b>8:</b> Periodic advertising packets</li> </ul>
6	uint8array	adv_data	Data to be set

**Table 2.166. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x0c	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0:</b> success</li> <li>• <b>Non-zero:</b> an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

**BGLIB C API**

```
/* Function */
struct gecko_msg_le_gap_bt5_set_adv_data_rsp_t *gecko_cmd_le_gap_bt5_set_adv_data(uint8 handle, uint8
scan_rsp, uint8 adv_data_len, const uint8 *adv_data_data);

/* Response id */
gecko_rsp_le_gap_bt5_set_adv_data_id

/* Response structure */
struct gecko_msg_le_gap_bt5_set_adv_data_rsp_t
{
    uint16 result;
};
```

**2.10.1.2 (deprecated) cmd\_le\_gap\_bt5\_set\_adv\_parameters**

**Deprecated.** Replacements are [le\\_gap\\_set\\_advertise\\_timing](#) command for setting the advertising intervals, [le\\_gap\\_set\\_advertise\\_channel\\_map](#) command for setting the channel map, and [le\\_gap\\_set\\_advertise\\_report\\_scan\\_request](#) command for enabling and disabling scan request notifications.

**Table 2.167. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x07	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x0b	method	Message ID
4	uint8	handle	Advertising set handle, number of sets available is defined in stack configuration
5-6	uint16	interval_min	Minimum advertising interval. Value in units of 0.625 ms <ul style="list-style-type: none"> <li>• Range: 0x20 to 0xFFFF</li> <li>• Time range: 20 ms to 40.96 s</li> </ul> Default value: 100 ms
7-8	uint16	interval_max	Maximum advertising interval. Value in units of 0.625 ms <ul style="list-style-type: none"> <li>• Range: 0x20 to 0xFFFF</li> <li>• Time range: 20 ms to 40.96 s</li> <li>• Note: interval_max should be bigger than interval_min</li> </ul> Default value: 200 ms
9	uint8	channel_map	Advertising channel map which determines which of the three channels will be used for advertising. This value is given as a bit-mask. Values: <ul style="list-style-type: none"> <li>• <b>1:</b> Advertise on CH37</li> <li>• <b>2:</b> Advertise on CH38</li> <li>• <b>3:</b> Advertise on CH37 and CH38</li> <li>• <b>4:</b> Advertise on CH39</li> <li>• <b>5:</b> Advertise on CH37 and CH39</li> <li>• <b>6:</b> Advertise on CH38 and CH39</li> <li>• <b>7:</b> Advertise on all channels</li> </ul> Recommended value: 7 Default value: 7
10	uint8	report_scan	If non-zero, enables scan request notification, and scan requests will be reported as events. Default value: 0

**Table 2.168. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x0b	method	Message ID

Byte	Type	Name	Description
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

## BGLIB C API

```
/* Function */
struct gecko_msg_le_gap_bt5_set_adv_parameters_rsp_t *gecko_cmd_le_gap_bt5_set_adv_parameters(uint8 handle,
uint16 interval_min, uint16 interval_max, uint8 channel_map, uint8 report_scan);

/* Response id */
gecko_rsp_le_gap_bt5_set_adv_parameters_id

/* Response structure */
struct gecko_msg_le_gap_bt5_set_adv_parameters_rsp_t
{
    uint16 result;
};
```

**Table 2.169. Events Generated**

Event	Description
<a href="#">le_gap_scan_request</a>	Triggered when a scan request has been received during the advertising if scan request notification has been enabled by this command.

### 2.10.1.3 (deprecated) cmd\_le\_gap\_bt5\_set\_mode

**Deprecated.** Replacements are [le\\_gap\\_start\\_advertising](#) command to start the advertising, and [le\\_gap\\_stop\\_advertising](#) command to stop the advertising. [le\\_gap\\_set\\_advertise\\_timing](#) command can be used for setting the maxevents and command [le\\_gap\\_set\\_advertise\\_configuration](#) can be used to for setting address types.

**Table 2.170. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x06	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x0a	method	Message ID
4	uint8	handle	Advertising set handle, number of sets available is defined in stack configuration
5	uint8	<a href="#">discover</a>	Discoverable mode
6	uint8	<a href="#">connect</a>	Connectable mode
7-8	uint16	maxevents	If non-zero, indicates the maximum number of advertising events to send before stopping advertiser. Value 0 indicates no maximum number limit.
9	uint8	<a href="#">address_type</a>	Address type to use for packets

**Table 2.171. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x0a	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0:</b> success</li> <li>• <b>Non-zero:</b> an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_le_gap_bt5_set_mode_rsp_t *gecko_cmd_le_gap_bt5_set_mode(uint8 handle, uint8 discover, uint8 connect, uint16 maxevents, uint8 address_type);

/* Response id */
gecko_rsp_le_gap_bt5_set_mode_id

/* Response structure */
struct gecko_msg_le_gap_bt5_set_mode_rsp_t
{
    uint16 result;
};

```

Table 2.172. Events Generated

Event	Description
<a href="#">le_gap_adv_timeout</a>	Triggered when the number of advertising events set by this command has been done and advertising is stopped on the given advertising set.
<a href="#">le_connection_opened</a>	Triggered when a remote device opened a connection to the advertiser on the specified advertising set.

## 2.10.1.4 cmd\_le\_gap\_clear\_advertise\_configuration

Table 2.173. Command

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x05	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x13	method	Message ID
4	uint8	handle	Advertising set handle
5-8	uint32	configurations	Advertising configuration flags to disable. This value can be a bit-mask of multiple flags. See <a href="#">le_gap_set_advertise_configuration</a> for possible flags.

Table 2.174. Response

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x13	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

## BGLIB C API

```

/* Function */
struct                                gecko_msg_le_gap_clear_advertise_configuration_rsp_t
*gecko_cmd_le_gap_clear_advertise_configuration(uint8 handle, uint32 configurations);

/* Response id */
gecko_rsp_le_gap_clear_advertise_configuration_id

/* Response structure */
struct gecko_msg_le_gap_clear_advertise_configuration_rsp_t
{
    uint16 result;
};

```



### 2.10.1.5 cmd\_le\_gap\_connect

This command can be used to connect an advertising device with the specified initiating PHY. The Bluetooth stack will enter a state where it continuously scans for the connectable advertising packets from the remote device which matches the Bluetooth address given as a parameter. Scan parameters set in [le\\_gap\\_set\\_discovery\\_timing](#) are used in this operation. Upon receiving the advertising packet, the module will send a connection request packet to the target device to initiate a Bluetooth connection. To cancel an ongoing connection process use the [le\\_connection\\_close](#) command with the handle received in the response from this command.

A connection is opened in no-security mode. If the GATT client needs to read or write the attributes on GATT server requiring encryption or authentication, it must first encrypt the connection using an appropriate authentication method.

If a connection cannot be established at all for some reason (for example, the remote device has gone out of range, has entered into deep sleep, or is not advertising), the stack will try to connect forever. In this case the application will not get any event related to the connection request. To recover from this situation, application can implement a timeout and call [le\\_connection\\_close](#) to cancel the connection request.

This command fails with "Connection Limit Exceeded" error if the number of connections attempted to be opened exceeds the configured MAX\_CONNECTIONS value.

This command fails with "Invalid Parameter" error if the initiating PHY value is invalid or the device does not support the PHY.

Later calls of this command have to wait for the ongoing command to complete. A received event [le\\_connection\\_opened](#) indicates connection opened successfully and a received event [le\\_connection\\_closed](#) indicates connection failures have occurred.

**Table 2.175. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x08	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x1a	method	Message ID
4-9	bd_addr	address	Address of the device to connect to
10	uint8	<a href="#">address_type</a>	Address type of the device to connect to
11	uint8	<a href="#">initiating_phy</a>	The initiating PHY. Value: <ul style="list-style-type: none"> <li>• <b>1:</b> LE 1M PHY</li> <li>• <b>4:</b> LE Coded PHY</li> </ul>

**Table 2.176. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x03	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x1a	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0:</b> success</li> <li>• <b>Non-zero:</b> an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>
6	uint8	connection	Handle that will be assigned to the connection once the connection will be established. This handle is valid only if the result code of this response is 0 (zero).

BGLIB C API

```
/* Function */
struct gecko_msg_le_gap_connect_rsp_t *gecko_cmd_le_gap_connect(bd_addr address, uint8 address_type, uint8
initiating_phy);

/* Response id */
gecko_rsp_le_gap_connect_id

/* Response structure */
struct gecko_msg_le_gap_connect_rsp_t
{
    uint16 result;,
    uint8 connection;
};
```

Table 2.177. Events Generated

Event	Description
le_connection_opened	This event is triggered after the connection has been opened, and indicates whether the devices are already bonded and what is the role of the Bluetooth device (Slave or Master).
le_connection_parameters	This event indicates the connection parameters and security mode of the connection.

### 2.10.1.6 (deprecated) cmd\_le\_gap\_discover

**Deprecated.** Replacement is [le\\_gap\\_start\\_discovery](#) command. To preserve the same functionality when migrating to this new command, use LE 1M PHY in scanning\_phy parameter.

This command can be used to start the GAP discovery procedure to scan for advertising devices on LE 1M PHY. To cancel an ongoing discovery process use the [le\\_gap\\_end\\_procedure](#) command.

**Table 2.178. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x01	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x02	method	Message ID
4	uint8	<a href="#">mode</a>	Bluetooth discovery Mode. For values see link

**Table 2.179. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x02	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0:</b> success</li> <li>• <b>Non-zero:</b> an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_le_gap_discover_rsp_t *gecko_cmd_le_gap_discover(uint8 mode);

/* Response id */
gecko_rsp_le_gap_discover_id

/* Response structure */
struct gecko_msg_le_gap_discover_rsp_t
{
    uint16 result;
};

```

**Table 2.180. Events Generated**

Event	Description
<a href="#">le_gap_scan_response</a>	Every time an advertising packet is received, this event is triggered. The packets are not filtered in any way, so multiple events will be received for every advertising device in range.

### 2.10.1.7 cmd\_le\_gap\_enable\_whitelisting

This command is used to enable whitelisting. To add devices to the whitelist either bond with the device or add it manually with [sm\\_add\\_to\\_whitelist](#)

**Table 2.181. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x01	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x21	method	Message ID
4	uint8	enable	1 enable, 0 disable whitelisting.

**Table 2.182. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x21	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```
/* Function */
struct gecko_msg_le_gap_enable_whitelisting_rsp_t *gecko_cmd_le_gap_enable_whitelisting(uint8 enable);

/* Response id */
gecko_rsp_le_gap_enable_whitelisting_id

/* Response structure */
struct gecko_msg_le_gap_enable_whitelisting_rsp_t
{
    uint16 result;
};
```

### 2.10.1.8 cmd\_le\_gap\_end\_procedure

This command can be used to end a current GAP procedure.

**Table 2.183. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x00	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x03	method	Message ID

**Table 2.184. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x03	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

#### BGLIB C API

```
/* Function */
struct gecko_msg_le_gap_end_procedure_rsp_t *gecko_cmd_le_gap_end_procedure();

/* Response id */
gecko_rsp_le_gap_end_procedure_id

/* Response structure */
struct gecko_msg_le_gap_end_procedure_rsp_t
{
    uint16 result;
};
```

### 2.10.1.9 (deprecated) cmd\_le\_gap\_open

**Deprecated.** Replacement is [le\\_gap\\_connect](#) command which allows to open a connection with a specified PHY.

This command can be used to connect an advertising device with initiating PHY being the LE 1M PHY.

**Table 2.185. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x07	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x00	method	Message ID
4-9	bd_addr	address	Address of the device to connect to
10	uint8	<a href="#">address_type</a>	Address type of the device to connect to

**Table 2.186. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x03	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x00	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0:</b> success</li> <li>• <b>Non-zero:</b> an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>
6	uint8	connection	Handle that will be assigned to the connection once the connection will be established. This handle is valid only if the result code of this response is 0 (zero).

### BGLIB C API

```

/* Function */
struct gecko_msg_le_gap_open_rsp_t *gecko_cmd_le_gap_open(bd_addr address, uint8 address_type);

/* Response id */
gecko_rsp_le_gap_open_id

/* Response structure */
struct gecko_msg_le_gap_open_rsp_t
{
    uint16 result;
    uint8 connection;
};

```

**Table 2.187. Events Generated**

Event	Description
<a href="#">le_connection_opened</a>	This event is triggered after the connection has been opened, and indicates whether the devices are already bonded and what is the role of the Bluetooth device (Slave or Master).
<a href="#">le_connection_parameters</a>	This event indicates the connection parameters and security mode of the connection.

### 2.10.1.10 (deprecated) cmd\_le\_gap\_set\_adv\_data

**Deprecated.** Use [le\\_gap\\_bt5\\_set\\_adv\\_data](#) command to set the advertising data and scan response data.

This command is only effective on the first advertising set (handle value 0). Other advertising sets are not affected.

**Table 2.188. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x07	method	Message ID
4	uint8	scan_rsp	This value selects if the data is intended for advertising packets, scan response packets or advertising packet in OTA. Values: <ul style="list-style-type: none"><li>• <b>0:</b> Advertising packets</li><li>• <b>1:</b> Scan response packets</li><li>• <b>2:</b> OTA advertising packets</li><li>• <b>4:</b> OTA scan response packets</li></ul>
5	uint8array	adv_data	Data to be set

**Table 2.189. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x07	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0:</b> success</li><li>• <b>Non-zero:</b> an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```
/* Function */
struct gecko_msg_le_gap_set_adv_data_rsp_t *gecko_cmd_le_gap_set_adv_data(uint8 scan_rsp, uint8 adv_data_len,
const uint8 *adv_data_data);

/* Response id */
gecko_rsp_le_gap_set_adv_data_id

/* Response structure */
struct gecko_msg_le_gap_set_adv_data_rsp_t
{
    uint16 result;
};
```



**2.10.1.11 (deprecated) cmd\_le\_gap\_set\_adv\_parameters**

**Deprecated.** Replacements are [le\\_gap\\_set\\_advertise\\_timing](#) command for setting the advertising intervals, and [le\\_gap\\_set\\_advertise\\_channel\\_map](#) command for setting the channel map.

This command is only effective on the first advertising set (handle value 0). Other advertising sets are not affected.

**Table 2.190. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x05	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x04	method	Message ID
4-5	uint16	interval_min	Minimum advertising interval. Value in units of 0.625 ms <ul style="list-style-type: none"> <li>• Range: 0x20 to 0xFFFF</li> <li>• Time range: 20 ms to 40.96 s</li> </ul> Default value: 100 ms
6-7	uint16	interval_max	Maximum advertising interval. Value in units of 0.625 ms <ul style="list-style-type: none"> <li>• Range: 0x20 to 0xFFFF</li> <li>• Time range: 20 ms to 40.96 s</li> <li>• Note: interval_max should be bigger than interval_min</li> </ul> Default value: 200 ms
8	uint8	channel_map	Advertising channel map which determines which of the three channels will be used for advertising. This value is given as a bit-mask. Values: <ul style="list-style-type: none"> <li>• <b>1:</b> Advertise on CH37</li> <li>• <b>2:</b> Advertise on CH38</li> <li>• <b>3:</b> Advertise on CH37 and CH38</li> <li>• <b>4:</b> Advertise on CH39</li> <li>• <b>5:</b> Advertise on CH37 and CH39</li> <li>• <b>6:</b> Advertise on CH38 and CH39</li> <li>• <b>7:</b> Advertise on all channels</li> </ul> Recommended value: 7 Default value: 7

**Table 2.191. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x04	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0:</b> success</li> <li>• <b>Non-zero:</b> an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

## BGLIB C API

```
/* Function */
struct gecko_msg_le_gap_set_adv_parameters_rsp_t *gecko_cmd_le_gap_set_adv_parameters(uint16 interval_min,
uint16 interval_max, uint8 channel_map);

/* Response id */
gecko_rsp_le_gap_set_adv_parameters_id

/* Response structure */
struct gecko_msg_le_gap_set_adv_parameters_rsp_t
{
    uint16 result;
};
```

### 2.10.1.12 (deprecated) cmd\_le\_gap\_set\_adv\_timeout

**Deprecated.** New command [le\\_gap\\_set\\_advertise\\_timing](#) should be used for this functionality.

This command is only effective on the first advertising set (handle value 0). Other advertising sets are not affected.

**Table 2.192. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x01	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x08	method	Message ID
4	uint8	maxevents	If non-zero, indicates the maximum number of advertising events to send before stopping advertiser. Value 0 indicates no maximum number limit.

**Table 2.193. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x08	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0:</b> success</li><li>• <b>Non-zero:</b> an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```
/* Function */
struct gecko_msg_le_gap_set_adv_timeout_rsp_t *gecko_cmd_le_gap_set_adv_timeout(uint8 maxevents);

/* Response id */
gecko_rsp_le_gap_set_adv_timeout_id

/* Response structure */
struct gecko_msg_le_gap_set_adv_timeout_rsp_t
{
    uint16 result;
};
```

### 2.10.1.13 cmd\_le\_gap\_set\_advertise\_channel\_map

This command can be used to set the primary advertising channel map of the given advertising set. This setting will take effect on the next advertising enabling.

**Table 2.194. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x0f	method	Message ID
4	uint8	handle	Advertising set handle
5	uint8	channel_map	Advertisement channel map which determines which of the three channels will be used for advertising. This value is given as a bit-mask. Values: <ul style="list-style-type: none"> <li>• <b>1</b>: Advertise on CH37</li> <li>• <b>2</b>: Advertise on CH38</li> <li>• <b>3</b>: Advertise on CH37 and CH38</li> <li>• <b>4</b>: Advertise on CH39</li> <li>• <b>5</b>: Advertise on CH37 and CH39</li> <li>• <b>6</b>: Advertise on CH38 and CH39</li> <li>• <b>7</b>: Advertise on all channels</li> </ul> Recommended value: 7 Default value: 7

**Table 2.195. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x0f	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_le_gap_set_advertise_channel_map_rsp_t *gecko_cmd_le_gap_set_advertise_channel_map(uint8
handle, uint8 channel_map);

/* Response id */
gecko_rsp_le_gap_set_advertise_channel_map_id

/* Response structure */
struct gecko_msg_le_gap_set_advertise_channel_map_rsp_t
{

```

```
uint16 result;  
};
```

### 2.10.1.14 cmd\_le\_gap\_set\_advertise\_configuration

This command can be used to enable advertising configuration flags on the given advertising set. The configuration change will take effects on the next advertising enabling.

These configuration flags can be disabled using [le\\_gap\\_clear\\_advertise\\_configuration](#) command.

**Table 2.196. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x05	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x12	method	Message ID
4	uint8	handle	Advertising set handle
5-8	uint32	configurations	Advertising configuration flags to enable. This value can be a bit-mask of multiple flags. Flags: <ul style="list-style-type: none"> <li>• <b>1 (Bit 0):</b> Use legacy advertising PDUs.</li> <li>• <b>2 (Bit 1):</b> Omit advertiser's address from all PDUs (anonymous advertising). This flag is effective only in extended advertising.</li> <li>• <b>4 (Bit 2):</b> Use <code>le_gap_non_resolvable</code> address type. Advertising must be in non-connectable mode if this configuration is enabled.</li> <li>• <b>8 (Bit 3):</b> Include TX power in advertising packets. This flag is effective only in extended advertising.</li> </ul> Default value: 1

**Table 2.197. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x12	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0:</b> success</li> <li>• <b>Non-zero:</b> an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_le_gap_set_advertise_configuration_rsp_t *gecko_cmd_le_gap_set_advertise_configuration(uint8
handle, uint32 configurations);

/* Response id */
gecko_rsp_le_gap_set_advertise_configuration_id

/* Response structure */
struct gecko_msg_le_gap_set_advertise_configuration_rsp_t
{

```

```
uint16 result;  
};
```

### 2.10.1.15 cmd\_le\_gap\_set\_advertise\_phy

This command can be used to set the advertising PHYs of the given advertising set. This setting will take effect on the next advertising enabling. "Invalid Parameter" error will be returned if a PHY value is invalid or the device does not support a given PHY.

**Table 2.198. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x03	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x11	method	Message ID
4	uint8	handle	Advertising set handle
5	uint8	<a href="#">primary_phy</a>	<p>The PHY on which the advertising packets are transmitted on the primary advertising channel. If legacy advertising PDUs are being used, the PHY must be LE 1M.</p> <p>Values:</p> <ul style="list-style-type: none"> <li>• <b>1:</b> Advertising PHY is LE 1M</li> <li>• <b>4:</b> Advertising PHY is LE Coded</li> </ul> <p>Default: 1</p>
6	uint8	<a href="#">secondary_phy</a>	<p>The PHY on which the advertising packets are transmitted on the secondary advertising channel.</p> <p>Values:</p> <ul style="list-style-type: none"> <li>• <b>1:</b> Advertising PHY is LE 1M</li> <li>• <b>2:</b> Advertising PHY is LE 2M</li> <li>• <b>4:</b> Advertising PHY is LE Coded</li> </ul> <p>Default: 1</p>

**Table 2.199. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x11	method	Message ID
4-5	uint16	result	<p>Result code</p> <ul style="list-style-type: none"> <li>• <b>0:</b> success</li> <li>• <b>Non-zero:</b> an error occurred</li> </ul> <p>For other values refer to the <a href="#">Error codes</a></p>

### BGLIB C API

```

/* Function */
struct gecko_msg_le_gap_set_advertise_phy_rsp_t *gecko_cmd_le_gap_set_advertise_phy(uint8 handle, uint8
primary\_phy, uint8 secondary\_phy);

/* Response id */
gecko_rsp_le_gap_set_advertise_phy_id

/* Response structure */
struct gecko_msg_le_gap_set_advertise_phy_rsp_t

```



```
{  
    uint16 result;  
};
```

### 2.10.1.16 cmd\_le\_gap\_set\_advertise\_report\_scan\_request

This command can be used to enable or disable the scan request notification of the given advertising set. This setting will take effect on the next advertising enabling.

**Table 2.200. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x10	method	Message ID
4	uint8	handle	Advertising set handle
5	uint8	report_scan_req	If non-zero, enables scan request notification, and scan requests will be reported as events.  Default value: 0

**Table 2.201. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x10	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct                                gecko_msg_le_gap_set_advertise_report_scan_request_rsp_t
*gecko_cmd_le_gap_set_advertise_report_scan_request(uint8 handle, uint8 report_scan_req);

/* Response id */
gecko_rsp_le_gap_set_advertise_report_scan_request_id

/* Response structure */
struct gecko_msg_le_gap_set_advertise_report_scan_request_rsp_t
{
    uint16 result;
};

```

**Table 2.202. Events Generated**

Event	Description
<a href="#">le_gap_scan_request</a>	Triggered when a scan request has been received during the advertising if scan request notification has been enabled by this command.

### 2.10.1.17 cmd\_le\_gap\_set\_advertise\_timing

This command can be used to set the advertising timing parameters of the given advertising set. This setting will take effect on the next advertising enabling.

**Table 2.203. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x0c	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x0e	method	Message ID
4	uint8	handle	Advertising set handle
5-8	uint32	interval_min	Minimum advertising interval. Value in units of 0.625 ms <ul style="list-style-type: none"> <li>Range: 0x20 to 0xFFFF</li> <li>Time range: 20 ms to 40.96 s</li> </ul> Default value: 100 ms
9-12	uint32	interval_max	Maximum advertising interval. Value in units of 0.625 ms <ul style="list-style-type: none"> <li>Range: 0x20 to 0xFFFF</li> <li>Time range: 20 ms to 40.96 s</li> <li>Note: interval_max should be bigger than interval_min</li> </ul> Default value: 200 ms
13-14	uint16	duration	The advertising duration for this advertising set. Value 0 indicates no advertising duration limit and the advertising continues until it is disabled. A non-zero value sets the duration in units of 10 ms. The duration begins at the start of the first advertising event of this advertising set. <ul style="list-style-type: none"> <li>Range: 0x0001 to 0xFFFF</li> <li>Time range: 10 ms to 655.35 s</li> </ul> Default value: 0
15	uint8	maxevents	If non-zero, indicates the maximum number of advertising events to send before stopping advertiser. Value 0 indicates no maximum number limit. <p>Default value: 0</p>

**Table 2.204. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x0e	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li><b>0</b>: success</li> <li><b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

## BGLIB C API

```
/* Function */
struct gecko_msg_le_gap_set_advertise_timing_rsp_t *gecko_cmd_le_gap_set_advertise_timing(uint8 handle, uint32
interval_min, uint32 interval_max, uint16 duration, uint8 maxevents);

/* Response id */
gecko_rsp_le_gap_set_advertise_timing_id

/* Response structure */
struct gecko_msg_le_gap_set_advertise_timing_rsp_t
{
    uint16 result;
};
```

### 2.10.1.18 cmd\_le\_gap\_set\_advertise\_tx\_power

This command can be used to limit the maximum advertising TX power on the given advertising set. If the value goes over the global value that has been set using [system\\_set\\_tx\\_power](#) command, the global value will be the maximum limit. The maximum TX power of legacy advertising is further constrained to not go over +10 dBm. Extended advertising TX power can be +10 dBm and over if Adaptive Frequency Hopping has been enabled.

This setting will take effect on the next advertising enabling.

By default, maximum advertising TX power is limited by the global value.

**Table 2.205. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x03	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x1b	method	Message ID
4	uint8	handle	Advertising set handle
5-6	int16	power	TX power in 0.1dBm steps, for example the value of 10 is 1dBm and 55 is 5.5dBm

**Table 2.206. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x04	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x1b	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>
6-7	int16	set_power	The selected maximum advertising TX power

### BGLIB C API

```

/* Function */
struct gecko_msg_le_gap_set_advertise_tx_power_rsp_t *gecko_cmd_le_gap_set_advertise_tx_power(uint8 handle,
int16 power);

/* Response id */
gecko_rsp_le_gap_set_advertise_tx_power_id

/* Response structure */
struct gecko_msg_le_gap_set_advertise_tx_power_rsp_t
{
    uint16 result;,
    int16 set_power;
};

```

**2.10.1.19 (deprecated) cmd\_le\_gap\_set\_conn\_parameters**

**Deprecated.** Replacement is [le\\_gap\\_set\\_conn\\_timing\\_parameters](#) command for setting timing parameters.

This command can be used to set the default Bluetooth connection parameters. The configured values are valid for all subsequent connections that will be established. For changing the parameters of an already established connection use the command [le\\_connection\\_set\\_parameters](#).

**Table 2.207. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x08	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x05	method	Message ID
4-5	uint16	min_interval	Minimum value for the connection event interval. This must be set be less than or equal to max_interval. <ul style="list-style-type: none"> <li>• Time = Value x 1.25 ms</li> <li>• Range: 0x0006 to 0x0c80</li> <li>• Time Range: 7.5 ms to 4 s</li> </ul> Default value: 20 ms
6-7	uint16	max_interval	Maximum value for the connection event interval. This must be set greater than or equal to min_interval. <ul style="list-style-type: none"> <li>• Time = Value x 1.25 ms</li> <li>• Range: 0x0006 to 0x0c80</li> <li>• Time Range: 7.5 ms to 4 s</li> </ul> Default value: 50 ms
8-9	uint16	latency	Slave latency. This parameter defines how many connection intervals the slave can skip if it has no data to send <ul style="list-style-type: none"> <li>• Range: 0x0000 to 0x01f4</li> </ul> Default value: 0
10-11	uint16	timeout	Supervision timeout. The supervision timeout defines for how long the connection is maintained despite the devices being unable to communicate at the currently configured connection intervals. <ul style="list-style-type: none"> <li>• Range: 0x000a to 0x0c80</li> <li>• Time = Value x 10 ms</li> <li>• Time Range: 100 ms to 32 s</li> <li>• The value in milliseconds must be larger than <math>(1 + \text{latency}) * \text{max\_interval} * 2</math>, where max_interval is given in milliseconds</li> </ul> It is recommended that the supervision timeout is set at a value which allows communication attempts over at least a few connection intervals. <p>Default value: 1000 ms</p>

**Table 2.208. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile

Byte	Type	Name	Description
3	0x05	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

## BGLIB C API

```
/* Function */
struct gecko_msg_le_gap_set_conn_parameters_rsp_t *gecko_cmd_le_gap_set_conn_parameters(uint16 min_interval,
uint16 max_interval, uint16 latency, uint16 timeout);

/* Response id */
gecko_rsp_le_gap_set_conn_parameters_id

/* Response structure */
struct gecko_msg_le_gap_set_conn_parameters_rsp_t
{
    uint16 result;
};
```

### 2.10.1.20 cmd\_le\_gap\_set\_conn\_timing\_parameters

This command can be used to set the default Bluetooth connection parameters. The configured values are valid for all subsequent connections that will be established. For changing the parameters of an already established connection use the command [le\\_connection\\_set\\_timing\\_parameters](#).

**Table 2.209. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x0c	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x22	method	Message ID
4-5	uint16	min_interval	Minimum value for the connection event interval. This must be set be less than or equal to max_interval. <ul style="list-style-type: none"> <li>• Time = Value x 1.25 ms</li> <li>• Range: 0x0006 to 0x0c80</li> <li>• Time Range: 7.5 ms to 4 s</li> </ul> Default value: 20 ms
6-7	uint16	max_interval	Maximum value for the connection event interval. This must be set greater than or equal to min_interval. <ul style="list-style-type: none"> <li>• Time = Value x 1.25 ms</li> <li>• Range: 0x0006 to 0x0c80</li> <li>• Time Range: 7.5 ms to 4 s</li> </ul> Default value: 50 ms
8-9	uint16	latency	Slave latency. This parameter defines how many connection intervals the slave can skip if it has no data to send <ul style="list-style-type: none"> <li>• Range: 0x0000 to 0x01f4</li> </ul> Default value: 0
10-11	uint16	timeout	Supervision timeout. The supervision timeout defines for how long the connection is maintained despite the devices being unable to communicate at the currently configured connection intervals. <ul style="list-style-type: none"> <li>• Range: 0x000a to 0x0c80</li> <li>• Time = Value x 10 ms</li> <li>• Time Range: 100 ms to 32 s</li> <li>• The value in milliseconds must be larger than <math>(1 + \text{latency}) * \text{max\_interval} * 2</math>, where max_interval is given in milliseconds</li> </ul> It is recommended that the supervision timeout is set at a value which allows communication attempts over at least a few connection intervals. Default value: 1000 ms
12-13	uint16	min_ce_length	Minimum value for the connection event length. This must be set be less than or equal to max_ce_length. <ul style="list-style-type: none"> <li>• Time = Value x 0.625 ms</li> <li>• Range: 0x0000 to 0xffff</li> </ul> Default value: 0x0000 Value is not currently used and is reserved for future. It should be set to 0.



Byte	Type	Name	Description
14-15	uint16	max_ce_length	Maximum value for the connection event length. This must be set greater than or equal to min_ce_length. <ul style="list-style-type: none"> <li>Time = Value x 0.625 ms</li> <li>Range: 0x0000 to 0xffff</li> </ul> Default value: 0xffff

Table 2.210. Response

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x22	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li><b>0</b>: success</li> <li><b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

**BGLIB C API**

```

/* Function */
struct gecko_msg_le_gap_set_conn_timing_parameters_rsp_t *gecko_cmd_le_gap_set_conn_timing_parameters(uint16
min_interval, uint16 max_interval, uint16 latency, uint16 timeout, uint16 min_ce_length, uint16 max_ce_length);

/* Response id */
gecko_rsp_le_gap_set_conn_timing_parameters_id

/* Response structure */
struct gecko_msg_le_gap_set_conn_timing_parameters_rsp_t
{
    uint16 result;
};

```

### 2.10.1.21 cmd\_le\_gap\_set\_data\_channel\_classification

This command can be used to specify a channel classification for data channels. This classification persists until overwritten with a subsequent command or until the system is reset.

**Table 2.211. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x01	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x19	method	Message ID
4	uint8array	channel_map	This parameter is 5 bytes and contains 37 1-bit fields. The nth such field (in the range 0 to 36) contains the value for the link layer channel index n. <ul style="list-style-type: none"><li>• <b>0</b>: Channel n is bad.</li><li>• <b>1</b>: Channel n is unknown.</li></ul> The most significant bits are reserved and shall be set to 0 for future use. At least two channels shall be marked as unknown.

**Table 2.212. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x19	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```
/* Function */
struct          gecko_msg_le_gap_set_data_channel_classification_rsp_t
*gecko_cmd_le_gap_set_data_channel_classification(uint8 channel_map_len, const uint8 *channel_map_data);

/* Response id */
gecko_rsp_le_gap_set_data_channel_classification_id

/* Response structure */
struct gecko_msg_le_gap_set_data_channel_classification_rsp_t
{
    uint16 result;
};
```

### 2.10.1.22 cmd\_le\_gap\_set\_discovery\_extended\_scan\_response

This command can be used to enable and disable the extended scan response event. When the extended scan response event is enabled, it replaces [le\\_gap\\_scan\\_response](#), that is, the stack will generate either [le\\_gap\\_extended\\_scan\\_response](#) or [le\\_gap\\_scan\\_response](#), but not both at a time.

**Table 2.213. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x01	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x1c	method	Message ID
4	uint8	enable	Values: <ul style="list-style-type: none"><li>• <b>0</b>: Disable extended scan response event</li><li>• <b>1</b>: Enable extended scan response event</li></ul>

**Table 2.214. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x1c	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```
/* Function */
struct                gecko_msg_le_gap_set_discovery_extended_scan_response_rsp_t
*gecko_cmd_le_gap_set_discovery_extended_scan_response(uint8 enable);

/* Response id */
gecko_rsp_le_gap_set_discovery_extended_scan_response_id

/* Response structure */
struct gecko_msg_le_gap_set_discovery_extended_scan_response_rsp_t
{
    uint16 result;
};
```

### 2.10.1.23 cmd\_le\_gap\_set\_discovery\_timing

This command can be used to set the timing parameters of the specified PHYs. If the device is currently scanning for advertising devices the PHYs, new parameters will take effect when the scanning is restarted.

**Table 2.215. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x05	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x16	method	Message ID
4	uint8	phys	The PHYs for which the parameters are set. <ul style="list-style-type: none"> <li>• 1: LE 1M PHY</li> <li>• 4: LE Coded PHY</li> <li>• 5: LE 1M PHY and LE Coded PHY</li> </ul>
5-6	uint16	scan_interval	<p>Scan interval. This is defined as the time interval from when the device started its last scan until it begins the subsequent scan, that is how often to scan</p> <ul style="list-style-type: none"> <li>• Time = Value x 0.625 ms</li> <li>• Range: 0x0004 to 0xFFFF</li> <li>• Time Range: 2.5 ms to 40.96 s</li> </ul> <p>Default value: 10 ms</p> <p>There is a variable delay when switching channels at the end of each scanning interval which is included in the scanning interval time itself. During this switch time no advertising packets will be received by the device. The switch time variation is dependent on use case, for example in case of scanning while keeping active connections the channel switch time might be longer than when only scanning without any active connections. Increasing the scanning interval will reduce the amount of time in which the device cannot receive advertising packets as it will switch channels less often.</p> <p>After every scan interval the scanner will change the frequency it operates at. It will cycle through all the three advertising channels in a round robin fashion. According to the specification all three channels must be used by a scanner.</p>
7-8	uint16	scan_window	<p>Scan window. The duration of the scan. scan_window shall be less than or equal to scan_interval</p> <ul style="list-style-type: none"> <li>• Time = Value x 0.625 ms</li> <li>• Range: 0x0004 to 0xFFFF</li> <li>• Time Range: 2.5 ms to 40.96 s</li> </ul> <p>Default value: 10 ms Note that packet reception is aborted if it has been started before scan window ends.</p>

**Table 2.216. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile

Byte	Type	Name	Description
3	0x16	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

## BGLIB C API

```
/* Function */
struct gecko_msg_le_gap_set_discovery_timing_rsp_t *gecko_cmd_le_gap_set_discovery_timing(uint8 phys, uint16
scan_interval, uint16 scan_window);

/* Response id */
gecko_rsp_le_gap_set_discovery_timing_id

/* Response structure */
struct gecko_msg_le_gap_set_discovery_timing_rsp_t
{
    uint16 result;
};
```

### 2.10.1.24 cmd\_le\_gap\_set\_discovery\_type

This command can be used to set the scan type of the specified PHYs. If the device is currently scanning for advertising devices on the PHYs, new parameters will take effect when the scanning is restarted

**Table 2.217. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x17	method	Message ID
4	uint8	phys	The PHYs for which the parameters are set. <ul style="list-style-type: none"> <li>• <b>1:</b> LE 1M PHY</li> <li>• <b>4:</b> LE Coded PHY</li> <li>• <b>5:</b> LE 1M PHY and LE Coded PHY</li> </ul>
5	uint8	scan_type	Scan type indicated by a flag. Values: <ul style="list-style-type: none"> <li>• <b>0:</b> Passive scanning</li> <li>• <b>1:</b> Active scanning</li> <li>• In passive scanning mode the device only listens to advertising packets and will not transmit any packet</li> <li>• In active scanning mode the device will send out a scan request packet upon receiving advertising packet from a remote device and then it will listen to the scan response packet from remote device</li> </ul> Default value: 0

**Table 2.218. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x17	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0:</b> success</li> <li>• <b>Non-zero:</b> an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_le_gap_set_discovery_type_rsp_t *gecko_cmd_le_gap_set_discovery_type(uint8 phys, uint8 scan_type);

/* Response id */
gecko_rsp_le_gap_set_discovery_type_id

/* Response structure */
struct gecko_msg_le_gap_set_discovery_type_rsp_t
{
    uint16 result;
};

```

### 2.10.1.25 cmd\_le\_gap\_set\_long\_advertising\_data

This command can be used to set advertising data for specified packet type and advertising set. All data currently in the system data buffer will be extracted as the advertising data. The buffer will be emptied after this command regardless of the completion status.

Prior to calling this command, data could be added to the buffer with one or multiple calls of [system\\_data\\_buffer\\_write](#).

See [le\\_gap\\_bt5\\_set\\_adv\\_data](#) for more details of advertising data.

**Table 2.219. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x20	method	Message ID
4	uint8	handle	Advertising set handle
5	uint8	packet_type	This value selects if the data is intended for advertising packets, scan response packets, or periodic advertising packets. Values: <ul style="list-style-type: none"> <li>• <b>0</b>: Advertising packets</li> <li>• <b>1</b>: Scan response packets</li> <li>• <b>2</b>: OTA advertising packets</li> <li>• <b>4</b>: OTA scan response packets</li> <li>• <b>8</b>: Periodic advertising packets</li> </ul>

**Table 2.220. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x20	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_le_gap_set_long_advertising_data_rsp_t *gecko_cmd_le_gap_set_long_advertising_data(uint8
handle, uint8 packet_type);

/* Response id */
gecko_rsp_le_gap_set_long_advertising_data_id

/* Response structure */
struct gecko_msg_le_gap_set_long_advertising_data_rsp_t
{
    uint16 result;
};

```

### 2.10.1.26 (deprecated) cmd\_le\_gap\_set\_mode

**Deprecated.** Use [le\\_gap\\_start\\_advertising](#) command for enabling the advertising, and [le\\_gap\\_stop\\_advertising](#) command for disabling the advertising.

This command is only effective on the first advertising set (handle value 0). Other advertising sets are not affected.

**Table 2.221. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x01	method	Message ID
4	uint8	<a href="#">discover</a>	Discoverable mode
5	uint8	<a href="#">connect</a>	Connectable mode

**Table 2.222. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x01	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0:</b> success</li> <li>• <b>Non-zero:</b> an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_le_gap_set_mode_rsp_t *gecko_cmd_le_gap_set_mode(uint8 discover, uint8 connect);

/* Response id */
gecko_rsp_le_gap_set_mode_id

/* Response structure */
struct gecko_msg_le_gap_set_mode_rsp_t
{
    uint16 result;
};

```

**Table 2.223. Events Generated**

Event	Description
<a href="#">le_gap_adv_timeout</a>	Triggered when the number of advertising events has been done and advertising is stopped.
<a href="#">le_connection_opened</a>	Triggered when a remote device opened a connection to this advertising device.



### 2.10.1.27 cmd\_le\_gap\_set\_privacy\_mode

This command can be used to enable or disable privacy feature on all GAP roles. The new privacy mode will take effect for advertising on the next advertising enabling, for scanning on the next scan enabling, and for initiating on the next open connection command. When privacy is enabled and the device is advertising or scanning, the stack will maintain a periodic timer with the specified time interval as timeout value. At each timeout the stack will generate a new private resolvable address and use it in advertising data packets and scanning requests.

By default, privacy feature is disabled.

**Table 2.224. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x0d	method	Message ID
4	uint8	privacy	Values: <ul style="list-style-type: none"> <li>• <b>0</b>: Disable privacy</li> <li>• <b>1</b>: Enable privacy</li> </ul>
5	uint8	interval	The minimum time interval between private address change. This parameter is ignored if this command is issued for disabling privacy mode. Values: <ul style="list-style-type: none"> <li>• <b>0</b>: Use default interval, 15 minutes</li> <li>• <b>others</b>: The time interval in minutes</li> </ul>

**Table 2.225. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x0d	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_le_gap_set_privacy_mode_rsp_t *gecko_cmd_le_gap_set_privacy_mode(uint8 privacy, uint8 interval);

/* Response id */
gecko_rsp_le_gap_set_privacy_mode_id

/* Response structure */
struct gecko_msg_le_gap_set_privacy_mode_rsp_t
{
    uint16 result;
};

```

**2.10.1.28 (deprecated) cmd\_le\_gap\_set\_scan\_parameters**

**Deprecated.** Replacements are [le\\_gap\\_set\\_discovery\\_timing](#) command for setting timing parameters, and [le\\_gap\\_set\\_discovery\\_type](#) command for the scan type.

The parameters set by this command is only effective on the LE 1M PHY. For LE Coded PHY, above replacement command must be used.

**Table 2.226. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x05	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x06	method	Message ID
4-5	uint16	scan_interval	<p>Scanner interval. This is defined as the time interval from when the device started its last scan until it begins the subsequent scan, that is how often to scan</p> <ul style="list-style-type: none"> <li>• Time = Value x 0.625 ms</li> <li>• Range: 0x0004 to 0x4000</li> <li>• Time Range: 2.5 ms to 10.24 s</li> </ul> <p>Default value: 10 ms</p> <p>There is a variable delay when switching channels at the end of each scanning interval which is included in the scanning interval time itself. During this switch time no advertising packets will be received by the device. The switch time variation is dependent on use case, for example in case of scanning while keeping active connections the channel switch time might be longer than when only scanning without any active connections. Increasing the scanning interval will reduce the amount of time in which the device cannot receive advertising packets as it will switch channels less often.</p> <p>After every scan interval the scanner will change the frequency it operates at. It will cycle through all the three advertising channels in a round robin fashion. According to the specification all three channels must be used by a scanner.</p>
6-7	uint16	scan_window	<p>Scan window. The duration of the scan. scan_window shall be less than or equal to scan_interval</p> <ul style="list-style-type: none"> <li>• Time = Value x 0.625 ms</li> <li>• Range: 0x0004 to 0x4000</li> <li>• Time Range: 2.5 ms to 10.24 s</li> </ul> <p>Default value: 10 ms Note that packet reception is aborted if it has been started before scan window ends.</p>
8	uint8	active	<p>Scan type indicated by a flag. Values:</p> <ul style="list-style-type: none"> <li>• <b>0</b>: Passive scanning</li> <li>• <b>1</b>: Active scanning</li> </ul> <ul style="list-style-type: none"> <li>• In passive scanning mode the device only listens to advertising packets and will not transmit any packet</li> <li>• In active scanning mode the device will send out a scan request packet upon receiving advertising packet from a remote device and then it will listen to the scan response packet from remote device</li> </ul> <p>Default value: 0</p>

Table 2.227. Response

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x06	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

**BGLIB C API**

```
/* Function */
struct gecko_msg_le_gap_set_scan_parameters_rsp_t *gecko_cmd_le_gap_set_scan_parameters(uint16 scan_interval,
uint16 scan_window, uint8 active);

/* Response id */
gecko_rsp_le_gap_set_scan_parameters_id

/* Response structure */
struct gecko_msg_le_gap_set_scan_parameters_rsp_t
{
    uint16 result;
};
```

### 2.10.1.29 cmd\_le\_gap\_start\_advertising

This command can be used to start the advertising of the given advertising set with specified discoverable and connectable modes.

The number of concurrent connectable advertisings is also limited by MAX\_CONNECTIONS configuration. For example, only one connectable advertising can be enabled if the device has (MAX\_CONNECTIONS - 1) connections when this command is called. The limitation does not apply to non-connectable advertising.

The default advertising configuration in the stack is set to using legacy advertising PDUs on LE 1M PHY. The stack will automatically select extended advertising PDUs if either of the followings has occurred under the default configuration:

1. The connectable mode is set to le\_gap\_connectable\_non\_scannable.
2. The primary advertising PHY has been set to LE Coded PHY by command [le\\_gap\\_set\\_advertise\\_phy](#).
3. The user advertising data length is more than 31 bytes.
4. Periodic advertising has been enabled.

If currently set parameters can't be used then an error will be returned. Specifically, this command fails with "Connection Limit Exceeded" error if it may cause the number of connections exceeding the configured MAX\_CONNECTIONS value. It fails with "Invalid Parameter" error if one of the following cases occur:

1. Non-resolvable random address is used but the connectable mode is le\_gap\_connectable\_scannable or le\_gap\_connectable\_non\_scannable.
2. The connectable mode is le\_gap\_connectable\_non\_scannable, but using legacy advertising PDUs has been explicitly enabled with command [le\\_gap\\_set\\_advertise\\_configuration](#).
3. The primary advertising PHY is LE Coded PHY but using legacy advertising PDUs has been explicitly enabled with command [le\\_gap\\_set\\_advertise\\_configuration](#).
4. The connectable mode is le\_gap\_connectable\_scannable but using extended advertising PDUs has been explicitly enabled or the primary advertising PHY has been set to LE Coded PHY.

If advertising will be enabled in user\_data mode, [le\\_gap\\_bt5\\_set\\_adv\\_data](#) should be used to set advertising and scan response data before issuing this command. When the advertising is enabled in other modes than user\_data, the advertising and scan response data is generated by the stack using the following procedure:

1. Add a Flags field to advertising data.
2. Add a TX power level field to advertising data if TX power service exists in the local GATT database.
3. Add a Slave Connection Interval Range field to advertising data if the GAP peripheral preferred connection parameters characteristic exists in the local GATT database.
4. Add a list of 16-bit Service UUIDs to advertising data if there are one or more 16-bit service UUIDs to advertise. The list is complete if all advertised 16-bit UUIDs are in advertising data; otherwise the list is incomplete.
5. Add a list of 128-bit service UUIDs to advertising data if there are one or more 128-bit service UUIDs to advertise and there is still free space for this field. The list is complete if all advertised 128-bit UUIDs are in advertising data; otherwise the list is incomplete. Note that an advertising data packet can contain at most one 128-bit service UUID.
6. Try to add the full local name to advertising data if device is not in privacy mode. In case the full local name does not fit into the remaining free space, the advertised name is a shortened version by cutting off the end if the free space has at least 6 bytes; Otherwise, the local name is added to scan response data.

Event [le\\_connection\\_opened](#) will be received when a remote device opens a connection to the advertiser on this advertising set.

**Table 2.228. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x03	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x14	method	Message ID
4	uint8	handle	Advertising set handle
5	uint8	<a href="#">discover</a>	Discoverable mode
6	uint8	<a href="#">connect</a>	Connectable mode

Table 2.229. Response

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x14	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

## BGLIB C API

```
/* Function */
struct gecko_msg_le_gap_start_advertising_rsp_t *gecko_cmd_le_gap_start_advertising(uint8 handle, uint8
discover, uint8 connect);

/* Response id */
gecko_rsp_le_gap_start_advertising_id

/* Response structure */
struct gecko_msg_le_gap_start_advertising_rsp_t
{
    uint16 result;
};
```

Table 2.230. Events Generated

Event	Description
<a href="#">le_gap_adv_timeout</a>	Triggered when the number of advertising events set by this command has been done and advertising is stopped on the given advertising set.
<a href="#">le_connection_opened</a>	Triggered when a remote device opened a connection to the advertiser on the specified advertising set.

### 2.10.1.30 cmd\_le\_gap\_start\_discovery

This command can be used to start the GAP discovery procedure to scan for advertising devices on the specified scanning PHY, that is to perform a device discovery. To cancel an ongoing discovery process use the [le\\_gap\\_end\\_discovery](#) command.

"Invalid Parameter" error will be returned if the scanning PHY value is invalid or the device does not support the PHY.

**Table 2.231. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x18	method	Message ID
4	uint8	<a href="#">scanning_phy</a>	The scanning PHY. Value: <ul style="list-style-type: none"><li>• <b>1</b>: LE 1M PHY</li><li>• <b>4</b>: LE Coded PHY</li></ul>
5	uint8	<a href="#">mode</a>	Bluetooth discovery Mode. For values see link

**Table 2.232. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x18	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```
/* Function */
struct gecko_msg_le_gap_start_discovery_rsp_t *gecko_cmd_le_gap_start_discovery(uint8 scanning_phy, uint8
mode);

/* Response id */
gecko_rsp_le_gap_start_discovery_id

/* Response structure */
struct gecko_msg_le_gap_start_discovery_rsp_t
{
    uint16 result;
};
```

**Table 2.233. Events Generated**

Event	Description
<a href="#">le_gap_scan_response</a>	Every time an advertising packet is received, this event is triggered. The packets are not filtered in any way, so multiple events will be received for every advertising device in range.

### 2.10.1.31 cmd\_le\_gap\_start\_periodic\_advertising

This command can be used to start periodic advertising on the given advertising set. The stack will enable the advertising set automatically if the set has not been enabled and the set can advertise using extended advertising PDUs.

"Invalid Parameter" error will be returned if the application has configured to use legacy advertising PDUs or anonymous advertising, or advertising set has been enabled using legacy advertising PDUs.

**Table 2.234. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x09	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x1d	method	Message ID
4	uint8	handle	Advertising set handle
5-6	uint16	interval_min	Minimum periodic advertising interval. Value in units of 1.25 ms <ul style="list-style-type: none"> <li>• Range: 0x06 to 0xFFFF</li> <li>• Time range: 7.5 ms to 81.92 s</li> </ul> Default value: 100 ms
7-8	uint16	interval_max	Maximum periodic advertising interval. Value in units of 1.25 ms <ul style="list-style-type: none"> <li>• Range: 0x06 to 0xFFFF</li> <li>• Time range: 7.5 ms to 81.92 s</li> <li>• Note: interval_max should be bigger than interval_min</li> </ul> Default value: 200 ms
9-12	uint32	flags	Periodic advertising configurations. Bitmask of followings: <ul style="list-style-type: none"> <li>• <b>Bit 0:</b> Include TX power in advertising PDU</li> </ul>

**Table 2.235. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x1d	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0:</b> success</li> <li>• <b>Non-zero:</b> an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_le_gap_start_periodic_advertising_rsp_t *gecko_cmd_le_gap_start_periodic_advertising(uint8
handle, uint16 interval_min, uint16 interval_max, uint32 flags);

/* Response id */
gecko_rsp_le_gap_start_periodic_advertising_id

/* Response structure */
struct gecko_msg_le_gap_start_periodic_advertising_rsp_t
{

```



```
uint16 result;
};
```

### 2.10.1.32 cmd\_le\_gap\_stop\_advertising

This command can be used to stop the advertising of the given advertising set.

**Table 2.236. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x01	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x15	method	Message ID
4	uint8	handle	Advertising set handle

**Table 2.237. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x15	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

## BGLIB C API

```
/* Function */
struct gecko_msg_le_gap_stop_advertising_rsp_t *gecko_cmd_le_gap_stop_advertising(uint8 handle);

/* Response id */
gecko_rsp_le_gap_stop_advertising_id

/* Response structure */
struct gecko_msg_le_gap_stop_advertising_rsp_t
{
    uint16 result;
};
```

### 2.10.1.33 cmd\_le\_gap\_stop\_periodic\_advertising

This command can be used to stop the periodic advertising on the given advertising set.

This command does not affect the enable state of the advertising set.

**Table 2.238. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x01	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x1f	method	Message ID
4	uint8	handle	Advertising set handle

**Table 2.239. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x1f	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_le_gap_stop_periodic_advertising_rsp_t *gecko_cmd_le_gap_stop_periodic_advertising(uint8
handle);

/* Response id */
gecko_rsp_le_gap_stop_periodic_advertising_id

/* Response structure */
struct gecko_msg_le_gap_stop_periodic_advertising_rsp_t
{
    uint16 result;
};

```

### 2.10.2 le\_gap events

### 2.10.2.1 evt\_le\_gap\_adv\_timeout

This event indicates that the advertiser has completed the configured number of advertising events in the advertising set and advertising is stopped. The maximum number of advertising events can be configured by the maxevents parameter in command [le\\_gap\\_set\\_advertise\\_timing](#).

**Table 2.240. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x01	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x01	method	Message ID
4	uint8	handle	The advertising set handle

### C Functions

```
/* Event id */
gecko_evt_le_gap_adv_timeout_id

/* Event structure */
struct gecko_msg_le_gap_adv_timeout_evt_t
{
    uint8 handle;
};
```

### 2.10.2.2 evt\_le\_gap\_extended\_scan\_response

This event reports an advertising or scan response packet that is received by the device's radio while in scanning mode.

By default this event is disabled and the stack will not generate it. The application needs to enable it using [le\\_gap\\_set\\_discovery\\_extended\\_scan\\_response](#) command. When this event is enabled it replaces [le\\_gap\\_scan\\_response](#), that is, the stack will generate either this event or [le\\_gap\\_scan\\_response](#), but not both at a time.

**Table 2.241. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x12	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x04	method	Message ID
4	uint8	packet_type	<b>Bits 0..2:</b> advertising packet type <ul style="list-style-type: none"> <li>• <b>000:</b> Connectable scannable undirected advertising</li> <li>• <b>001:</b> Connectable undirected advertising</li> <li>• <b>010:</b> Scannable undirected advertising</li> <li>• <b>011:</b> Non-connectable non-scannable undirected advertising</li> <li>• <b>100:</b> Scan Response. Note: this is received only if the device is in active scan mode.</li> </ul> <b>Bits 3..4:</b> Reserved for future <b>Bits 5..6:</b> data completeness <ul style="list-style-type: none"> <li>• <b>00:</b> Complete</li> <li>• <b>01:</b> Incomplete, more data to come in new events</li> <li>• <b>10:</b> Incomplete, data truncated, no more to come</li> </ul> <b>Bit 7:</b> legacy or extended advertising <ul style="list-style-type: none"> <li>• <b>0:</b> Legacy advertising PDUs used</li> <li>• <b>1:</b> Extended advertising PDUs used</li> </ul>
5-10	bd_addr	address	Bluetooth address of the remote device
11	uint8	address_type	Advertiser address type. Values: <ul style="list-style-type: none"> <li>• <b>0:</b> Public address</li> <li>• <b>1:</b> Random address</li> <li>• <b>255:</b> No address provided (anonymous advertising)</li> </ul>
12	uint8	bonding	Bonding handle if the remote advertising device has previously bonded with the local device. Values: <ul style="list-style-type: none"> <li>• <b>0xff:</b> No bonding</li> <li>• <b>Other:</b> Bonding handle</li> </ul>
13	uint8	<a href="#">primary_phy</a>	The PHY on which advertising packets are transmitted on the primary advertising channel. Values: <ul style="list-style-type: none"> <li>• <b>1:</b> LE 1M PHY</li> <li>• <b>4:</b> LE Coded PHY</li> </ul>

Byte	Type	Name	Description
14	uint8	<a href="#">secondary_phy</a>	The PHY on which advertising packets are transmitted on the secondary advertising channel.  Values: <ul style="list-style-type: none"> <li>• <b>1</b>: Advertising PHY is LE 1M</li> <li>• <b>2</b>: Advertising PHY is LE 2M</li> <li>• <b>4</b>: Advertising PHY is LE Coded</li> </ul>
15	uint8	adv_sid	Advertising set identifier
16	int8	tx_power	TX power value in the received packet header. Units: dBm <ul style="list-style-type: none"> <li>• Valid value range: -127 to 126</li> <li>• Value 127: information unavailable</li> </ul>
17	int8	rssi	Signal strength indicator (RSSI) in the last received packet. Units: dBm <ul style="list-style-type: none"> <li>• Range: -127 to +20</li> </ul>
18	uint8	channel	The channel number on which the last packet was received
19-20	uint16	periodic_interval	The periodic advertising interval. Value 0 indicates no periodic advertising. Otherwise, <ul style="list-style-type: none"> <li>• Range: 0x06 to 0xFFFF</li> <li>• Unit: 1.25 ms</li> <li>• Time range: 7.5 ms to 81.92 s</li> </ul>
21	uint8array	data	Advertising or scan response data

## C Functions

```

/* Event id */
gecko_evt_le_gap_extended_scan_response_id

/* Event structure */
struct gecko_msg_le_gap_extended_scan_response_evt_t
{
    uint8 packet_type;
    bd_addr address;
    uint8 address_type;
    uint8 bonding;
    uint8 primary_phy;
    uint8 secondary_phy;
    uint8 adv_sid;
    int8 tx_power;
    int8 rssi;
    uint8 channel;
    uint16 periodic_interval;
    uint8array data;
};

```

### 2.10.2.3 evt\_le\_gap\_scan\_request

This event reports any scan request received in advertising mode if scan request notification is enabled

**Table 2.242. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x09	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x02	method	Message ID
4	uint8	handle	The advertising set handle where scan request was received
5-10	bd_addr	address	Bluetooth address of the scanning device
11	uint8	address_type	Scanner address type. Values: <ul style="list-style-type: none"><li>• <b>0</b>: Public address</li><li>• <b>1</b>: Random address</li></ul>
12	uint8	bonding	Bonding handle if the remote scanning device has previously bonded with the local device. Values: <ul style="list-style-type: none"><li>• <b>0xff</b>: No bonding</li><li>• <b>Other</b>: Bonding handle</li></ul>

### C Functions

```
/* Event id */
gecko_evt_le_gap_scan_request_id

/* Event structure */
struct gecko_msg_le_gap_scan_request_evt_t
{
    uint8 handle;,
    bd_addr address;,
    uint8 address_type;,
    uint8 bonding;
};
```

### 2.10.2.4 evt\_le\_gap\_scan\_response

This event reports any advertising or scan response packet that is received by the device's radio while in scanning mode.

Note that this event will be replaced by [le\\_gap\\_extended\\_scan\\_response](#) if extended scan response event has been enabled. The extended scan response event can be enabled or disabled using command [le\\_gap\\_set\\_discovery\\_extended\\_scan\\_response](#) command.

**Table 2.243. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x0b	lolen	Minimum payload length
2	0x03	class	Message class: Generic Access Profile
3	0x00	method	Message ID
4	int8	rssi	Signal strength indicator (RSSI) in the latest received packet. Units: dBm <ul style="list-style-type: none"> <li>Range: -127 to +20</li> </ul>
5	uint8	packet_type	<b>Bits 0..2:</b> advertising packet type <ul style="list-style-type: none"> <li><b>000:</b> Connectable scannable undirected advertising</li> <li><b>001:</b> Connectable undirected advertising</li> <li><b>010:</b> Scannable undirected advertising</li> <li><b>011:</b> Non-connectable non-scannable undirected advertising</li> <li><b>100:</b> Scan Response. Note: this is received only if the device is in active scan mode.</li> </ul> <b>Bits 3..4:</b> Reserved for future <b>Bits 5..6:</b> data completeness <ul style="list-style-type: none"> <li><b>00:</b> Complete</li> <li><b>01:</b> Incomplete, more data to come in new events</li> <li><b>10:</b> Incomplete, data truncated, no more to come</li> </ul> <b>Bit 7:</b> legacy or extended advertising <ul style="list-style-type: none"> <li><b>0:</b> Legacy advertising PDUs used</li> <li><b>1:</b> Extended advertising PDUs used</li> </ul>
6-11	bd_addr	address	Bluetooth address of the remote device
12	uint8	address_type	Advertiser address type. Values: <ul style="list-style-type: none"> <li><b>0:</b> Public address</li> <li><b>1:</b> Random address</li> <li><b>255:</b> No address provided (anonymous advertising)</li> </ul>
13	uint8	bonding	Bonding handle if the remote advertising device has previously bonded with the local device. Values: <ul style="list-style-type: none"> <li><b>0xff:</b> No bonding</li> <li><b>Other:</b> Bonding handle</li> </ul>
14	uint8array	data	Advertising or scan response data

### C Functions

```

/* Event id */
gecko_evt_le_gap_scan_response_id

/* Event structure */
struct gecko_msg_le_gap_scan_response_evt_t
{

```

```
int8 rssi;,  
uint8 packet_type;,  
bd_addr address;,  
uint8 address_type;,  
uint8 bonding;,  
uint8array data;  
};
```

## 2.10.3 le\_gap enumerations

### 2.10.3.1 enum\_le\_gap\_address\_type

These values define the Bluetooth Address types used by the stack.

**Table 2.244. Enumerations**

Value	Name	Description
0	le_gap_address_type_public	Public address
1	le_gap_address_type_random	Random address
2	le_gap_address_type_public_identity	Public identity address resolved by stack
3	le_gap_address_type_random_identity	Random identity address resolved by stack

### 2.10.3.2 enum\_le\_gap\_adv\_address\_type

Address type to use for advertising

**Table 2.245. Enumerations**

Value	Name	Description
0	le_gap_identity_address	Use public or static device address, or identity address if privacy mode is enabled
1	le_gap_non_resolvable	Use non resolvable address type, advertising mode must also be non-connectable



### 2.10.3.3 enum\_le\_gap\_connectable\_mode

These values define the available connectable modes.

**Table 2.246. Enumerations**

Value	Name	Description
0	le_gap_non_connectable	Non-connectable non-scannable.
1	le_gap_directed_connectable	Directed connectable (RESERVED, DO NOT USE)
2	le_gap_undirected_connectable	Undirected connectable scannable.  <b>Deprecated</b> , replaced by enum le_gap_connectable_scannable.  This mode can only be used in legacy advertising PDUs.
2	le_gap_connectable_scannable	Undirected connectable scannable. This mode can only be used in legacy advertising PDUs.
3	le_gap_scannable_non_connectable	Undirected scannable (Non-connectable but responds to scan requests)
4	le_gap_connectable_non_scannable	Undirected connectable non-scannable. This mode can only be used in extended advertising PDUs.

### 2.10.3.4 enum\_le\_gap\_discover\_mode

These values indicate which Bluetooth discovery mode to use when scanning for advertising devices.

**Table 2.247. Enumerations**

Value	Name	Description
0	le_gap_discover_limited	Discover only limited discoverable devices
1	le_gap_discover_generic	Discover limited and generic discoverable devices
2	le_gap_discover_observation	Discover all devices

### 2.10.3.5 enum\_le\_gap\_discoverable\_mode

These values define the available Discoverable Modes, which dictate how the device is visible to other devices.

**Table 2.248. Enumerations**

Value	Name	Description
0	le_gap_non_discoverable	Not discoverable
1	le_gap_limited_discoverable	Discoverable using both limited and general discovery procedures
2	le_gap_general_discoverable	Discoverable using general discovery procedure
3	le_gap_broadcast	Device is not discoverable in either limited or generic discovery procedure, but may be discovered by using the Observation procedure
4	le_gap_user_data	Send advertising and/or scan response data defined by the user using <a href="#">le_gap_bt5_set_adv_data</a> . The limited/general discoverable flags are defined by the user.

### 2.10.3.6 enum\_le\_gap\_phy\_type

Types of PHYs used within le\_gap class.

**Table 2.249. Enumerations**

Value	Name	Description
1	le_gap_phy_1m	LE 1M PHY
2	le_gap_phy_2m	LE 2M PHY
4	le_gap_phy_coded	LE Coded PHY

## 2.11 Security Manager (sm)

The commands in this section are used to manage Bluetooth security, including commands for starting and stopping encryption and commands for management of all bonding operations.

The following procedure can be used to bond with a remote device:

- Use command `sm_configure` to configure security requirements and I/O capabilities of this device.
- Use command `sm_set_bondable_mode` to set this device into bondable mode.
- Use command `le_gap_connect` to open a connection to the remote device.
- After the connection is open, use command `sm_increase_security` to encrypt the connection. This will also start the bonding process.

If MITM is required, the application needs to display or ask user to enter a passkey during the process. See events `sm_passkey_display` and `sm_passkey_request` for more information. The following procedure can be used to respond the bonding initiated by a remote device:

- Use command `sm_configure` to configure security requirements and I/O capabilities of this device.
- Use command `sm_set_bondable_mode` to set this device into bondable mode.
- Use command `le_gap_start_advertising` to set this device into advertising and connectable mode.
- Open a connection to this device from the remote device.
- After the connection is open, start the bonding process on the remote device.

If MITM is required, the application needs to display or ask user to enter a passkey during the process. See events `sm_passkey_display` and `sm_passkey_request` for more information.

### 2.11.1 sm commands

### 2.11.1.1 cmd\_sm\_add\_to\_whitelist

This command can be used to add device to whitelist, which can be enabled with [le\\_gap\\_enable\\_whitelisting](#)

**Table 2.250. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x07	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x13	method	Message ID
4-9	bd_addr	address	Address of the device added to whitelist
10	uint8	<a href="#">address_type</a>	Address type of the device added to whitelist

**Table 2.251. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x13	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```
/* Function */
struct gecko_msg_sm_add_to_whitelist_rsp_t *gecko_cmd_sm_add_to_whitelist(bd_addr address, uint8 address_type);

/* Response id */
gecko_rsp_sm_add_to_whitelist_id

/* Response structure */
struct gecko_msg_sm_add_to_whitelist_rsp_t
{
    uint16 result;
};
```

### 2.11.1.2 cmd\_sm\_bonding\_confirm

This command can be used for accepting or rejecting bonding request.

**Table 2.252. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x02	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x0e	method	Message ID
4	uint8	connection	Connection handle
5	uint8	confirm	Accept bonding request. Values: <ul style="list-style-type: none"><li>• <b>0</b>: Reject</li><li>• <b>1</b>: Accept bonding request</li></ul>

**Table 2.253. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x0e	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```
/* Function */
struct gecko_msg_sm_bonding_confirm_rsp_t *gecko_cmd_sm_bonding_confirm(uint8 connection, uint8 confirm);

/* Response id */
gecko_rsp_sm_bonding_confirm_id

/* Response structure */
struct gecko_msg_sm_bonding_confirm_rsp_t
{
    uint16 result;
};
```

### 2.11.1.3 cmd\_sm\_configure

This command can be used to configure security requirements and I/O capabilities of the system.

**Table 2.254. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x02	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x01	method	Message ID
4	uint8	flags	<p>Security requirement bitmask.</p> <p>Bit 0:</p> <ul style="list-style-type: none"> <li>• <b>0</b>: Allow bonding without MITM protection</li> <li>• <b>1</b>: Bonding requires MITM protection</li> </ul> <p>Bit 1:</p> <ul style="list-style-type: none"> <li>• <b>0</b>: Allow encryption without bonding</li> <li>• <b>1</b>: Encryption requires bonding. Note that this setting will also enable bonding.</li> </ul> <p>Bit 2:</p> <ul style="list-style-type: none"> <li>• <b>0</b>: Allow bonding with legacy pairing</li> <li>• <b>1</b>: Secure connections only</li> </ul> <p>Bit 3:</p> <ul style="list-style-type: none"> <li>• <b>0</b>: Bonding request does not need to be confirmed</li> <li>• <b>1</b>: Bonding requests need to be confirmed. Received bonding requests are notified with <a href="#">sm_confirm_bonding events</a>.</li> </ul> <p>Bit 4:</p> <ul style="list-style-type: none"> <li>• <b>0</b>: Allow all connections</li> <li>• <b>1</b>: Allow connections only from bonded devices</li> </ul> <p>Bit 5 to 7: Reserved</p> <p>Default value: 0x00</p>
5	uint8	<a href="#">io_capabilities</a>	I/O Capabilities. See link

**Table 2.255. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x01	method	Message ID
4-5	uint16	result	<p>Result code</p> <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> <p>For other values refer to the <a href="#">Error codes</a></p>

## BGLIB C API

```
/* Function */
struct gecko_msg_sm_configure_rsp_t *gecko_cmd_sm_configure(uint8 flags, uint8 io_capabilities);

/* Response id */
gecko_rsp_sm_configure_id

/* Response structure */
struct gecko_msg_sm_configure_rsp_t
{
    uint16 result;
};
```

### 2.11.1.4 cmd\_sm\_delete\_bonding

This command can be used to delete specified bonding information or whitelist from Persistent Store.

**Table 2.256. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x01	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x06	method	Message ID
4	uint8	bonding	Bonding handle

**Table 2.257. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x06	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

## BGLIB C API

```
/* Function */
struct gecko_msg_sm_delete_bonding_rsp_t *gecko_cmd_sm_delete_bonding(uint8 bonding);

/* Response id */
gecko_rsp_sm_delete_bonding_id

/* Response structure */
struct gecko_msg_sm_delete_bonding_rsp_t
{
    uint16 result;
};
```

### 2.11.1.5 cmd\_sm\_delete\_bondings

This command can be used to delete all bonding information and whitelist from Persistent Store.

**Table 2.258. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x00	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x07	method	Message ID

**Table 2.259. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x07	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```
/* Function */
struct gecko_msg_sm_delete_bondings_rsp_t *gecko_cmd_sm_delete_bondings();

/* Response id */
gecko_rsp_sm_delete_bondings_id

/* Response structure */
struct gecko_msg_sm_delete_bondings_rsp_t
{
    uint16 result;
};
```



### 2.11.1.6 cmd\_sm\_enter\_passkey

This command can be used to enter a passkey after receiving a passkey request event.

**Table 2.260. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x05	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x08	method	Message ID
4	uint8	connection	Connection handle
5-8	int32	passkey	Passkey. Valid range: 0-999999. Set -1 to cancel pairing.

**Table 2.261. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x08	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```
/* Function */
struct gecko_msg_sm_enter_passkey_rsp_t *gecko_cmd_sm_enter_passkey(uint8 connection, int32 passkey);

/* Response id */
gecko_rsp_sm_enter_passkey_id

/* Response structure */
struct gecko_msg_sm_enter_passkey_rsp_t
{
    uint16 result;
};
```

### 2.11.1.7 cmd\_sm\_increase\_security

This command can be used to enhance the security of a connection to current security requirements. On an unencrypted connection, this will encrypt the connection and will also perform bonding if requested by both devices. On an encrypted connection, this will cause the connection re-encrypted.

**Table 2.262. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x01	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x04	method	Message ID
4	uint8	connection	Connection handle

**Table 2.263. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x04	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_sm_increase_security_rsp_t *gecko_cmd_sm_increase_security(uint8 connection);

/* Response id */
gecko_rsp_sm_increase_security_id

/* Response structure */
struct gecko_msg_sm_increase_security_rsp_t
{
    uint16 result;
};

```

**Table 2.264. Events Generated**

Event	Description
<a href="#">le_connection_parameters</a>	This event is triggered after increasing security has been completed successfully, and indicates the latest security mode of the connection.
<a href="#">sm_bonded</a>	This event is triggered if pairing or bonding was performed in this operation and the result is success.
<a href="#">sm_bonding_failed</a>	This event is triggered if pairing or bonding was performed in this operation and the result is failure.

### 2.11.1.8 cmd\_sm\_list\_all\_bondings

This command can be used to list all bondings stored in the bonding database. Bondings are reported by using the [sm\\_list\\_bonding\\_entry](#) event for each bonding and the report is ended with [sm\\_list\\_all\\_bondings\\_complete](#) event. Recommended to be used only for debugging purposes, because reading from the Persistent Store is relatively slow.

**Table 2.265. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x00	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x0b	method	Message ID

**Table 2.266. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x0b	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_sm_list_all_bondings_rsp_t *gecko_cmd_sm_list_all_bondings();

/* Response id */
gecko_rsp_sm_list_all_bondings_id

/* Response structure */
struct gecko_msg_sm_list_all_bondings_rsp_t
{
    uint16 result;
};

```

**Table 2.267. Events Generated**

Event	Description
<a href="#">sm_list_bonding_entry</a>	This event is triggered by the command <a href="#">sm_list_all_bondings</a> if bondings exist in the local database.
<a href="#">sm_list_all_bondings_complete</a>	This event is triggered by the <a href="#">sm_list_all_bondings</a> and follows <a href="#">sm_list_bonding_entry</a> events.

### 2.11.1.9 cmd\_sm\_passkey\_confirm

This command can be used for accepting or rejecting reported confirm value.

**Table 2.268. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x02	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x09	method	Message ID
4	uint8	connection	Connection handle
5	uint8	confirm	Accept confirm value. Values: <ul style="list-style-type: none"><li>• <b>0</b>: Reject</li><li>• <b>1</b>: Accept confirm value</li></ul>

**Table 2.269. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x09	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```
/* Function */
struct gecko_msg_sm_passkey_confirm_rsp_t *gecko_cmd_sm_passkey_confirm(uint8 connection, uint8 confirm);

/* Response id */
gecko_rsp_sm_passkey_confirm_id

/* Response structure */
struct gecko_msg_sm_passkey_confirm_rsp_t
{
    uint16 result;
};
```

### 2.11.1.10 cmd\_sm\_set\_bondable\_mode

This command can be used to set whether the device should accept new bondings. By default, the device does not accept new bondings.

**Table 2.270. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x01	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x00	method	Message ID
4	uint8	bondable	Bondable mode. Values: <ul style="list-style-type: none"><li>• <b>0</b>: New bondings not accepted</li><li>• <b>1</b>: Bondings allowed</li></ul> Default value: 0

**Table 2.271. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x00	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```
/* Function */
struct gecko_msg_sm_set_bondable_mode_rsp_t *gecko_cmd_sm_set_bondable_mode(uint8 bondable);

/* Response id */
gecko_rsp_sm_set_bondable_mode_id

/* Response structure */
struct gecko_msg_sm_set_bondable_mode_rsp_t
{
    uint16 result;
};
```

### 2.11.1.11 cmd\_sm\_set\_debug\_mode

This command can be used to set Security Manager in debug mode. In this mode the secure connections bonding uses debug keys, so that the encrypted packet can be opened by Bluetooth protocol analyzer. To disable the debug mode, you need to restart the device.

**Table 2.272. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x00	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x0f	method	Message ID

**Table 2.273. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x0f	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```
/* Function */
struct gecko_msg_sm_set_debug_mode_rsp_t *gecko_cmd_sm_set_debug_mode();

/* Response id */
gecko_rsp_sm_set_debug_mode_id

/* Response structure */
struct gecko_msg_sm_set_debug_mode_rsp_t
{
    uint16 result;
};
```

### 2.11.1.12 cmd\_sm\_set\_minimum\_key\_size

This command can be used to set the minimum allowed key size used for bonding. The default value is 16 bytes.

**Table 2.274. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x01	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x14	method	Message ID
4	uint8	minimum_key_size	Minimum allowed key size for bonding. Range: 7 to 16

**Table 2.275. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x14	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```
/* Function */
struct gecko_msg_sm_set_minimum_key_size_rsp_t *gecko_cmd_sm_set_minimum_key_size(uint8 minimum_key_size);

/* Response id */
gecko_rsp_sm_set_minimum_key_size_id

/* Response structure */
struct gecko_msg_sm_set_minimum_key_size_rsp_t
{
    uint16 result;
};
```

### 2.11.1.13 cmd\_sm\_set\_oob\_data

This command can be used to set the OOB data (out-of-band encryption data) for legacy pairing for a device. The OOB data may be, for example, a PIN code exchanged over an alternate path like NFC. The device will not allow any other kind of bonding if OOB data is set. The OOB data cannot be set simultaneously with secure connections OOB data.

**Table 2.276. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x01	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x0a	method	Message ID
4	uint8array	oob_data	OOB data. To set OOB data, send a 16-byte array. To clear OOB data, send a zero-length array.

**Table 2.277. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x0a	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0:</b> success</li> <li>• <b>Non-zero:</b> an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_sm_set_oob_data_rsp_t *gecko_cmd_sm_set_oob_data(uint8 oob_data_len, const uint8
*oob_data_data);

/* Response id */
gecko_rsp_sm_set_oob_data_id

/* Response structure */
struct gecko_msg_sm_set_oob_data_rsp_t
{
    uint16 result;
};

```



### 2.11.1.14 cmd\_sm\_set\_passkey

This command can be used to enter a fixed passkey which will be used in the [sm\\_passkey\\_display](#) event.

**Table 2.278. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x04	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x10	method	Message ID
4-7	int32	passkey	Passkey. Valid range: 0-999999. Set -1 to disable and start using random passkeys.

**Table 2.279. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x10	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```
/* Function */
struct gecko_msg_sm_set_passkey_rsp_t *gecko_cmd_sm_set_passkey(int32 passkey);

/* Response id */
gecko_rsp_sm_set_passkey_id

/* Response structure */
struct gecko_msg_sm_set_passkey_rsp_t
{
    uint16 result;
};
```

### 2.11.1.15 cmd\_sm\_set\_sc\_remote\_oob\_data

This command can be used to set OOB data and confirm values (out-of-band encryption) received from the remote device for secure connections pairing. OOB data must be enabled with [sm\\_use\\_sc\\_oob](#) before setting the remote device OOB data.

**Table 2.280. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x01	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x12	method	Message ID
4	uint8array	oob_data	Remote device OOB data and confirm values. To set OOB data, send a 32-byte array. First 16-bytes is the OOB data and last 16-bytes the confirm value. To clear OOB data, send a zero-length array.

**Table 2.281. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x12	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_sm_set_sc_remote_oob_data_rsp_t *gecko_cmd_sm_set_sc_remote_oob_data(uint8 oob_data_len,
const uint8 *oob_data_data);

/* Response id */
gecko_rsp_sm_set_sc_remote_oob_data_id

/* Response structure */
struct gecko_msg_sm_set_sc_remote_oob_data_rsp_t
{
    uint16 result;
};

```

### 2.11.1.16 cmd\_sm\_store\_bonding\_configuration

This command can be used to set maximum allowed bonding count and bonding policy. The actual maximum number of bondings that can be supported depends on how much user data is stored in the NVM and the NVM size. The default value is 14.

**Table 2.282. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x02	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x02	method	Message ID
4	uint8	max_bonding_count	Maximum allowed bonding count. Range: 1 to 32
5	uint8	policy_flags	Bonding policy. Values: <ul style="list-style-type: none"><li>• <b>0</b>: If database is full, new bonding attempts will fail</li><li>• <b>1</b>: New bonding will overwrite the oldest existing bonding</li><li>• <b>2</b>: New bonding will overwrite longest time ago used existing bonding</li></ul>

**Table 2.283. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x02	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```
/* Function */
struct gecko_msg_sm_store_bonding_configuration_rsp_t *gecko_cmd_sm_store_bonding_configuration(uint8
max_bonding_count, uint8 policy_flags);

/* Response id */
gecko_rsp_sm_store_bonding_configuration_id

/* Response structure */
struct gecko_msg_sm_store_bonding_configuration_rsp_t
{
    uint16 result;
};
```

### 2.11.1.17 cmd\_sm\_use\_sc\_oob

This command can be used to enable the use of OOB data (out-of-band encryption data) for a device for secure connections pairing. The enabling will generate new OOB data and confirm values which can be sent to the remote device. After enabling the secure connections OOB data, the remote devices OOB data can be set with [sm\\_set\\_sc\\_remote\\_oob\\_data](#). Calling this function will erase any set remote device OOB data and confirm values. The device will not allow any other kind of bonding if OOB data is set. The secure connections OOB data cannot be enabled simultaneously with legacy pairing OOB data.

**Table 2.284. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x01	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x11	method	Message ID
4	uint8	enable	Enable OOB with secure connections pairing. Values: <ul style="list-style-type: none"><li>• <b>0</b>: disable</li><li>• <b>1</b>: enable</li></ul>

**Table 2.285. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x03	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x11	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>
6	uint8array	oob_data	OOB data. 32-byte array. First 16-bytes contain randomly generated OOB data and last 16-bytes confirm value.

### BGLIB C API

```
/* Function */
struct gecko_msg_sm_use_sc_oob_rsp_t *gecko_cmd_sm_use_sc_oob(uint8 enable);

/* Response id */
gecko_rsp_sm_use_sc_oob_id

/* Response structure */
struct gecko_msg_sm_use_sc_oob_rsp_t
{
    uint16 result;,
    uint8array oob_data;
};
```

### 2.11.2 sm events

### 2.11.2.1 evt\_sm\_bonded

This event is triggered after the pairing or bonding procedure has been successfully completed.

**Table 2.286. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x02	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x03	method	Message ID
4	uint8	connection	Connection handle
5	uint8	bonding	Bonding handle. Values: <ul style="list-style-type: none"><li>• <b>0xff</b>: Pairing completed without bonding - the pairing key will be discarded after disconnection.</li><li>• <b>Other</b>: Procedure completed, pairing key stored with given bonding handle</li></ul>

### C Functions

```
/* Event id */
gecko_evt_sm_bonded_id

/* Event structure */
struct gecko_msg_sm_bonded_evt_t
{
    uint8 connection;,
    uint8 bonding;
};
```

### 2.11.2.2 evt\_sm\_bonding\_failed

This event is triggered if the pairing or bonding procedure has failed.

**Table 2.287. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x03	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x04	method	Message ID
4	uint8	connection	Connection handle
5-6	uint16	reason	Describes error that occurred

### C Functions

```
/* Event id */
gecko_evt_sm_bonding_failed_id

/* Event structure */
struct gecko_msg_sm_bonding_failed_evt_t
{
    uint8 connection;,
    uint16 reason;
};
```

### 2.11.2.3 evt\_sm\_confirm\_bonding

This event indicates a request to display that new bonding request has been received to the user and for the user to confirm the request. Use the command [sm\\_bonding\\_confirm](#) to accept or reject the bonding request.

**Table 2.288. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x02	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x09	method	Message ID
4	uint8	connection	Connection handle
5	int8	bonding_handle	Bonding handle for the request. Range: -1 to 31. <ul style="list-style-type: none"><li>• NOTE! When the bonding handle is anything else than -1 there is already existing bonding for this connection. Overwriting existing bonding is potential security risk.</li></ul>

### C Functions

```
/* Event id */
gecko_evt_sm_confirm_bonding_id

/* Event structure */
struct gecko_msg_sm_confirm_bonding_evt_t
{
    uint8 connection;,
    int8 bonding_handle;
};
```

### 2.11.2.4 evt\_sm\_confirm\_passkey

This event indicates a request to display the passkey to the user and for the user to confirm the displayed passkey. Use the command [sm\\_passkey\\_confirm](#) to accept or reject the displayed passkey.

**Table 2.289. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x05	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x02	method	Message ID
4	uint8	connection	Connection handle
5-8	uint32	passkey	Passkey. Range: 0 to 999999. <ul style="list-style-type: none"> <li>NOTE! When displaying the passkey to the user, prefix the number with zeros in order to obtain a 6 digit number</li> <li>Example: Passkey value is 42</li> <li>Number to display to user is 000042</li> </ul>

### C Functions

```
/* Event id */
gecko_evt_sm_confirm_passkey_id

/* Event structure */
struct gecko_msg_sm_confirm_passkey_evt_t
{
    uint8 connection;,
    uint32 passkey;
};
```

### 2.11.2.5 evt\_sm\_list\_all\_bondings\_complete

This event is triggered by the [sm\\_list\\_all\\_bondings](#) and follows [sm\\_list\\_bonding\\_entry](#) events.

**Table 2.290. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x00	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x06	method	Message ID

### C Functions

```
/* Event id */
gecko_evt_sm_list_all_bondings_complete_id

/* Event structure */
struct gecko_msg_sm_list_all_bondings_complete_evt_t
{
};
```



### 2.11.2.6 evt\_sm\_list\_bonding\_entry

This event is triggered by the command [sm\\_list\\_all\\_bondings](#) if bondings exist in the local database.

**Table 2.291. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x08	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x05	method	Message ID
4	uint8	bonding	Bonding handle
5-10	bd_addr	address	Bluetooth address of the remote device
11	uint8	<a href="#">address_type</a>	Address type

### C Functions

```
/* Event id */
gecko_evt_sm_list_bonding_entry_id

/* Event structure */
struct gecko_msg_sm_list_bonding_entry_evt_t
{
    uint8 bonding;,
    bd_addr address;,
    uint8 address\_type;
};
```

### 2.11.2.7 evt\_sm\_passkey\_display

This event indicates a request to display the passkey to the user.

**Table 2.292. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x05	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x00	method	Message ID
4	uint8	connection	Connection handle
5-8	uint32	passkey	Passkey. Range: 0 to 999999. <ul style="list-style-type: none"><li>• NOTE! When displaying the passkey to the user, prefix the number with zeros in order to obtain a 6 digit number</li><li>• Example: Passkey value is 42</li><li>• Number to display to user is 000042</li></ul>

### C Functions

```
/* Event id */
gecko_evt_sm_passkey_display_id

/* Event structure */
struct gecko_msg_sm_passkey_display_evt_t
{
    uint8 connection;,
    uint32 passkey;
};
```

### 2.11.2.8 evt\_sm\_passkey\_request

This event indicates a request for the user to enter the passkey displayed on the remote device. Use the command [sm\\_enter\\_passkey](#) to input the passkey value.

**Table 2.293. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x01	lolen	Minimum payload length
2	0x0f	class	Message class: Security Manager
3	0x01	method	Message ID
4	uint8	connection	Connection handle

## C Functions

```
/* Event id */
gecko_evt_sm_passkey_request_id

/* Event structure */
struct gecko_msg_sm_passkey_request_evt_t
{
    uint8 connection;
};
```

### 2.11.3 sm enumerations

#### 2.11.3.1 enum\_sm\_bonding\_key

These values define the bonding information of the bonded device stored in persistent store.

**Table 2.294. Enumerations**

Value	Name	Description
1	sm_bonding_key_ltk	LTK saved in master
2	sm_bonding_key_addr_public	Public Address
4	sm_bonding_key_addr_static	Static Address
8	sm_bonding_key_irk	Identity resolving key for resolvable private addresses
16	sm_bonding_key_edivrand	EDIV+RAND received from slave
32	sm_bonding_key_csrk	Connection signature resolving key
64	sm_bonding_key_masterid	EDIV+RAND sent to master

### 2.11.3.2 enum\_sm\_io\_capability

These values define the security management related I/O capabilities supported by the device

**Table 2.295. Enumerations**

Value	Name	Description
0	sm_io_capability_displayonly	Display Only
1	sm_io_capability_displayyesno	Display with Yes/No-buttons
2	sm_io_capability_keyboardonly	Keyboard Only
3	sm_io_capability_noinputnooutput	No Input and No Output
4	sm_io_capability_keyboarddisplay	Display with Keyboard

## 2.12 Periodic Advertising Synchronization (sync)

This class provides periodic advertising synchronization feature.

When this feature is used, it is recommended to enable event [le\\_gap\\_extended\\_scan\\_response](#) which contains useful information for establishing a synchronization.

### 2.12.1 sync commands

### 2.12.1.1 cmd\_sync\_close

This command can be used to close a synchronization with periodic advertising or cancel an ongoing synchronization establishment procedure.

**Table 2.296. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x01	lolen	Minimum payload length
2	0x42	class	Message class: Periodic Advertising Synchronization
3	0x01	method	Message ID
4	uint8	sync	Periodic advertising synchronization handle

**Table 2.297. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x42	class	Message class: Periodic Advertising Synchronization
3	0x01	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_sync_close_rsp_t *gecko_cmd_sync_close(uint8 sync);

/* Response id */
gecko_rsp_sync_close_id

/* Response structure */
struct gecko_msg_sync_close_rsp_t
{
    uint16 result;
};

```

**Table 2.298. Events Generated**

Event	Description
<a href="#">sync_closed</a>	This event is triggered after the synchronization has been closed.

### 2.12.1.2 cmd\_sync\_open

This command can be used to establish a synchronization with a periodic advertising from the specified advertiser and begin receiving periodic advertising packets. Note that synchronization establishment can only occur when scanning is enabled. While scanning is disabled, no attempt to synchronize will take place.

The application should decide skip and timeout values based on the periodic advertising interval provided by the advertiser. It is recommended to set skip and timeout at the values that allow a few receiving attempts. Periodic advertising intervals are reported in event [le\\_gap\\_extended\\_scan\\_response](#).

**Table 2.299. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x0c	lolen	Minimum payload length
2	0x42	class	Message class: Periodic Advertising Synchronization
3	0x00	method	Message ID
4	uint8	adv_sid	Advertising set identifier
5-6	uint16	skip	The maximum number of periodic advertising packets that can be skipped after a successful receive. Range: 0x0000 to 0x01F3
7-8	uint16	timeout	The maximum permitted time between successful receives. If this time is exceeded, synchronization is lost. Unit: 10 ms. <ul style="list-style-type: none"> <li>• Range: 0x06 to 0xFFFF</li> <li>• Unit: 10 ms</li> <li>• Time range: 100 ms to 163.84 s</li> </ul>
9-14	bd_addr	address	Address of the advertiser
15	uint8	address_type	Advertiser address type. Values: <ul style="list-style-type: none"> <li>• <b>0</b>: Public address</li> <li>• <b>1</b>: Random address</li> </ul>

**Table 2.300. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x03	lolen	Minimum payload length
2	0x42	class	Message class: Periodic Advertising Synchronization
3	0x00	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>
6	uint8	sync	Handle that will be assigned to the periodic advertising synchronization once the synchronization will be established. This handle is valid only if the result code of this response is 0 (zero).

### BGLIB C API

```
/* Function */
struct gecko_msg_sync_open_rsp_t *gecko_cmd_sync_open(uint8 adv_sid, uint16 skip, uint16 timeout, bd_addr
```

```

address, uint8 address_type);

/* Response id */
gecko_rsp_sync_open_id

/* Response structure */
struct gecko_msg_sync_open_rsp_t
{
    uint16 result;,
    uint8 sync;
};

```

**Table 2.301. Events Generated**

Event	Description
<a href="#">sync_opened</a>	This event is triggered after the synchronization has been established.
<a href="#">sync_data</a>	This event indicates a periodic advertising packet has been received.

## 2.12.2 sync events

### 2.12.2.1 evt\_sync\_closed

This event indicates sync lost or a sync establishment procedure was cancelled.

**Table 2.302. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x03	lolen	Minimum payload length
2	0x42	class	Message class: Periodic Advertising Synchronization
3	0x01	method	Message ID
4-5	uint16	reason	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>
6	uint8	sync	Periodic advertising synchronization handle

## C Functions

```

/* Event id */
gecko_evt_sync_closed_id

/* Event structure */
struct gecko_msg_sync_closed_evt_t
{
    uint16 reason;,
    uint8 sync;
};

```



### 2.12.2.2 evt\_sync\_data

This event reports a received periodic advertising packet.

**Table 2.303. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x05	lolen	Minimum payload length
2	0x42	class	Message class: Periodic Advertising Synchronization
3	0x02	method	Message ID
4	uint8	sync	Periodic advertising synchronization handle
5	int8	tx_power	TX power value in the received packet header. Units: dBm <ul style="list-style-type: none"><li>Valid value range: -127 to 126</li><li>Value 127: information unavailable</li></ul>
6	int8	rssi	Signal strength indicator (RSSI) in the latest received packet. Units: dBm <ul style="list-style-type: none"><li>Range: -127 to +20</li></ul>
7	uint8	data_status	Data completeness: <ul style="list-style-type: none"><li><b>0</b>: Complete</li><li><b>1</b>: Incomplete, more data to come in new events</li><li><b>2</b>: Incomplete, data truncated, no more to come</li></ul>
8	uint8array	data	Periodic advertising data

### C Functions

```
/* Event id */
gecko_evt_sync_data_id

/* Event structure */
struct gecko_msg_sync_data_evt_t
{
    uint8 sync;,
    int8 tx_power;,
    int8 rssi;,
    uint8 data_status;,
    uint8array data;
};
```

### 2.12.2.3 evt\_sync\_opened

This event indicates a synchronization has been opened.

**Table 2.304. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x0e	lolen	Minimum payload length
2	0x42	class	Message class: Periodic Advertising Synchronization
3	0x00	method	Message ID
4	uint8	sync	Periodic advertising synchronization handle
5	uint8	adv_sid	Advertising set identifier
6-11	bd_addr	address	Address of the advertiser
12	uint8	address_type	Advertiser address type. Values: <ul style="list-style-type: none"> <li>• <b>0</b>: Public address</li> <li>• <b>1</b>: Random address</li> </ul>
13	uint8	adv_phy	The advertiser PHY. Value: <ul style="list-style-type: none"> <li>• <b>1</b>: LE 1M PHY</li> <li>• <b>2</b>: LE 2M PHY</li> <li>• <b>4</b>: LE Coded PHY</li> </ul>
14-15	uint16	adv_interval	The periodic advertising interval. Value in units of 1.25 ms <ul style="list-style-type: none"> <li>• Range: 0x06 to 0xFFFF</li> <li>• Time range: 7.5 ms to 81.92 s</li> </ul>
16-17	uint16	clock_accuracy	The advertiser clock accuracy.

### C Functions

```

/* Event id */
gecko_evt_sync_opened_id

/* Event structure */
struct gecko_msg_sync_opened_evt_t
{
    uint8 sync;,
    uint8 adv_sid;,
    bd_addr address;,
    uint8 address_type;,
    uint8 adv_phy;,
    uint16 adv_interval;,
    uint16 clock_accuracy;
};

```

### 2.12.3 sync enumerations

### 2.12.3.1 enum\_sync\_advertiser\_clock\_accuracy

These values indicate what is the advertiser clock accuracy in a periodic advertising synchronization.

**Table 2.305. Enumerations**

Value	Name	Description
500	sync_clock_accuracy_500	Clock accuracy 500 ppm
250	sync_clock_accuracy_250	Clock accuracy 250 ppm
150	sync_clock_accuracy_150	Clock accuracy 150 ppm
100	sync_clock_accuracy_100	Clock accuracy 100 ppm
75	sync_clock_accuracy_75	Clock accuracy 75 ppm
50	sync_clock_accuracy_50	Clock accuracy 50 ppm
30	sync_clock_accuracy_30	Clock accuracy 30 ppm
20	sync_clock_accuracy_20	Clock accuracy 20 ppm

## 2.13 System (system)

The commands and events in this class can be used to access and query the local device.

### 2.13.1 system commands

#### 2.13.1.1 cmd\_system\_data\_buffer\_clear

This command can be used to remove all data from system data buffer.

**Table 2.306. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x00	lolen	Minimum payload length
2	0x01	class	Message class: System
3	0x14	method	Message ID

**Table 2.307. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x01	class	Message class: System
3	0x14	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

## BGLIB C API

```
/* Function */
struct gecko_msg_system_data_buffer_clear_rsp_t *gecko_cmd_system_data_buffer_clear();

/* Response id */
gecko_rsp_system_data_buffer_clear_id

/* Response structure */
struct gecko_msg_system_data_buffer_clear_rsp_t
{
    uint16 result;
};
```

### 2.13.1.2 cmd\_system\_data\_buffer\_write

This command can be used to write data into system data buffer. Data will be appended to the end of existing data.

**Table 2.308. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x01	lolen	Minimum payload length
2	0x01	class	Message class: System
3	0x12	method	Message ID
4	uint8array	data	Data to write

**Table 2.309. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x01	class	Message class: System
3	0x12	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```
/* Function */
struct gecko_msg_system_data_buffer_write_rsp_t *gecko_cmd_system_data_buffer_write(uint8 data_len, const
uint8 *data_data);

/* Response id */
gecko_rsp_system_data_buffer_write_id

/* Response structure */
struct gecko_msg_system_data_buffer_write_rsp_t
{
    uint16 result;
};
```

### 2.13.1.3 cmd\_system\_get\_bt\_address

This command can be used to read the Bluetooth public address used by the device.

**Table 2.310. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x00	lolen	Minimum payload length
2	0x01	class	Message class: System
3	0x03	method	Message ID

**Table 2.311. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x06	lolen	Minimum payload length
2	0x01	class	Message class: System
3	0x03	method	Message ID
4-9	bd_addr	address	Bluetooth public address in little endian format

#### BGLIB C API

```
/* Function */
struct gecko_msg_system_get_bt_address_rsp_t *gecko_cmd_system_get_bt_address();

/* Response id */
gecko_rsp_system_get_bt_address_id

/* Response structure */
struct gecko_msg_system_get_bt_address_rsp_t
{
    bd_addr address;
};
```

### 2.13.1.4 cmd\_system\_get\_counters

Get packet and error counters

**Table 2.312. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x01	lolen	Minimum payload length
2	0x01	class	Message class: System
3	0x0f	method	Message ID
4	uint8	reset	Reset counters if parameter value is nonzero

**Table 2.313. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x0a	lolen	Minimum payload length
2	0x01	class	Message class: System
3	0x0f	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>
6-7	uint16	tx_packets	Number of successfully transmitted packets
8-9	uint16	rx_packets	Number of successfully received packets
10-11	uint16	crc_errors	Number of received packets with CRC errors
12-13	uint16	failures	Number of radio failures like aborted tx/rx packets, scheduling failures, etc

### BGLIB C API

```

/* Function */
struct gecko_msg_system_get_counters_rsp_t *gecko_cmd_system_get_counters(uint8 reset);

/* Response id */
gecko_rsp_system_get_counters_id

/* Response structure */
struct gecko_msg_system_get_counters_rsp_t
{
    uint16 result;,
    uint16 tx_packets;,
    uint16 rx_packets;,
    uint16 crc_errors;,
    uint16 failures;
};

```

### 2.13.1.5 cmd\_system\_get\_random\_data

This command can be used to get random data up to 16 bytes.

**Table 2.314. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x01	lolen	Minimum payload length
2	0x01	class	Message class: System
3	0x0b	method	Message ID
4	uint8	length	Length of random data. Maximum length is 16 bytes.

**Table 2.315. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x03	lolen	Minimum payload length
2	0x01	class	Message class: System
3	0x0b	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>
6	uint8array	data	Random data

#### BGLIB C API

```
/* Function */
struct gecko_msg_system_get_random_data_rsp_t *gecko_cmd_system_get_random_data(uint8 length);

/* Response id */
gecko_rsp_system_get_random_data_id

/* Response structure */
struct gecko_msg_system_get_random_data_rsp_t
{
    uint16 result;,
    uint8array data;
};
```



### 2.13.1.6 cmd\_system\_halt

This command forces radio to idle state and allows device to sleep. Advertising, scanning, connections and software timers are halted by this commands. Halted operations are resumed by calling this command with parameter 0. Connections stay alive if system is resumed before connection supervision timeout.

This command should only be used for a short time period (a few seconds at maximum). It halts Bluetooth activity, but all the tasks and operations are still existing inside stack with their own concepts of time. Halting the system for a long time period may have negative consequences on stack's internal states.

**NOTE:**Software timer is also halted. Hardware interrupts are the only way to wake up from energy mode 2 when system is halted.

**Table 2.316. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x01	lolen	Minimum payload length
2	0x01	class	Message class: System
3	0x0c	method	Message ID
4	uint8	halt	Values: <ul style="list-style-type: none"><li>• <b>1</b>: halt</li><li>• <b>0</b>: resume</li></ul>

**Table 2.317. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x01	class	Message class: System
3	0x0c	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```
/* Function */
struct gecko_msg_system_halt_rsp_t *gecko_cmd_system_halt(uint8 halt);

/* Response id */
gecko_rsp_system_halt_id

/* Response structure */
struct gecko_msg_system_halt_rsp_t
{
    uint16 result;
};
```

### 2.13.1.7 cmd\_system\_hello

This command does not trigger any event but the response to the command is used to verify that communication between the host and the device is working.

**Table 2.318. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x00	lolen	Minimum payload length
2	0x01	class	Message class: System
3	0x00	method	Message ID

**Table 2.319. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x01	class	Message class: System
3	0x00	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

#### BGLIB C API

```
/* Function */
struct gecko_msg_system_hello_rsp_t *gecko_cmd_system_hello();

/* Response id */
gecko_rsp_system_hello_id

/* Response structure */
struct gecko_msg_system_hello_rsp_t
{
    uint16 result;
};
```

### 2.13.1.8 cmd\_system\_linklayer\_configure

Send configuration data to linklayer. This command is used to fine tune low level Bluetooth operation.

**Table 2.320. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x02	lolen	Minimum payload length
2	0x01	class	Message class: System
3	0x0e	method	Message ID
4	uint8	key	Key to configure: <ul style="list-style-type: none"> <li>• <b>1:</b>HALT, same as system_halt command, value-0 Stop Radio 1- Start Radio</li> <li>• <b>2:</b>PRIORITY_RANGE, Sets RAIL priority_mapping offset field of linklayer Priority configuration structure to the first byte of value field.</li> <li>• <b>3:</b>SCAN_CHANNELS, Sets channels to scan on. First byte of value is channel map. 0x1 = Channel 37, 0x2 = Channel 38, 0x4 = Channel 39</li> <li>• <b>4:</b>SET_FLAGS, Set Link Layer configuration flags. value is little endian 32bit integer. Flag Values: <ul style="list-style-type: none"> <li>• 0x00000001 - Disable Feature Exchange when slave</li> <li>• 0x00000002 - Disable Feature Exchange when master</li> </ul> </li> <li>• <b>5:</b>CLR_FLAGS, value is flags to clear. Flags are same as in SET_FLAGS command.</li> <li>• <b>7:</b>SET_AFH_INTERVAL, Set afh_scan_interval field of Link Layer priority configuration structure.</li> <li>• <b>0:</b></li> </ul>
5	uint8array	data	Configuration data. Length and contents of data field depend on the key value used.

**Table 2.321. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x01	class	Message class: System
3	0x0e	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0:</b> success</li> <li>• <b>Non-zero:</b> an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_system_linklayer_configure_rsp_t *gecko_cmd_system_linklayer_configure(uint8 key, uint8
data_len, const uint8 *data_data);

/* Response id */
gecko_rsp_system_linklayer_configure_id

```

```

/* Response structure */
struct gecko_msg_system_linklayer_configure_rsp_t
{
    uint16 result;
};

```

### 2.13.1.9 cmd\_system\_reset

This command can be used to reset the system. It does not have a response, but it triggers one of the boot events (normal reset or boot to DFU mode) depending on the selected boot mode.

**Table 2.322. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x01	lolen	Minimum payload length
2	0x01	class	Message class: System
3	0x01	method	Message ID
4	uint8	dfu	Boot mode: <ul style="list-style-type: none"> <li>• <b>0</b>: Normal reset</li> <li>• <b>1</b>: Boot to UART DFU mode</li> <li>• <b>2</b>: Boot to OTA DFU mode</li> </ul>

### BGLIB C API

```

/* Function */
void *gecko_cmd_system_reset(uint8 dfu);

/* Command does not have a response */

```

**Table 2.323. Events Generated**

Event	Description
<a href="#">system_boot</a>	Sent after the device has booted into normal mode
<a href="#">dfu_boot</a>	Sent after the device has booted into UART DFU mode

### 2.13.1.10 (deprecated) cmd\_system\_set\_bt\_address

**Deprecated.** Replacement is [system\\_set\\_identity\\_address](#) command.

This command can be used to set the Bluetooth public address used by the device. A valid address set with this command overrides the default Bluetooth public address programmed at production, and it will be effective in the next system reboot. The stack treats 00:00:00:00:00:00 and ff:ff:ff:ff:ff:ff as invalid addresses. Thus passing one of them into this command will cause the stack to use the default address in the next system reboot.

**Table 2.324. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x06	lolen	Minimum payload length
2	0x01	class	Message class: System
3	0x04	method	Message ID
4-9	bd_addr	address	Bluetooth public address in little endian format

**Table 2.325. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x01	class	Message class: System
3	0x04	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0:</b> success</li> <li>• <b>Non-zero:</b> an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_system_set_bt_address_rsp_t *gecko_cmd_system_set_bt_address(bd_addr address);

/* Response id */
gecko_rsp_system_set_bt_address_id

/* Response structure */
struct gecko_msg_system_set_bt_address_rsp_t
{
    uint16 result;
};

```

### 2.13.1.11 cmd\_system\_set\_device\_name

This command can be used to set the device name. Currently it is possible to set the name which will be used during the OTA update. The name will be stored in persistent storage. If the OTA device name is also set in gecko configuration, the name stored in persistent storage is overwritten with the name in gecko configuration during device boot.

**Table 2.326. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x02	lolen	Minimum payload length
2	0x01	class	Message class: System
3	0x0d	method	Message ID
4	uint8	type	Device name to set. Values: <ul style="list-style-type: none"><li>• <b>0</b>: OTA device name</li></ul>
5	uint8array	name	Device name

**Table 2.327. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x01	class	Message class: System
3	0x0d	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```
/* Function */
struct gecko_msg_system_set_device_name_rsp_t *gecko_cmd_system_set_device_name(uint8 type, uint8 name_len,
const uint8 *name_data);

/* Response id */
gecko_rsp_system_set_device_name_id

/* Response structure */
struct gecko_msg_system_set_device_name_rsp_t
{
    uint16 result;
};
```

### 2.13.1.12 cmd\_system\_set\_identity\_address

This command can be used to set the device's Bluetooth identity address. The address can be a public device address or static random address. A valid address set with this command overrides the default Bluetooth public address that was programmed at production, and it will be effective in the next system reboot. The stack treats 00:00:00:00:00:00 and ff:ff:ff:ff:ff:ff as invalid addresses. Thus passing one of them into this command will cause the stack to use the default address in next system reboot.

**Table 2.328. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x07	lolen	Minimum payload length
2	0x01	class	Message class: System
3	0x13	method	Message ID
4-9	bd_addr	address	Bluetooth identity address in little endian format
10	uint8	type	Address type <ul style="list-style-type: none"> <li>• <b>0</b>: Public device address</li> <li>• <b>1</b>: Static random address</li> </ul>

**Table 2.329. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x01	class	Message class: System
3	0x13	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"> <li>• <b>0</b>: success</li> <li>• <b>Non-zero</b>: an error occurred</li> </ul> For other values refer to the <a href="#">Error codes</a>

### BGLIB C API

```

/* Function */
struct gecko_msg_system_set_identity_address_rsp_t *gecko_cmd_system_set_identity_address(bd_addr address,
uint8 type);

/* Response id */
gecko_rsp_system_set_identity_address_id

/* Response structure */
struct gecko_msg_system_set_identity_address_rsp_t
{
    uint16 result;
};

```

### 2.13.1.13 cmd\_system\_set\_tx\_power

This command can be used to set the global maximum TX power for Bluetooth. The returned value in the response is the selected maximum output power level after applying RF path compensation. If the GATT server contains a Tx Power service, the Tx Power Level attribute of the service will be updated accordingly.

The selected power level may be less than the specified value if the device does not meet the power requirements. For Bluetooth connections the maximum TX power will be limited to 10 dBm if Adaptive Frequency Hopping (AFH) is not enabled.

By default, the global maximum TX power value is 8 dBm.

**NOTE:** This command should not be used while advertising, scanning or during connection.

**Table 2.330. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x02	lolen	Minimum payload length
2	0x01	class	Message class: System
3	0x0a	method	Message ID
4-5	int16	power	TX power in 0.1dBm steps, for example the value of 10 is 1dBm and 55 is 5.5dBm

**Table 2.331. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x01	class	Message class: System
3	0x0a	method	Message ID
4-5	int16	set_power	The selected maximum power level

### BGLIB C API

```

/* Function */
struct gecko_msg_system_set_tx_power_rsp_t *gecko_cmd_system_set_tx_power(int16 power);

/* Response id */
gecko_rsp_system_set_tx_power_id

/* Response structure */
struct gecko_msg_system_set_tx_power_rsp_t
{
    int16 set_power;
};

```

### 2.13.2 system events



### 2.13.2.1 evt\_system\_awake

This event indicates that the device has woken up from sleep mode.

**NOTE:** Stack does not generate this event by itself as sleep and wakeup are managed in applications. If this event is needed, the application should call function `gecko_send_system_awake()` to signal stack to send this event.

**Table 2.332. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x00	lolen	Minimum payload length
2	0x01	class	Message class: System
3	0x04	method	Message ID

### C Functions

```
/* Event id */
gecko_evt_system_awake_id

/* Event structure */
struct gecko_msg_system_awake_evt_t
{
};
```

### 2.13.2.2 evt\_system\_boot

This event indicates the device has started and the radio is ready. This event carries the firmware build number and other SW and HW identification codes.

**Table 2.333. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x12	lolen	Minimum payload length
2	0x01	class	Message class: System
3	0x00	method	Message ID
4-5	uint16	major	Major release version
6-7	uint16	minor	Minor release version
8-9	uint16	patch	Patch release number
10-11	uint16	build	Build number
12-15	uint32	bootloader	Bootloader version
16-17	uint16	hw	Hardware type
18-21	uint32	hash	Version hash

### C Functions

```
/* Event id */
gecko_evt_system_boot_id

/* Event structure */
struct gecko_msg_system_boot_evt_t
{
    uint16 major;,
    uint16 minor;,
    uint16 patch;,
    uint16 build;,
    uint32 bootloader;,
    uint16 hw;,
    uint32 hash;
};
```

### 2.13.2.3 evt\_system\_error

This event indicates errors.

**Table 2.334. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x03	lolen	Minimum payload length
2	0x01	class	Message class: System
3	0x06	method	Message ID
4-5	uint16	reason	Standard code of the error just happened.
6	uint8array	data	Data related to the error, this field can be empty.

### C Functions

```
/* Event id */
gecko_evt_system_error_id

/* Event structure */
struct gecko_msg_system_error_evt_t
{
    uint16 reason;
    uint8array data;
};
```

### 2.13.2.4 evt\_system\_external\_signal

This event indicates external signals have been received. External signals are generated from native application.

**Table 2.335. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x04	lolen	Minimum payload length
2	0x01	class	Message class: System
3	0x03	method	Message ID
4-7	uint32	extsignals	Bitmask of external signals received since last event.

### C Functions

```
/* Event id */
gecko_evt_system_external_signal_id

/* Event structure */
struct gecko_msg_system_external_signal_evt_t
{
    uint32 extsignals;
};
```

### 2.13.2.5 evt\_system\_hardware\_error

This event indicates that hardware related errors occurred.

**Table 2.336. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x02	lolen	Minimum payload length
2	0x01	class	Message class: System
3	0x05	method	Message ID
4-5	uint16	status	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>

### C Functions

```
/* Event id */
gecko_evt_system_hardware_error_id

/* Event structure */
struct gecko_msg_system_hardware_error_evt_t
{
    uint16 status;
};
```

## 2.14 testing commands (test)

### 2.14.1 test commands

#### 2.14.1.1 cmd\_test\_dtm\_end

This command can be used to end a transmitter or a receiver test. When the command is processed by the radio and the test has ended, a [test\\_dtm\\_completed](#) event is triggered.

**Table 2.337. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x00	lolen	Minimum payload length
2	0x0e	class	Message class: testing commands
3	0x02	method	Message ID

**Table 2.338. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x0e	class	Message class: testing commands
3	0x02	method	Message ID
4-5	uint16	result	Command result

### BGLIB C API

```
/* Function */
struct gecko_msg_test_dtm_end_rsp_t *gecko_cmd_test_dtm_end();

/* Response id */
gecko_rsp_test_dtm_end_id

/* Response structure */
struct gecko_msg_test_dtm_end_rsp_t
{
    uint16 result;
};
```

**Table 2.339. Events Generated**

Event	Description
<a href="#">test_dtm_completed</a>	This event is received when the command is processed.

### 2.14.1.2 cmd\_test\_dtm\_rx

This command can be used to start a receiver test. The test is meant to be used against a separate Bluetooth tester device. When the command is processed by the radio, a [test\\_dtm\\_completed](#) event is triggered. This event indicates if the test started successfully.

Parameter **phy** specifies which PHY is used to receive the packets. All devices support at least the 1M PHY.

The test may be stopped using the [test\\_dtm\\_end](#) command. This will trigger another [test\\_dtm\\_completed](#) event, which carries the number of packets received during the test.

**Table 2.340. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x02	lolen	Minimum payload length
2	0x0e	class	Message class: testing commands
3	0x01	method	Message ID
4	uint8	channel	Bluetooth channel  <b>Range:</b> 0-39  Channel is (F - 2402) / 2, where F is frequency in MHz
5	uint8	<a href="#">phy</a>	PHY to use

**Table 2.341. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x0e	class	Message class: testing commands
3	0x01	method	Message ID
4-5	uint16	result	Command result

### BGLIB C API

```

/* Function */
struct gecko_msg_test_dtm_rx_rsp_t *gecko_cmd_test_dtm_rx(uint8 channel, uint8 phy);

/* Response id */
gecko_rsp_test_dtm_rx_id

/* Response structure */
struct gecko_msg_test_dtm_rx_rsp_t
{
    uint16 result;
};

```

**Table 2.342. Events Generated**

Event	Description
<a href="#">test_dtm_completed</a>	This event is received when the command is processed.

### 2.14.1.3 cmd\_test\_dtm\_tx

This command can be used to start a transmitter test. The test is meant to be used against a separate Bluetooth tester device. When the command is processed by the radio, a [test\\_dtm\\_completed](#) event is triggered. This event indicates if the test started successfully.

In the transmitter test, the device sends packets continuously with a fixed interval. The type and length of each packet is set by **packet\_type** and **length** parameters. Parameter **phy** specifies which PHY is used to transmit the packets. All devices support at least the 1M PHY. There is also a special packet type, **test\_pkt\_carrier**, which can be used to transmit continuous unmodulated carrier. The **length** field is ignored in this mode.

The test may be stopped using the [test\\_dtm\\_end](#) command.

**Table 2.343. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x04	lolen	Minimum payload length
2	0x0e	class	Message class: testing commands
3	0x00	method	Message ID
4	uint8	<a href="#">packet_type</a>	Packet type to transmit
5	uint8	length	Packet length in bytes <b>Range:</b> 0-255
6	uint8	channel	Bluetooth channel <b>Range:</b> 0-39 Channel is $(F - 2402) / 2$ , where F is frequency in MHz
7	uint8	<a href="#">phy</a>	PHY to use

**Table 2.344. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x02	lolen	Minimum payload length
2	0x0e	class	Message class: testing commands
3	0x00	method	Message ID
4-5	uint16	result	Command result

### BGLIB C API

```

/* Function */
struct gecko_msg_test_dtm_tx_rsp_t *gecko_cmd_test_dtm_tx(uint8 packet_type, uint8 length, uint8 channel,
uint8 phy);

/* Response id */
gecko_rsp_test_dtm_tx_id

/* Response structure */
struct gecko_msg_test_dtm_tx_rsp_t
{
    uint16 result;
};

```

Table 2.345. Events Generated

Event	Description
<a href="#">test_dtm_completed</a>	This event is received when the command is processed.

## 2.14.2 test events

### 2.14.2.1 evt\_test\_dtm\_completed

This event indicates that the radio has processed a test start or end command. The **result** parameter indicates the success of the command.

After the receiver or transmitter test is stopped, the **number\_of\_packets** parameter in this event indicates the number of received or transmitted packets.

Table 2.346. Event

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x04	lolen	Minimum payload length
2	0x0e	class	Message class: testing commands
3	0x00	method	Message ID
4-5	uint16	result	Command result
6-7	uint16	number_of_packets	Number of packets Only valid for <a href="#">test_dtm_end</a> command.

## C Functions

```
/* Event id */
gecko_evt_test_dtm_completed_id

/* Event structure */
struct gecko_msg_test_dtm_completed_evt_t
{
    uint16 result;,
    uint16 number_of_packets;
};
```

## 2.14.3 test enumerations



### 2.14.3.1 enum\_test\_packet\_type

Test packet types supported by the stack.

**Table 2.347. Enumerations**

Value	Name	Description
0	test_pkt_prbs9	PRBS9 packet payload
1	test_pkt_11110000	11110000 packet payload
2	test_pkt_10101010	10101010 packet payload
4	test_pkt_11111111	11111111 packet payload
5	test_pkt_00000000	00000000 packet payload
6	test_pkt_00001111	00001111 packet payload
7	test_pkt_01010101	01010101 packet payload
253	test_pkt_pn9	PN9 continuously modulated output
254	test_pkt_carrier	Unmodulated carrier

### 2.14.3.2 enum\_test\_phy

Test PHY types

**Table 2.348. Enumerations**

Value	Name	Description
1	test_phy_1m	1M PHY
2	test_phy_2m	2M PHY
3	test_phy_125k	125k Coded PHY
4	test_phy_500k	500k Coded PHY

## 2.15 User messaging (user)

This class provides one command and one event which can be utilized by a NCP host and target to implement a communication mechanism with own proprietary protocol. An application has the full responsibility on deciding whether and how the command and event are used. The stack does not produce or consume any messages belonging to this class.

### 2.15.1 user commands

#### 2.15.1.1 cmd\_user\_message\_to\_target

This command can be used by an NCP host to send a message to the target application on device.

**Table 2.349. Command**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Command
1	0x01	lolen	Minimum payload length
2	0xff	class	Message class: User messaging
3	0x00	method	Message ID
4	uint8array	data	The message

**Table 2.350. Response**

Byte	Type	Name	Description
0	0x20	hlen	Message type: Response
1	0x03	lolen	Minimum payload length
2	0xff	class	Message class: User messaging
3	0x00	method	Message ID
4-5	uint16	result	Result code <ul style="list-style-type: none"><li>• <b>0</b>: success</li><li>• <b>Non-zero</b>: an error occurred</li></ul> For other values refer to the <a href="#">Error codes</a>
6	uint8array	data	The response message

### BGLIB C API

```
/* Function */
struct gecko_msg_user_message_to_target_rsp_t *gecko_cmd_user_message_to_target(uint8 data_len, const uint8
*data_data);

/* Response id */
gecko_rsp_user_message_to_target_id

/* Response structure */
struct gecko_msg_user_message_to_target_rsp_t
{
    uint16 result;,
    uint8array data;
};
```

### 2.15.2 user events

### 2.15.2.1 evt\_user\_message\_to\_host

This event can be used by the target application on device to send a message to NCP host.

**Table 2.351. Event**

Byte	Type	Name	Description
0	0xa0	hlen	Message type: Event
1	0x01	lolen	Minimum payload length
2	0xff	class	Message class: User messaging
3	0x00	method	Message ID
4	uint8array	data	The message

### C Functions

```
/* Event id */
gecko_evt_user_message_to_host_id

/* Event structure */
struct gecko_msg_user_message_to_host_evt_t
{
    uint8array data;
};
```

## 2.16 Error codes

This chapter describes all BGAPI error codes.

### ■ Errors related to hardware

Code	Name	Description
0x0501	ps_store_full	Flash reserved for PS store is full
0x0502	ps_key_not_found	PS key not found
0x0503	i2c_ack_missing	Acknowledge for i2c was not received.
0x0504	i2c_timeout	I2C read or write timed out.

### ■ Errors related to BGAPI protocol

Code	Name	Description
0x0101	invalid_conn_handle	Invalid GATT connection handle.
0x0102	waiting_response	Waiting response from GATT server to previous procedure.
0x0103	gatt_connection_timeout	GATT connection is closed due procedure timeout.
0x0180	invalid_param	Command contained invalid parameter
0x0181	wrong_state	Device is in wrong state to receive command
0x0182	out_of_memory	Device has run out of memory
0x0183	not_implemented	Feature is not implemented
0x0184	invalid_command	Command was not recognized

Code	Name	Description
0x0185	timeout	A command or procedure failed or a link lost due to timeout
0x0186	not_connected	Connection handle passed is to command is not a valid handle
0x0187	flow	Command would cause either underflow or overflow error
0x0188	user_attribute	User attribute was accessed through API which is not supported
0x0189	invalid_license_key	No valid license key found
0x018a	command_too_long	Command maximum length exceeded
0x018b	out_of_bonds	Bonding procedure can't be started because device has no space left for bond.
0x018c	unspecified	Unspecified error
0x018d	hardware	Hardware failure
0x018e	buffers_full	Command not accepted, because internal buffers are full
0x018f	disconnected	Command or Procedure failed due to disconnection
0x0190	too_many_requests	Too many Simultaneous Requests
0x0191	not_supported	Feature is not supported in this firmware build
0x0192	no_bonding	The bonding does not exist.
0x0193	crypto	Error using crypto functions
0x0194	data_corrupted	Data was corrupted.
0x0195	command_incomplete	Data received does not form a complete command
0x0196	not_initialized	Feature or subsystem not initialized
0x0197	invalid_sync_handle	Invalid periodic advertising sync handle
0x0198	invalid_module_action	Bluetooth cannot be used on this hardware
0x0199	radio	Error received from radio

#### ■ Errors from Security Manager Protocol

Code	Name	Description
0x0301	passkey_entry_failed	The user input of passkey failed, for example, the user cancelled the operation
0x0302	oob_not_available	Out of Band data is not available for authentication
0x0303	authentication_requirements	The pairing procedure cannot be performed as authentication requirements cannot be met due to IO capabilities of one or both devices
0x0304	confirm_value_failed	The confirm value does not match the calculated compare value
0x0305	pairing_not_supported	Pairing is not supported by the device
0x0306	encryption_key_size	The resultant encryption key size is insufficient for the security requirements of this device

Code	Name	Description
0x0307	command_not_supported	The SMP command received is not supported on this device
0x0308	unspecified_reason	Pairing failed due to an unspecified reason
0x0309	repeated_attempts	Pairing or authentication procedure is disallowed because too little time has elapsed since last pairing request or security request
0x030a	invalid_parameters	The Invalid Parameters error code indicates: the command length is invalid or a parameter is outside of the specified range.
0x030b	dhkey_check_failed	Indicates to the remote device that the DHKey Check value received doesn't match the one calculated by the local device.
0x030c	numeric_comparison_failed	Indicates that the confirm values in the numeric comparison protocol do not match.
0x030d	bredr_pairing_in_progress	Indicates that the pairing over the LE transport failed due to a Pairing Request sent over the BR/EDR transport in process.
0x030e	cross_transport_key_derivation_generation_not_allowed	Indicates that the BR/EDR Link Key generated on the BR/EDR transport cannot be used to derive and distribute keys for the LE transport.

#### ■ Bluetooth errors

Code	Name	Description
0x0202	unknown_connection_identifier	Connection does not exist, or connection open request was cancelled.
0x0205	authentication_failure	Pairing or authentication failed due to incorrect results in the pairing or authentication procedure. This could be due to an incorrect PIN or Link Key
0x0206	pin_or_key_missing	Pairing failed because of missing PIN, or authentication failed because of missing Key
0x0207	memory_capacity_exceeded	Controller is out of memory.
0x0208	connection_timeout	Link supervision timeout has expired.
0x0209	connection_limit_exceeded	Controller is at limit of connections it can support.
0x020a	synchronous_connection_limit_exceeded	The Synchronous Connection Limit to a Device Exceeded error code indicates that the Controller has reached the limit to the number of synchronous connections that can be achieved to a device.
0x020b	acl_connection_already_exists	The ACL Connection Already Exists error code indicates that an attempt to create a new ACL Connection to a device when there is already a connection to this device.
0x020c	command_disallowed	Command requested cannot be executed because the Controller is in a state where it cannot process this command at this time.
0x020d	connection_rejected_due_to_limited_resources	The Connection Rejected Due To Limited Resources error code indicates that an incoming connection was rejected due to limited resources.

Code	Name	Description
0x020e	connection_rejected_due_to_security_reasons	The Connection Rejected Due To Security Reasons error code indicates that a connection was rejected due to security requirements not being fulfilled, like authentication or pairing.
0x020f	connection_rejected_due_to_unacceptable_bd_addr	The Connection was rejected because this device does not accept the BD_ADDR. This may be because the device will only accept connections from specific BD_ADDRs.
0x0210	connection_accept_timeout_exceeded	The Connection Accept Timeout has been exceeded for this connection attempt.
0x0211	unsupported_feature_or_parameter_value	A feature or parameter value in the HCI command is not supported.
0x0212	invalid_command_parameters	Command contained invalid parameters.
0x0213	remote_user_terminated	User on the remote device terminated the connection.
0x0214	remote_device_terminated_connection_due_to_low_resources	The remote device terminated the connection because of low resources
0x0215	remote_powering_off	Remote Device Terminated Connection due to Power Off
0x0216	connection_terminated_by_local_host	Local device terminated the connection.
0x0217	repeated_attempts	The Controller is disallowing an authentication or pairing procedure because too little time has elapsed since the last authentication or pairing attempt failed.
0x0218	pairing_not_allowed	The device does not allow pairing. This can be for example, when a device only allows pairing during a certain time window after some user input allows pairing
0x021a	unsupported_remote_feature	The remote device does not support the feature associated with the issued command.
0x021f	unspecified_error	No other error code specified is appropriate to use.
0x0222	ll_response_timeout	Connection terminated due to link-layer procedure timeout.
0x0223	ll_procedure_collision	LL procedure has collided with the same transaction or procedure that is already in progress.
0x0225	encryption_mode_not_acceptable	The requested encryption mode is not acceptable at this time.
0x0226	link_key_cannot_be_changed	Link key cannot be changed because a fixed unit key is being used.
0x0228	instant_passed	LMP PDU or LL PDU that includes an instant cannot be performed because the instant when this would have occurred has passed.
0x0229	pairing_with_unit_key_not_supported	It was not possible to pair as a unit key was requested and it is not supported.
0x022a	different_transaction_collision	LMP transaction was started that collides with an ongoing transaction.
0x022e	channel_assessment_not_supported	The Controller cannot perform channel assessment because it is not supported.
0x022f	insufficient_security	The HCI command or LMP PDU sent is only possible on an encrypted link.

Code	Name	Description
0x0230	parameter_out_of_mandatory_range	A parameter value requested is outside the mandatory range of parameters for the given HCI command or LMP PDU.
0x0237	simple_pairing_not_supported_by_host	The IO capabilities request or response was rejected because the sending Host does not support Secure Simple Pairing even though the receiving Link Manager does.
0x0238	host_busy_pairing	The Host is busy with another pairing operation and unable to support the requested pairing. The receiving device should retry pairing again later.
0x0239	connection_rejected_due_to_no_suitable_channel_found	The Controller could not calculate an appropriate value for the Channel selection operation.
0x023a	controller_busy	Operation was rejected because the controller is busy and unable to process the request.
0x023b	unacceptable_connection_interval	Remote device terminated the connection because of an unacceptable connection interval.
0x023c	advertising_timeout	Advertising for a fixed duration completed or, for directed advertising, that advertising completed without a connection being created.
0x023d	connection_terminated_due_to_mic_failure	Connection was terminated because the Message Integrity Check (MIC) failed on a received packet.
0x023e	connection_failed_to_be_established	LL initiated a connection but the connection has failed to be established. Controller did not receive any packets from remote end.
0x023f	mac_connection_failed	The MAC of the 802.11 AMP was requested to connect to a peer, but the connection failed.
0x0240	coarse_clock_adjustment_rejected_but_will_try_to_adjust_using_clock_dragging	The master, at this time, is unable to make a coarse adjustment to the piconet clock, using the supplied parameters. Instead the master will attempt to move the clock using clock dragging.
0x0242	unknown_advertising_identifier	A command was sent from the Host that should identify an Advertising or Sync handle, but the Advertising or Sync handle does not exist.
0x0243	limit_reached	Number of operations requested has been reached and has indicated the completion of the activity (e.g., advertising or scanning).
0x0244	operation_cancelled_by_host	A request to the Controller issued by the Host and still pending was successfully canceled.
0x0245	packet_too_long	An attempt was made to send or receive a packet that exceeds the maximum allowed packet length.

#### ■ Application errors

Code	Name	Description
0x0a01	file_open_failed	File open failed.
0x0a02	xml_parse_failed	XML parsing failed.
0x0a03	device_connection_failed	Device connection failed.
0x0a04	device_comunication_failed	Device communication failed.

Code	Name	Description
0x0a05	authentication_failed	Device authentication failed.
0x0a06	incorrect_gatt_database	Device has incorrect GATT database.
0x0a07	disconnected_due_to_procedure_collision	Device disconnected due to procedure collision.
0x0a08	disconnected_due_to_secure_session_failed	Device disconnected due to failure to establish or reestablish a secure session.
0x0a09	encryption_decryption_error	Encryption/decryption operation failed.
0x0a0a	maximum_retries	Maximum allowed retries exceeded.
0x0a0b	data_parse_failed	Data parsing failed.
0x0a0c	pairing_removed	Pairing established by the application layer protocol has been removed.
0x0a0d	inactive_timeout	Inactive timeout.
0x0a0e	mismatched_or_insufficient_security	Mismatched or insufficient security level

#### ■ Errors from Attribute Protocol

Code	Name	Description
0x0401	invalid_handle	The attribute handle given was not valid on this server
0x0402	read_not_permitted	The attribute cannot be read
0x0403	write_not_permitted	The attribute cannot be written
0x0404	invalid_pdu	The attribute PDU was invalid
0x0405	insufficient_authentication	The attribute requires authentication before it can be read or written.
0x0406	request_not_supported	Attribute Server does not support the request received from the client.
0x0407	invalid_offset	Offset specified was past the end of the attribute
0x0408	insufficient_authorization	The attribute requires authorization before it can be read or written.
0x0409	prepare_queue_full	Too many prepare writes have been queued
0x040a	att_not_found	No attribute found within the given attribute handle range.
0x040b	att_not_long	The attribute cannot be read or written using the Read Blob Request
0x040c	insufficient_enc_key_size	The Encryption Key Size used for encrypting this link is insufficient.
0x040d	invalid_att_length	The attribute value length is invalid for the operation
0x040e	unlikely_error	The attribute request that was requested has encountered an error that was unlikely, and therefore could not be completed as requested.
0x040f	insufficient_encryption	The attribute requires encryption before it can be read or written.
0x0410	unsupported_group_type	The attribute type is not a supported grouping attribute as defined by a higher layer specification.
0x0411	insufficient_resources	Insufficient Resources to complete the request



Code	Name	Description
0x0412	out_of_sync	The server requests the client to rediscover the data-base.
0x0413	value_not_allowed	The attribute parameter value was not allowed.
0x0480	application	When this is returned in a BGAPI response, the application tried to read or write the value of a user attribute from the GATT database.

#### ■ Bluetooth Mesh errors

Code	Name	Description
0x0c01	already_exists	Returned when trying to add a key or some other unique resource with an ID which already exists
0x0c02	does_not_exist	Returned when trying to manipulate a key or some other resource with an ID which does not exist
0x0c03	limit_reached	Returned when an operation cannot be executed because a pre-configured limit for keys, key bindings, elements, models, virtual addresses, provisioned devices, or provisioning sessions is reached
0x0c04	invalid_address	Returned when trying to use a reserved address or add a "pre-provisioned" device using an address already used by some other device
0x0c05	malformed_data	In a BGAPI response, the user supplied malformed data; in a BGAPI event, the remote end responded with malformed or unrecognized data
0x0c06	already_initialized	An attempt was made to initialize a subsystem that was already initialized.
0x0c07	not_initialized	An attempt was made to use a subsystem that wasn't initialized yet. Call the subsystem's init function first.
0x0c08	no_friend_offer	Returned when trying to establish a friendship as a Low Power Node, but no acceptable friend offer message was received.
0x0c09	prov_link_closed	Provisioning link was unexpectedly closed before provisioning was complete.
0x0c0a	prov_invalid_pdu	An unrecognized provisioning PDU was received.
0x0c0b	prov_invalid_pdu_format	A provisioning PDU with wrong length or containing field values that are out of bounds was received.
0x0c0c	prov_unexpected_pdu	An unexpected (out of sequence) provisioning PDU was received.
0x0c0d	prov_confirmation_failed	The computed confirmation value did not match the expected value.
0x0c0e	prov_out_of_resources	Provisioning could not be continued due to insufficient resources.
0x0c0f	prov_decryption_failed	The provisioning data block could not be decrypted.
0x0c10	prov_unexpected_error	An unexpected error happened during provisioning.
0x0c11	prov_cannot_assign_addr	Device could not assign unicast addresses to all of its elements.

Code	Name	Description
0x0c12	address_temporarily_unavailable	Returned when trying to reuse an address of a previously deleted device before an IV Index Update has been executed.
0x0c13	address_already_used	Returned when trying to assign an address that is used by one of the devices in the Device Database, or by the Provisioner itself.

#### ■ Bluetooth Mesh foundation errors

Code	Name	Description
0x0e01	invalid_address	Returned when address in request was not valid
0x0e02	invalid_model	Returned when model identified is not found for a given element
0x0e03	invalid_app_key	Returned when the key identified by AppKeyIndex is not stored in the node
0x0e04	invalid_net_key	Returned when the key identified by NetKeyIndex is not stored in the node
0x0e05	insufficient_resources	Returned when The node cannot serve the request due to insufficient resources
0x0e06	key_index_exists	Returned when the key identified is already stored in the node and the new NetKey value is different
0x0e07	invalid_publish_params	Returned when the model does not support the publish mechanism
0x0e08	not_subscribe_model	Returned when the model does not support the subscribe mechanism
0x0e09	storage_failure	Returned when storing of the requested parameters failed
0x0e0a	not_supported	Returned when requested setting is not supported
0x0e0b	cannot_update	Returned when the requested update operation cannot be performed due to general constraints
0x0e0c	cannot_remove	Returned when the requested delete operation cannot be performed due to general constraints
0x0e0d	cannot_bind	Returned when the requested bind operation cannot be performed due to general constraints
0x0e0e	temporarily_unable	Returned when The node cannot start advertising with Node Identity or Proxy since the maximum number of parallel advertising is reached
0x0e0f	cannot_set	Returned when the requested state cannot be set
0x0e10	unspecified	Returned when an unspecified error took place
0x0e11	invalid_binding	Returned when the NetKeyIndex and AppKeyIndex combination is not valid for a Config AppKey Update

#### ■ Filesystem errors

Code	Name	Description
0x0901	file_not_found	File not found

## ■ Errors from Logical Link Control and Adaptation Protocol

Code	Name	Description
0x0d01	remote_disconnected	Returned when remote disconnects the connection-oriented channel by sending disconnection request.
0x0d02	local_disconnected	Returned when local host disconnect the connection-oriented channel by sending disconnection request.
0x0d03	cid_not_exist	Returned when local host did not find a connection-oriented channel with given destination CID.
0x0d04	le_disconnected	Returned when connection-oriented channel disconnected due to LE connection is dropped.
0x0d05	flow_control_violated	Returned when connection-oriented channel disconnected due to remote end send data even without credit.
0x0d06	flow_control_credit_overflowed	Returned when connection-oriented channel disconnected due to remote end send flow control credits exceed 65535.
0x0d07	no_flow_control_credit	Returned when connection-oriented channel has run out of flow control credit and local application still trying to send data.
0x0d08	connection_request_timeout	Returned when connection-oriented channel has not received connection response message within maximum timeout.
0x0d09	invalid_cid	Returned when local host received a connection-oriented channel connection response with an invalid destination CID.
0x0d0a	wrong_state	Returned when local host application tries to send a command which is not suitable for L2CAP channel's current state.


## ■ Security errors

Code	Name	Description
0x0b01	image_signature_verification_failed	Device firmware signature verification failed.
0x0b02	file_signature_verification_failed	File signature verification failed.
0x0b03	image_checksum_error	Device firmware checksum is not valid.

### 3. Document Revision History

**Table 3.1. Document Revision History**

Revision Number	Effective Date	Change Description
1.0	April 1st 2015	Initial version.
1.1	December 23rd 2015	Updated for firmware version 0.9.2.
1.2	January 15th 2016	Corrected typography and formatting issues.
1.3	February 12th 2016	Updated for firmware version 1.0.0.
1.4	March 24th 2016	Updated for firmware version 1.0.2.
1.5	June 6th 2016	Updated for firmware version 1.0.4.
1.6	June 15th 2016	Revised description for timestamp parameter in evt_hardware_interrupt.
1.7	September 2nd 2016	Updated for firmware version 2.0.0.
1.8	October 13th 2016	Corrected default ATT MTU value.
1.9	December 2nd 2016	Updated for firmware version 2.1.0.
2.0	March 10th 2017	Updated for firmware version 2.3.0.
2.1	July 9th 2017	Updated for firmware version 2.4.0.
2.2	July 21st, 2017	Updated for firmware version 2.4.1.
2.3	August 16th, 2017	Updated for firmware version 2.4.2.
2.4	September 29th, 2017	Updated for firmware version 2.6.0 beta.
2.5	October 27th, 2017	Updated for firmware version 2.6.0.
2.7.0	December 20th, 2017	Updated for firmware version 2.7.0.
2.8.0	February 23rd, 2018	Updated for firmware version 2.8.0.
2.8.1	March 23rd, 2018	Updated for firmware version 2.8.1.
2.9.0	May 25th, 2018	Updated for firmware version 2.9.0.
2.9.1	June 22nd, 2018	Updated for firmware version 2.9.1.
2.9.2	July 13th, 2018	Updated for firmware version 2.9.2.
2.10.0	Sep 14th, 2018	Updated for firmware version 2.10.0.
2.11.0	Dec 14th, 2018	Updated for firmware version 2.11.0.
2.11.1	Jan 28th, 2019	Updated for firmware version 2.11.1.
2.11.2	Feb 21st, 2019	Updated for firmware version 2.11.2.
2.11.3	Mar 22nd, 2019	Updated for firmware version 2.11.3.
2.11.4	Apr 26th, 2019	Updated for firmware version 2.11.4.
2.11.5	May 8th, 2019	Updated for firmware version 2.11.5.
2.12.0	June 7th, 2019	Updated for firmware version 2.12.0.
2.12.1	July 19th, 2019	Updated for firmware version 2.12.1.

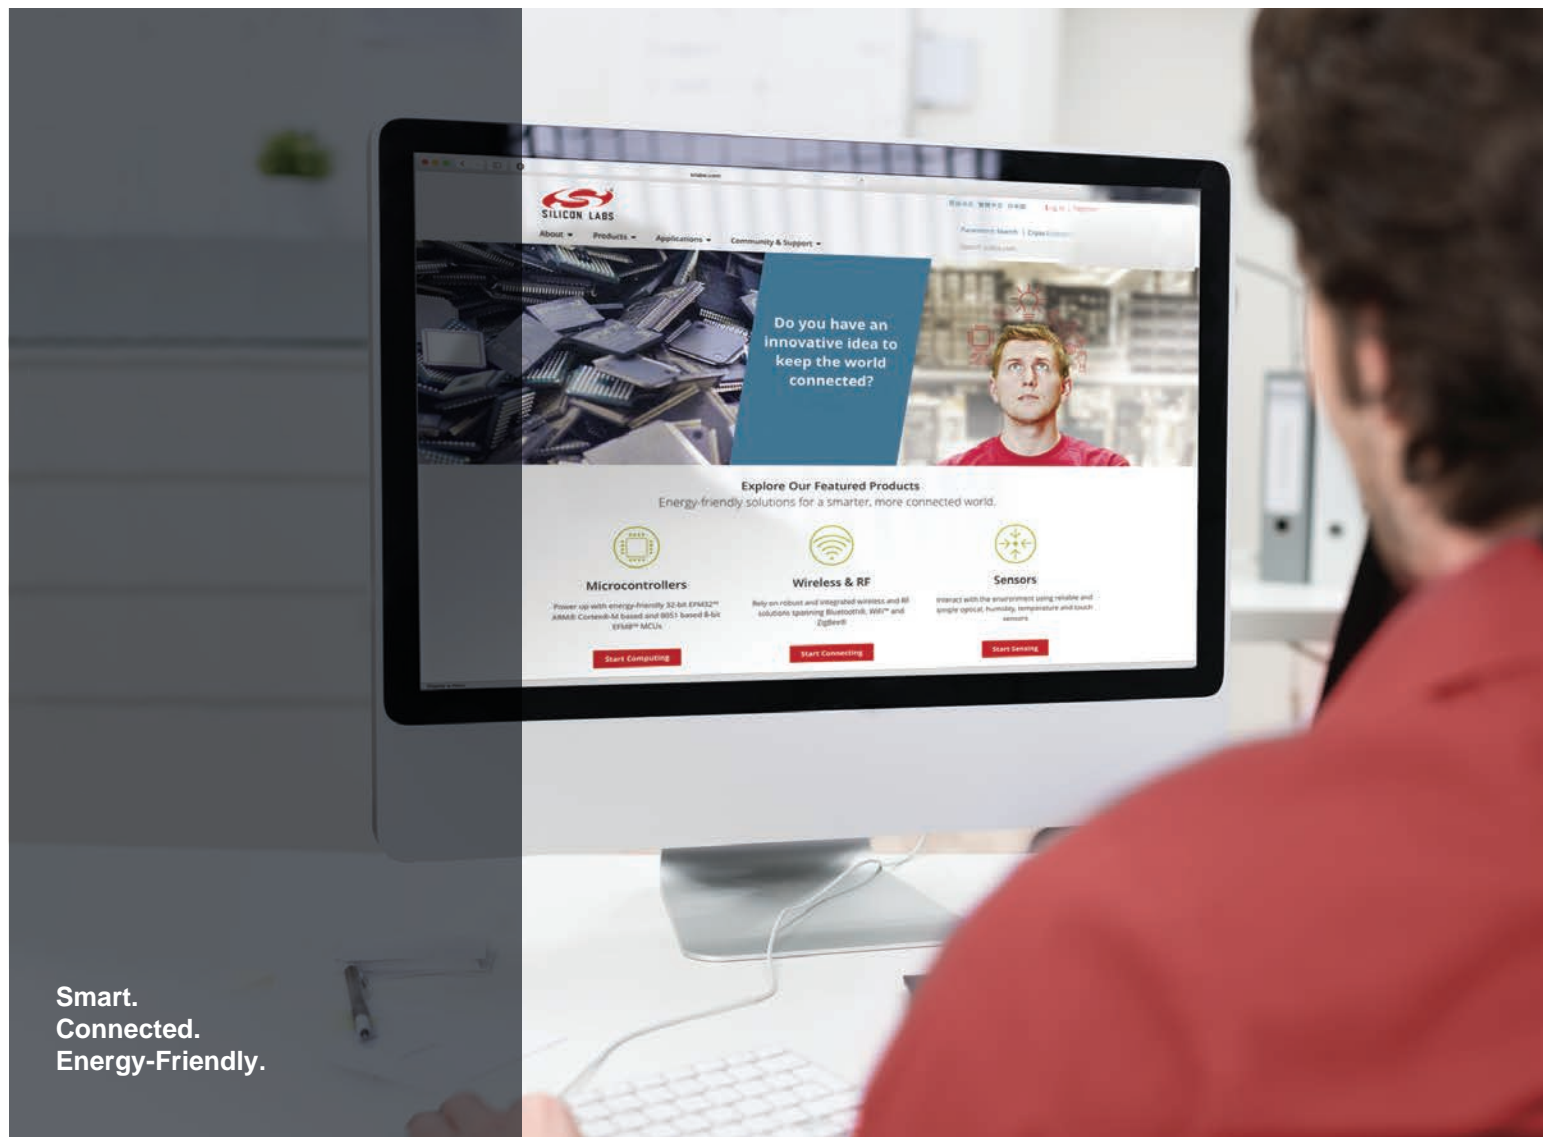

Smart.  
Connected.  
Energy-Friendly.



**Products**

[www.silabs.com/products](http://www.silabs.com/products)



**Quality**

[www.silabs.com/quality](http://www.silabs.com/quality)



**Support and Community**

[community.silabs.com](http://community.silabs.com)

#### Disclaimer

Silicon Labs intends to provide customers with the latest, accurate, and in-depth documentation of all peripherals and modules available for system and software implementers using or intending to use the Silicon Labs products. Characterization data, available modules and peripherals, memory sizes and memory addresses refer to each specific device, and "Typical" parameters provided can and do vary in different applications. Application examples described herein are for illustrative purposes only. Silicon Labs reserves the right to make changes without further notice to the product information, specifications, and descriptions herein, and does not give warranties as to the accuracy or completeness of the included information. Without prior notification, Silicon Labs may update product firmware during the manufacturing process for security or reliability reasons. Such changes will not alter the specifications or the performance of the product. Silicon Labs shall have no liability for the consequences of use of the information supplied in this document. This document does not imply or expressly grant any license to design or fabricate any integrated circuits. The products are not designed or authorized to be used within any FDA Class III devices, applications for which FDA premarket approval is required or Life Support Systems without the specific written consent of Silicon Labs. A "Life Support System" is any product or system intended to support or sustain life and/or health, which, if it fails, can be reasonably expected to result in significant personal injury or death. Silicon Labs products are not designed or authorized for military applications. Silicon Labs products shall under no circumstances be used in weapons of mass destruction including (but not limited to) nuclear, biological or chemical weapons, or missiles capable of delivering such weapons. Silicon Labs disclaims all express and implied warranties and shall not be responsible or liable for any injuries or damages related to use of a Silicon Labs product in such unauthorized applications.

#### Trademark Information

Silicon Laboratories Inc.®, Silicon Laboratories®, Silicon Labs®, SiLabs® and the Silicon Labs logo®, Bluegiga®, Bluegiga Logo®, ClockBuilder®, CMEMS®, DSPLL®, EFM®, EFM32®, EFR, Ember®, Energy Micro, Energy Micro logo and combinations thereof, "the world's most energy friendly microcontrollers", Ember®, EZLink®, EZRadio®, EZRadioPRO®, Gecko®, Gecko OS, Gecko OS Studio, ISOModem®, Precision32®, ProSLIC®, Simplicity Studio®, SiPHY®, Telegesis, the Telegesis Logo®, USBXpress®, Zentri, the Zentri logo and Zentri DMS, Z-Wave®, and others are trademarks or registered trademarks of Silicon Labs. ARM, CORTEX, Cortex-M3 and THUMB are trademarks or registered trademarks of ARM Holdings. Keil is a registered trademark of ARM Limited. Wi-Fi is a registered trademark of the Wi-Fi Alliance. All other products or brand names mentioned herein are trademarks of their respective holders.



Silicon Laboratories Inc.  
400 West Cesar Chavez  
Austin, TX 78701  
USA

<http://www.silabs.com>