TEST REPORT

Report No.： VR251211-H01

Report Date：2026/01/02

Applicant : Aplex Technology Inc.

Address : 15F-1,No.186,Jian Yi Road,Zhonghe Dist.,New Taipei City,235 Taiwan.

Product : Panel PC

Model : AEx-921EP

Serial No : AEx-9XXXXXXXXXXX (X=0-9,a-z,A-Z,Blank or Dash)

AEx-PXXXXXXXXXXX (X=0-9,a-z,A-Z,Blank or Dash)

1. This report, including cover and content, is a total of 10 pages. It is invalid if it is not presented as the entire report.

2. This test report cannot be reproduced, except in full, without prior written permission of the lab.

3.This results shown in this test report refer only to the test sample(s) tested.

4. Any change or update of the report will be noticed in the "Remark".

Report Signatory：

Qisda Corporation Measurement Lab

157 Shan-Ying Road, Gueishan Taoyuan 333, Taiwan

Tel：(03)3598800 ext 2545,2621

Qisda Qisda Qisda

Product	Panel PC		Applicant No	VR251211-H01
Model	AEX-921EP		Applicant	Tim Chuang
Serial No.	AEx-9XXXXXXXXXXX (X=0-9,a-z,A-Z,Blank or Dash) AEx-PXXXXXXXXXXX (X=0-9,a-z,A-Z,Blank or Dash)		Receive Date	2025/12/11
Quantity	1 Set		Meas. Date	2025/12/11 to 2025/12/29
Manufacturer	Aplex Technology Inc.		Meas. Procedure Used	TL17025-16-05 TL17025-16-06 TL17025-16-16 TL17025-16-17
Ambient Condition	Temp.	(25 ± 10) ℃	Measured by	Duncan Lee
	R.H.	(55 ± 25) %	Reviewed by	Roman Lu

I. Purpose

Verify the product appearance and function to endure the environment test.

II. Instrument

Operating Temperature Test			
Brand	HITACHI	Model name	MHK-225LK
Storage Temperature Test			
Brand	HITACHI	Model name	ES-306LH
Storage Humidity Test			
Brand	HITACHI	Model name	MHK-225LK
Vibration Test / Mechanical Shock Test			
Brand	King-Design	Model name	EM-1000F2K.50N250
Drop Test			
Brand	King-Design	Model name	KD-128

III. Method / Condition

operating temperature test was performed IEC60068-2-1 (2007) and IEC60068-2-2 (2007).
Storage temperature test was performed IEC 60068-2-14 (2023).
Storage humidity test wsa performed IEC 60068-2-78 (2012).
Vibration test was performed IEC 60068-2-64 (2019).
Mechanical shock test wasperformed IEC 60068-2-27 (2008).
Drop test was performed IEC 60068-2-31(2008).
Detailed test procedure please refer to V. Result/Data.

Qisda Qisda Qisda

IV. Sample Appearance

V. Result/Data

1. Operating Temperature Test

Step	Temperature (℃)	Humidity (%RH)	Duration (h : min)	Condition
1	+25 to -20	–	00:25	Operation
2	-20	–	12:00	
3	-20 to +70	–	00:50	
4	+70	–	12:00	
5	+70 to +25	–	00:25	

- Operation: BurnIn Test.

1-1 Before Test

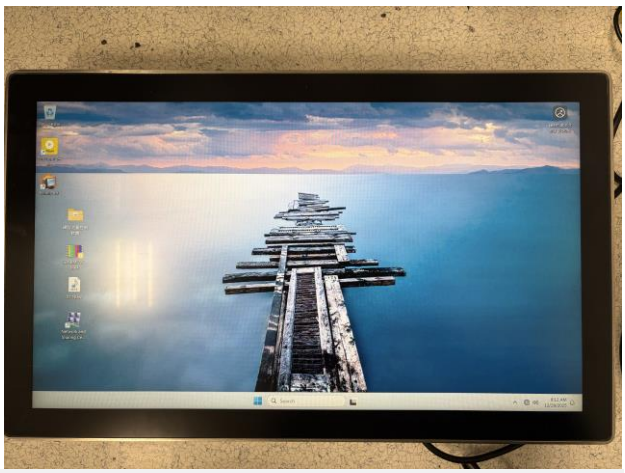

1-2 After Test

Qisda Qisda Qisda

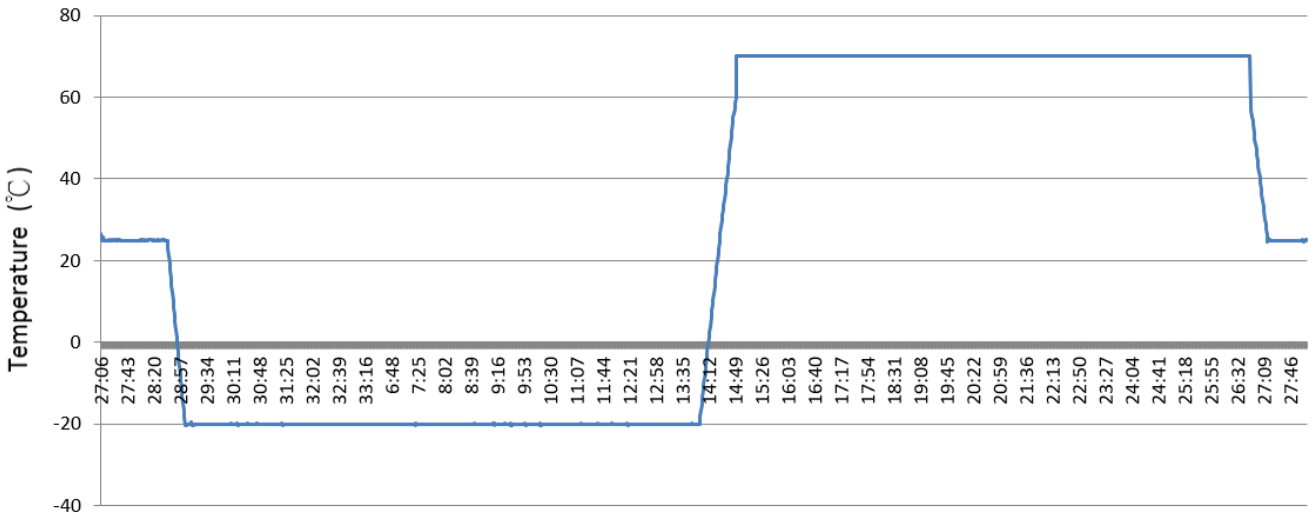

Test Result :

Model Name	PASS	FAIL	No Judgment
AEX-921EP	V	–	–

2. Storage Temperature Test

Step	Temperature (°C)	Duration (h : min)	Temp. Ramp (h : min)	Cycle	Condition
1	-30	00:30	00:05	20	Non-Operation
2	+70	00:30	00:05		

2-1 Before Test

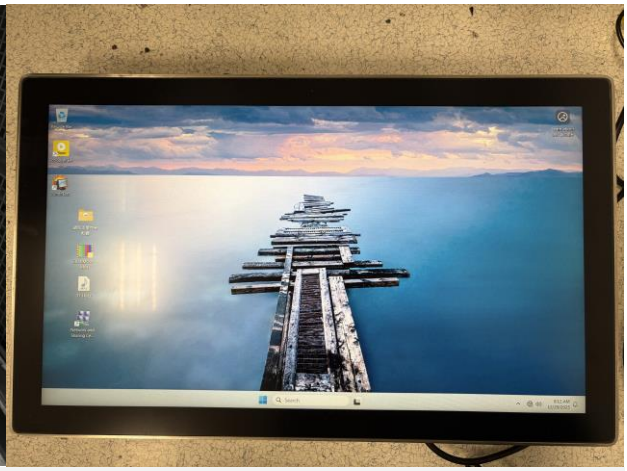

2-2 After Test

(V. Result/Data - Continued)

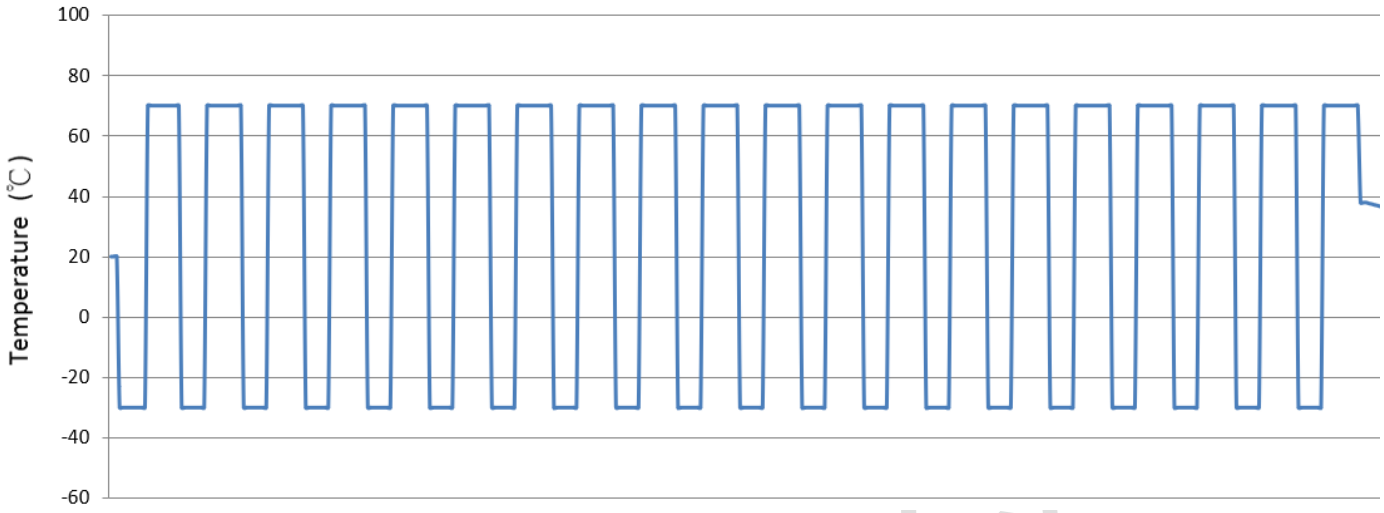

Test Result :

Model Name	PASS	FAIL	No Judgment
AEX-921EP	V	–	–

3. Storage Humidity Test

Step	Temperature (°C)	Humidity (%RH)	Duration (h : min)	Condition
1	+25 to +40	60 to 10	00:50	Non-Operation
2	+40	10	22:40	
3	+40	10 to 95	01:20	
4	+40	94	22:40	
5	+40 to +25	95 to 60	00:30	

3-1 Before Test

3-2 After Test

(V. Result/Data - Continued)

Test Result :

Model Name	PASS	FAIL	No Judgment
AEX-921EP	V	–	–

4. Vibration Test (Random wave)

Frequency(Hz)	Grms	Duration (h : min)	Direction(Axis)	Condition
5~500	1.0	00 : 30	X、Y、Z	Operation

- Operation: BurnIn Test.

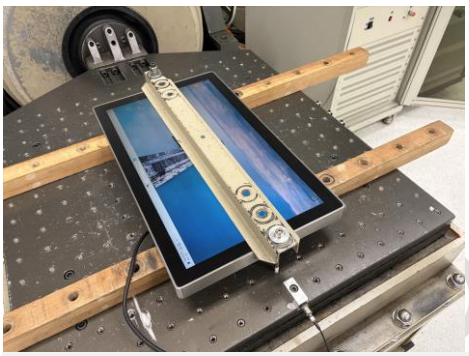

X Axis

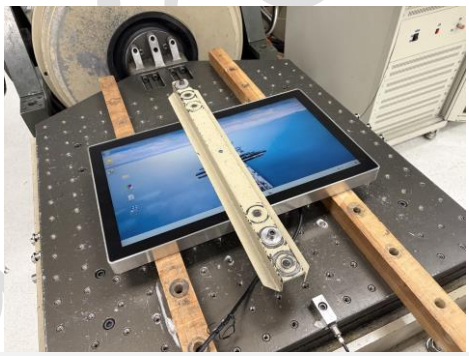

Y Axis

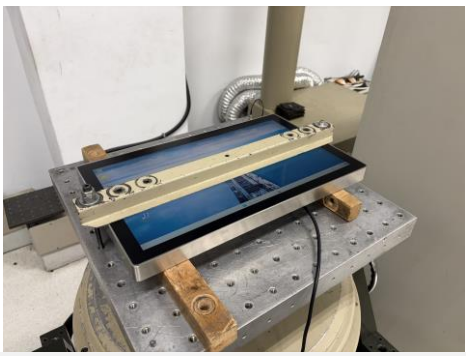

Z Axis

Current Level: 0.00 dB Demand RMS: 1.000 g Control RMS: 1.000 g
Frame Time:3.2000 (s) Lines: 800 dF: 0.3 Hz
DOF: 120 Current Level Time: 00:30:00 Remaining Time: 00:00:00

Test Result :

Model Name	PASS	FAIL	No Judgment
AEX-921EP	V	–	–

5. Mechanical Shock Test

Pulse Shapes	Acceleration (G)	Pulse width (ms)	Direction (axis)	Total Shocks	Condition
Half Sine	15	11	±X, ±Y, ±Z	18	Operation

- Operation : BurnIn Test.

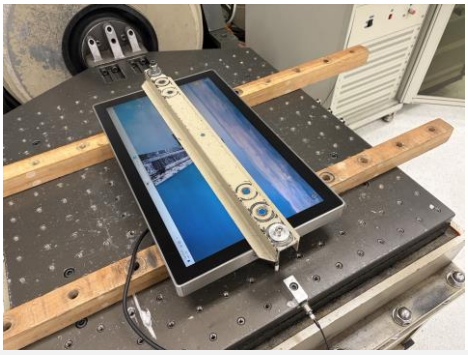

X Axis

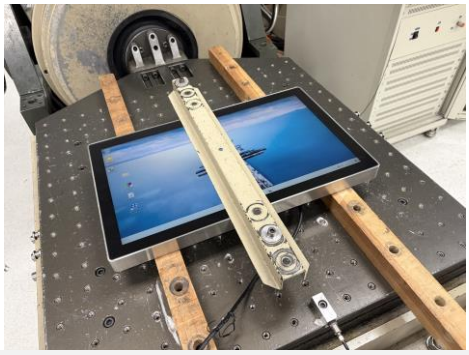

Y Axis

Z Axis

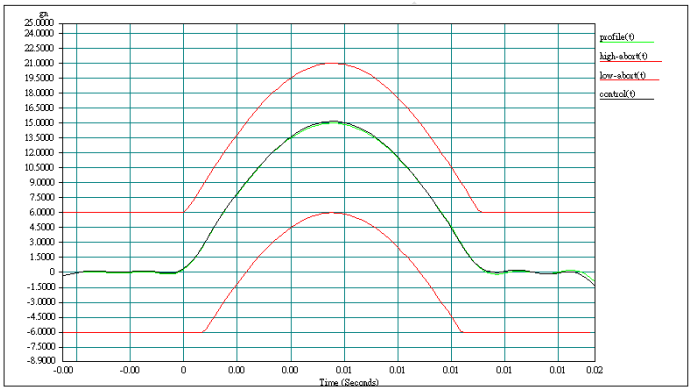

Level: 100 % Block Size: 4096 Elapsed Pulses: 14
Frame Time: 0.682667 Seconds Control Peak: 15.175774 gn Control RMS: 1.510813 gn Full Level Elapsed Pulses: 3
dT: 0.000167 Seconds Demand Peak: 14.999999 gn Demand RMS: 1.490445 gn Remaining Pulses: 0

,

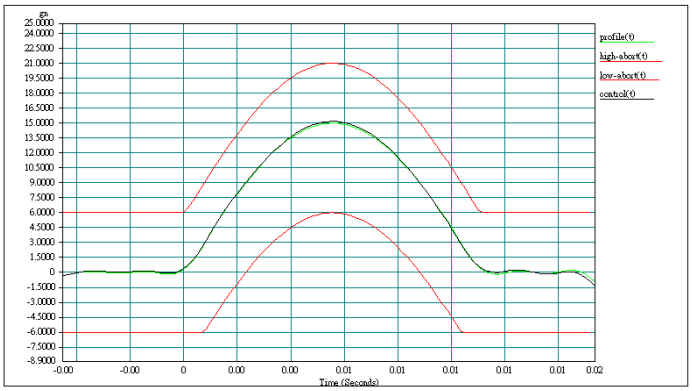

Level: 100 % Block Size: 4096 Elapsed Pulses: 14
Frame Time: 0.682667 Seconds Control Peak: 15.175774 gn Control RMS: 1.510813 gn Full Level Elapsed Pulses: 3
dT: 0.000167 Seconds Demand Peak: 14.999999 gn Demand RMS: 1.490445 gn Remaining Pulses: 0

Test Result :

Model Name	PASS	FAIL	No Judgment
AEX-921EP	V	–	–

6. Drop Test

Drop height : 90 cm

Drop position : 1 corner, 3 edges, 6 faces (Total : 10 drop / condition).

Sequence	1	2	3	4	5	6	7	8	9	10
Position										

Bottom corner

Shortest edge from that corner

Next longest edge from that corner

Longest edge from that corner

Flat on one of the smallest faces

Flat on the opposite faces

(V. Result/Data - Continued)

Flat on one of the medium faces

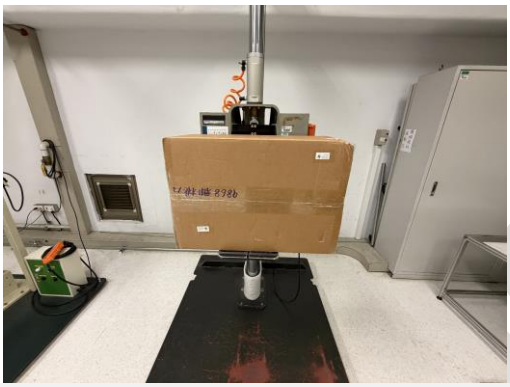

Flat on one of the medium faces

Flat on one of the largest faces

Flat on the opposite largest faces

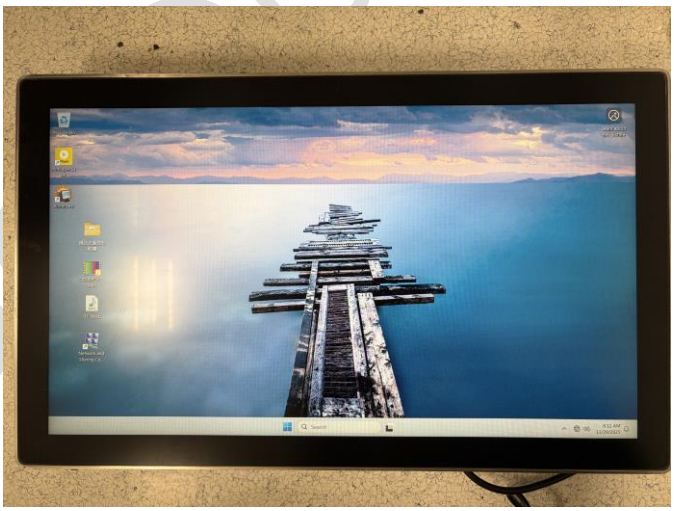

After Test

Test Result :

Model Name	PASS	FAIL	No Judgment
AEX-921EP	V	–	–

VI. Conclusion

There is no visible damage on the unit.
The function is normal after the test.

(V. Result/Data - Continued)

Test Information	Q'ty	Test Result
Operating Temperature Test	1	PASS
Storage Temperature Test	1	PASS
Storage Humidity Test	1	PASS
Vibration Test	1	PASS
Mechanical Shock Test	1	PASS
Drop Test	1	PASS

VI. Remark

NA

Qisda Qisda Qisda

Unless otherwise stated,the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule(w=0)stated in ILAC-G8:09/2019.According to this rule,the judgement of conformity is based on the comparing test results with limits.