TEST REPORT

Project No.: TM-2603000044P
Applicant: Teguar Corporation
Address: 2920 Whitehall Park Drive, Charlotte, NC 28273, USA
Manufacturer: Teguar Corporation
Address: 2920 Whitehall Park Drive, Charlotte, NC 28273, USA
Equipment Under Test (EUT):
Name: Box PC
Model No.: TB-6145
Added Model(s): TB-6145-xx-xxxx(x=0-9,a-z,A-Z,Blank or Dash)

Standards:

FCC 47 CFR Part 15 Subpart B,
ICES-003 Issue 7-2020
ANSI C63.4-2014

Date of Sample Receipt : August 26, 2025
Date of Test : August 30, 2025
Date of Issue : March 20, 2026

Remarks:

This report shall not be reproduced except in full, without approval of the Compliance Certification Services Inc. in writing.
This document may be altered or revised by Compliance Certification Services Inc. personnel only. The applicant should not use it to claim product endorsement by TAF or any other Government agencies.

Disclaimer

Variants information between/among model numbers / trademarks is provided by the applicant, test results of this test report are applicable to the sample EUT received of main test model name.

Approved By Stanley Cheng ***Date*** ***March 20, 2026***
Stanley Cheng (Supervisor of engineering dept.)

Testing Laboratory
1108

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留 90 天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Revision History

Revision	Report Number	Description	Issue Date
00	TMXD2508003222DE	Original.	September 16, 2025
01	TMXD2603000682DE	Copy report	March 20, 2026

Note:

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Contents

1. GENERAL DESCRIPTION 4

1.1 General Description of EUT 4
1.2 Details of EUT 4
1.3 Description of Support Units 5
1.4 I/O Port Description 5
1.5 Decision of Test Mode 6
1.6 The Final Test Mode of the EUT 6
1.7 Configuration of Tested System 7
1.8 Operation Procedure 7
1.9 Summary of Results 8
1.10 Reporting Statements of Conformity 8
1.11 Deviation 8

2. EMISSION 9

2.1 Limit 9
2.2 Conducted Emission 12
2.3 Radiated Emission 15

APPENDIX 21

Photograph of Testing General Set-up 21
Photographs of EUT Unit 24

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

1. General Description

1.1 General Description of EUT

Name of EUT	Box PC
Model No.(s)	TB-6145
Added Model(s)	TB-6145-xx-xxxx(x=0-9,a-z,A-Z,Blank or Dash)

Variant Description

Model	Difference	Tested (Check)
TB-6145	Original	☒
TB-6145-xx-xxxx	1. x=0-9,a-z,A-Z,Blank or Dash 2. The manufacturer declares that the serial products are identical to main test sample. For marketing reason, there are different serial numbers.	☐

1.2 Details of EUT

EUT Power Rating	DC 12V from AC adapter
AC Adapter Manufacturer	EDAC
AC Adapter Model	EA10681N-120
AC Adaptor Power Rating	IP: 100-240V~,2.0A, 50-60Hz OP: 12.0V⎓5.0A 60.0W
Highest internal frequency	2000MHz

Accessories Cable List

Cable Type	Core	Length	Category	Shielding/Non-shielding
AC power cable	N/A	1.8m	N/A	Non-shielding
DC power cable	1	1.2m	N/A	Non-shielding

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

1.3 Description of Support Units

EUT Devices

No.	Equipment	Model No.	Brand Name
1	Motherboard	SBC-7136	APLEX
2	CPU (2.00GHz Socket: FCBGA1264)	Intel® Processor N97	Intel
3	Memory (8GB)	DDR5 SO-DIMM 4800 TS1GSA64V6G	Transcend
4	M.2 SSD(512 GB)	M.2 B+M Key 2242 DEM24-C12IB1KWCQF	Innodisk
5	power adapter	EA10681N-120	EDAC

Peripherals Devices

No.	PRODUCT	MANUFACTURER	MODEL NO.	SERIAL NO.
1-2	USB HDD	Transcend	TS1TSJ25MC	N/A
3	USB Mouse	Logitech	M-U0026	N/A
4	USB Keyboard	Logitech	YU0036	2340SC3138W8
5	Monitor	ASUS	PA279CV	N/A
6	Monitor	ASUS	VP289Q	N/A
7	LAN HUB	TP-LINK	TL-SX105	22396W0000409
8	Server PC	DELL	T3610	57TT032
9-14	COM Loopback	N/A	N/A	N/A
15	Ground	N/A	N/A	N/A

Support Equipment Used in Tested Cable

No.	Cable Type	Core	Length	Shielding/Non-shielding
1-2	USB	N/A	1.5m	Shielding
3-4	USB	N/A	1.8m	Shielding
5	HDMI	N/A	1.8m	Shielding
6	DP	N/A	1.8m	Shielding
7	RJ45 (CAT6A)	N/A	20m X2	Non-shielding
8	RJ45 (CAT6A)	N/A	1.0m	Non-shielding
9-14	COM	N/A	2.0m	Shielding
15	GND	N/A	1.8m	Non-shielding

1.4 I/O Port Description

I/O Port Types	Q'TY
1. DP Port	1
2. HDMI Port	1
3. COM Port	6
4. USB Port	4
5. SW Port	1
6. GPIO Port	2
7. LAN Port	2

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

1.5 Decision of Test Mode

The test configuration/ modes are as the following:

Conducted Modes:

1	**HDMI+DP 3840*2160 60Hz**	**120VAC, 60Hz**
2		**230VAC, 60Hz**

Radiation Modes:

1	**HDMI+DP 3840*2160 60Hz**	**120VAC, 60Hz**
	HDMI+DP 3840*2160 60Hz / 1-10GHz	
2	**HDMI+DP 3840*2160 60Hz**	**230VAC, 60Hz**

1.6 The Final Test Mode of the EUT

After the preliminary scan, the following test mode was found to produce the highest emission level.

Final Test Mode	
Conducted Emission	**Mode 1**
Radiated Emission Below 1GHz	**Mode 1**
Radiated Emission Above 1GHz	**Mode 1**

Then, the above highest emission mode of the configuration of the EUT and cable was chosen for all final test items.

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

1.7 Configuration of Tested System

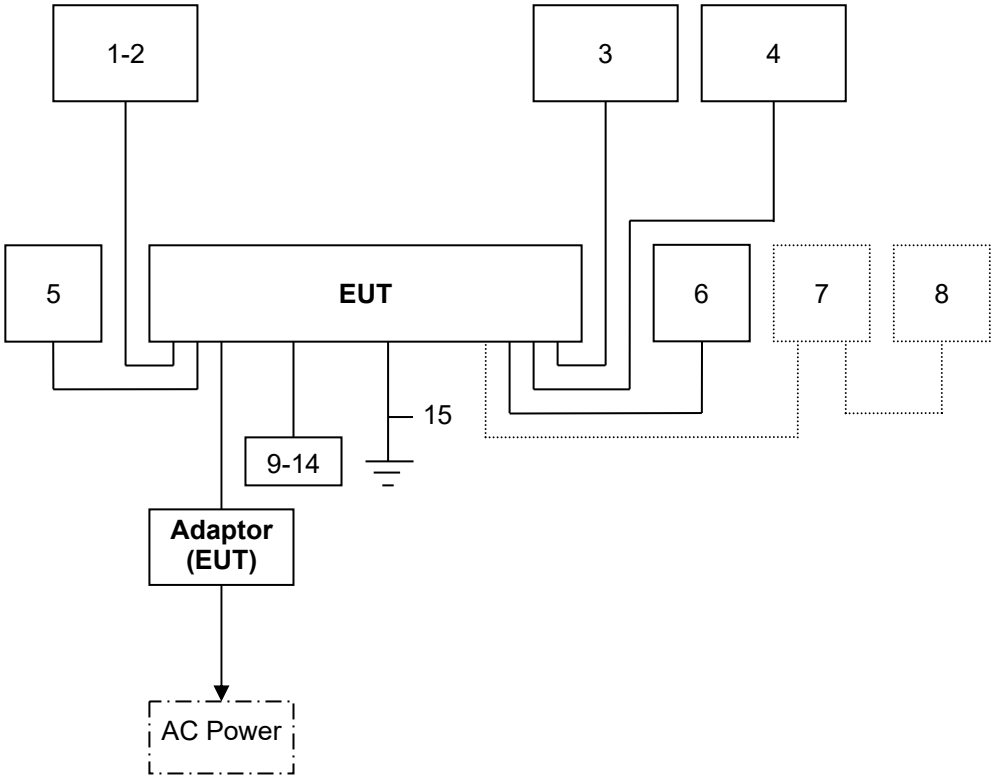

1.8 Operation Procedure

1. Windows 11 boots system.
2. Run Burnintest.exe to activate all peripherals and display “H” pattern on monitor screen.
3. Run Lantest20.exe and type ping 192.168.1.1 –t (EUT), type ping 192.168.1.2~3 –t (Server PC).

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

1.9 Summary of Results

Emission		
Standard	**Test Type**	**Result**
FCC 47 CFR Part 15 Subpart B, ICES-003 Issue 7-2020 ANSI C63.4-2014	Conducted Emission	PASS
	Radiated Emission	PASS

1.10 Reporting Statements of Conformity

The conformity statement in this report is based solely on the test results, measurement uncertainty is excluded.

1.11 Deviation

No deviation from the mentioned test methods and applicable standards.

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

2. EMISSION

2.1 Limit

Maximum permissible level of Line Conducted Emission

FREQUENCY (MHz)	Class A(dBuV)		Class B(dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

Note: The lower limit shall apply at the transition frequency.

Maximum permissible level of Radiated Emission

FCC 47 CFR Part 15 Subpart B

Below 1GHz (for digital device / CISPR 22)

FREQUENCY (MHz)	dBuV/m (At 10m)	
	Class A	Class B
30 - 230	40	30
230 - 1000	47	37

Limit tables for non-digital device:

Class A Radiated Emission limit at 10m (for others)

FREQUENCY (MHz)	Field Strength Limit(uV/m)	Field Strength Limit(dBuV/m)
	Quasi - peak	Quasi - peak
30 - 88	90	39
88 - 216	150	43.5
216 – 960	210	46.4
Above 960	300	49.5

Class B Radiated Emission limit at 3m (for others)

FREQUENCY (MHz)	Field Strength Limit(uV/m)	Field Strength Limit(dBuV/m)
	Quasi - peak	Quasi - peak
30 - 88	100	40
88 - 216	150	43.5
216 – 960	200	46
Above 960	500	54

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Above 1GHz(for all device)

FREQUENCY (MHz)	Class A(dBuV/m)(At 10m)		Class B(dBuV/m)(At 3m)	
	Average	Peak	Average	Peak
Above 1000	49.5	69.5	54	74

NOTE: (1) The lower limit shall apply at the transition frequencies.
(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).
(3) The measurement above 1GHz is at close-in distances 3m,and determine the limit **L_2** corresponding to the close-in distance **d_2** by applying the following relation: **$L_2 = L_1 (d_1/d_2)$**, where **L_1** is the specified limit in microvolts per metre (**uV/m**) at the distance **d_1** (**10m**), **L_2** is the new limit for distance **d_2** (**3m**).
So the new Class A limit above 1GHz at 3m is as following table:

FREQUENCY (MHz)	Class A(dBuV/m)(At 3m)	
	Average	Peak
Above 1000	60	80

According to FCC Part 15.33 (b), for an unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table:

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5th harmonic of the highest frequency or 40GHz, whichever is lower

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

ICES-003 Issue 7-2020

Below 1GHz

Class A Radiated Emission limit

FREQUENCY (MHz)	(dBuV/m)Q.P. Distances (3m)	(dBuV/m)Q.P. Distances (10m)
30 - 88	50	40
88 - 216	54	43.5
216 - 230	56.9	46.4
230 – 960	57	47
960 - 1000	60	49.5

Class B Radiated Emission limit

FREQUENCY (MHz)	(dBuV/m)Q.P. Distances (3m)	(dBuV/m)Q.P. Distances (10m)
30 - 88	40	30
88 - 216	43.5	33.1
216 - 230	46	35.6
230 – 960	47	37
960 - 1000	54	43.5

Above 1GHz

FREQUENCY (MHz)	Class A(dBuV/m)(At 3m)		Class B(dBuV/m)(At 3m)	
	Average	Peak	Average	Peak
Above 1000	60	80	54	74

Required highest measurement frequency for radiated emissions

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Fx-108	1000
108-500	2000
500-1000	5000
Above 1000	5 x FX up to a maximum of 40 GHz

Note: Fx is the highest fundamental frequency generated and/or used in the ITE or digital apparatus under test.

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

2.2 Conducted Emission

2.2.1 Test Instruments

Conducted Emission Room # B					
EQUIPMENT TYPE	Manufacturer	Model Number	Serial Number	Calibration Date	Calibration Due
Pulse Limiter	Schwarzbeck	VTSD 9561-F-N	01423	02/08/2025	02/07/2026
BNC Cable	EMEC	CFD300-NL	SD-C020	12/27/2024	12/26/2025
EMI Test Receiver	R&S	ESCI	101299	11/12/2024	11/11/2025
LISN	Schwarzbeck	NSLK 8127	01082	02/27/2025	02/26/2026
LISN(EUT)	Schwarzbeck	NSLK 8127	01084	02/27/2025	02/26/2026
Thermo-Hygro Meter	NDr.AV	GM-108A	SD-R100	08/12/2025	08/11/2026
Test S/W	EZ-EMC Ver.CCS-03A1				

Testing Site : No.163-1, Jhongsheng Rd., Xindian Dist., New Taipei City, Taiwan
Measurement Uncertainty of Conducted Emission
Expanded uncertainty Ulab (k=2) of Conducted Emission is 2.8 dB.
Expanded uncertainty CISPR 16-4-2:2011+A1:2014+A2:2018 (k=2) of Conducted Emission measurement is 3.8 dB.

2.2.2 Measurement Level Calculation

Factor = LISN insertion loss + Cable loss + Pulse Limiter insertion loss
Measurement Level = Reading Level + Factor
Over (Margin) = Measurement Level – Limit

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

2.2.3 Measurement Data (CE)

Model No.	TB-6145	**6dB Bandwidth**	9 kHz
Environmental Conditions	25.1°C, 59% RH	**Test Mode**	Mode 1
Tested by	Kevin Chang	**Phase**	L1
Standard	FCC CLASS A / ICES-003 CLASS A	**Test Date**	2025/08/30

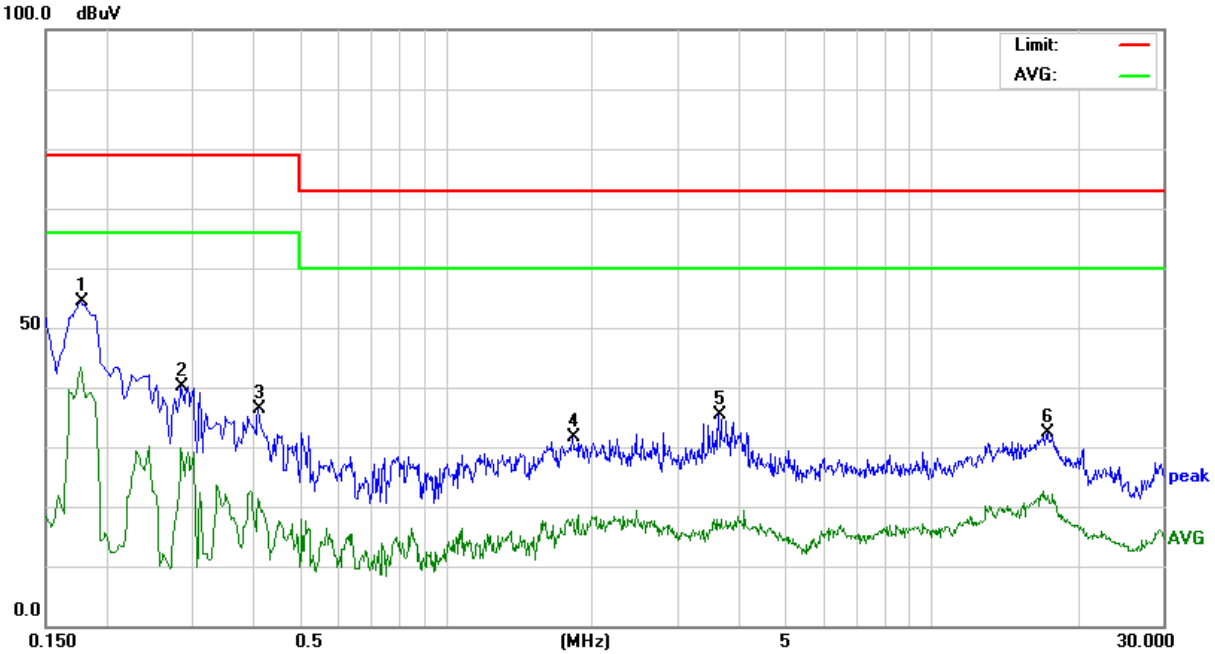

Conducted Emission Readings							
Frequency Range Investigated				**150 kHz to 30 MHz**			
Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector (P/Q/A)	Line (L1/L2)
0.1770	**44.32**	**10.09**	**54.41**	**79.00**	**-24.59**	**P**	**L1**
0.2850	**30.18**	**10.07**	**40.25**	**79.00**	**-38.75**	**P**	**L1**
0.4110	**26.32**	**10.10**	**36.42**	**79.00**	**-42.58**	**P**	**L1**
1.8240	**21.45**	**10.23**	**31.68**	**73.00**	**-41.32**	**P**	**L1**
3.6420	**24.91**	**10.36**	**35.27**	**73.00**	**-37.73**	**P**	**L1**
17.3265	**21.51**	**10.94**	**32.45**	**73.00**	**-40.55**	**P**	**L1**

Note: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Model No.	TB-6145	**6dB Bandwidth**	9 kHz
Environmental Conditions	25.1°C, 59% RH	**Test Mode**	Mode 1
Tested by	Kevin Chang	**Phase**	L2
Standard	FCC CLASS A / ICES-003 CLASS A	**Test Date**	2025/08/30

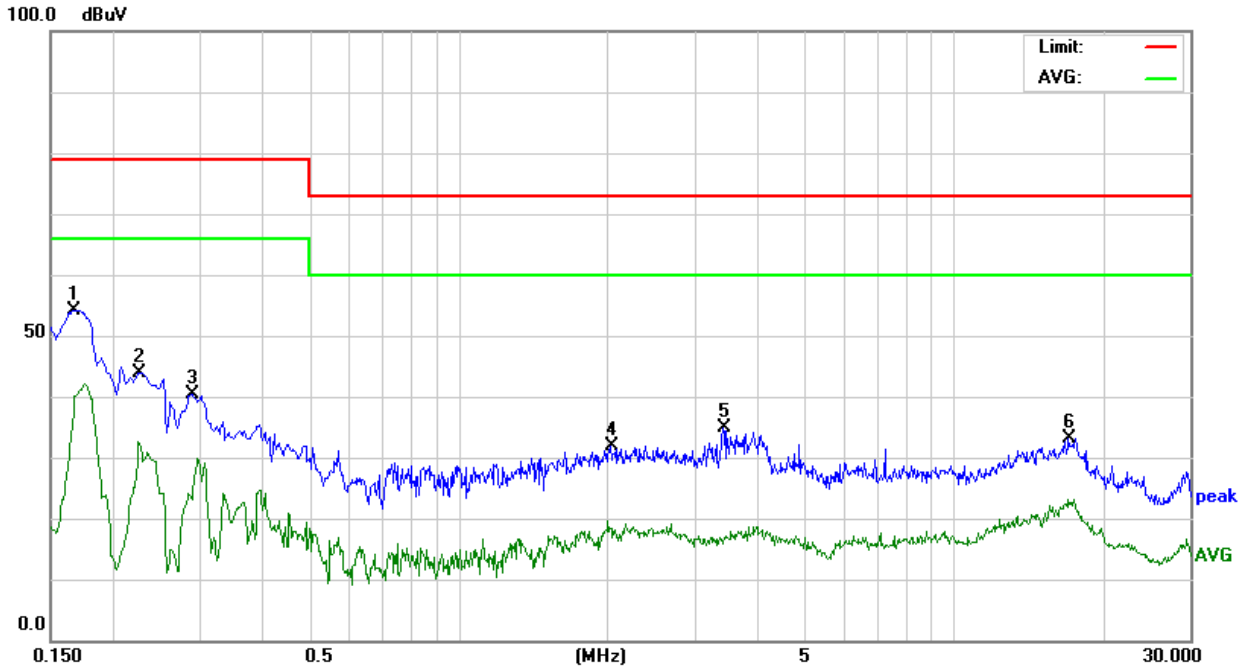

Conducted Emission Readings							
Frequency Range Investigated				**150 kHz to 30 MHz**			
Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector (P/Q/A)	Line (L1/L2)
0.1659	**44.10**	**10.12**	**54.22**	**79.00**	**-24.78**	**P**	**L2**
0.2265	**33.89**	**10.07**	**43.96**	**79.00**	**-35.04**	**P**	**L2**
0.2895	**30.34**	**10.07**	**40.41**	**79.00**	**-38.59**	**P**	**L2**
2.0310	**21.71**	**10.24**	**31.95**	**73.00**	**-41.05**	**P**	**L2**
3.4215	**24.57**	**10.34**	**34.91**	**73.00**	**-38.09**	**P**	**L2**
17.0250	**22.16**	**10.92**	**33.08**	**73.00**	**-39.92**	**P**	**L2**

Note: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

2.3 Radiated Emission

2.3.1 Test Instruments

Below 1GHz

Open Area Test Site # H					
EQUIPMENT TYPE	Manufacturer	Model Number	Serial Number	Calibration Date	Calibration Due
Bilog Antenna	Teseq	CBL 6112D	35409	04/21/2025	04/20/2026
Cable	EMEC	CFD400E-LW	SD-R074	08/07/2025	08/06/2026
EMI Test Receiver	R&S	ESCI	101340	01/14/2025	01/13/2026
Pre-Amplifier	HP	8447D	1937A01554	09/20/2024	09/19/2025
Thermo-Hygro Meter	NDr.AV	GM-108A	SD-R103	04/21/2025	04/20/2026
Test S/W	EZ-EMC Ver.CCS-03A1				

Testing Site : No.163-1, Jhongsheng Rd., Xindian Dist., New Taipei City, Taiwan

Measurement Uncertainty of Radiated Emission

Expanded uncertainty Ulab (k=2) of Radiated Emission is 5.1 dB.(30MHz-1000MHz)

Expanded uncertainty CISPR 16-4-2:2011+A1:2014+A2:2018 (k=2) of Radiated Emission measurement is 5.2 dB.(30MHz-1000MHz)

Above 1GHz

Chamber # E					
EQUIPMENT TYPE	Manufacturer	Model Number	Serial Number	Calibration Date	Calibration Due
Horn Antenna	ETS-Lindgren	3117	00139062	05/20/2025	05/19/2026
Microflex Cable x 7m	JMT	LF01	SD-R097	05/22/2025	05/21/2026
K-Type Cable x 1m	JMT	LK01	SD-R087	05/22/2025	05/21/2026
Pre-Amplifier	Com-Power	PAM-118A	551041	05/21/2025	05/20/2026
Signal Analyzer	R&S	FSV40	101269	05/20/2025	05/19/2026
Thermo-Hygro Meter	NDr.AV	GM-108A	SD-R099	07/07/2025	07/06/2026
Test S/W	EZ-EMC Ver.CCS-03A1				

Testing Site : No.163-1, Jhongsheng Rd., Xindian Dist., New Taipei City, Taiwan

Measurement Uncertainty of Radiated Emission

Expanded uncertainty (k=2) of Radiated Emission measurement is 4.6 dB.(1-18GHz)

Expanded uncertainty (k=2) of Radiated Emission measurement is 3.8 dB.(18-40GHz)

Expanded uncertainty CISPR 16-4-2:2011+A1:2014+A2:2018 (k=2) of Radiated Emission measurement is 5.5 dB.(1-18GHz)

2.3.2 Measurement Level Calculation

Correction Factor = Antenna Factor + Cable loss- Amplifier Gain
Measurement Level = Reading Level + Correction Factor
Over (Margin) = Measurement Level – Limit

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

2.3.3 Measurement Data

FCC 47 CFR Part 15 Subpart B

Below 1GHz

Model No.	TB-6145	**Test Mode**	Mode 1
Environmental Conditions	34.2°C, 67% RH	**6dB Bandwidth**	120 kHz
Antenna Pole	Vertical	**Antenna Distance**	10m
Detector Function	Quasi-peak.	**Tested by**	Kevin Chang
Standard	FCC CLASS A W/ CISPR 22 CLASS A LIMIT	**Test Date**	2025/08/30

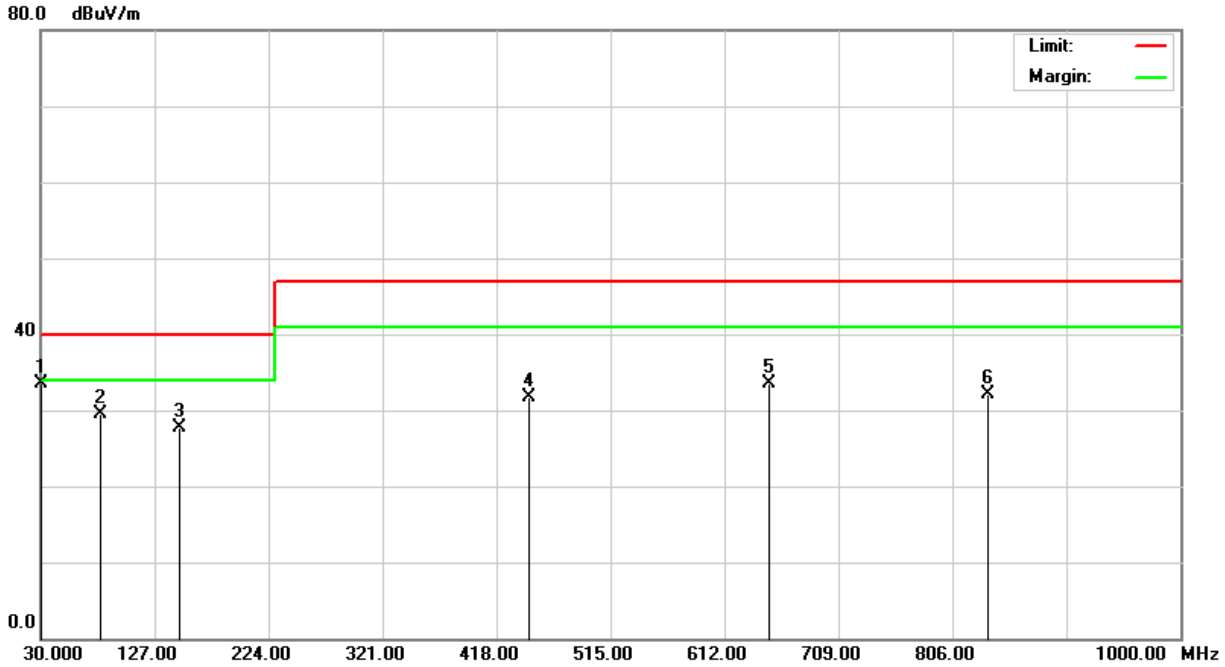

Radiated Emission Readings									
Frequency Range Investigated				**30 MHz to 1000 MHz at 10m**					
Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Detector (P/Q)	Pol. (H/V)
30.4700	**35.50**	**-1.94**	**33.56**	**40.00**	**-6.44**	**100**	**154**	**Q**	**V**
80.5300	**42.50**	**-13.08**	**29.42**	**40.00**	**-10.58**	**100**	**168**	**Q**	**V**
148.4500	**36.71**	**-8.92**	**27.79**	**40.00**	**-12.21**	**100**	**121**	**Q**	**V**
445.3900	**33.20**	**-1.55**	**31.65**	**47.00**	**-15.35**	**400**	**241**	**Q**	**V**
650.2300	**31.70**	**1.83**	**33.53**	**47.00**	**-13.47**	**400**	**105**	**Q**	**V**
836.1200	**28.24**	**3.79**	**32.03**	**47.00**	**-14.97**	**400**	**263**	**Q**	**V**

Note: 1. 30MHz to 1000MHz test is Applicable CISPR 22 standard.
2. P= Peak Reading; Q= Quasi-peak Reading.

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Model No.	TB-6145	**Test Mode**	Mode 1
Environmental Conditions	34.2°C, 67% RH	**6dB Bandwidth**	120 kHz
Antenna Pole	Horizontal	**Antenna Distance**	10m
Detector Function	Quasi-peak.	**Tested by**	Kevin Chang
Standard	FCC CLASS A W/ CISPR 22 CLASS A LIMIT	**Test Date**	2025/08/30

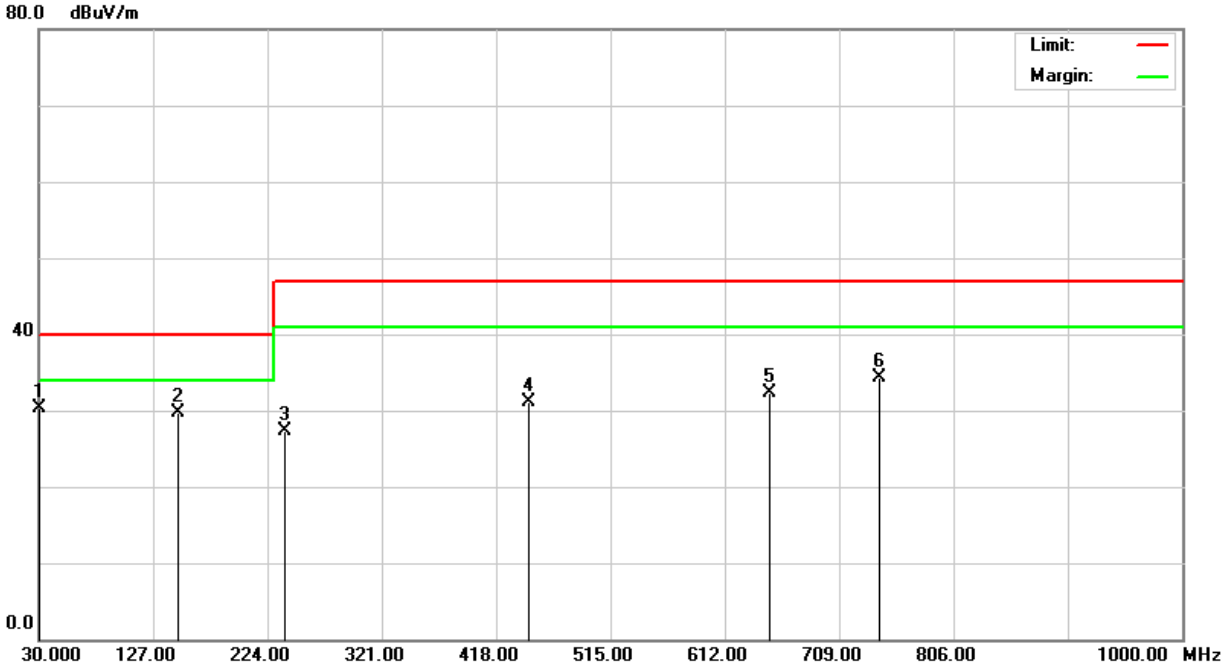

Radiated Emission Readings									
Frequency Range Investigated				**30 MHz to 1000 MHz at 10m**					
Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Detector (P/Q)	Pol. (H/V)
30.1500	**32.20**	**-1.81**	**30.39**	**40.00**	**-9.61**	**400**	**245**	**Q**	**H**
148.5500	**38.70**	**-8.95**	**29.75**	**40.00**	**-10.25**	**400**	**298**	**Q**	**H**
238.6200	**35.10**	**-7.81**	**27.29**	**47.00**	**-19.71**	**400**	**271**	**Q**	**H**
445.4300	**32.60**	**-1.55**	**31.05**	**47.00**	**-15.95**	**100**	**163**	**Q**	**H**
650.3100	**30.50**	**1.83**	**32.33**	**47.00**	**-14.67**	**100**	**251**	**Q**	**H**
742.8300	**31.50**	**2.84**	**34.34**	**47.00**	**-12.66**	**100**	**117**	**Q**	**H**

Note: 1. 30MHz to 1000MHz test is Applicable CISPR 22 standard.
2. P= Peak Reading; Q= Quasi-peak Reading.

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

ICES-003 Issue 7-2020

Below 1GHz

Model No.	TB-6145	**Test Mode**	Mode 1
Environmental Conditions	34.2°C, 67% RH	**6dB Bandwidth**	120 kHz
Antenna Pole	Vertical	**Antenna Distance**	10m
Detector Function	Quasi-peak.	**Tested by**	Kevin Chang
Standard	ICES-003 CLASS A	**Test Date**	2025/08/30

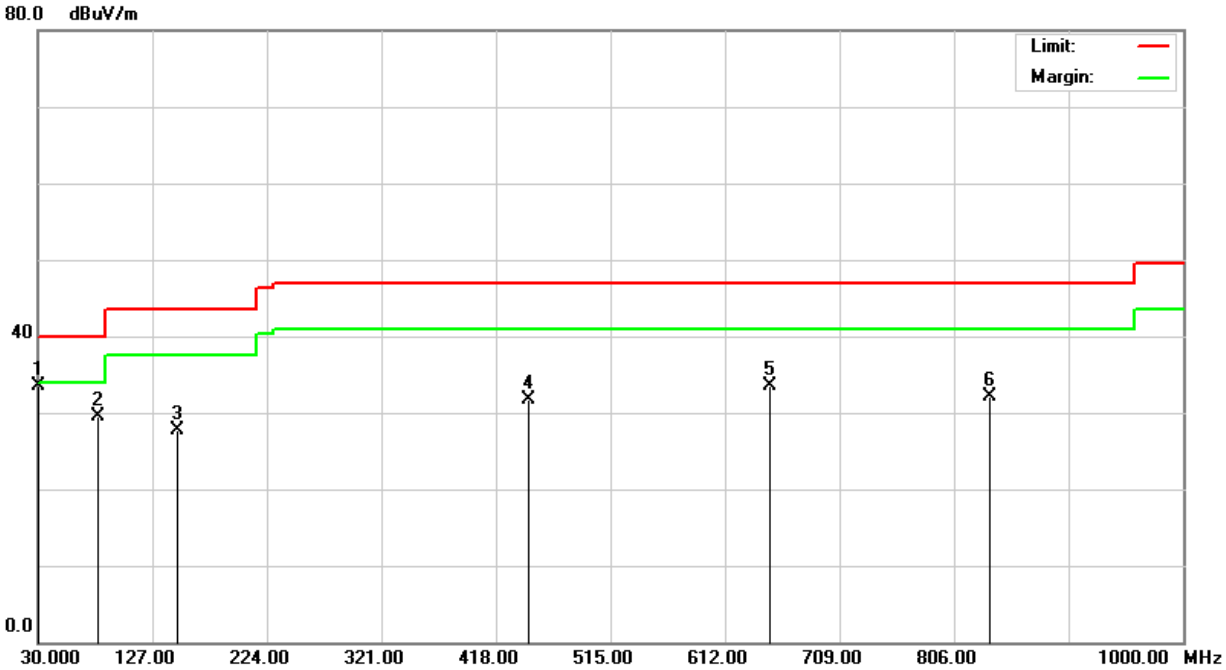

Radiated Emission Readings									
Frequency Range Investigated				30 MHz to 1000 MHz at 10m					
Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Detector (P/Q)	Pol. (H/V)
30.4700	**35.50**	**-1.94**	**33.56**	**40.00**	**-6.44**	**100**	**154**	**Q**	**V**
80.5300	**42.50**	**-13.08**	**29.42**	**40.00**	**-10.58**	**100**	**168**	**Q**	**V**
148.4500	**36.71**	**-8.92**	**27.79**	**43.50**	**-15.71**	**100**	**121**	**Q**	**V**
445.3900	**33.20**	**-1.55**	**31.65**	**47.00**	**-15.35**	**400**	**241**	**Q**	**V**
650.2300	**31.70**	**1.83**	**33.53**	**47.00**	**-13.47**	**400**	**105**	**Q**	**V**
836.1200	**28.24**	**3.79**	**32.03**	**47.00**	**-14.97**	**400**	**263**	**Q**	**V**

Note: 1. P= Peak Reading; Q= Quasi-peak Reading.

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Model No.	TB-6145	**Test Mode**	Mode 1
Environmental Conditions	34.2°C, 67% RH	**6dB Bandwidth**	120 kHz
Antenna Pole	Horizontal	**Antenna Distance**	10m
Detector Function	Quasi-peak.	**Tested by**	Kevin Chang
Standard	ICES-003 CLASS A	**Test Date**	2025/08/30

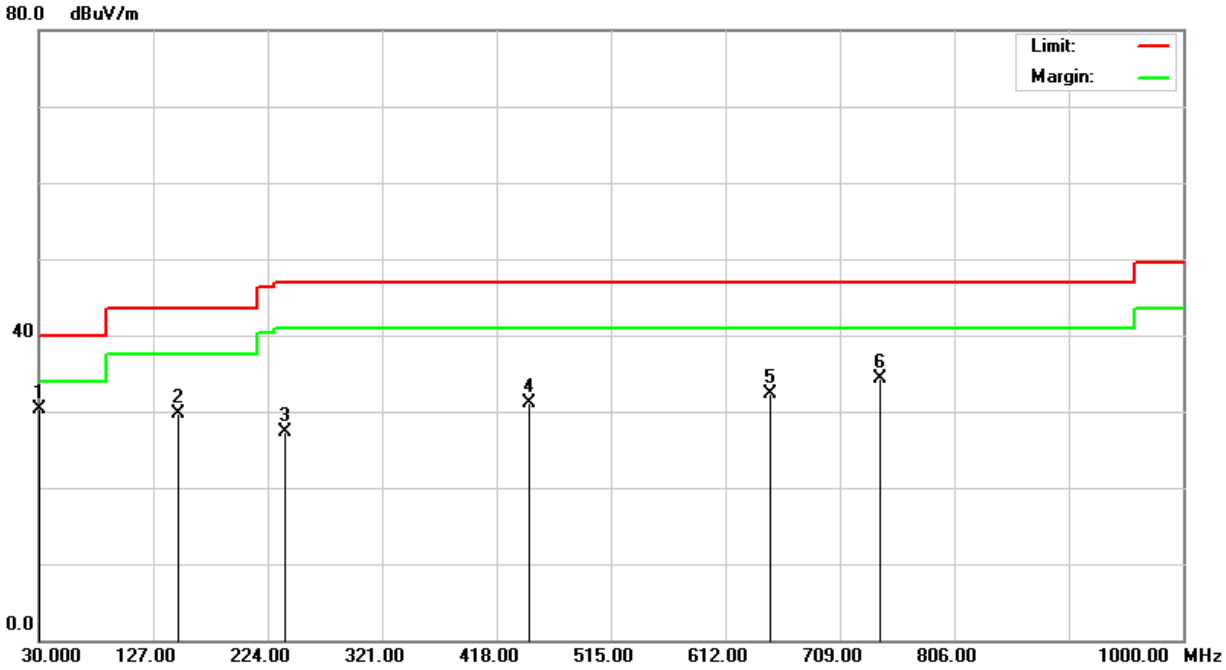

Radiated Emission Readings									
Frequency Range Investigated				**30 MHz to 1000 MHz at 10m**					
Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Detector (P/Q)	Pol. (H/V)
30.1500	**32.20**	**-1.81**	**30.39**	**40.00**	**-9.61**	**400**	**245**	**Q**	**H**
148.5500	**38.70**	**-8.95**	**29.75**	**43.50**	**-13.75**	**400**	**298**	**Q**	**H**
238.6200	**35.10**	**-7.81**	**27.29**	**47.00**	**-19.71**	**400**	**271**	**Q**	**H**
445.4300	**32.60**	**-1.55**	**31.05**	**47.00**	**-15.95**	**100**	**163**	**Q**	**H**
650.3100	**30.50**	**1.83**	**32.33**	**47.00**	**-14.67**	**100**	**251**	**Q**	**H**
742.8300	**31.50**	**2.84**	**34.34**	**47.00**	**-12.66**	**100**	**117**	**Q**	**H**

Note: 1. P= Peak Reading; Q= Quasi-peak Reading.

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Above 1GHz

Model No.	TB-6145	**Test Mode**	Mode 1
Environmental Conditions	25.3°C, 62% RH	**6dB Bandwidth**	1 MHz
Antenna Pole	Vertical / Horizontal	**Antenna Distance**	3m
Highest frequency generated or used	2000MHz	**Upper frequency**	10000MHz
Detector Function	Peak and average.	**Tested by**	Kevin Chang
Standard	FCC CLASS A / ICES-003 CLASS A	**Test Date**	2025/08/30

Radiated Emission Readings							
Frequency Range Investigated				Above 1GHz at 3m			
Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (P/A)	Pol. (H/V)
1918.000	**50.25**	**-4.15**	**46.10**	**80.00**	**-33.90**	**P**	**V**
2666.000	**49.84**	**-3.61**	**46.23**	**80.00**	**-33.77**	**P**	**V**
3482.000	**49.53**	**-2.94**	**46.59**	**80.00**	**-33.41**	**P**	**V**
4451.000	**48.58**	**-1.38**	**47.20**	**80.00**	**-32.80**	**P**	**V**
5403.000	**48.95**	**-0.08**	**48.87**	**80.00**	**-31.13**	**P**	**V**
5930.000	**47.97**	**1.16**	**49.13**	**80.00**	**-30.87**	**P**	**V**

Radiated Emission Readings							
Frequency Range Investigated				Above 1GHz at 3m			
Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (P/A)	Pol. (H/V)
1459.000	**52.63**	**-7.43**	**45.20**	**80.00**	**-34.80**	**P**	**H**
2139.000	**49.80**	**-4.46**	**45.34**	**80.00**	**-34.66**	**P**	**H**
2989.000	**51.90**	**-3.25**	**48.65**	**80.00**	**-31.35**	**P**	**H**
3567.000	**48.90**	**-3.21**	**45.69**	**80.00**	**-34.31**	**P**	**H**
4910.000	**47.06**	**-0.93**	**46.13**	**80.00**	**-33.87**	**P**	**H**
6066.000	**47.91**	**1.60**	**49.51**	**80.00**	**-30.49**	**P**	**H**

Note: 1. P= Peak Reading; A= Average Reading.

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

APPENDIX

Photograph of Testing General Set-up

CE Testing Set-up

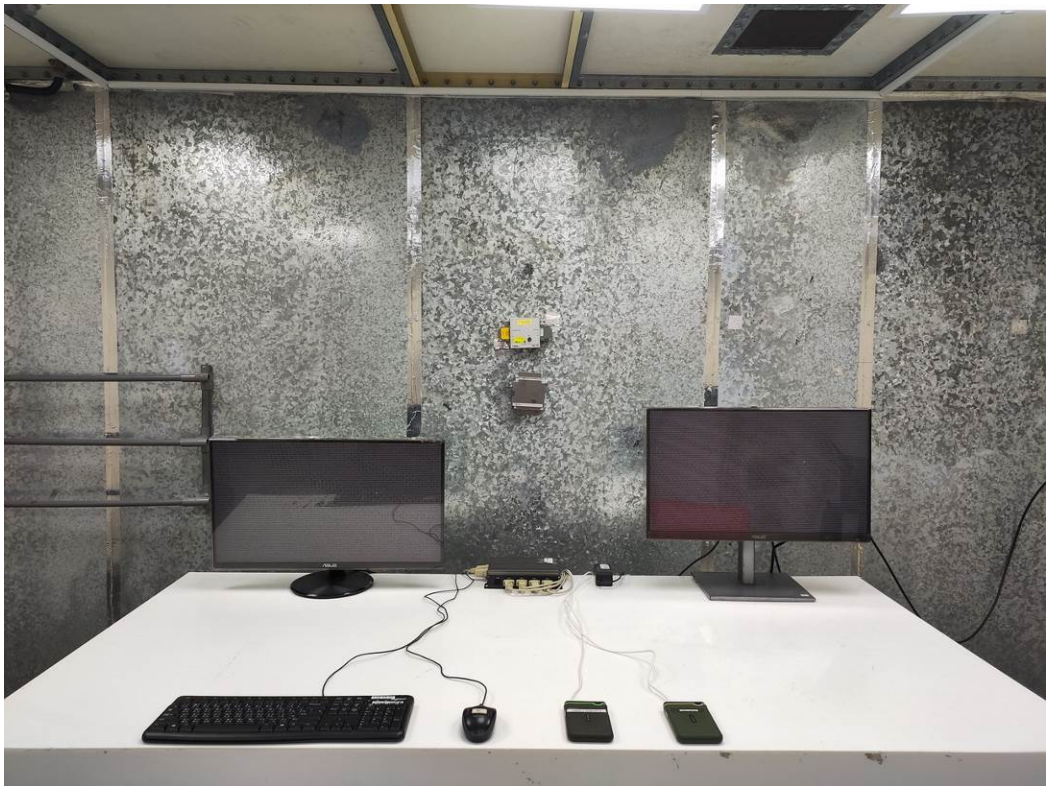

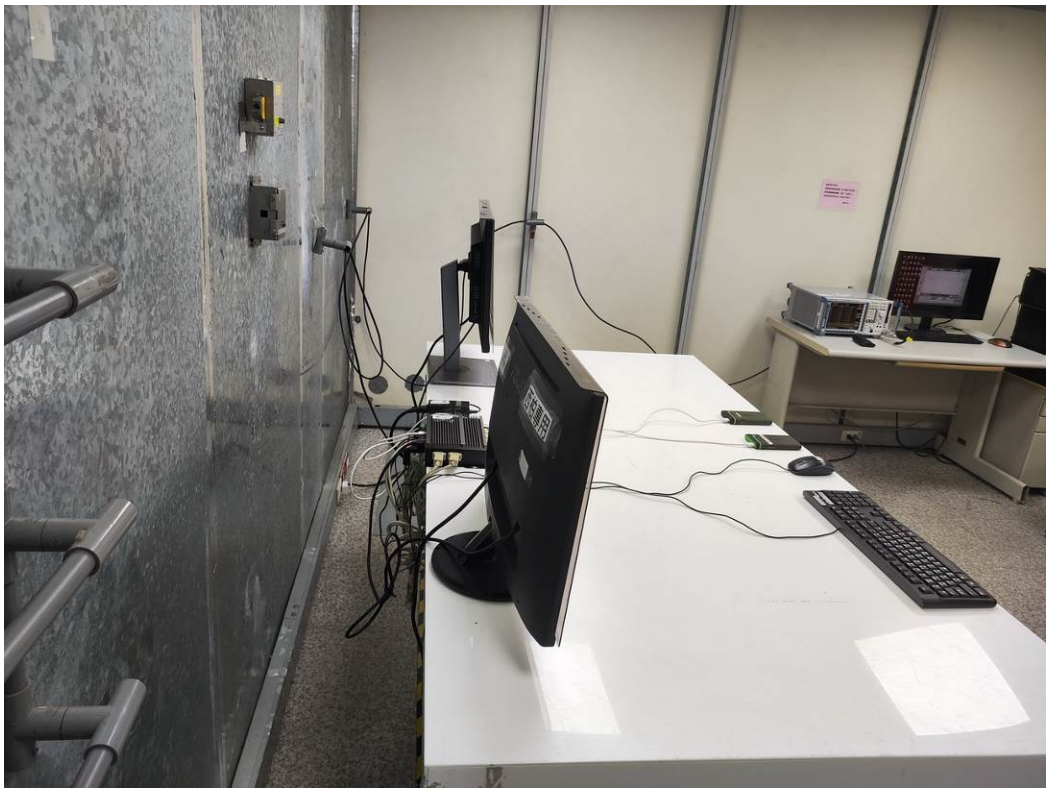

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

RE Testing Set-up

Below 1GHz

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Above 1GHz

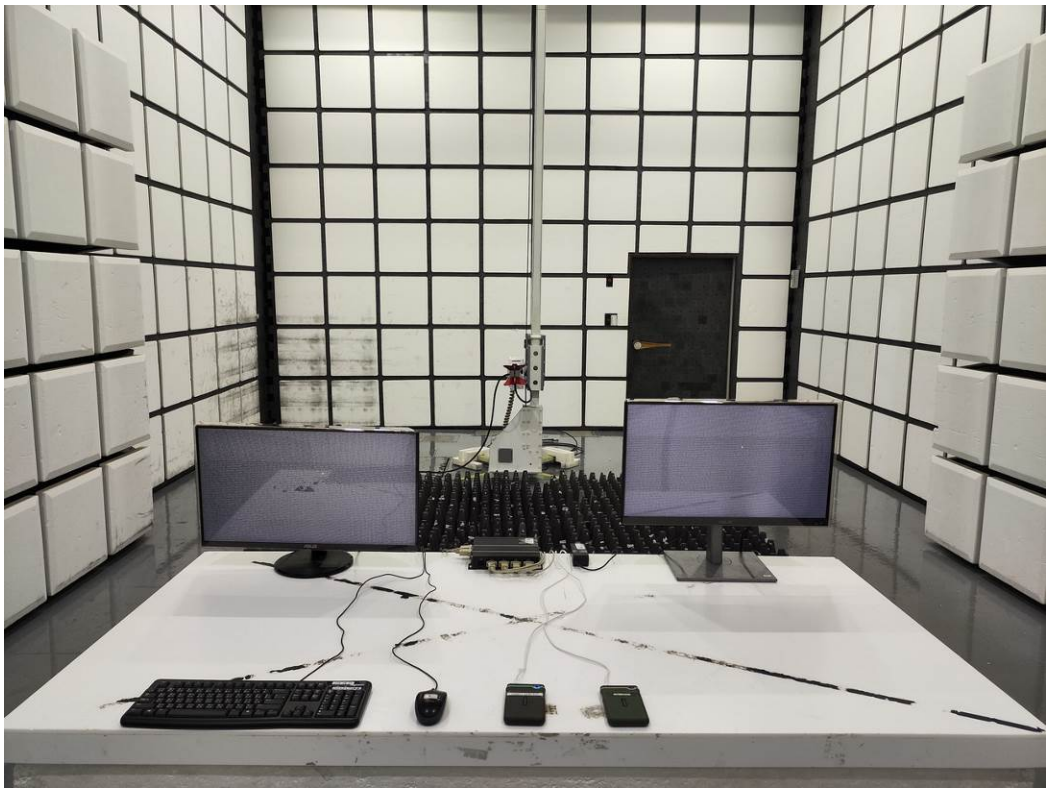

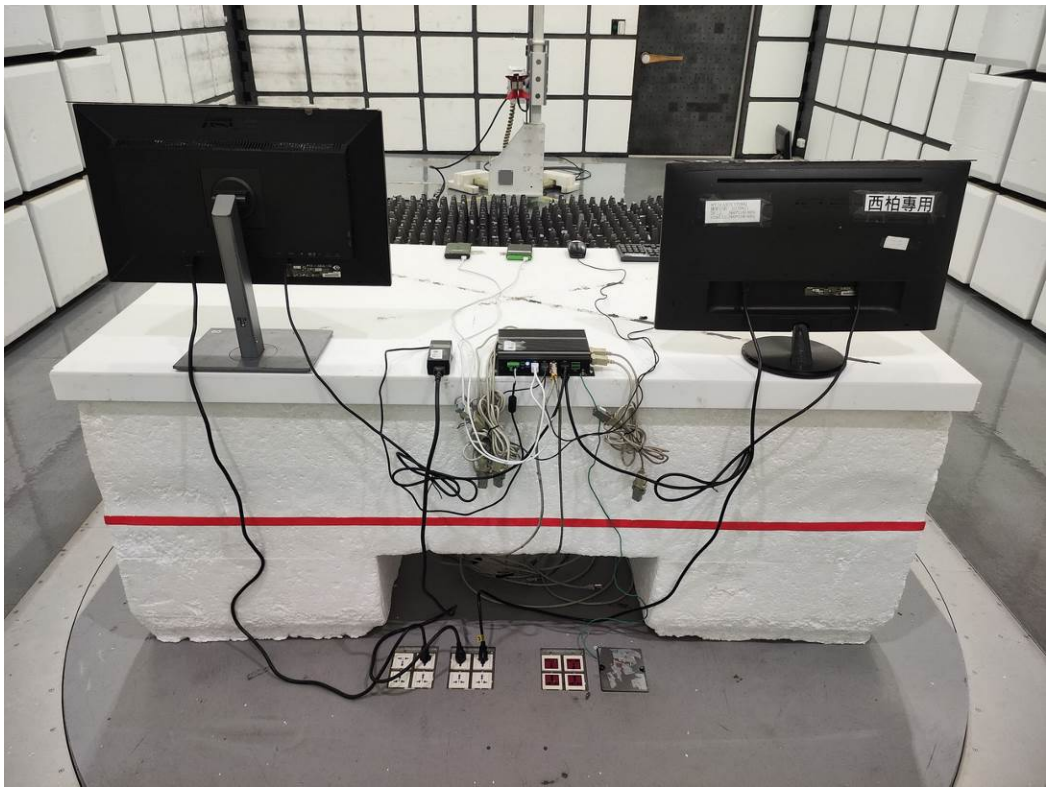

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Photographs of EUT Unit

Exterior

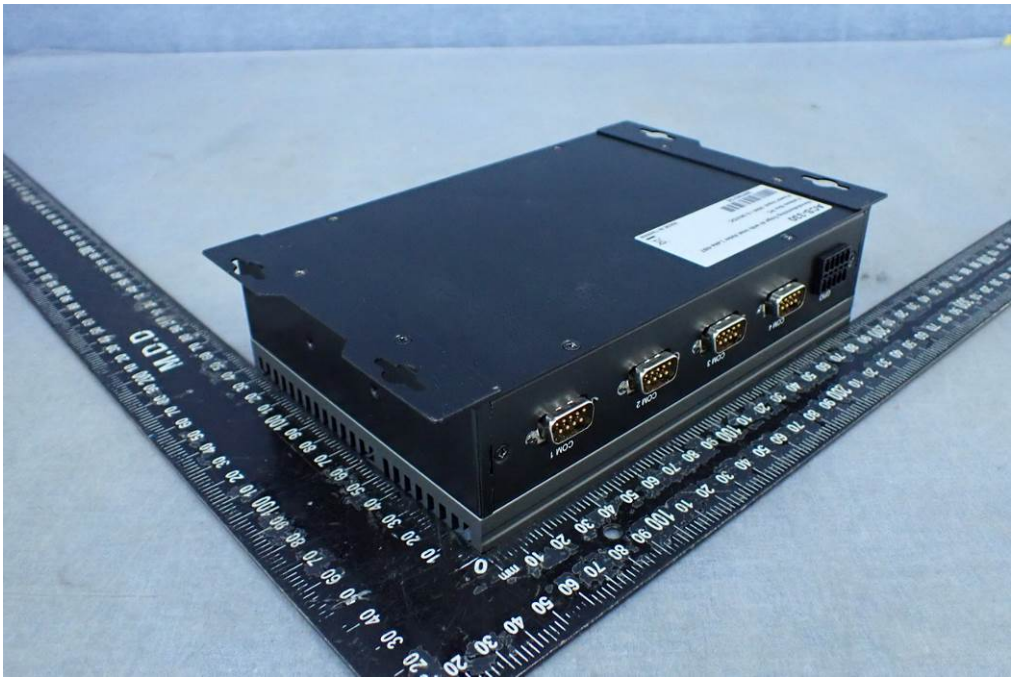

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

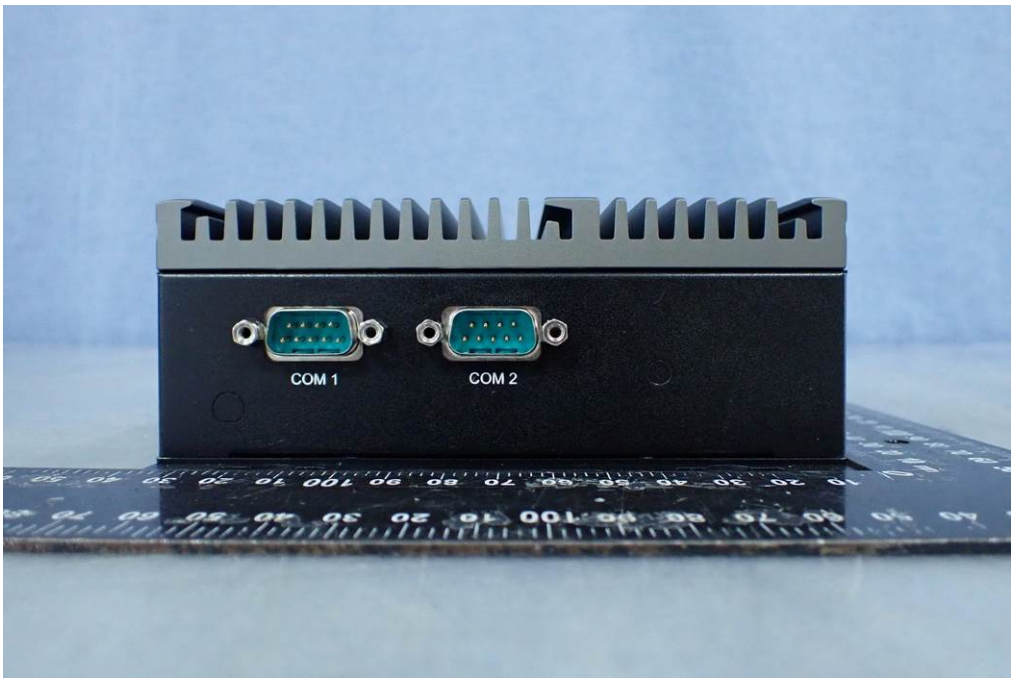

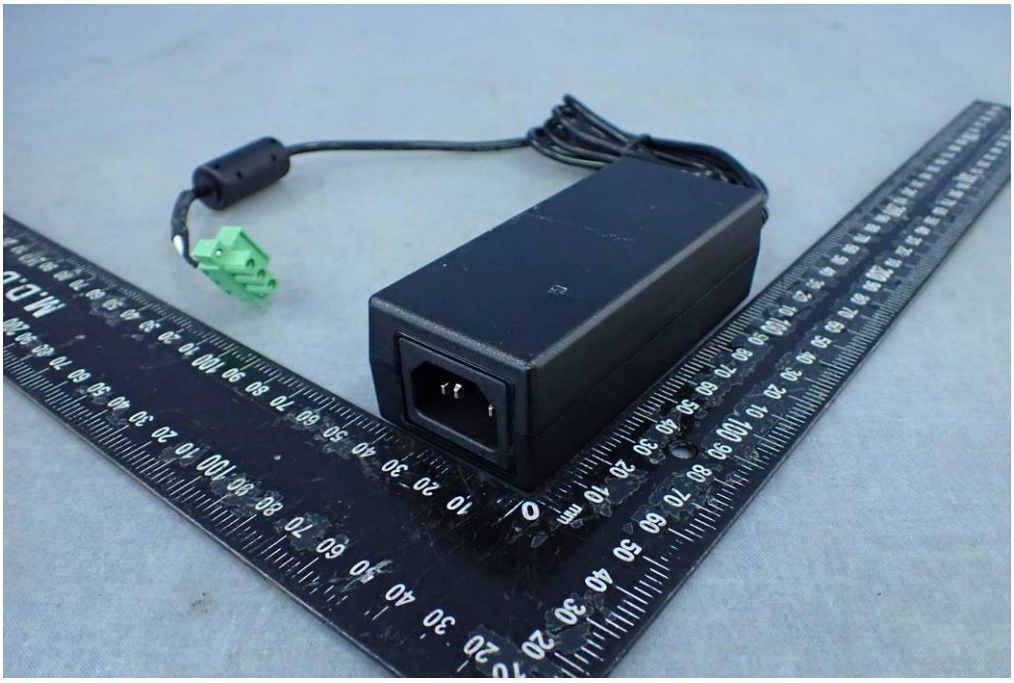

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

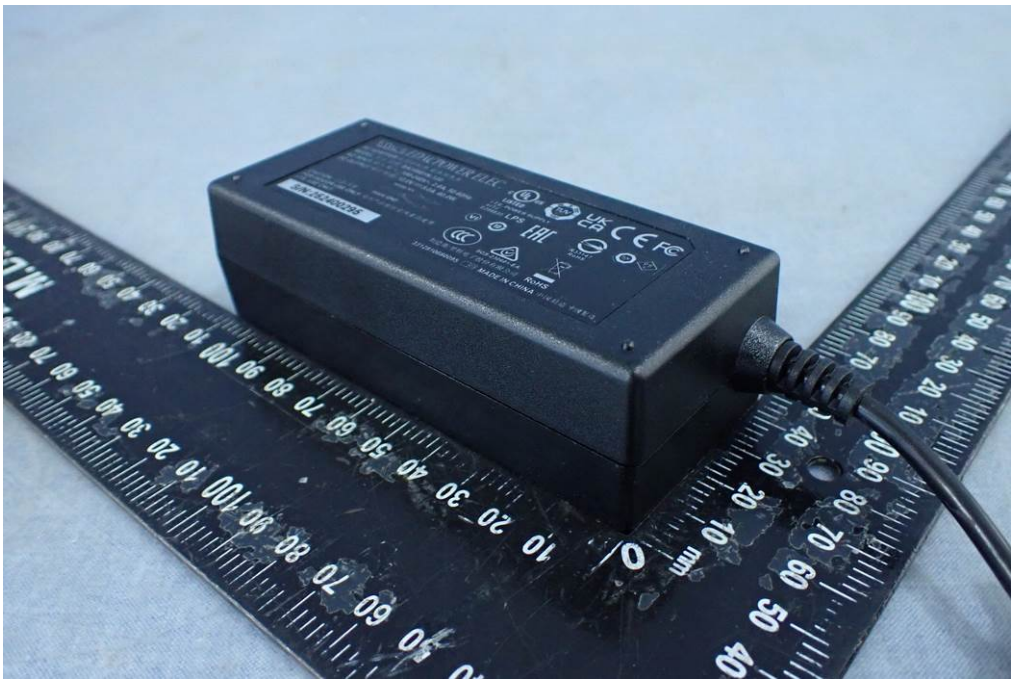

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

** End of Report **

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。