


MANEIRA KONFIGURA ROUTING STATIK IHA SOFTWARE CISCO PAKET TRASER

DEFINISAUN ROUTING TATIK:

Router estatiku mak métodu aranjamentu dalan rede nian ida-ne'ebé administradór rede sira determina manualmente dalan transmisaun nian iha router, sein asisténsia husi protokolu router dinámiku.

Iha rotasaun estatika, router la automatikamente hala'o navigasaun estrada. Se mudansa iha topolojia rede nian akontese, administradór tenke troka manualmente ni dalan.

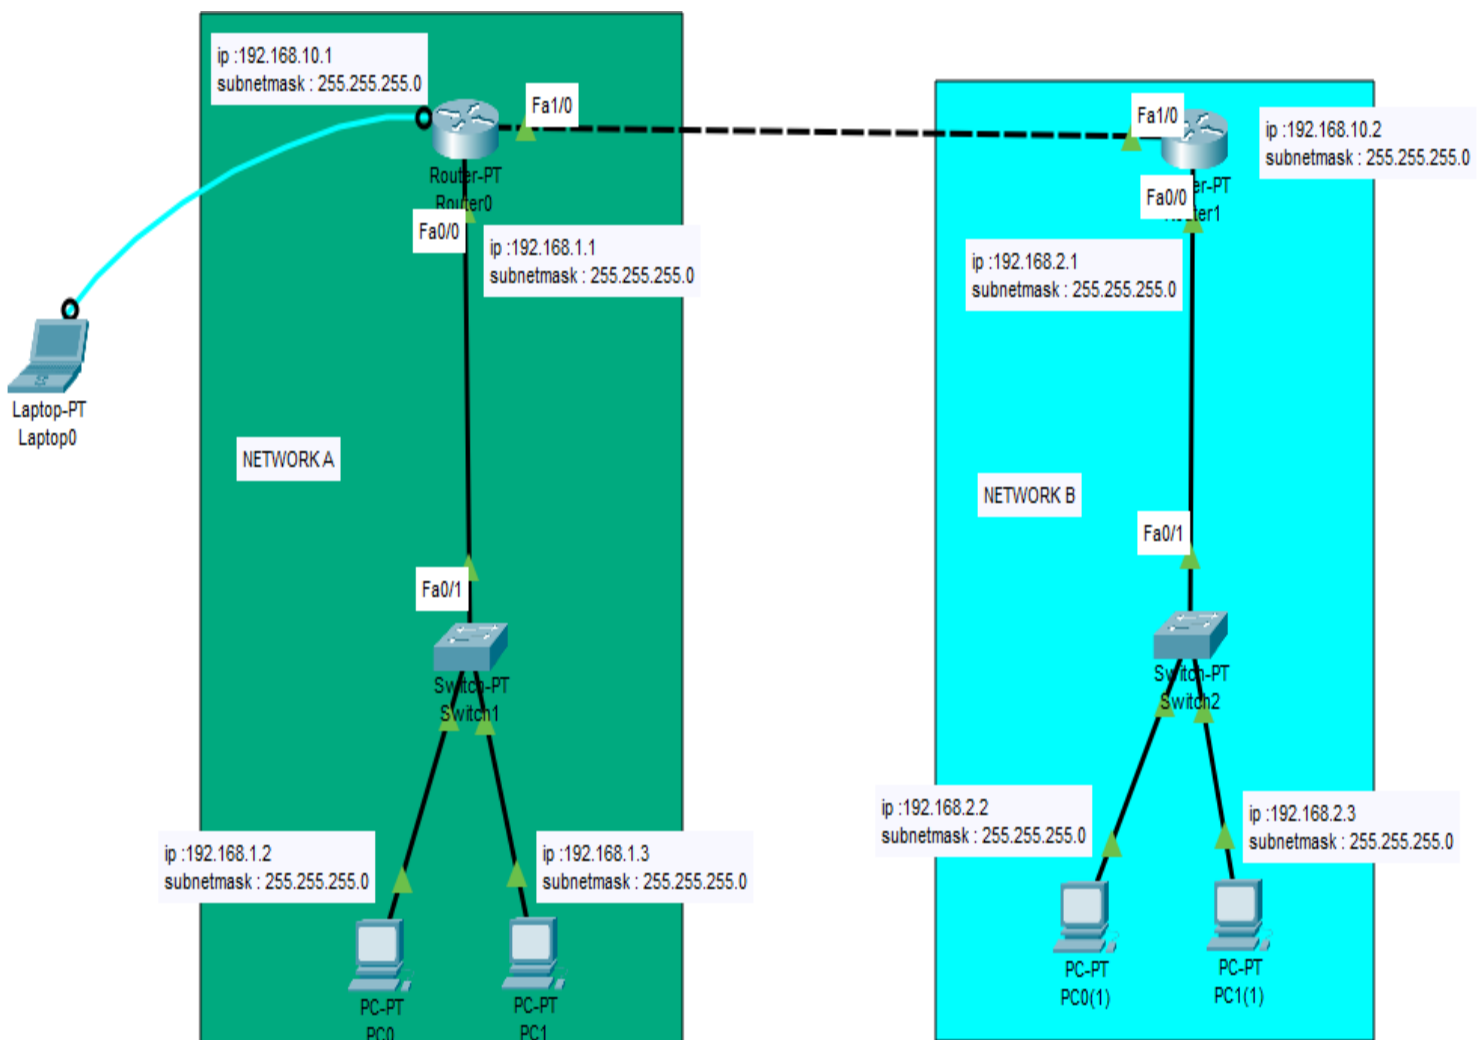

Konfigura Network A

interface fastEthernet 0/0

1.enable

2.configuration terminal

3. Router(config)#interface fastEthernet 0/0

4. Router(config-if)#ip address 192.168.1.1 255.255.255.0

5. Router(config-if)#no shutdown

interface fastEthernet 1/0

1. Router(config)#interface fastEthernet 1/0

2. Router(config-if)#ip address 192.168.10.1 255.255.255.0

3. Router(config-if)#no shutdown

Konfigura Network B

interface fastEthernet 0/0

1.enable

2.configuration terminal

3. Router(config)#interface fastEthernet 0/0

4. Router(config-if)#ip address 192.168.2.1 255.255.255.0

5. Router(config-if)#no shutdown

interface fastEthernet 1/0

1. Router(config)#interface fastEthernet 1/0

2. Router(config-if)#ip address 192.168.10.2 255.255.255.0

3. Router(config-if)#no shutdown

KONFIGURA IP ROUTE FUNSAUN ATU NETWORK A BELE COMUNIKA HO NETWORK B

NETWORK A

1. Router(config)#ip route 192.168.2.0 255.255.255.0 192.168.10.2

NETWORK B

1. Router(config)#ip route 192.168.1.0 255.255.255.0 192.168.10.1

TUIR MAI FO IP BA PC MANUAL NETWORK A

IP: 192.168.1.2

SUBNETMASK:255.255.255.0

GATEWAY: 192.168.1.1

TUIR MAI FO IP BA PC MANUAL

IP: 192.168.2.2

SUBNETMASK:255.255.255.0

GATEWAY: 192.168.2.1