


CONFIGURASI OSPT PROTOCOL IHA APLIKASAUN CISCO PAKET TREASURE

DEFINISAUN OSPF: (Open Shortest Path First) mak protokolu rotasaun dinámika ida-ne'ebé uza iha rede komputadór hodi determina dalan ne'ebé lalais liu atu haruka dadus entre rede sira.

OSPF inklui iha Protokolu Internu Gateway (IGP) no servisu iha Sistema Autonomu (AS). Protokolu ida-ne'e uza dalan barak liu hodi sura dalan ne'ebé di'ak liu tuir kustu, hanesan valór sira ne'ebé baibain determina husi bandwidth rede.

KONFIGURASAUN ROUTER A

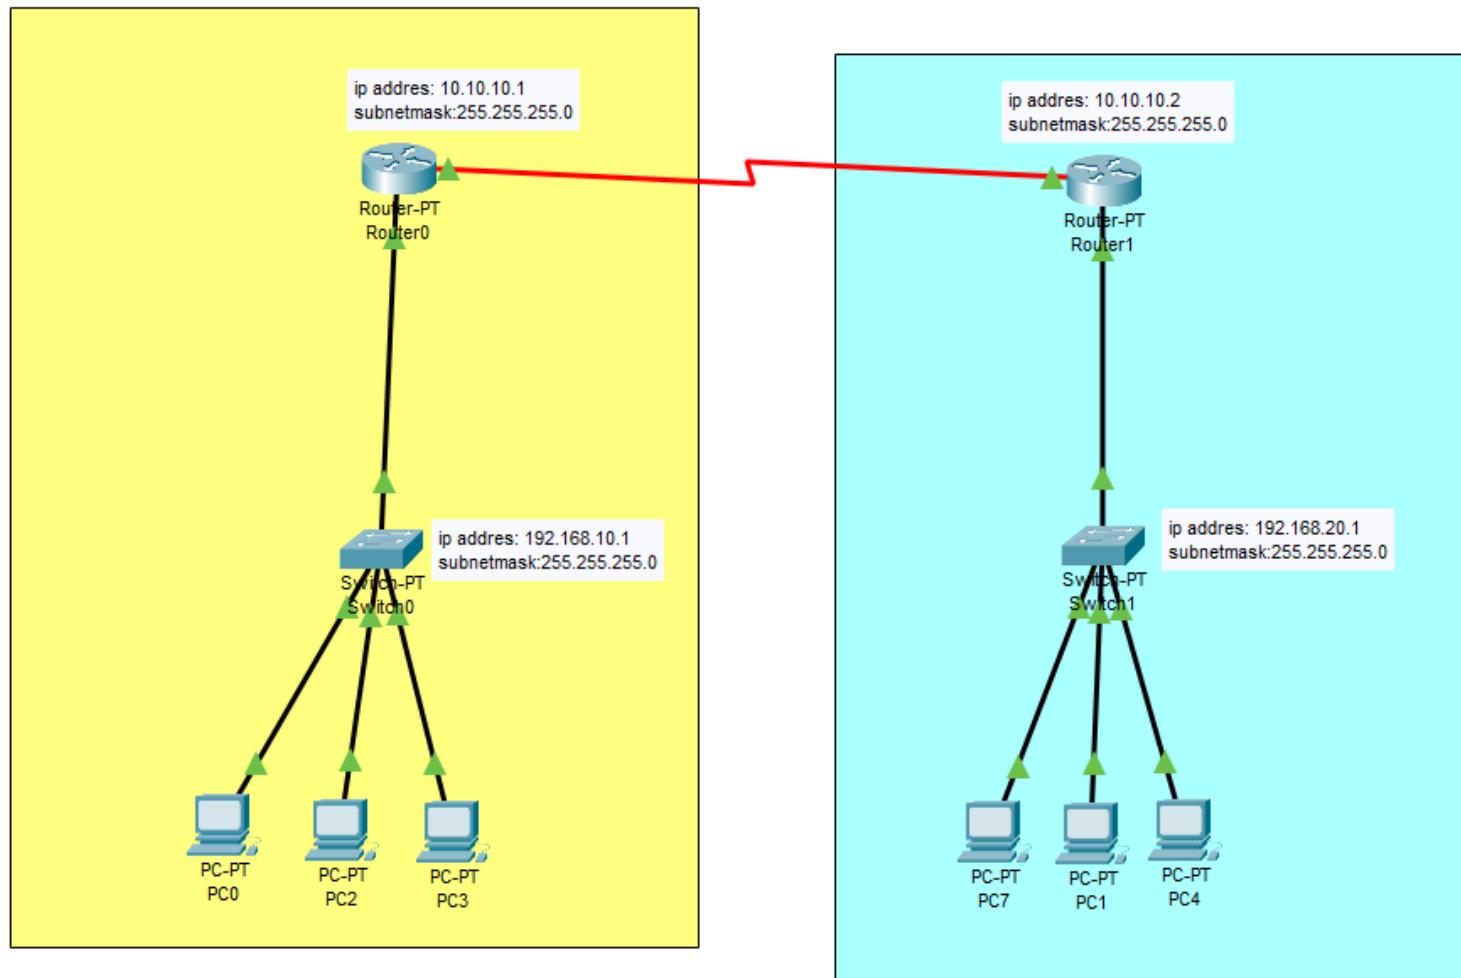

Router>

Router>en

Router#conf t

Router(config)#

Router(config)#interface se2/0

Router(config-if)#ip address 10.10.10.1 255.255.255.0

Router(config-if)#no shutdown

Router(config-if)#exit

Router(config)#interface fa

Router(config)#interface fastEthernet 0/0

Router(config-if)#ip address 192.168.10.1 255.255.255.0

Router(config-if)#no shutdown

Router(config-if)#exit

KONFIGURASAUN ROUTER B

Router>

Router>en

Router#conf t

Router(config)#

Router(config)#interface se2/0

Router(config-if)#ip address 10.10.10.2 255.255.255.0

Router(config-if)#no shutdown

Router(config-if)#exit

```
Router(config)#interface fa  
Router(config)#interface fastEthernet 0/0  
Router(config-if)#ip address 192.168.20.1 255.255.255.0  
Router(config-if)#no shutdown  
Router(config-if)#exit
```

KONFIGURASAUN OSPF PROTOCOL ROUTER A

```
Router(config)#router ospf 10  
Router(config-router)#net  
Router(config-router)#network 10.10.10.0 0.0.0.255 area 0  
Router(config-router)#net  
Router(config-router)#network 192.168.10.0 0.0.0.255 area 0
```

KONFIGURASAUN OSPF PROTOCOL ROUTER A

```
Router(config)#router ospf 10  
Router(config-router)#net  
Router(config-router)#network 10.10.10.0 0.0.0.255 area 0  
Router(config-router)#net  
Router(config-router)#network 192.168.20.0 0.0.0.255 area 0
```

TUIR MAI FO IP BA PC MANUAL NETWORK A

IP: 192.168.10.2

SUBNETMASK:255.255.255.0

GATEWAY: 192.168.10.1

TUIR MAI FO IP BA PC MANUAL

IP: 192.168.20.2

SUBNETMASK:255.255.255.0

GATEWAY: 192.168.20.1