



FILE NO:ES02010

SPECIFICATIONS

Rated Current:1.5AMP

Contact Resistance:20mΩ Max

Withstand Voltage:400V AC/DC

Insulation Resistance:800MΩ Min

Operation Temperature:-40°c to +105°c

Contact Material:Brass



Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds

(260°C for 10 seconds)

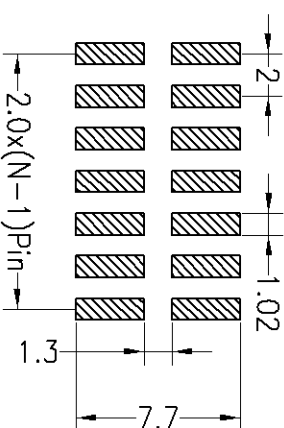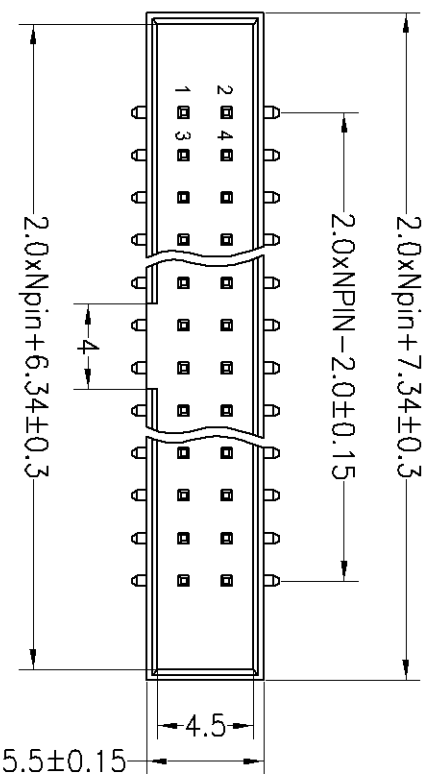

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Ordering Information

3220-XX M XX X B K00 X 01

No. of Pins Per Row 6--64

Contact Plating Insulator Material Option

G0:Gold Flash

G2:3U" Gold

G2:5U" Gold

G3:10U" Gold

G4:15U" Gold

G5:30U" Gold

SN:Tin

Packing 0=PE Bog



A=Tray

T=Tube

P=Tube+Cap

F=BK-LCP

SN:Tin

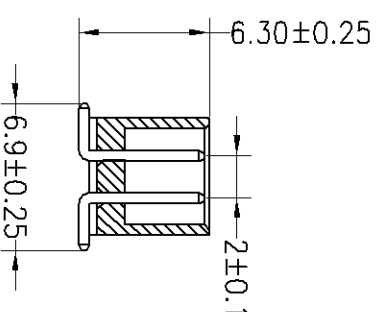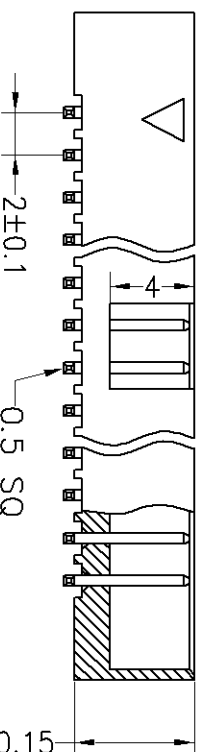

深圳市优联康电子有限公司

PART NO.

3220-XXMXXB K00X01

TITLE:

2.0Box Header Npin H5.65 SMT

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	PROJ.	7	8	9
-----	------	--------------------------	--------	-----	-----	---------	-------	---	---	---

1

2

3

4

5

6

7

8

9