




detail 1 scale 1:10
— gutter

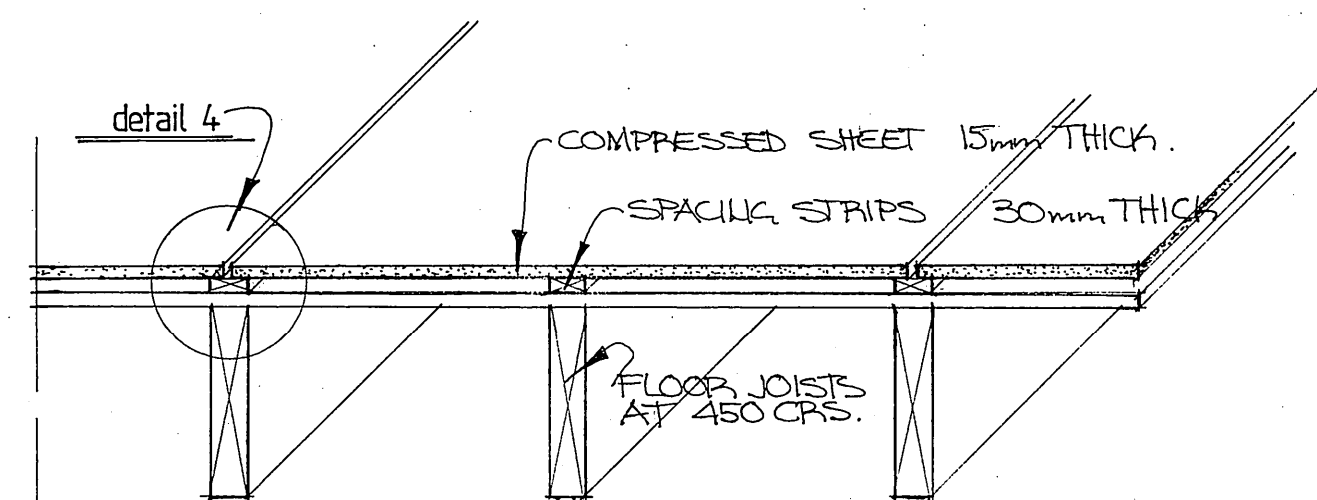


detail 3 scale 1:10

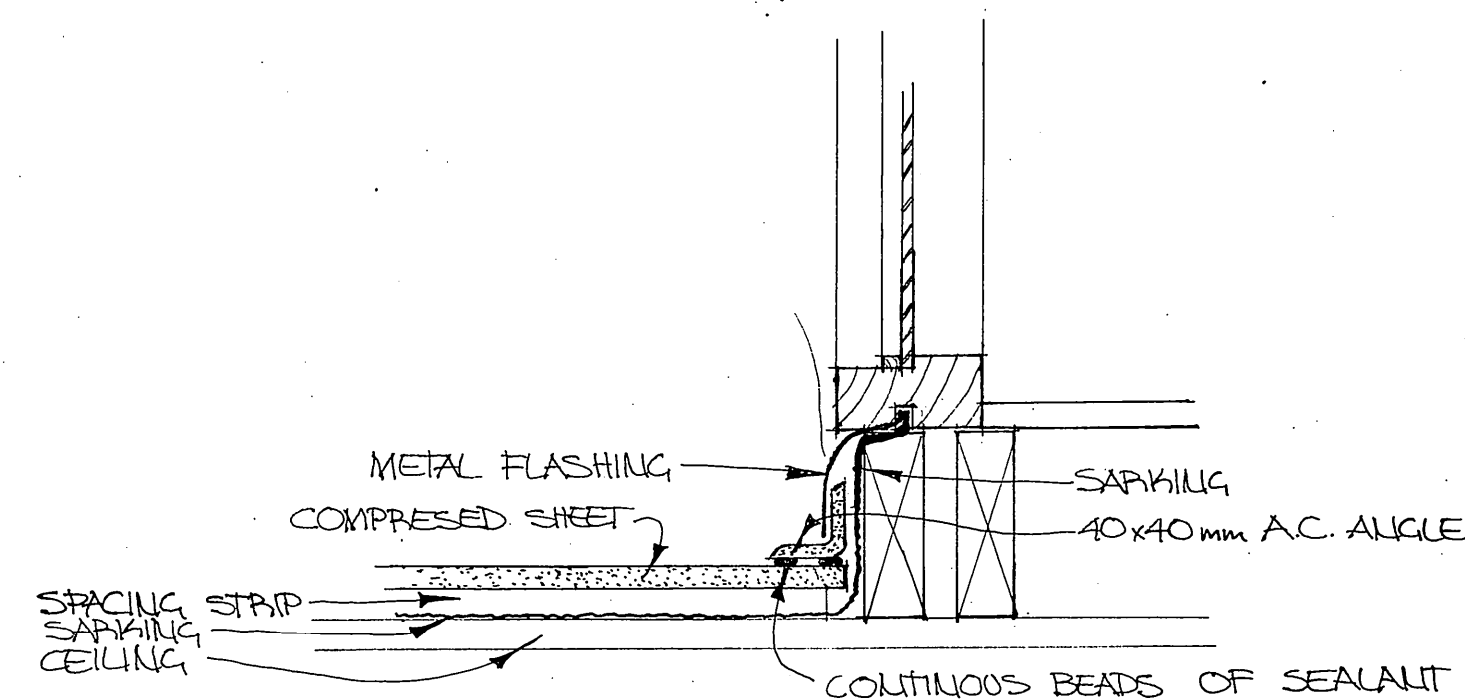


detail 2 scale 1:5
— flashing at wall

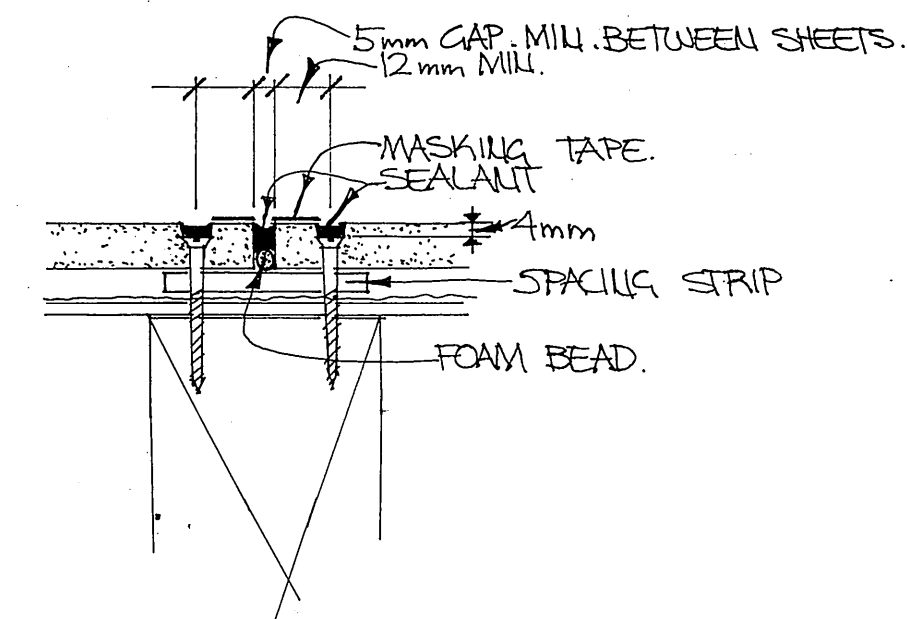

detail 4 not to scale
— sealing the joints

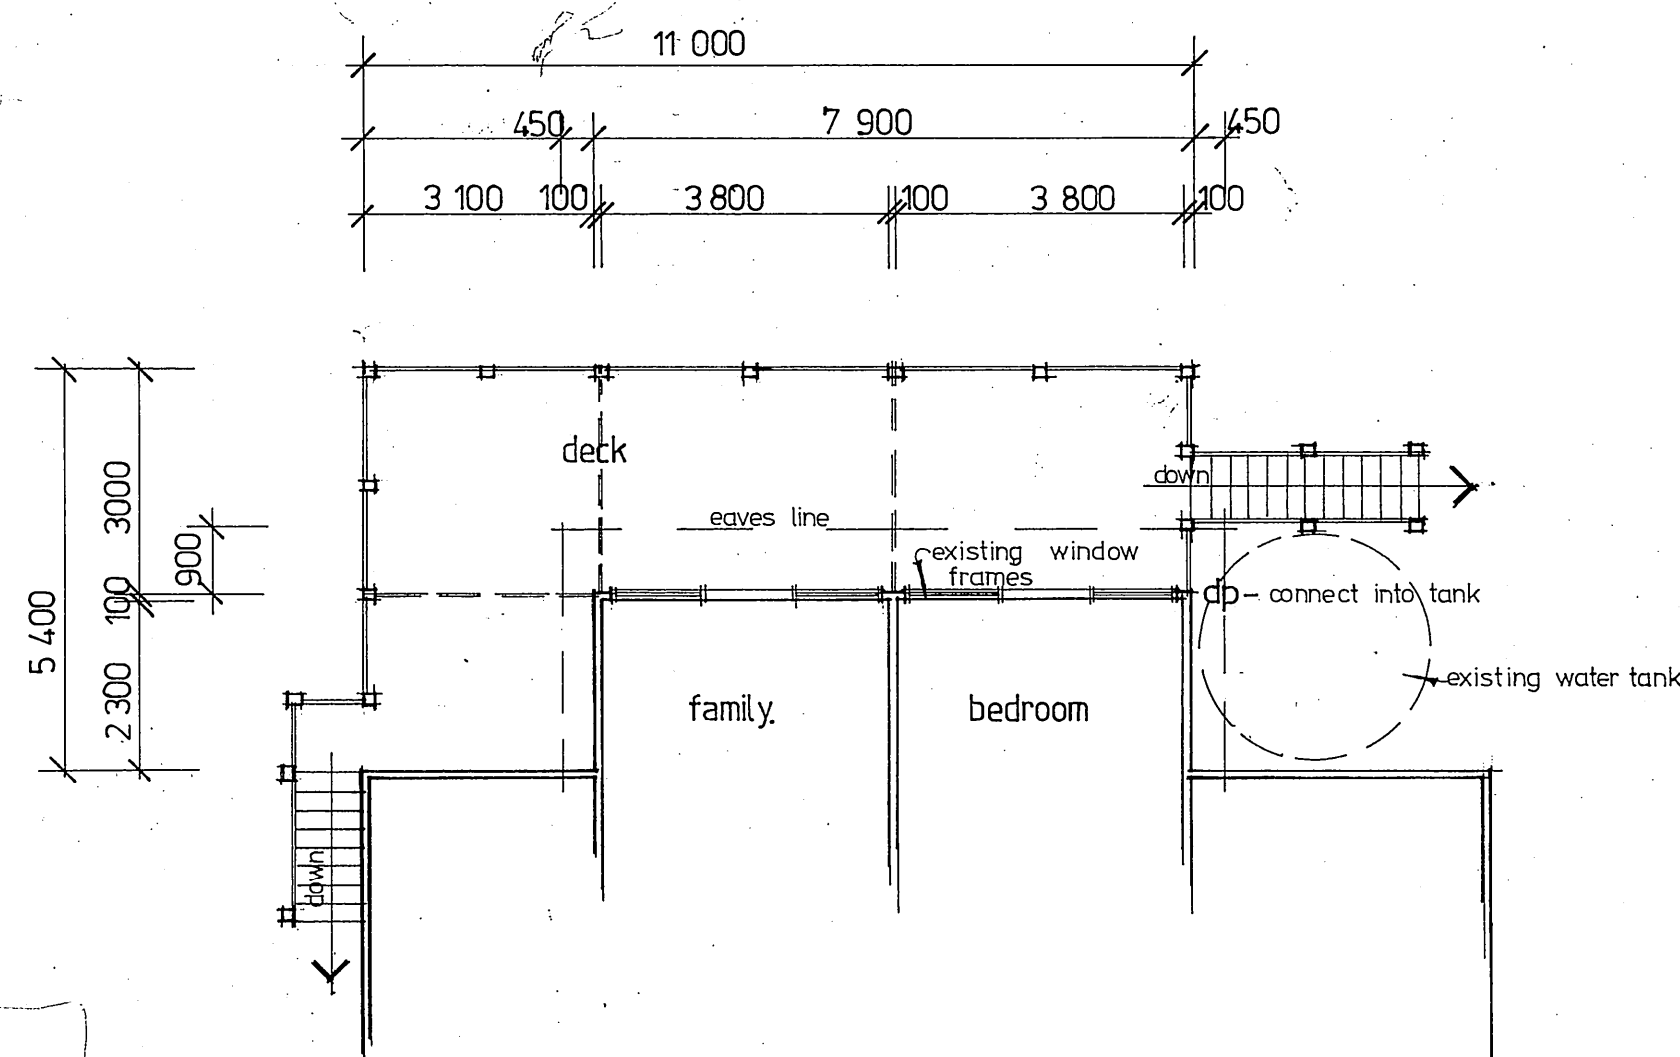

PLAN 1:100

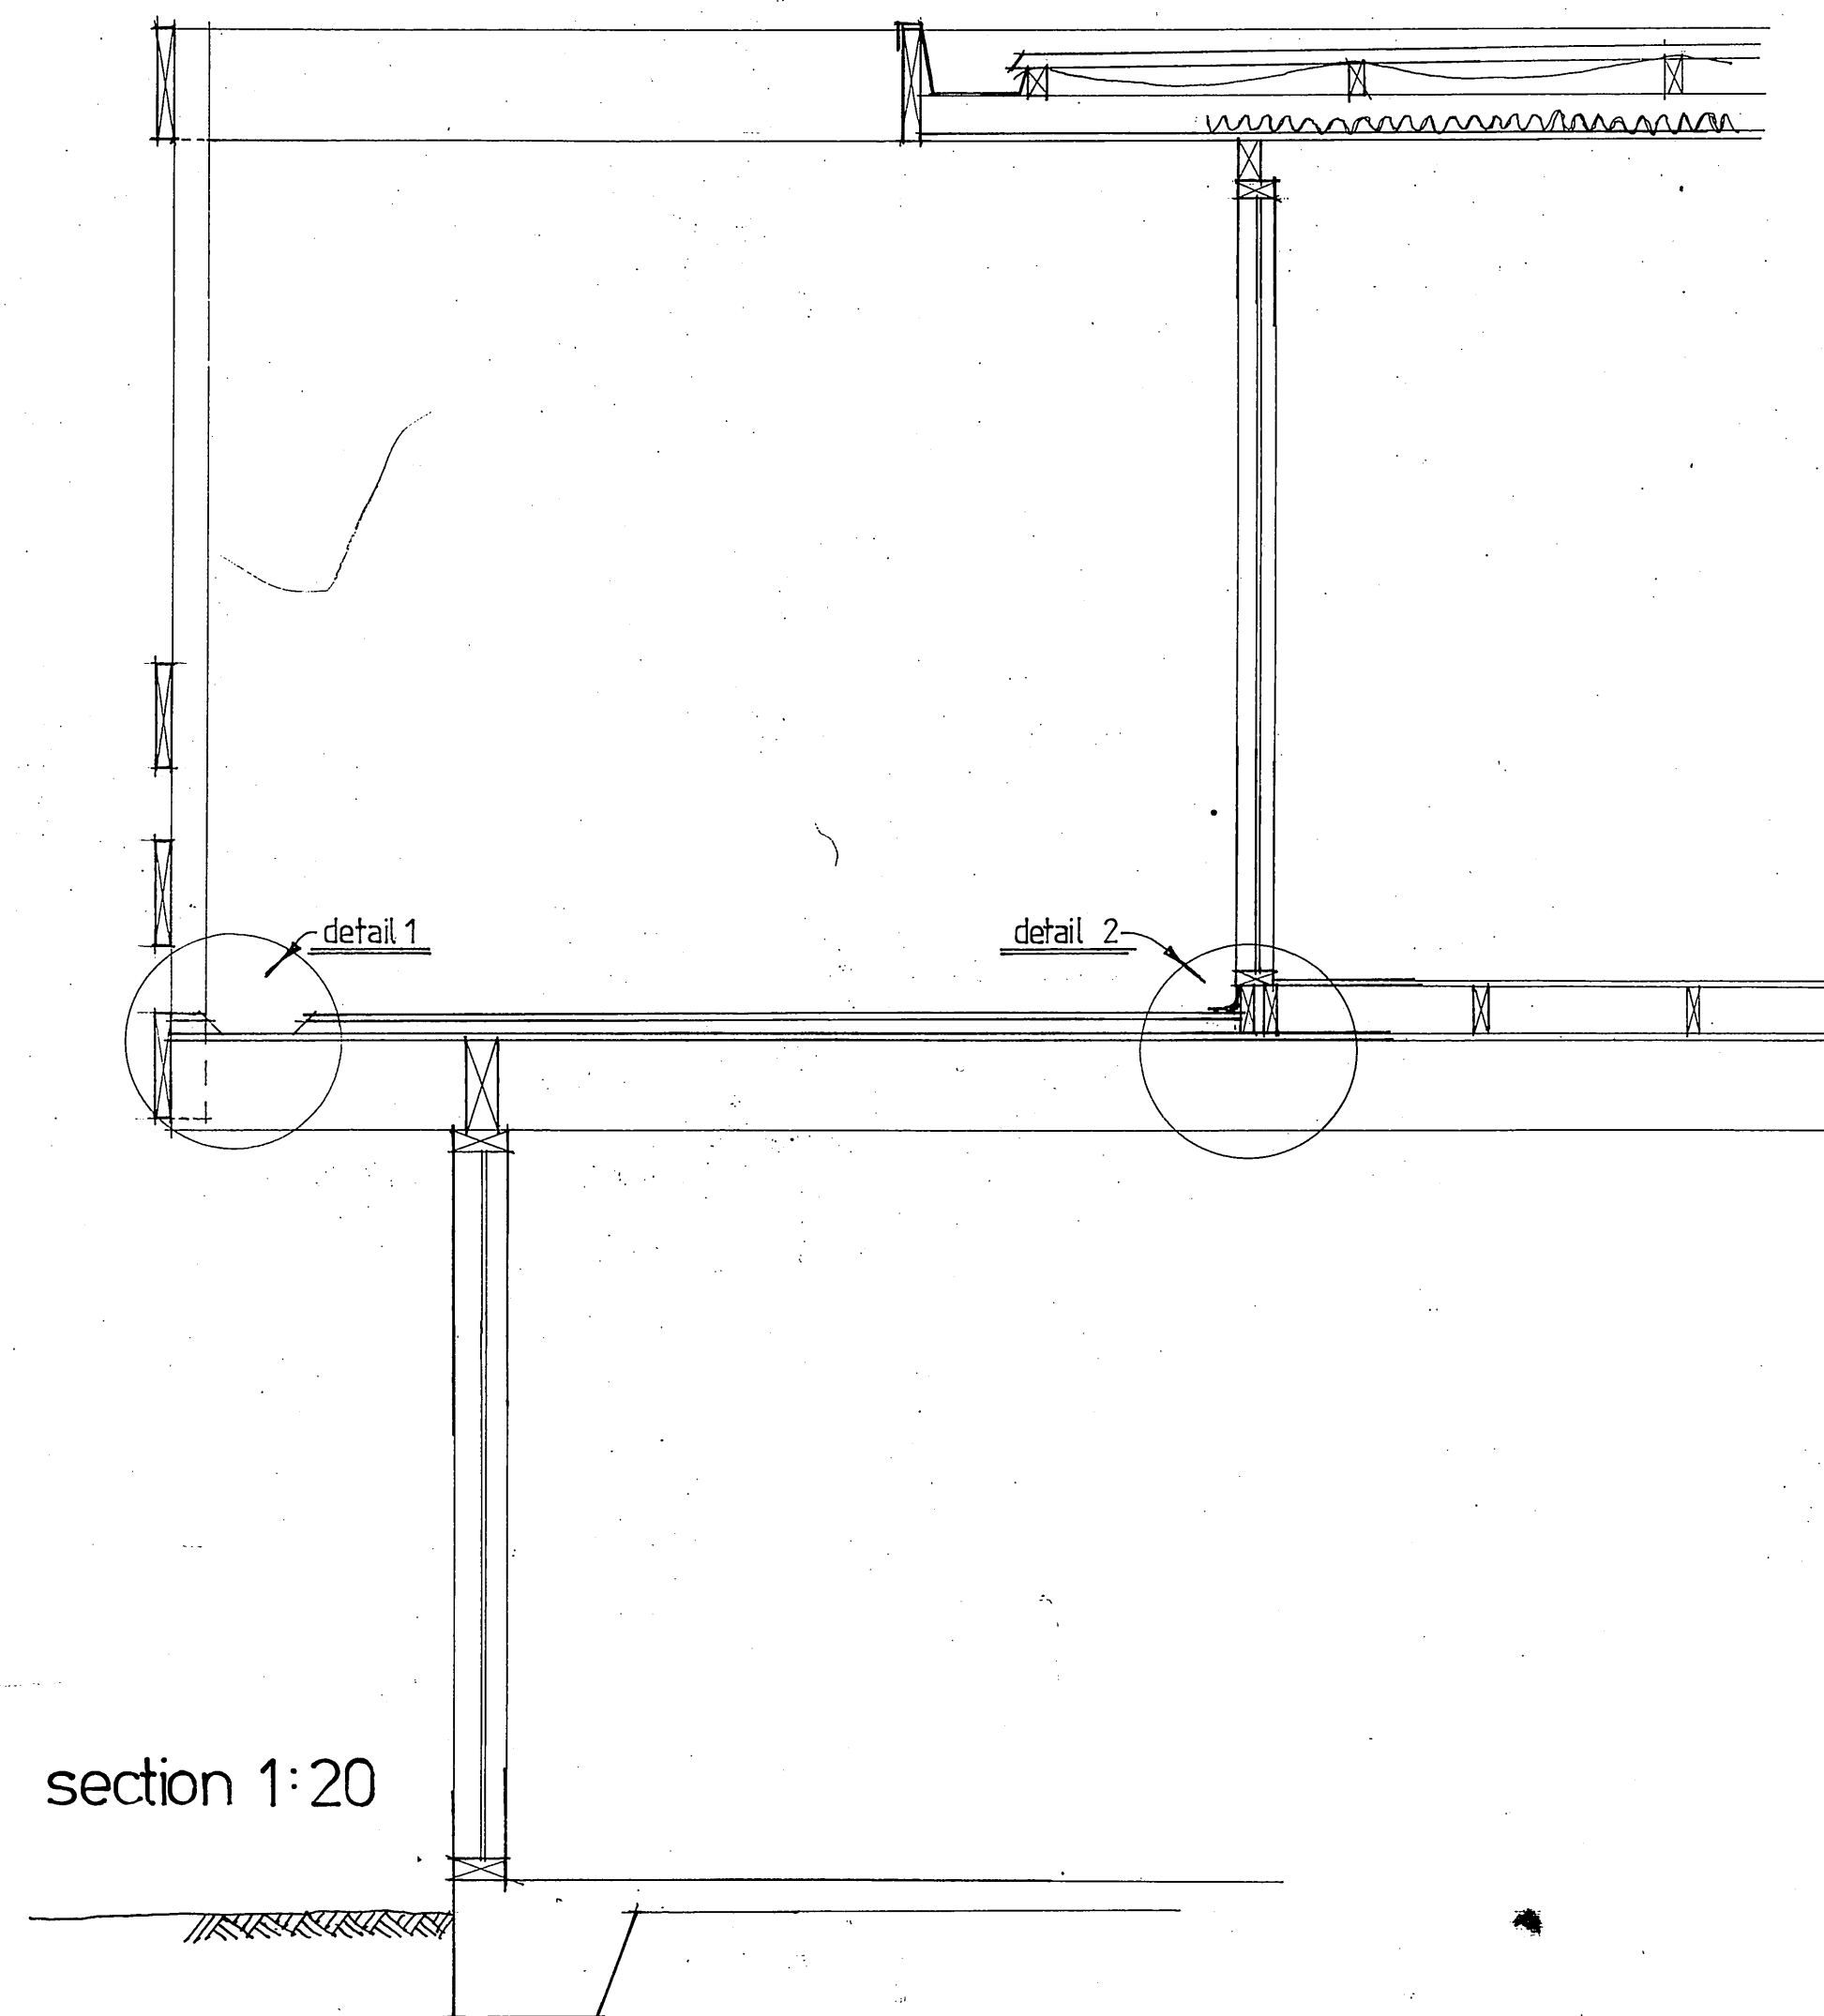

section 1:20

note — accessories to be used

- HARDIES COMPRESSED SHEETS = 3 000 x 900 mm x 15 mm THICK
- SELLEY'S SILICONE 790 SEALANT
- SELLEY'S POLYETHYLENE FOAM BEAD 9 mm DIAM.
- HARDIFLEX INTERNAL ANGLE MOLD 40x40mm.
- 1/2 10x50 mm GALVANISED STEEL OR BRASS COUNTERSINK HEAD WOOD SCREWS FOR COMPRESSED THICK SHEET.

SMITHS — amendment proposal
STEELE'S CREEK

design Alistair Knox & assoc.
mt. Pleasant rd Eltham 439 7404

drawn Danny
date december 84
scale 1:100 1:20 1:10 1:5

job № 1211 P.T.L.