




ZENMUSE H3-3D GIMBAL

QUICK START GUIDE

安装指南


- 1** Insert the securing pins through the holes on the diagonal line of the upper plate of the damping unit. Then, attach and secure the upper plate of damping unit to the Phantom 2 airframe with four M2.5x5 screws.

首先将云台防脱落扣安装在减震装置的任一对角线上，然后用4颗M2.5x5螺丝将减震装置上板安装Phantom 2机身底部。

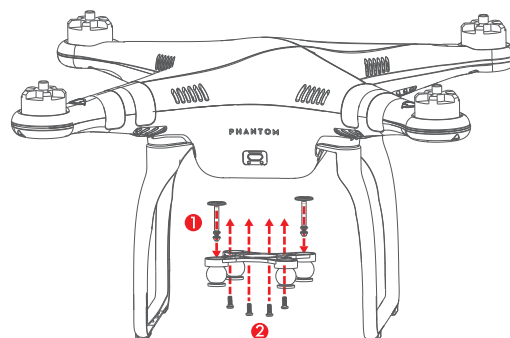

- 2** Attach the bottom plate of damping unit to the upper plate of the damping unit through four vibration absorbers. Be sure the lip of the vibration absorbers are properly inserted through the mounting holes of the bottom plate.

将减震装置上板上的四个减震球套入减震下板。

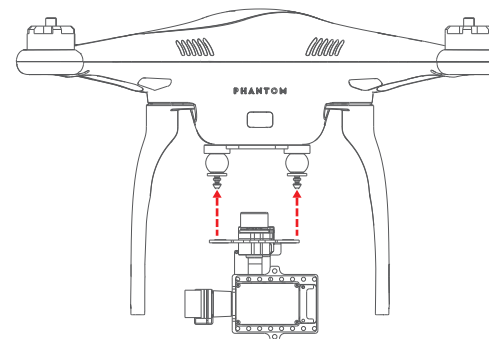


LEARN MORE : WWW.DJI.COM

20140404


- 3** Firmly insert the securing washers into the securing pins to lock in the damping unit. We recommend mounting the securing pins and washers to the highlighted position shown below.

将云台防脱落件盘推入云台防脱落扣中，并确保防脱落件之间锁死。建议参考下图防脱落件的安装位置，进行安装。

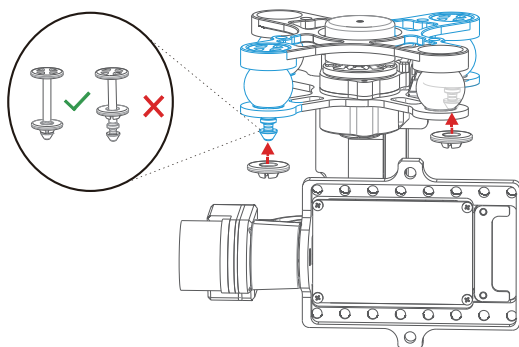


- 4** Plug the 8-pin cable from the Phantom 2 to the Phantom 2 port on the anti-interference enhancement board, then connect the H3-3D port on the anti-interference enhancement board with the 8-pin port on the gimbal via the supplied 8-pin cable. You can either attach the anti-interference enhancement board to the bottom of Phantom 2, or install it inside Phantom 2 housing.

首先，将Phantom 2上的8针线插入到抗干扰加强板的Phantom 2端口，然后，使用8针线连接抗干扰加强板H3-3D端口与云台上8针端口。抗干扰加强板既可安装于机身外，也可安装于机身内部预留位上。

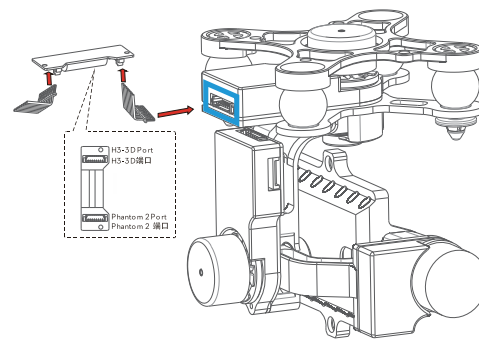

- 5** Mount the camera onto the gimbal and secure the camera with the camera bracket by using two M2.5x6.3 screws.

安装相机到云台底座，用2颗M2.5x6.3螺丝拧紧相机固定框。

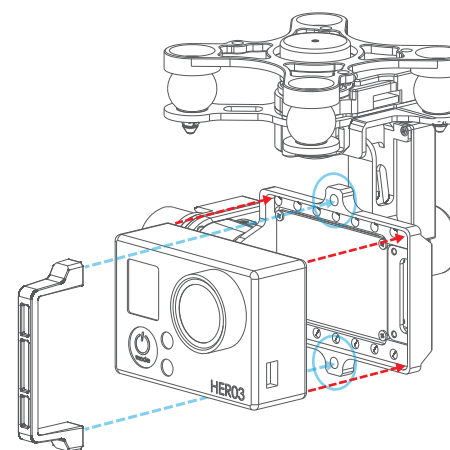

- 6** Assembly is finished. Ensure the installed damping unit is aligned parallel with the Phantom 2. Double check and ensure all vibration absorbers are securely fastened and the gimbal is properly assembled prior to use.

安装完成。检查安装，确保减震装置牢固水平地安装于飞行器上，且减震装置上下板平行，确保安装精确牢固。

