


單位:mm

螺桿尺寸		鋼珠 直徑	循環 圈數	基本額定負荷(kgf)		螺帽		法蘭						配合	螺絲孔			油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	G	H	S	X	Y	Z	Q	kgf/ μm	
14	3	2	3	260	460	26	37	46	10	36	-	-	10	4.5	8	4.5	M6×1P	13	
	4	2.381	3	420	805	26	42	46	10	36	20	40	10	4.5	8	4.5	M6×1P	14	
		2.778	4	840	1870		42											21	
16	5	3.175	3	720	1010	26	42	46	10	36	20	40	10	4.5	8	4.5	M6×1P	16	
	4	2.381	3	435	920	28	42	49	10	39	20	40	10	4.5	8	4.5	M6×1P	16	
20	5	3.175	3	765	1240	30	42	49	10	39	20	40	10	4.5	8	4.5	M6×1P	18	
			4	980	1650		49	49	10	39	20	40	10	4.5	8	4.5		23	
25	6	3.175	4	980	1650	30	55	54	12	40	20	40	12	5.5	9.5	5.5	M6×1P	23	
	4	2.381	4	600	1530	34	44	60	12	48	22	44	12	5.5	9.5	5.5	M6×1P	25	
																		21	
32	5	3.175	3	860	1710	34	47	57	12	45	20	40	12	5.5	9.5	5.5	M6×1P	28	
			4	1100	2280	34	53	57	12	45	20	40	12	5.5	9.5	5.5	M6×1P	42	
			6	1560	3420		62												
40	6	3.969	3	1080	2050	34	53	57	12	45	20	40	12	5.5	9.5	5.5	M6×1P	22	
			4	1380	2730		61											28	
50	10	3.175	3	860	1710	36	66	57	12	45	20	40	12	5.5	9.5	5.5	M6×1P	21	
	4	2.381	3	500	1440	40	40	63	12	51	22	44	15	5.5	9.5	5.5	M8×1P	23	
																		26	
55	5	3.175	4	980	2300	40	47	63.5	12	51	22	44	15	5.5	9.5	5.5	M8×1P	33	
			5	1520	3830		57											42	
63	6	3.969	3	1275	2740	40	53	63.5	12	51	22	44	15	5.5	9.5	5.5	M8×1P	26	
			4	1630	3650		61											34	
80	8	3.969	4	1630	3650	40	69	63.5	12	51	22	44	15	5.5	9.5	5.5	M8×1P	34	
			5	1970	4560		77											43	
90		3.175	3	980	2300	38	70	68	15	55	26	52	15	6.6	11	6.5	M8×1P	26	
			4	1250	3070		81											33	
100			3	1620	3205		80											27	
		4.762	4	2070	4270	42	85	68.5	15	55	26	52	15	6.6	11	6.5	M8×1P	35	
			5	2510	5340		91											44	
125	6	3.175	3	1030	2630	43	50	68	12	55	26	52	15	6.6	11	6.5	M8×1P	28	
	10	3.175	4	1320	3510	45	77	73	12	60	30	60	15	6.6	11	6.5	M8×1P	37	


FSIC

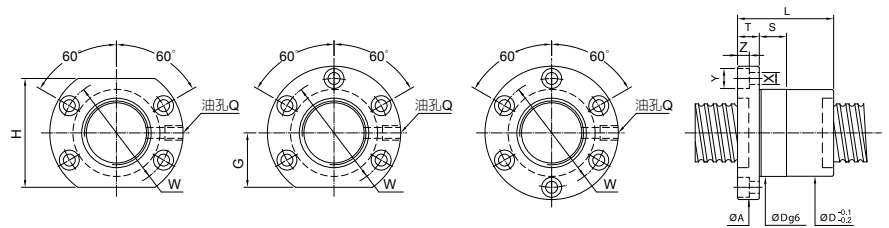

單位:mm


螺桿尺寸		鋼珠 直徑	循環 圈數	基本額定負荷(kgf)		螺帽		法蘭					配合	螺絲孔			油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	G	H	S	X	Y	Z	Q	kgf/ μm
32	4	2.381	3	560	1840	43	40	68	15	55	26	52	15	6.6	11	6.5	M8×1P	28
			5	870	3070		49											45
	5	3.175	3	1095	3060		47											31
			4	1400	4080	48	53	73.5	12	60	30	60	15	6.6	11	6.5	M8×1P	41
	6	3.969	6	1980	6120		62											60
			3	1500	3750		53											32
	8	4.762	4	1920	5000	48	61	73.5	12	60	30	60	15	6.6	11	6.5	M8×1P	43
			6	2720	7500		73											63
	10	6.35	3	1820	4230		68											32
			4	2330	5640	50	77	83	16	66	32	64	15	6.6	11	6.5	M8×1P	43
	12	6.35	3	2605	5310		80											33
			4	3340	7080	50	90	88	16	70	34	68	15	9	14	8.5	M8×1P	45
36	5	3.175	3	2605	5310	50	86	88	16	70	34	68	15	9	14	8.5	M8×1P	33
			4	1490	4690	52	56	88	16	70	34	68	15	9	14	8.5	M8×1P	46
	8	4.762	4	2530	6630	55	73	88	16	72	29	58	15	9	14	8.5	M8×1P	48
			3	2810	6210		78											37
40	5	3.175	4		5290		56											49
			5	1575	5290		56											49
			6	1910	6610	55	61	88.5	16	72	29	58	15	9	14	8.5	M8×1P	61
			6	2230	7940		65											73
	6	3.969	3	1660	4810		56											39
			4	2130	6410	55	65	88.5	16	72	34	68	15	9	14	8.5	M8×1P	51
			6	3020	9620		77											75
			3	2120	5720		64											40
	8	4.762	4	2720	7620	60	77	93	16	76	36	72	20	9	14	8.5	M8×1P	52
			6	3850	11430		94											77
	10	6.35	3	3010	7100		83											41
			4	3850	9470	64	93	106	18	84	43	86	20	11	17.5	11	M8×1P	53
			5	4670	11830		99											67
	12	7.144	3	3010	7100		82											41
			4	3850	9470	63	100	106	18	84	43	86	20	11	17.5	11	M8×1P	53
			5	4670	11830		107											67
			3	4010	9250		93											43
			4	5130	12330	70	103	110	18	85	45	90	20	11	17.5	11	M8×1P	56

FSIC

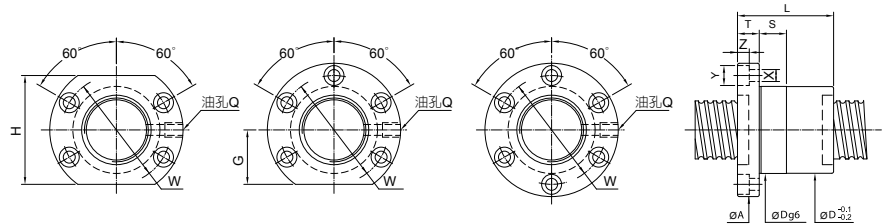

單位:mm


螺桿尺寸		鋼珠 直徑	循環 圈數	基本額定負荷(kgf)		螺帽		法蘭					配合	螺絲孔			油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	G	H	S	X	Y	Z	Q	kgf/ μm
63	6	3.969	4	2610	10550	80	67	122	18	100	45	90	20	11	17.5	11	PT1/8"	73
			6	3700	15830	80	80											107
	8	4.762	4	3375	12200	82	80	124	18	102	46	92	20	11	17.5	11	PT1/8"	76
			6	4780	18300	96	96											111
	10	6.35	4	5020	16450	85	98	132	22	107	48	96	20	14	20	13	PT1/8"	79
			6	7110	24680	118	118											116
12	7.938	4	6580	19430	90	111	136	22	112	52	104	20	14	20	13	PT1/8"	80	
		6	9320	29150	136	136											111	
20	9.525	3	8490	23610	95	146	153	28	123	59	118	20	18	26	17.5	PT1/8"	79	
		4	10870	31480	156	156											89	
80	10	6.35	4	5510	21200		98											95
			5	6670	26500	105	105	151	22	127	57	114	20	14	20	13	PT1/8"	118
			6	7810	31800	118	118											140
	12	7.938	4	7500	25700	110	111	156	22	132	59	118	20	14	20	13	PT1/8"	98
			6	10620	38550	136	136											143
	20	9.525	3	9770	31700	115	146	173	28	143	66	132	20	18	26	17.5	PT1/8"	97
4			12510	42270	168	168											127	
100	10	6.35	3	4760	20090		84											91
			4	6090	26790		95											120
			5	7380	33490	125	104	171	22	147	67	134	25	14	20	13	PT1/8"	148
			6	8630	40190	115	115											176
	16	9.525	4	14440	54960		140											140
			5	17490	68700	135	157	205	28	169	73	146	30	18	26	17.5	PT1/8"	173
			6	20460	82440		175											205
			4	14440	54960		159											140
	20	9.525	5	17490	68700	135	180	205	28	169	73	146	30	18	26	17.5	PT1/8"	173
			6	20460	82440		200											205

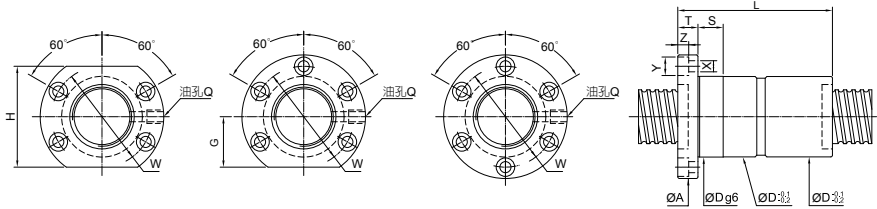

單位:mm


螺桿尺寸		鋼珠 直徑	循環 圈數	基本額定負荷(kgf)		螺帽		法蘭					配合	螺絲孔			油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	G	H	S	X	Y	Z	Q	kgf/ μm
16	4	2.381	3	435	920	30	66	46.5	10	39	20	40	10	4.5	8	4.5	M6×1P	31
	5	3.175	3	765	1240	30	80	49	10	39	20	40	10	4.5	8	4.5	M6×1P	35
			4	980	1650		89											47
20	5	3.175	3	860	1710		82											43
			4	1100	2280	34	92	57	12	45	20	40	12	5.5	9.5	5.5	M6×1P	56
	6	3.969	3	1080	2050		93											43
25			4	1380	2730	34	107	57	12	45	20	40	12	5.5	9.5	5.5	M6×1P	56
	5	3.175	3	980	2300		82											51
			4	1250	3070	40	92	63.5	12	51	22	44	15	5.5	9.5	5.5	M8×1P	67
	6	3.969	3	1275	2740		93											52
			4	1630	3650	40	107	63.5	12	51	22	44	15	5.5	9.5	5.5	M8×1P	68
	3.175	3	3	980	2300	38	129	68	15	55	26	52	15	6.6	11	6.5	M8×1P	51
	4.762	3	4	1620	3205		140											53
32			4	2070	4270	42	155	68.5	15	55	26	52	15	6.6	11	6.5	M8×1P	70
			3	1095	3060		82											63
	5	3.175	4	1400	4080	48	92	73.5	12	60	30	60	15	6.6	11	6.5	M8×1P	82
			6	1980	6120		118											122
			3	1500	3750		93											65
	6	3.969	4	1920	5000	48	109	73.5	12	60	30	60	15	6.6	11	6.5	M8×1P	86
			6	2720	7500		133											125
	8	4.762	3	1820	4230		117											66
			4	2330	5640	50	135	83	16	66	32	64	15	6.6	11	6.5	M8×1P	86
	10	6.35	3	2605	5310		139											67
			4	3340	7080	50	160	88.5	16	70	34	68	15	9	14	8.5	M8×1P	89
36			3	2605	5310		153											67
			5	4040	8850	50	203	88	16	70	34	68	15	9	14	8.5	M8×1P	110
	5	3.175	4	1490	4690	52	96	88	16	70	34	68	15	9	14	8.5	M8×1P	91
	8	4.762	4	2530	6630	55	138	88	16	72	34	68	15	9	14	8.5	M8×1P	95
	10	6.35	3	2810	6210		138											75
			4	3600	8280	58	159	98	18	77	36	72	20	11	17.5	11	M8×1P	98

FDIC

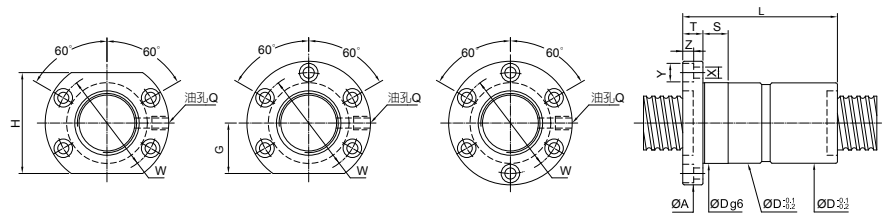

單位:mm


螺桿尺寸		鋼珠 直徑	循環 圈數	基本額定負荷(kgf)		螺帽		法蘭						配合	螺絲孔				油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	G	H	S	X	Y	Z	Q		kgf/ μm	
40	5	3.175	4	1575	5290		96												100	
			5	1910	6610	55	111	88.5	16	72	29	58	15	9	14	8.5	M8×1P	124		
			6	2230	7940		122											147		
	6	3.969	3	1660	4810		97												77	
			4	2130	6410	55	113	88.5	16	72	34	68	15	9	14	8.5	M8×1P	103		
			6	3020	9620		137											149		
	8	3.175	3	2120	5720		121												80	
			4	2720	7620	60	134	93	16	76	36	72	20	9	14	8.5	M8×1P	105		
			6	3850	11430		172											154		
	10	6.35	3	3010	7100		142												82	
			4	3850	9470	65	162	106	18	84	43	86	20	11	17.5	11	M8×1P	107		
			5	4670	11830		189											133		
	12	6.35	3	3010	7100		154												82	
			5	4670	11830	63	203	106	18	84	43	86	20	11	17.5	11	M8×1P	133		
		7.144	3	4010	9250		160												86	
			4	5130	12330	70	185	110	18	85	45	90	20	11	17.5	11	M8×1P	114		
45	8	4.762	4	1650	6030	61	136	92	16	75	36	72	15	9	14.5	9	M6×1P	109		
	12	7.144	3	4160	10750		158												94	
			4	5330	14330	70	183	110	16	90	45	90	20	11	17.5	11	PT1/8"	124		
	16	6.35	3	3220	8200	70	198	110	16	90	45	90	20	11	17.5	11	PT1/8"	90		

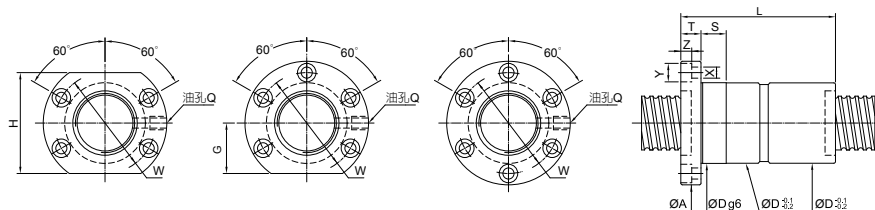

單位:mm


螺桿尺寸		鋼珠 直徑	循環 圈數	基本額定負荷(kgf)		螺帽		法蘭					配合	螺絲孔			油孔	剛性				
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	G	H	S	X	Y	Z	Q	kgf/ μm				
50	5	3.175	4	1730	6760	96																119
			5	2100	8450	66	111	98	16	82	36	72	20	9	14	8.5	PT1/8"	148				
			6	2450	10140	122															174	
	6	3.969	4	2380	8250	111																123
			5	2880	10310	66	122	98	16	82	36	72	20	9	14	8.5	PT1/8"	151				
			6	3370	12380	142															181	
	8	4.762	4	3010	9610	136																125
			5	3650	12010	70	157	113	18	90	42	84	20	11	17.5	11.0	PT1/8"	155				
			6	4260	14420	174															185	
	10	6.35	3	3430	9300	143																99
			4	4390	12400	74	162	114	18	92	42	84	20	11	17.5	11	PT1/8"	129				
			5	5320	15500													189	161			
			6	6220	18600													205	191			
	12	7.144	5	6680	20420	75	213	121	22	97	47	94	20	14	20	13	PT1/8"	166				
			3	4510	11150	75	171	121	22	97	47	94	20	14	20	13	PT1/8"	101				
	4	5770	14870	195	132																	
	16	6.35	3	3430	9300	74	201	114	18	92	42	84	20	11	17.5	11	PT1/8"	99				
20	7.938	3	4510	11150	78	253	121	28	97	47	94	20	14	20	13	PT1/8"	101					

FDIC

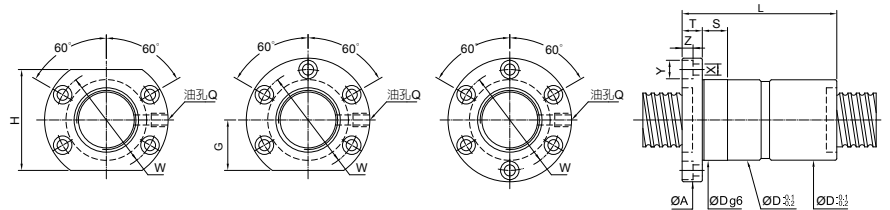

單位:mm


螺桿尺寸		鋼珠 直徑	循環 圈數	基本額定負荷(kgf)		螺帽		法蘭						配合	螺絲孔				油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	G	H	S	X	Y	Z	Q	kgf/ μm		
63	6	3.969	4 6	2610 3700	10550 15830	80	120 144	122	18	100	45	90	20	11	17.5	11	PT1/8"	146 217		
	8	4.762	4 6	3375 4780	12200 18300	82	141 178	124	18	102	46	92	20	11	17.5	11	PT1/8"	151 222		
	10	6.35	4 6	5020 7110	16450 24680	85	166 209	132	22	107	48	96	20	14	20	13	PT1/8"	158 232		
	12	7.938	4 6	6580 9320	19430 29150	90	195 248	136	22	112	52	104	20	14	20	13	PT1/8"	161 236		
	20	9.525	3 4	8490 10870	23610 31480	95	255 296	153	28	123	59	118	20	18	26	17.5	PT1/8"	157 207		
80	10	6.35	4 5 6	5510 6670 7810	21200 26500 31800		166 185 209	151	22	127	57	114	20	14	20	13	PT1/8"	190 235 280		
	12	7.938	4 6	7500 10620	25700 38550	110	195 248	156	22	132	59	118	20	14	20	13	PT1/8"	196 288		
			3	9770	31700		254											193		
	20	9.525	4 6	12510 17720	42270 63410	115	297 376	173	28	143	66	132	20	18	26	17.5	PT1/8"	254 373		
	100	10	6.35	3 4 5 6	4760 6090 7380 8630	20090 26790 33490 40190		143 164 184 210	171	22	147	67	134	25	14	20	13	PT1/8"	173 228 281 334	
			4	14440	54960		252											266		
16		9.525	5 6	17490 20460	68700 82440	135	285 318	205	28	169	73	146	30	18	26	17.5	PT1/8"	329 391		
			4	14440	54960		299											266		
20		9.525	5 6	17490 20460	68700 82440	135	340 381	205	28	169	73	146	30	18	26	17.5	PT1/8"	329 391		

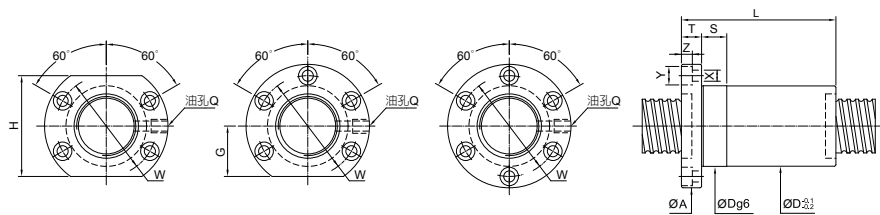

單位:mm


螺桿尺寸		鋼珠 直徑	循環 圈數	基本額定負荷(kgf)		螺帽		法蘭					配合	螺絲孔			油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	G	H	S	X	Y	Z	Q	kgf/ μm
20	5	3.175	2×(2)	610	1140	34	53	57	12	45	20	40	12	5.5	9.5	5.5	M6×1P	29
			3×(2)	860	1710		67											43
	6	3.969	2×(2)	760	1370	34	61	57	12	45	20	40	12	5.5	9.5	5.5	M6×1P	29
			3×(2)	1080	2050		77											50
25	4	2.381	2×(2)	350	960	40	44	63	12	51	22	44	15	5.5	9.5	5.5	M8×1P	30
			3×(2)	500	1440		56											46
			4×(2)	640	1920		64											59
	5	3.175	2×(2)	690	1530	40	53	63.5	12	51	22	44	15	5.5	9.5	5.5	M8×1P	35
			3×(2)	980	2300		67											51
			4×(2)	1250	3070		76											67
	6	3.969	3×(2)	1275	2740	40	77	63.5	12	51	22	44	15	5.5	9.5	5.5	M8×1P	52
	8	3.969	3×(2)	1275	2740	40	85	63.5	12	51	22	44	15	5.5	9.5	5.5	M8×1P	52
	10	4.762	2×(2)	1140	2140	42	88	69	15	55	26	52	15	6.6	11	6.5	M8×1P	36
			3×(2)	1610	3210		102											53
28	6	3.175	3×(2)	1030	2630	43	69	68	12	55	26	52	15	6.6	11	6.5	M8×1P	56
	10	3.175	2×(2)	730	1750	45	77	73	12	60	30	60	15	6.6	11	6.5	M8×1P	38
32	4	2.381	3×(2)	560	1840	43	56	68	12	55	26	52	15	6.6	11	6.5	M8×1P	55
			5×(2)	870	3070		73											89
	5	3.175	3×(2)	1095	3060	48	67	73.5	12	60	30	60	15	6.6	11	6.5	M8×1P	63
			4×(2)	1400	4080		77											82
	6	3.969	3×(2)	1500	3750	48	77	73.5	12	60	30	60	15	6.6	11	6.5	M8×1P	65
			4×(2)	1920	5000		90											86
	8	4.762	3×(2)	1820	4230	50	95	83	16	66	32	64	15	6.6	11	6.5	M8×1P	66
			4×(2)	2330	5640		112											86
	10	6.35	3×(2)	2605	5310	50	120	88	16	70	34	68	15	9	14	8.5	M8×1P	67
	12	6.35	3×(2)	2605	5310	50	124	88	16	70	34	68	15	9	14	8.5	M8×1P	67

FOIC

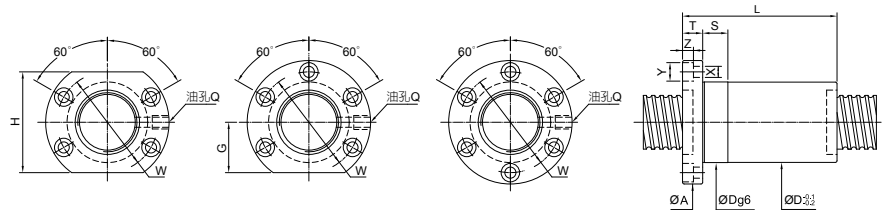

單位:mm


螺桿尺寸		鋼珠 直徑	循環 圈數	基本額定負荷(kgf)		螺帽		法蘭					配合	螺絲孔				油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	G	H	S	X	Y	Z	Q	kgf/ μm	
40	5	3.175	3×(2)	1230	3970	65												75	
			4×(2)	1575	5290	55	80	88.5	16	72	29	58	15	9	14	8.5	M8×1P	100	
			6×(2)	2230	7940	101												147	
	6	3.969	4×(2)	2130	6410	93												103	
			6×(2)	3020	9620	118	88.5	16	72	34	68	15	9	14	8.5	M8×1P	149		
			4×(2)	2720	7620	60	116	93	16	76	36	72	20	9	14	8.5	M8×1P	105	
10	6.35	3×(2)	3010	7100	123												82		
		4×(2)	3850	9470	64	123	106	18	84	43	86	20	11	17.5	11	PT1/8"	107		
		4×(2)	3850	9470	63	160	106	18	84	43	86	20	11	17.5	11	PT1/8"	107		
50	5	3.175	3×(2)	1350	5070	65												89	
			4×(2)	1730	6760	66	80	98	16	82	36	72	20	9	14	8.5	PT1/8"	119	
			6×(2)	2450	10140	101												174	
	6	3.969	4×(2)	2380	8250	93												123	
			6×(2)	3370	12380	118	98	16	82	36	72	20	9	14	8.5	PT1/8"	181		
			4×(2)	3010	9610	70	119	113	18	90	42	84	20	11	17.5	11	PT1/8"	125	
10	6.35	3×(2)	3430	9300	123												99		
		4×(2)	4390	12400	74	123	116	18	92	42	84	20	11	17.5	11	M8×1P	129		
		7.144	4×(2)	5530	16330	75	164	121	22	97	47	97	20	14	20	13	PT1/8"	135	
63	6	3.969	4×(2)	2610	10550	96												146	
			6×(2)	3700	15830	80	96	122	18	100	45	90	20	11	17.5	11	PT1/8"	217	
			4×(2)	3375	12200	82	119	124	18	102	46	92	20	11	17.5	11	PT1/8"	151	
	10	6.35	4×(2)	5020	16450	85	147	132	22	107	48	96	20	14	20	13	PT1/8"	158	
			3×(2)	5140	14570	90	147	136	22	112	52	104	20	14	20	13	PT1/8"	122	
			4×(2)	6580	19430	171												161	
80	20	9.525	2×(2)	5990	15740	95	156	153	28	123	59	118	20	18	26	17.5	PT1/8"	107	
			2×(2)	3360	13390	95												118	
			3×(2)	4760	20090	125	95	171	22	147	67	134	25	14	20	13	PT1/8"	173	
			2×(2)	11280	41220	135	175	205	28	169	73	146	30	18	26	17.5	PT1/8"	201	
20	9.525	3×(2)	7960	27480	135	159	205	28	169	73	146	30	18	26	17.5	PT1/8"	137		

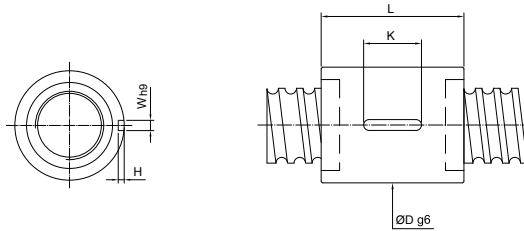

單位:mm


螺桿尺寸		鋼珠 直徑	循環 圈數	基本額定負荷(kgf)		螺帽		鍵槽			剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)	Co(靜負荷)	Dg6	L	K	W	H	kgf/μm
16	5	3.175	3	765	1240	30	40	20	3	1.8	18
	5	3.175	4	860	1710	34	41	20	3	1.8	21
20	6	3.969	3	1080	2050	34	46	20	4	2.5	22
	6	3.969	4	1380	2730	34	56	25	4	2.5	28
25	5	3.175	3	980	2300	40	41	20	4	2.5	26
	5	3.175	4	1250	3070	40	48	20	4	2.5	33
32	6	3.969	3	1275	2740	40	46	20	4	2.5	26
	6	3.969	4	1630	3650	40	56	25	4	2.5	34
32	5	3.175	3	1095	3060	48	41	20	4	2.5	31
	5	3.175	4	1400	4080	48	48	20	4	2.5	41
32	6	3.969	3	1500	3750	50	46	20	5	3.0	32
	6	3.969	4	1920	5000	50	56	25	5	3.0	43
40	8	4.762	3	1820	4230	50	59	25	5	3.0	32
	8	4.762	4	2330	5640	50	70	32	5	3.0	43
40	10	6.35	3	2605	5310	50	68	25	6	3.5	33
	10	6.35	4	3340	7080	50	79	32	6	3.5	45
40	5	3.175	4	1575	5290	55	48	20	4	2.5	49
	5	3.175	6	2230	7940	55	61	25	4	2.5	73
40	6	3.969	4	2130	6410	55	56	25	5	3.0	51
	6	3.969	6	3020	9620	55	70	32	5	3.0	75
40	8	4.762	4	2720	7620	60	70	25	5	3.0	52
	8	4.762	6	3850	11430	60	91	40	5	3.0	77
40	10	6.35	3	3010	7100	65	68	25	6	3.5	41
	10	6.35	4	3850	9470	65	79	32	6	3.5	53

RSIC

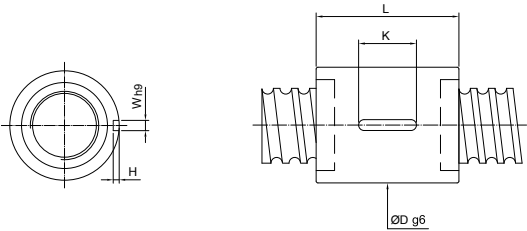

單位:mm


螺桿尺寸		鋼珠 直徑	循環圈數	基本額定負荷(kgf)		螺帽		鍵槽			剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)	Co(靜負荷)	Dg6	L	K	W	H	kgf/μm
50	5	3.175	4	1730	6750	66	48	20	4	2.5	60
			6	2450	10130		61	25			86
	6	3.969	4	2380	8250	66	56	25	5	3.0	61
			6	3370	12380		70	32			90
	8	4.762	4	3010	9610	70	70	32	5	3.0	63
			6	4260	14420		91	32			92
	10	6.35	3	3430	9300	74	68	32	6	3.5	49
			6	4390	12400		79				32
	12	7.938	4	6220	18600	74	102	32	6	3.5	95
			3	4510	11150		82				40
4	5770	14870	75	92	40	6	3.5	66			
63	6	3.969	4	2610	10550	80	56	25	6	3.5	73
			6	3700	15830		70	32			107
	8	4.762	4	3375	12200	82	70	32	6	3.5	76
			6	4780	18300		91	40			111
	10	6.35	4	5020	16450	85	79	32	8	4.0	79
			6	7110	24680		85	40			116
	12	7.938	4	6580	19430	90	95	40	8	4.0	80
			6	9320	29150		123	50			118
80	10	6.35	4	5510	21200	105	79	32	8	4.0	95
			6	7810	31800		102	40			140
	12	7.938	4	7500	25700	110	95	40	8	4.0	98
			6	10620	38550		123	50			143
	20	9.525	3	9770	31700	115	126	50	10	5.0	97
			4	12510	42270		149	63			127
100	10	6.35	3	4760	20090	125	72	50	10	5	91
			4	6090	26790		82				120
			5	7380	33490		94				148
			6	8630	40190		104				176
	16	9.525	4	14440	54960	135	128	63	10	5	140
			5	17490	68700		77				173
			6	20460	82440		162				205
	20	9.525	4	14440	54960	135	144	63	10	5	140
			5	17490	68700		164				173
			6	20460	82440		187				205

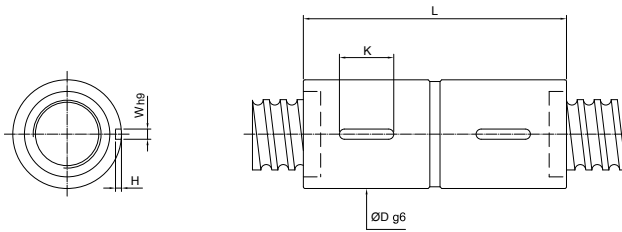

單位:mm

螺桿尺寸		鋼珠直徑	循環圈數	基本額定負荷(kgf)		螺帽		鍵槽			剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)	Co(靜負荷)	Dg6	L	K	W	H	kgf/μm
16	5	3.175	3	765	1240	28	75	20	3	1.8	35
			4	980	1650		85				47
20	5	3.175	3	860	1710	34	75	20	3	1.8	43
			4	1100	2280		85				56
	6	3.969	3	1080	2050	34	87	20	4	2.5	43
			4	1380	2730		103				56
25	5	3.175	3	980	2300	40	75	20	4	2.5	51
			4	1250	3070		85				67
	6	3.969	3	1275	2740	40	87	20	4	2.5	52
			4	1630	3650		103				68
32	5	3.175	3	1095	3060	48	75	20	4	2.5	63
			4	1400	4080		85				82
			6	1980	6120		105				122
	6	3.969	3	1500	3750	50	87	20	5	3.0	65
			4	1920	5000		103				86
			6	2720	7500		127				125
	8	4.762	3	1820	4230	50	109	25	5	3.0	66
			4	2330	5640		127				86
	10	6.35	3	2605	5310	50	135	25	6	3.5	67
			4	3340	7080		155				89
40	5	3.175	4	1575	5290	55	85	20	4	2.5	100
			6	2230	7940		105				147
	6	3.969	4	2130	6410	55	103	25	5	3.0	103
			6	3020	9620		127				149
	8	4.762	4	2720	7620	60	127	25	5	3.0	105
			6	3850	11430		161				154
	10	6.35	3	3010	7100	65	135	25	6	3.5	82
			4	3850	9470		155				107


RDIC

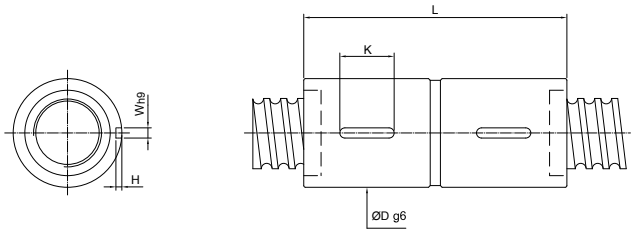

單位:mm

螺桿尺寸		鋼珠直徑	循環圈數	基本額定負荷(kgf)		螺帽		鍵槽			剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)	Co(靜負荷)	Dg6	L	K	W	H	kgf/μm
50	5	3.175	4	1730	6750	66	85	20	4	2.5	119
			6	2450	10130		105	25			174
	6	3.969	4	2380	8250	66	103	25	5	3.0	123
			6	3370	12380		127	32			181
	8	4.762	4	3010	9610	70	127	32	5	3.0	125
			6	4260	14420		161	40			185
63	10	6.35	3	3430	9300	74	135	32	6	3.5	99
			4	4390	12400		155	32			129
			6	6220	18600		197	40			191
	12	7.938	3	4510	11150	75	161	40	6	3.5	101
			4	5770	14870		185	50			132
80	6	3.969	4	2610	10550	80	106	25	6	3.5	146
			6	3700	15830		130	32			217
	8	4.762	4	3375	12200	82	131	32	6	3.5	151
			6	4780	18300		165	40			222
	10	6.35	4	5020	16450	85	160	32	8	4.0	158
			6	7110	24680		202	40			232
100	12	7.938	4	6580	19430	90	185	40	8	4.0	161
			6	9320	29150		238	50			236
	10	6.35	3	4760	20090	105	132	50	10	5.0	173
			4	6090	26790		164				228
			5	7380	33490		174				281
			6	8630	40190		204				334
160	16	9.525	4	14440	54960	135	240	63	10	5.0	266
			5	17490	68700		274				329
			6	20460	82440		306				391
	20	9.525	4	14440	54960	135	284	63	10	5.0	266
			5	17490	68700		324				329
200			6	20460	82440		366				391


FSDC

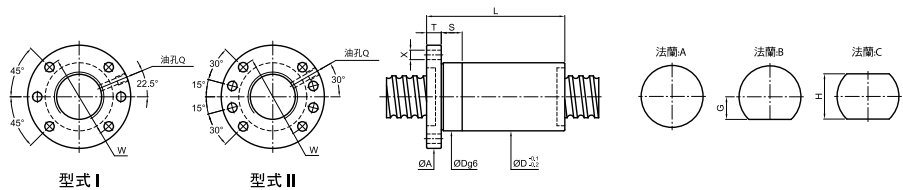

單位:mm

螺桿尺寸		鋼珠 尺寸	循環 圈數	修正後額定負荷(kgf)		螺帽		法蘭						配合	油孔	螺絲孔	剛性
外徑	導程			動負荷 (1×10 ⁶ REV) Cam	靜負荷 Coam	Dg6	L	A	T	W	G	H	TYPE	S	Q	X	kgf/μm
12	4	2.381	3	610	1190	24	28	44	10	34	16	32	I	10	M6×1P	4.5	20
	5		3	610	1190		32										20
	10		3	590	1160		45										20
	20		2	390	770		54										14
14	4	2.381	3	680	1430	26	28	46	10	36	16	32	I	10	M6×1P	4.5	23
	5	3.175	3	820	1520	28	32	49	10	39	16	32	I	10	M6×1P	4.5	25
15	5	3.175	3	850	1640	29	35	51	10	39	16	38	I	10	M6×1P	5.5	26
	10		3	840	1610		47										26
	20		2	560	1050		58										18
16	5	3.175	3	890	1760	29	41	51	10	39	16	38	I	10	M6×1P	5.5	27
	10		3	870	1740	29	50										27
	16		2	600	1150	29	51										19
20	4	2.381	3	780	2000	32	28	54	12	42	19	38	I	12	M6×1P	5.5	29
	5	3.175	4	1300	3030	36	40	62	12	49	19	38	I	12	M6×1P	6.6	43
	10		3	990	2220		47										33
	20		2	670	1450		56										23
	6	3.969	3	1540	3310	37	38	62	12	49	19	38	I	12	M6×1P	6.6	34
	8		3	1540	3300		45										34
	10	4.762	4	2560	5530	40	62	62	12	51	24	48	I	15	M6×1P	6.6	47
	4	2.381	3	870	2560	36	28	62	12	49	19	38	I	12	M6×1P	6.6	34
25	5	3.175	4	1440	3840	40	41	62	12	51	24	48	I	15	M6×1P	6.6	50
	10		3	1100	2810		50										38
	15		4	1410	3780		81										50
	20	4.762	2	750	1840	45	60	65	15	54	25.5	51	I	15	M6×1P	6.6	26
	25		2	730	1810		71										26
	6		4	2250	5710		45										53
	12	3.969	4	2240	5660	43	70	64	12	51	22	44	I	15	M6×1P	6.6	53
	25	6.35	2	1160	2720	51	70	84	16	67	32	64	I	15	M6×1P	9	28
	8		4	2880	6890		55										55
	10		4	2880	6870		63										55
	16	6.35	4	2830	6790	45	85	65	15	54	25.5	51	I	15	M6×1P	6.6	55
	20		2	1470	3180		61										29
	10		5	5050	11500	51	78	84	16	67	32	64	I	15	M6×1P	9	72


註：Cam與Coam分別表示修正後的動態與靜態負載，其計算方式依ISO-3408-5的標準。

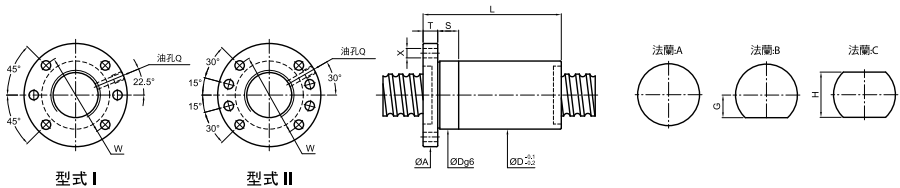

單位:mm

螺桿尺寸		鋼珠 尺寸	循環 圈數	修正後額定負荷(kgf)		螺帽		法蘭						配合	油孔	螺絲 孔	剛性
外徑	導程			動負荷 (1×10 ⁶ REV.) Cam	靜負荷 Coam	Dg6	L	A	T	W	G	H	TYPE	S	Q	X	kgf/μm
28	5	3.175	5	1850	5460	43	48	65	12	51	24	48	I	15	M8×1P	6.6	67
	6	3.969	5	2880	7980	46	52	66	12	50	26	52	I	15	M8×1P	6.6	70
	8		3	2350	5720		46										46
	10	4.762	3	2340	5710	48	52	74	12	60	30	60	I	15	M8×1P	6.6	46
	16		5	3680	9690		102										73
	12	6.35	5	5280	12530	54	78	87	16	72	34.5	69	I	15	M8×1P	9	77
	12		5	5270	12500		88										77
32	5	3.175	4	1610	4970	50	41	87	16	72	34.5	69	I	15	M8×1P	9	61
	6		5	3050	9140		52										77
	10	3.969	4	2550	7500	53	62	87	16	72	34.5	69	I	15	M8×1P	9	63
	32		2	1300	3540		84										40
	8		5	3900	10930		67										80
	10		5	3890	10910		77										80
	12	4.762	5	3890	10890	53	87	87	16	72	34.5	69	I	15	M8×1P	9	80
	15		5	3860	10850		116										80
	20		2	1700	4230		70										34
	32		2	1640	4120		84										34
	10		5	4900	13360		78										84
	12		5	4890	13340		88										84
	16	5.556	5	4860	13280	55	107	87	16	72	34.5	69	I	15	M8×1P	9	79
	20		3	3140	8110		87										53
	10		5	5720	14490		78										85
	12	6.35	5	5710	14470	57	88	87	16	72	34.5	69	I	15	M8×1P	9	85
	16		4	4520	11100		92										69
	20		3	3530	8340		88										54


註：Cam與Coam分別表示修正後的動態與靜態負載，其計算方式依ISO-3408-5的標準。

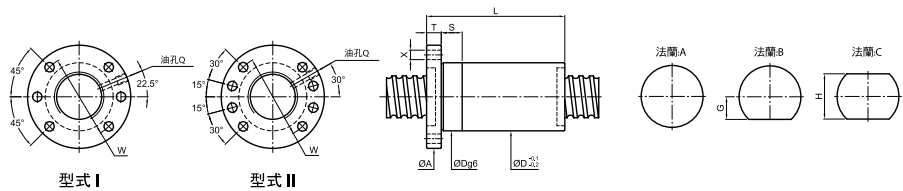

單位:mm

螺桿尺寸		鋼珠 尺寸	循環 圈數	修正後額定負荷(kgf)		螺帽		法蘭						配合	油孔	螺絲 孔	剛性
外徑	導程			動負荷 (1×10 ⁶ REV.) Cam	靜負荷 Coam	Dg6	L	A	T	W	G	H	TYPE	S	Q	X	kgf/μm
36	8	4.762	5	4170	12580	56	63	80	11	68	34	68	I	15	M8×1P	9	86
	10		5	6050	16460		78										93
	12		5	6080	16430		88										93
	16	6.35	5	6050	16360	61	109	91	18	76	34	68	II	15	M8×1P	9	93
	20		4	4910	12890		109										76
	36		2	2570	6250		95										41
38	10		5	6260	17740		80										97
	12	6.35	5	6260	17410	63	88	93	18	78	35	70	II	20	M8×1P	9	97
	16		5	6220	17350		109										97
	40		3	3830	10220		142										71
40	5	3.175	4	1760	6260	58	42	91	18	76	34	68	II	15	M8×1P	9	71
	6	3.969	5	3420	11810	58	52	91	18	76	34	68	II	15	M8×1P	9	92
	8	4.762	4	3610	11260	60	56	91	18	76	34	68	II	15	M8×1P	9	77
	10		5	6430	18440		78										101
	12		5	6420	18410		88										101
	15	6.35	5	6380	18350	65	103	95	18	80	36	72	II	20	M8×1P	9	101
	16		5	6390	18330		108										101
	20		4	5190	14450												82
	40		2	2700	6950		110	98	18	83	37	74	II	20	M8×1P	11	43
	12	7.144	5	7530	20800												103
	16		5	7500	20730	70	90	98	18	83	37	74	II	20	M8×1P	11	103

註：Cam與Coam分別表示修正後的動態與靜態負載，其計算方式依ISO-3408-5的標準。

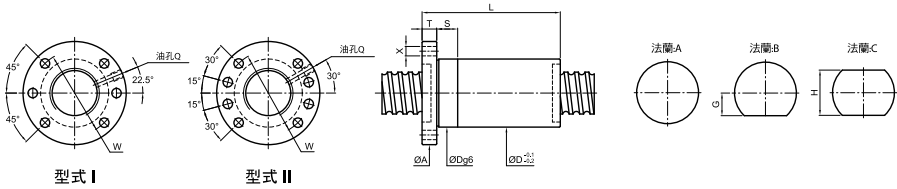


單位:mm

螺桿尺寸		鋼珠尺寸	循環圈數	修正後額定負荷(kgf)		螺帽		法蘭						配合	油孔	螺絲孔	剛性
外徑	導程			動負荷 (1×10 ⁵ REV.) Cam	靜負荷 Coam	Dg6	L	A	T	W	G	H	TYPE	S	Q	X	kgf/μm
45	8	4.762	4	3770	12580	66	55	98	18	83	37	74	II	20	M8×1P	11	84
	10		5	6910	21330		78										110
	12	6.35	5	6910	21310	70	89	105	18	88	40	80	II	20	M8×1P	11	110
	16		5	6880	21250		111										110
	12		5	7930	23300		88										113
	20	7.144	4	6440	18340	73	110	105	18	88	40	80	II	20	M8×1P	11	91
50	5	3.175	5	2360	9950	70	48	105	18	88	40	80	II	20	M8×1P	11	105
	8	4.762	5	4780	17550	70	64	105	18	88	40	80	II	20	M8×1P	11	109
	10		5	7160	23320		78										119
	12		5	7150	23300		90										119
	16		5	7120	23250	75	109	118	18	100	46	92	II	20	M8×1P	11	119
	20		3	4460	13520		95										74
	20	7.938	4	7810	22680	80	114	121	18	104	50	100	II	25	M8×1P	11	101
55	12	6.35	5	7340	25280	80	96	118	18	100	46	92	II	20	M8×1P	11	128
63	10	6.35	5	7800	29210	88	84	135	22	115	50	110	II	20	M8×1P	11	141
	16	9.525	5	13640	43620	102	116	147	20	127	56	112	II	25	M8×1P	14	167
80	20		5	15350	56760		143										196
	25	9.525	4	12530	44860	118	146	165	25	145	65	130	II	25	M8×1P	14	159
	30		3	9610	32980		134										121

註：Cam與Coam分別表示修正後的動態與靜態負載，其計算方式依ISO-3408-5的標準。


FDDC

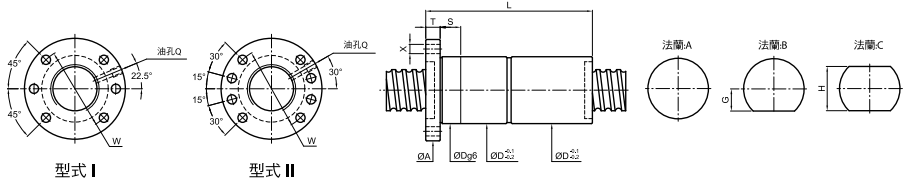

單位:mm

螺桿尺寸		鋼珠 尺寸	循環 圈數	修正後額定負荷(kgf)		螺帽		法蘭						配合	油孔	螺絲 孔	剛性
外徑	導程			動負荷 (1×10 ⁴ REV.) Cam	靜負荷 Coam	Dg6	L	A	T	W	G	H	TYPE	S	Q	X	kgf/μm
20	4	2.381	3	780	2000	32	61	54	12	42	19	38	I	12	M6×1P	5.5	44
	5		4	1300	3030		80										65
	10	3.175	3	990	2220	36	97	62	12	49	19	38	I	12	M6×1P	6.6	50
	20		2	670	1450		116										33
	6	3.969	3	1540	3310	37	81	62	12	49	19	38	I	12	M6×1P	6.6	51
	8		3	1540	3300		93										51
	10	4.762	4	2560	5530	40	107	62	12	51	24	48	I	15	M6×1P	6.6	70
	4	2.381	3	870	2560	36	60	62	12	49	19	38	I	12	M6×1P	6.6	53
25	5		4	1440	3840		81										77
	10		3	1100	2810		100										58
	15	3.175	4	1410	3780	40	166	62	12	51	24	48	I	15	M6×1P	6.6	77
	20		2	750	1840		120										39
	25		2	730	1810		146										39
	6		4	2250	5710		87										80
	12	3.969	4	2240	5660	43	142	64	12	51	22	44	I	15	M6×1P	6.6	80
	25		2	1160	2720		145										41
	8		4	2880	6890		111										83
	10		4	2880	6870		128										83
	16	4.762	4	2830	6790	45	173	65	15	54	25.5	51	I	15	M6×1P	6.6	83
	20		2	1470	3180		122										42
	10	6.35	5	5050	11500	51	153	84	16	67	32	64	I	15	M6×1P	9	108

註：Cam與Coam分別表示修正後的動態與靜態負載，其計算方式依ISO-3408-5的標準。

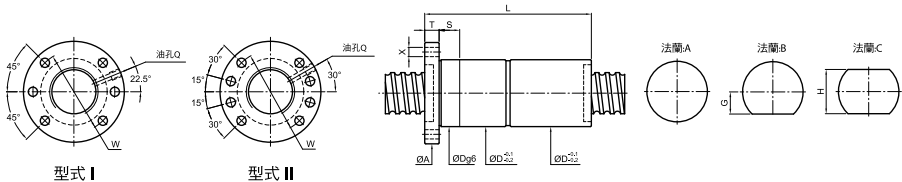


單位:mm

螺桿尺寸		鋼珠 尺寸	循環 圈數	修正後額定負荷(kgf)		螺帽		法蘭						配合	油孔	螺絲 孔	剛性
外徑	導程			動負荷 (1×10 ⁶ REV.) Cam	靜負荷 Coam	Dg6	L	A	T	W	G	H	TYPE	S	Q	X	kgf/μm
28	5	3.175	5	1850	5460	43	93	65	12	51	24	48	I		M8×1P	6.6	104
	6	3.969	5	2880	7980	46	106	66	12	50	26	52	I		M8×1P	6.6	108
	8		3	2350	5720		94										69
	10	4.762	3	2340	5710	48	102	74	12	60	30	60	I	15	M8×1P	6.6	69
	16		5	3680	9690		206										112
	10	6.35	5	5280	12530	54	158	87	16	72	34.5	69	I		M8×1P	9	118
	12		5	5270	12500		172										118
32	5	3.175	4	1610	4970	50	81	87	16	72	34.5	69	I	15	M8×1P	9	93
	6		5	3050	9140		106										120
	10	3.969	4	2550	7500	53	126	87	16	72	34.5	69	I	15	M8×1P	9	96
	32		2	1300	3540		172										60
	8		5	3900	10930		132										124
	10		5	3890	10910		147										124
	12	4.762	5	3890	10890	53	171	87	16	72	34.5	69	I	15	M8×1P	9	124
	15		5	3860	10850		221										124
	20		2	1700	4230		140										51
	32		2	1640	4120		186										51
	10		5	4900	13360		153										129
	12	5.556	5	4890	13340	55	172	87	16	72	34.5	69	I	15	M8×1P	9	129
	16		5	4860	13280		211										121
	20		3	3140	8110		177										79
	10		5	5720	14490		153										131
	12	6.35	5	5710	14470	57	172	87	16	72	34.5	69	I	15	M8×1P	9	131
	16		4	4520	11100		180										105
	20		3	3530	8340		178										80

註：Cam與Coam分別表示修正後的動態與靜態負載，其計算方式依ISO-3408-5的標準。


FDDC

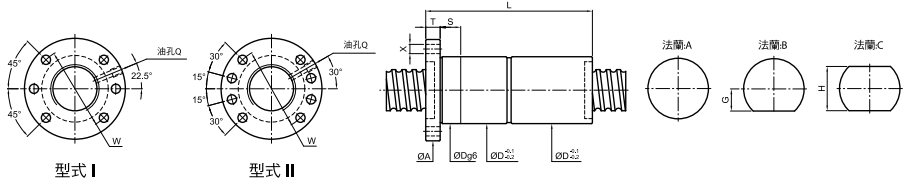

單位:mm

螺桿尺寸		鋼珠 尺寸	循環 圈數	修正後額定負荷(kgf)		螺帽		法蘭						配合	油孔	螺絲 孔	剛性
外徑	導程			動負荷 (1×10 ⁶ REV.) Cam	靜負荷 Coam	Dg6	L	A	T	W	G	H	TYPE	S	Q	X	kgf/μm
36	8	4.762	5	4170	12580	56	127	80	11	68	34	68	II	15	M8×1P	9	133
	10		5	6050	16460		153										142
	12		5	6080	16430		172										142
	16	6.35	5	6050	16360	61	213	91	18	76	34	68	II	15	M8×1P	9	142
	20		4	4910	12890		217										115
	36		2	2570	6250		194										59
38	10		5	6260	17740		155										149
	12	6.35	5	6260	17410	63	172	93	18	78	35	70	II	20	M8×1P	9	149
	16		5	6220	17350		213										149
	40		3	3830	10220		282										106
40	5	3.175	4	1760	6260	58	87	91	18	76	34	68	II	15	M8×1P	9	111
	6	3.969	5	3420	11810	58	108	91	18	76	34	68	II	15	M8×1P	9	142
	8	4.762	4	3610	11260	60	112	91	18	76	34	68	II	15	M8×1P	9	118
	10		5	6430	18440		158										155
	12		5	6420	18410		172										155
	15	6.35	5	6380	18350	65	226	95	18	80	36	72	II	20	M8×1P	9	155
	16		5	6390	18330		212										155
	20		4	5190	14450		220										125
	40		2	2700	6950		210	98	18	83	37	74	II	20	M8×1P	11	64
	12	7.144	5	7530	20800	70	174	98	18	83	37	74	II	20	M8×1P	11	158
	16		5	7500	20730		212										158


註：Cam與Coam分別表示修正後的動態與靜態負載，其計算方式依ISO-3408-5的標準。

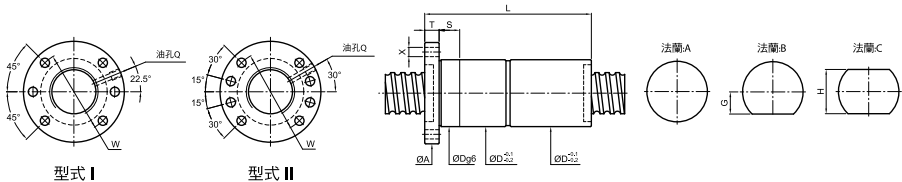

單位:mm

螺桿尺寸		鋼珠 尺寸	循環 圈數	修正後額定負荷(kgf)		螺帽		法蘭						配合	油孔	螺絲 孔	剛性
外徑	導程			動負荷 (1×10 ⁶ REV.) Cam	靜負荷 Coam	Dg6	L	A	T	W	G	H	TYPE	S	Q	X	kgf/μm
45	8	4.762	4	3770	12580	66	114	98	18	83	37	74	II	20	M8×1P	11	130
	10		5	6910	21330		158										170
	12	6.35	5	6910	21310	70	171	105	18	88	40	80	II	20	M8×1P	11	170
	16		5	6880	21250		215										170
	12	7.144	5	7930	23300	73	168	105	18	88	40	80	II	20	M8×1P	11	173
	20		4	6440	18340		220										139
50	5	3.175	5	2360	9950	70	98	105	18	88	40	80	II	20	M8×1P	11	164
	8	4.762	5	4780	17550	70	128	105	18	88	40	80	II	20	M8×1P	11	169
	10		5	7160	23320		158										185
	12	6.35	5	7150	23300	75	174	118	18	100	46	92	II	20	M8×1P	11	185
	16		5	7120	23250		215										185
	20		3	4460	13520	75	185	118	18	100	46	92	II	20	M8×1P	11	112
55	20	7.938	4	7810	22680	80	220	121		104							154
	12	6.35	5	7340	25280	80	174	118	18	100	46	92	II	20	M8×1P	11	198
	10	6.35	5	7800	29210	88	164	135	22	115	50	100	II	20	M8×1P	14	220
	16	9.525	5	13640	43620	102	228	147	20	127	56	112		25			257
	20		5	15350	56760		283										305
	25	9.525	4	12530	44860	118	296	165	25	145	65	130	II	25	M8×1P	14	245
80	30		3	9610	32980		254										185


註：Cam與Coam分別表示修正後的動態與靜態負載，其計算方式依ISO-3408-5的標準。

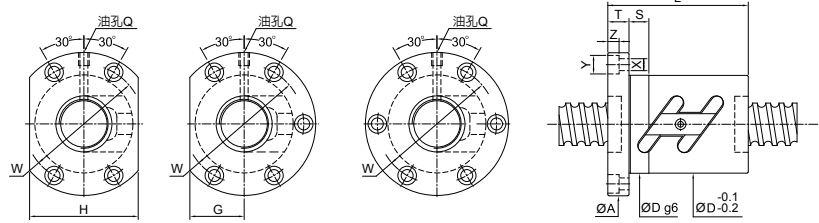

單位:mm


螺桿尺寸		鋼珠 直徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭						配合	螺絲孔				油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	G	H	S	X	Y	Z	Q	kgf/ μm		
10	3	2.000	2.5×1	250	430		37												9	
	4	2.000	2.5×1	250	430	26	40	46	10	36	14	28	10	4.5	8	4.5	M6×1P		9	
	5	2.000	2.5×1	250	430		42												9	
12	4	2.381	2.5×1	380	640		40												12	
	5	2.381	2.5×1	380	640	30	42	50	10	40	16	32	10	4.5	8	4.5	M6×1P		12	
14	4	2.381	2.5×1	410	750		40												14	
	5	3.175	2.5×1	675	1145	34	42	57	11	45	17	34	10	4.5	9.5	5.5	M6×1P		15	
15	4	2.381	2.5×1	420	800		40												14	
	5	3.175	2.5×1	680	1210	34	42	57	10	45	17	34	10	5.5	9.5	5.5	M6×1P		15	
	10	3.175	2.5×1	680	1210		55												16	
16	4	2.381	1.5×2	490	1010		44												18	
			2.5×1	430	850	34	41	57	11	45	17	34	10	5.5	9.5	5.5	M6×1P		15	
			3.5×1	560	1180		42												21	
	5	3.175	1.5×2	805	1525		45												19	
			2.5×1	690	1270	40	41	63	11	51	21	42	15	5.5	9.5	5.5	M6×1P		16	
			2.5×2	1250	2540		56												31	
			3.5×1	920	1780		46												22	
	6	3.175	1.5×2	805	1525		52												19	
			2.5×1	690	1270	40	44	63	11	51	21	42	15	5.5	9.5	5.5	M6×1P		16	
			3.5×1	920	1780		52												22	
10	3.175	2.5×1	690	1270	40	56	63	11	51	21	42	15	5.5	9.5	5.5	M6×1P		16		
20	4	2.381	1.5×2	530	1270		44												21	
			2.5×1	480	1060		40						10						18	
			2.5×2	820	2120	40	50	63.5	11	51	21	42	15	5.5	9.5	5.5	M6×1P		35	
			3.5×1	600	1480		43						10						25	
	5	3.175	1.5×2	965	2070		45						15						24	
			2.5×1	830	1730		42						10						20	
			2.5×2	1510	3460	44	56	67	11	55	26	52	15	5.5	9.5	5.5	M6×1P		39	
			3.5×1	1110	2420		46						15						26	
	6	3.969	1.5×2	1285	2545		56						15						24	
			2.5×1	1100	2120	48	49	71	11	59	27	54	10	5.5	9.5	5.5	M6×1P		20	
			3.5×1	1470	2970		56						15						28	
	8	3.969	1.5×2	1285	2545		61						15						24	
			2.5×1	1100	2120	48	54	75	13	61	27	54	15	6.6	11	6.5	M6×1P		20	
			3.5×1	1470	2970		62						15						28	

FSWC

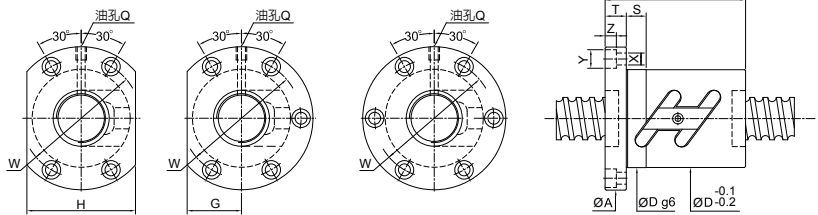

單位:mm


螺桿尺寸		鋼珠 直徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭						配合	螺絲孔				油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	G	H	S	X	Y	Z	Q	kgf/ μm		
25	4	2.381	1.5×2	600	1630	44													26	
			2.5×1	510	1355	40													22	
			2.5×2	930	2710	46	69	11	57	26	52	15	5.5	9.5	5.5		M6×1P	42		
			3.5×1	680	1900	42													30	
	5	3.175	1.5×2	1065	2575	45													28	
			2.5×1	910	2150	41													24	
			2.5×2	1650	4300	50	73	11	61	28	56	15	5.5	9.5	5.5		M6×1P	46		
			3.5×1	1210	3010	46													33	
	6	3.969	1.5×2	1420	3215	56													29	
			2.5×1	1210	2680	49													24	
			2.5×2	2190	5360	53	76	11	64	29	58	15	5.5	9.5	5.5		M6×1P	47		
			3.5×1	1610	3750	56													34	
	8	4.762	1.5×2	1820	3840	61													30	
			2.5×1	1560	3200	58	61	85	13	71	32	64	15	6.6	11	6.5	M6×1P	25		
			3.5×1	2080	4480	66													35	
	10	4.762	1.5×2	1820	3840	71													30	
			2.5×1	1560	3200	58	65	85	15	71	32	64	15	6.6	11	6.5	M6×1P	25		
			3.5×1	2080	4480	75													35	
	12	3.969	2.5×1	1210	2680	53	60	76	11	64	32	64	15	5.5	9.5	5.5	M6×1P	24		
28	5	3.175	1.5×2	1110	2960	46												31		
			2.5×1	950	2470	42												26		
			2.5×2	1720	4940	55	83	12	69	31	62	15	6.6	11	6.5		M8×1P	50		
			3.5×1	1270	3460	47												36		
	6	3.969	1.5×2	1480	3605	57												32		
			2.5×1	1270	3000	50												26		
			2.5×2	2300	6000	63	83	12	69	31	62	15	6.6	11	6.5		M8×1P	51		
			3.5×1	1690	4200	57												37		
	8	4.762	1.5×2	1935	4325	65												33		
			2.5×1	1650	3600	Dg6	63	93	15	76	36	72	15	9	14	8.5	M8×1P	28		
			3.5×1	2200	5040	68												38		
	10	4.762	1.5×2	1935	4325	74												33		
			2.5×1	1650	3600	60	67	93	15	76	36	72	15	9	14	8.5	M8×1P	28		
			3.5×1	2200	5040	77												38		

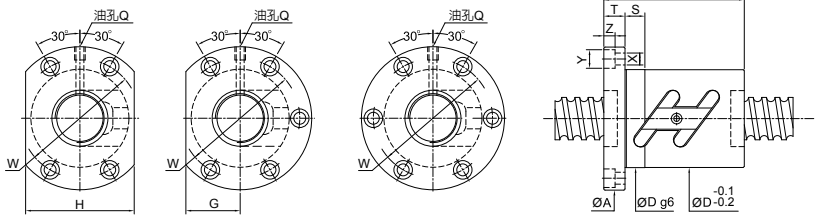

單位:mm


螺桿尺寸		鋼珠 直徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭						配 合		螺絲孔				油孔	剛 性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	G	H	S	X	Y	Z	Q	kgf/ μm			
32	4	2.381	2.5×1	565	1750	54	40	81	12	67	32	64	15	6.6	11	6.5	M6×1P		26		
			2.5×2	1020	3500		50												50	50	
	5	3.175	1.5×2	1180	3410	58	47	85	12	71	32	64	15	6.6	11	6.5	M8×1P		34		
			2.5×1	1010	2840		43												29		
			2.5×2	1830	5680		57												56		
			2.5×3	2590	8520		72												82		
			3.5×1	1350	3980		47												40		
	6	3.969	1.5×2	1560	4135	62	57	88	12	75	34	68	15	6.6	11	6.5	M8×1P		35		
			2.5×1	1330	3450		45												29		
			2.5×2	2410	6900		63												57		
			3.5×1	1770	4830		57												40		
	8	4.762	1.5×2	2010	5010	66	64	98	15	82	38	76	15	9	14	8.5	M8×1P		36		
			2.5×1	1720	4180		63												30		
			2.5×2	3120	8360		80												59		
			3.5×1	2300	5850		68												42		
	10	6.35	1.5×2	3000	6530	74	78	108	15	90	41	82	15	9	14	8.5	M8×1P		38		
			2.5×1	2570	5440		68												32		
			2.5×2	4660	10880		97												61		
			3.5×1	3430	7620		78												44		
	12	6.35	1.5×2	3000	6530	74	88	108	18	90	41	82	15	9	14	8.5	M8×1P		38		
			2.5×1	2570	5440		77												32		
			2.5×2	4660	10880		110												62		
3.5×1			3430	7620	91		44														
36	5	3.175	1.5×2	1240	3850	65	50	98	15	82	38	76	15	9	14	8.5	M8×1P		38		
			2.5×2	1920	6420		60												62		
			2.5×3	2720	9630		75												90		
			3.5×1	1410	4490		50												44		
	6	3.969	2.5×2	2600	7900	65	66	98	15	82	38	76	15	9	14	8.5	M8×1P		63		
			2.5×3	3680	11850		84												93		
	10	6.35	1.5×2	3180	7410	75	81	118	18	98	45	90	15	11	17.5	11	M8×1P		41		
			2.5×1	2720	6180		71												35		
			2.5×2	4930	12360		103												68		
			3.5×1	3630	8650		81												48		
	12	6.35	2.5×1	2720	6180	75	77	118	18	98	45	90	15	11	17.5	11	M8×1P		35		
			2.5×2	4930	12360		110												68		
				3.5×1	3630	8650		91											48		

FSWC

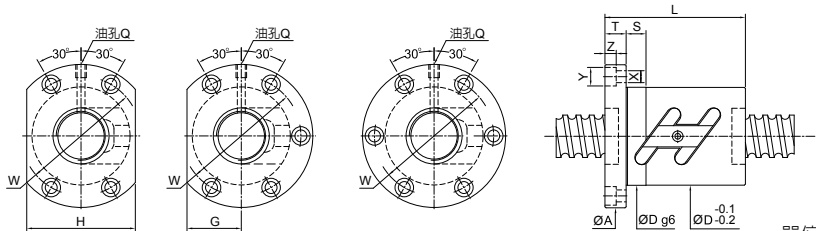

單位:mm


螺桿尺寸		鋼珠 直徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭						配 合		螺絲孔				油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)	Dg6	L	A	T	W	G	H	S	X	Y	Z	Q	kgf/ μm				
40	5	3.175	1.5×2	1280	4275	50														41	
			2.5×1	1090	3560	48														34	
			2.5×2	1980	7120	67	60	101	15	83	39	78	15	9	14	8.5	M8×1P			66	
			2.5×3	2800	10680	75														98	
			3.5×1	1450	4980	50														47	
	6	3.969	1.5×2	1750	5300	60														42	
			2.5×1	1500	4420	53														35	
			2.5×2	2720	8840	70	66	104	15	86	40	80	15	9	14	8.5	PT1/8"			69	
			2.5×3	3850	13260	84														101	
			3.5×1	2000	6190	60														49	
	8	4.762	1.5×2	2220	6320	64														43	
			2.5×1	1900	5270	74	63	108	15	90	41	82	15	9	14	8.5	PT1/8"			36	
			2.5×2	3450	10540	83														70	
			3.5×1	2540	7380	68														50	
	10	6.35	1.5×2	3370	8335	81														45	
			2.5×1	2880	6950	82	71	124	18	102	47	94	20	11	17.5	11	PT1/8"			35	
			2.5×2	5220	13900	103														74	
			3.5×1	3840	9730	81														52	
	12	6.35	2.5×1	2880	6950	77														38	
			2.5×2	5220	13900	86	112	128	18	106	48	96	20	11	17.5	11	PT1/8"			74	
			3.5×1	3840	9730	91														52	
45	10	6.35	2.5×2	5480	15700	101													81		
			2.5×3	7760	23550	88	131	132	18	110	50	100	20	11	17.5	11	PT1/8"			119	
	12	7.144	2.5×1	3550	8950	84													43		
			2.5×2	6440	17900	90	112	132	18	110	50	100	20	11	17.5	11	PT1/8"			82	
			2.5×3	9120	26850	148														121	

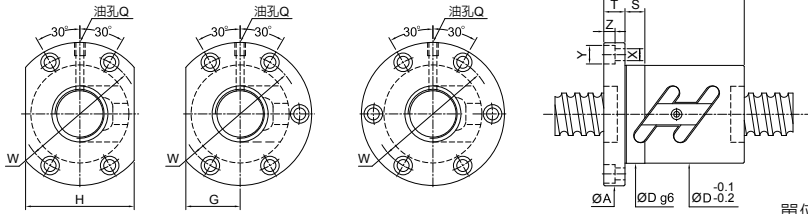

單位:mm


螺桿尺寸		鋼珠 直徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭					配合	螺絲孔			油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	G	H		S	X	Y		
50	5	3.175	1.5×2	1410	5305		50											49
			1.5×3	2000	7960	80	60	114	15	96	43	86	15	9	14	8.5	PT1/8"	72
			2.5×2	2190	8840	60												80
			3.5×1	1610	6190	50												57
	6	3.969	1.5×2	1920	6600		60											50
			2.5×2	2980	11000	84	67	118	15	100	45	90	15	9	14	8.5	PT1/8"	82
			2.5×3	4220	16500	85												121
			3.5×1	2190	7700	60												58
	8	4.762	1.5×2	2515	7810		68											52
			2.5×2	3900	13020	87	86	128	18	107	49	98	20	11	17.5	11	PT1/8"	85
			2.5×3	5520	19530	109												125
			3.5×1	2870	9110	71												60
	10	6.35	1.5×2	3725	10450		81											54
			2.5×1	3190	8710		71											45
			2.5×2	5790	17420	93	101	135	18	113	51	102	20	11	17.5	11	PT1/8"	88
			2.5×3	8200	26130		131											130
	12	7.144	3.5×1	4260	12190		81											63
			2.5×1	3700	10050	100	88	146	22	122	55	110	20	14	20	13	PT1/8"	46
			2.5×2	6710	20100		116											89
55	10	6.35	2.5×2	6005	19540	102	101	144	18	122	54	108	20	11	17.5	11	PT1/8"	95
			2.5×3	8510	29310		131											140
63	10	6.35	2.5×1	3510	11200		75										55	
			2.5×2	6370	22400	108	105	154	22	130	58	116	20	14	20	13	PT1/8"	106
			2.5×3	9020	33600		135											156
	12	7.938	2.5×1	4770	13780		88										59	
			2.5×2	8650	27560	115	124	161	22	137	61	122	20	14	20	13	PT1/8"	113
			2.5×3	12250	41340		160											167
80	10	6.35	2.5×2	7130	28500	130	105	176	22	152	66	132	20	14	20	13	PT1/8"	129
			2.5×3	10100	42750		134											190
	12	7.938	2.5×2	9710	35560	136	124	182	22	158	68	136	20	14	20	13	PT1/8"	137
			2.5×3	13760	53340		160											202
	16	9.525	2.5×2	16450	59280	143	160	204	28	172	77	154	30	18	26	17.5	PT1/8"	170
			2.5×3	23300	88920		208											250

FDWC

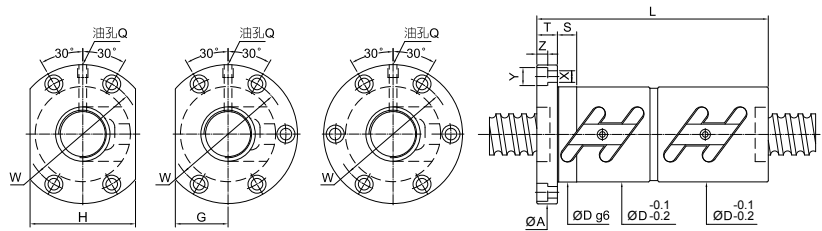

單位:mm


螺桿尺寸		鋼珠 直徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭						配 合	螺絲孔				油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	G	H	S	X	Y	Z	Q	kgf/ μm		
16	4	2.381	1.5×2	490	1010	81													36	
			2.5×1	430	850	34	70	57	11	45	17	34	15	5.5	9.5	5.5	M6×1P	30		
			3.5×1	560	1180	78												42		
	5	3.175	1.5×2	805	1525	90													39	
			2.5×1	690	1270	77													33	
			2.5×2	1250	2540	105	63	11	51	20	40	15	5.5	9.5	5.5	M6×1P	63			
	6	3.175	3.5×1	920	1780	88													45	
			1.5×2	805	1525	90													39	
			2.5×1	690	1270	40	80	63	11	51	20	40	15	5.5	9.5	5.5	M6×1P	33		
			3.5×1	920	1780	90													45	
			20	4	2.381	1.5×2	530	1270	83											42
						2.5×1	480	1060	67											
2.5×2	820	2120				89	63	11	51	24	48	15	5.5	9.5	5.5	M6×1P	69			
3.5×1	600	1480				75											49			
5	3.175	1.5×2	965	2070	99													47		
		2.5×1	830	1730	76													40		
		2.5×2	1510	3460	105	67	11	55	26	52	15	5.5	9.5	5.5	M6×1P	77				
		3.5×1	1110	2420	80											55				
6	3.969	1.5×2	1285	2545	98													49		
		2.5×1	1100	2120	48	82	71	11	59	27	54	15	5.5	9.5	5.5	M6×1P	41			
		3.5×1	1470	2970	93												45			
8	3.969	1.5×2	1285	2545	108													49		
		2.5×2	1100	2120	48	102	75	13	61	28	56	15	6.6	11	6.5	M6×1P	41			
		3.5×1	1470	2970	110												56			

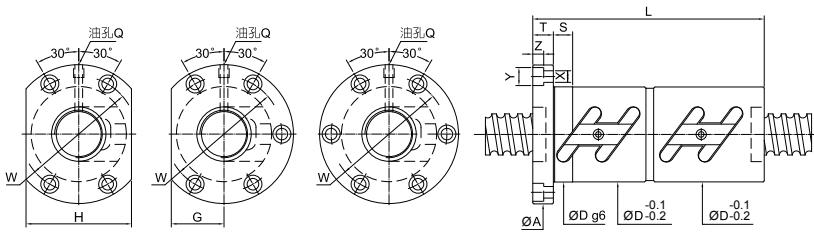

單位:mm


螺桿尺寸		鋼珠 直徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭						配 合	螺絲孔				油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	G	H	S		X	Y	Z	Q		
25	4	2.381	1.5×2	600	1630	83													51	
			2.5×1	510	1355	67													43	
			2.5×2	930	2710	91	69	11	57	26	52	15	5.5	9.5	5.5		M6×1P		84	
			3.5×1	680	1900	75													59	
	5	3.175	1.5×2	1065	2575	80													57	
			2.5×1	910	2150	77													48	
			2.5×2	1650	4300	105	73	11	61	28	56	15	5.5	9.5	5.5		M6×1P		92	
			3.5×1	1210	3010	86													65	
	6	3.969	1.5×2	1420	3215	91													58	
			2.5×1	1210	2680	82													49	
			2.5×2	2190	5360	116	76	11	64	29	58	15	5.5	9.5	5.5		M6×1P		94	
			3.5×1	1610	3750	93													67	
	8	4.762	1.5×2	1820	3840	111													60	
			2.5×1	1560	3200	95	85	13	71	32	64	15	6.6	11	6.5		M6×1P		50	
			3.5×1	2080	4480	111													69	
	10	4.762	1.5×2	1820	3840	134													60	
2.5×1			1560	3200	117	85	15	71	32	64	15	6.6	11	6.5		M6×1P		50		
3.5×1			2080	4480	138													69		
28	5	3.175	1.5×2	1110	2960	86												62		
			2.5×1	950	2470	78												52		
			2.5×2	1720	4940	106	83	12	69	31	62	15	6.6	11	6.5		M8×1P		101	
			3.5×1	1270	3460	86												72		
	6	3.969	1.5×2	1480	3605	98												63		
			2.5×1	1270	3000	89												53		
			2.5×2	2300	6000	117	83	12	69	31	62	15	6.6	11	6.5		M8×1P		103	
			3.5×1	1690	4200	94												73		
	8	4.762	1.5×2	1935	4325	113												66		
			2.5×1	1650	3600	97	93	15	76	36	72	15	9	14	8.5		M8×1P		55	
			3.5×1	2200	5040	113												76		
	10	4.762	1.5×2	1935	4325	134												66		
2.5×1			1635	3600	117	93	15	76	36	72	15	9	14	8.5		M8×1P		55		
3.5×1			2200	5040	138												76			

FDWC

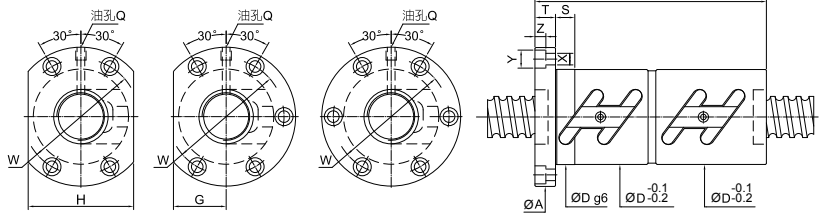

單位:mm


螺桿尺寸		鋼珠 直徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭				配 合		螺絲孔			油孔	剛性	
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	G	H	S	X	Y	Z	Q	kgf/ μm	
32	4	2.381	2.5×1	565	1750	54	68	81	12	67	32	64	15	6.6	11	6.5	M6×1P	52	
			2.5×2	1020	3500		90											101	
	5	3.175	1.5×2	1180	3410	58	82	105	85	12	71	32	64	15	6.6	11	6.5	M8×1P	69
			2.5×1	1010	2840		78												58
			2.5×2	1830	5680		105												112
			2.5×3	2590	8520		136												164
			3.5×1	1350	3980		82												80
	6	3.969	1.5×2	1560	4135	62	100	88	12	75	34	68	15	6.6	11	6.5	M8×1P	70	
			2.5×1	1330	3450		87											59	
			2.5×2	2410	6900		123											114	
			3.5×1	1770	4830		100											81	
	8	4.762	1.5×2	2010	5010	66	113	98	15	82	38	76	15	9	14	8.5	M8×1P	76	
			2.5×1	1720	4180		106											64	
			2.5×2	3120	8360		152											123	
			3.5×1	2300	5850		113											88	
	10	6.35	1.5×2	3000	6530	74	138	108	15	90	41	82	15	9	14	8.5	M8×1P	76	
			2.5×1	2570	5440		118											64	
			2.5×2	4660	10880		177											123	
			3.5×1	3430	7620		148											88	
	12	6.35	1.5×2	3000	6530	74	160	108	18	90	41	82	15	9	14	8.5	M8×1P	76	
			2.5×1	2570	5440		137											64	
			2.5×2	4660	10880		208											124	
3.5×1			3430	7620	160		88												
36	5	3.175	1.5×2	1240	3850	65	91	98	15	82	38	76	15	9	14	8.5	M8×1P	75	
			2.5×2	1920	6420		110											123	
			2.5×3	2720	9630		139											181	
			3.5×1	1410	4490		90											87	
	6	3.969	2.5×2	2600	7900	65	123	98	15	82	38	76	15	9	14	8.5	M8×1P	126	
			2.5×3	3680	11850		159											187	
			8	4.762	2.5×2		3265											9450	70
	10	6.35	1.5×2	3180	7410	75	141	118	18	98	45	90	15	11	17.5	11	M8×1P	83	
			2.5×1	2720	6180		131											70	
			2.5×2	4930	12360		180											136	
			3.5×1	3630	8650		151											96	
	12	6.35	2.5×1	2720	6180	75	137	118	18	98	45	90	15	11	17.5	11	M8×1P	70	
			2.5×2	4930	12360		208											136	
			3.5×1	3630	8650		161											97	

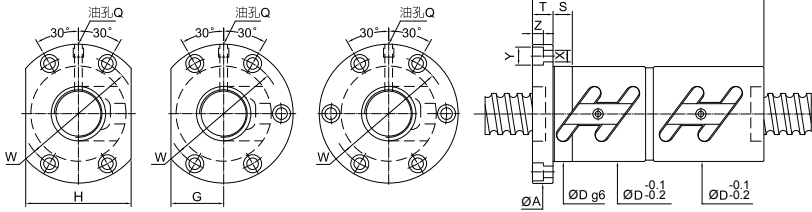

單位:mm

螺桿尺寸		鋼珠 直徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭						配 合	螺絲孔			油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)	Dg6	L	A	T	W	G	H	S	X		Y	Z	Q	kgf/ μm	
40	5	3.175	1.5×2	1280	4275	88													82
			2.5×1	1090	3560	84												69	
			2.5×2	1980	7120	67	108	101	15	83	39	78	15	9	14	8.5	M8×1P	133	
			2.5×3	2800	10680	139												196	
			3.5×1	1450	4980	88												95	
	6	3.969	1.5×2	1750	5300	103													85
			2.5×1	1500	4420	90													71
			2.5×2	2720	8840	70	123	104	15	86	40	80	15	9	14	8.5	PT1/8"	138	
			2.5×3	3850	13260	159												202	
			3.5×1	2000	6190	103												98	
	8	4.762	1.5×2	2220	6320	124													86
			2.5×1	1900	5270	108													73
			2.5×2	3450	10540	152	108	15	90	41	82	15	9	14	8.5	PT1/8"	141		
			3.5×1	2540	7380	125												100	
	10	6.35	1.5×2	3370	8335	141													91
			2.5×1	2880	6950	131													71
			2.5×2	5220	13900	180	124	18	102	47	94	20	11	17.5	11	PT1/8"	148		
			3.5×1	3840	9730	151												105	
	12	6.35	2.5×1	2880	6950	137													76
			2.5×2	5220	13900	86	208	128	18	106	48	96	20	11	17.5	11	PT1/8"	148	
			3.5×1	3840	9730	161												105	
45	6	3.969	2.5×2	2850	9870	123												151	
			2.5×3	4035	14800	80	114	15	96	48	96	15	9	14	8.5	PT1/8"	222		
	8	4.762	2.5×2	3650	11780	158												155	
			2.5×3	5175	17670	85	127	18	105	52	104	20	11	17.5	11	PT1/8"	228		
	10	6.35	2.5×2	5480	15700	180												163	
			2.5×3	7760	23550	88	132	18	110	50	100	20	11	17.5	11	PT1/8"	239		
	12	7.144	2.5×1	3550	8950	140												85	
			2.5×2	6440	17900	90	132	18	110	50	100	20	11	17.5	11	PT1/8"	165		


FDWC

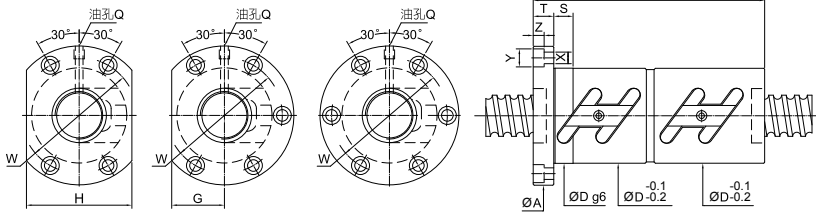

單位:mm


螺桿尺寸		鋼珠 直徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭						配合	螺絲孔				油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	G	H	S		X	Y	Z	Q		
50	5	3.175	1.5×2	1410	5305	108													98	
			1.5×3	2000	7960	128	114	15	96	43	86	15	9	14	8.5	PT1/8"		144		
			2.5×2	2190	8840	113												159		
			3.5×1	1610	6190	108												114		
	6	3.969	1.5×2	1920	6600	111												101		
			2.5×2	2980	11000	123	118	15	100	45	90	15	9	14	8.5	PT1/8"		164		
			2.5×3	4220	16500	159												242		
			3.5×1	2190	7700	107												117		
	8	4.762	1.5×2	2515	7810	127												104		
			2.5×2	3900	13020	156	128	18	107	49	98	20	11	17.5	11	PT1/8"		170		
			2.5×3	5520	19530	208												250		
			3.5×1	2870	9110	127												121		
	10	6.35	1.5×2	3725	10450	151												108		
			2.5×1	3190	8710	132												91		
			2.5×2	5790	17420	180	135	18	113	51	102	20	11	17.5	11	PT1/8"		177		
			2.5×3	8200	26130	243												261		
	12	7.144	3.5×1	4260	12190	151												126		
			2.5×1	3700	10050	140	146	18	122	55	110	20	14	20	13	PT1/8"		92		
			2.5×2	6710	20100	210												179		
	55	10	6.35	2.5×2	6005	19540	181												191	
			2.5×3	8510	29310	243	144	18	122	54	108	20	11	17.5	11	PT1/8"		281		
63	10	6.35	2.5×1	3510	11200	136												110		
			2.5×2	6370	22400	189	154	22	130	58	116	20	14	20	13	PT1/8"		213		
			2.5×3	9020	33600	249												313		
	12	7.938	2.5×1	4760	13820	144												112		
			2.5×2	8650	27560	214	161	22	137	61	122	20	14	20	13	PT1/8"		218		
	16	9.525	2.5×1	8050	23100	200												144		
		2.5×2	14600	46200	296	178	28	150	69	138	20	18	26	17.5	PT1/8"		280			
80	10	6.35	2.5×2	7130	28500	189												258		
			2.5×3	10100	42750	249	176	22	152	66	132	20	14	20	13	PT1/8"		380		
	12	7.938	2.5×2	9710	35560	220												265		
			2.5×3	13760	53340	292	182	22	158	68	136	20	14	20	13	PT1/8"		391		
	16	9.525	2.5×2	16450	59280	290												339		
			2.5×3	23300	88920	386	204	28	172	77	154	30	18	26	17.5	PT1/8"		500		

FSVC

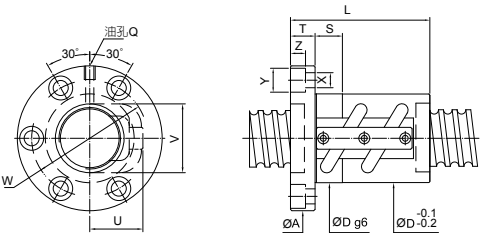

單位:mm


螺桿尺寸		鋼珠 直徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭			配 合	螺絲孔				循環管凸出部		油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W		S	X	Y	Z	U	V	Q	kgf/ μm
32	5	3.175	1.5×2	1180	3410	50													34
			2.5×1	1010	2840	45													29
			2.5×2	1830	5680	50	60	76	12	63	15	6.6	11	6.5	30	38	M6×1P		56
			2.5×3	2590	8520	75													82
			3.5×1	1350	3980	50													40
	6	3.969	1.5×2	1560	4135	55													35
			2.5×1	1330	3450	50													29
			2.5×2	2410	6900	52	68	78	12	65	15	6.6	11	6.5	32	39	M6×1P		57
			3.5×1	1770	4830	55													40
	8	4.762	1.5×2	2010	5010	70													36
			2.5×1	1720	4180	62													30
			2.5×2	3120	8360	54	86	88	16	70	15	9	14	8.5	33	40	M6×1P		59
			3.5×1	2300	5850	70													42
	10	6.35	1.5×2	3000	6530	78													38
			2.5×1	2570	5440	68													32
			2.5×2	4660	10880	57	98	91	16	73	15	9	14	8.5	37	44	M8×1P		61
			3.5×1	3430	7620	78													44
36	6	3.969	2.5×1	1430	3950	50												33	
			2.5×2	2600	7900	55	68	82	12	68	15	6.6	11	6.5	32	42	M6×1P		63
	10	6.35	1.5×2	3180	7410	82												41	
			2.5×1	2720	6180	72													35
			2.5×2	4930	12360	62	102	104	18	82	20	11	17.5	11	40	49	M6×1P		68
			3.5×1	3630	8650	82													48

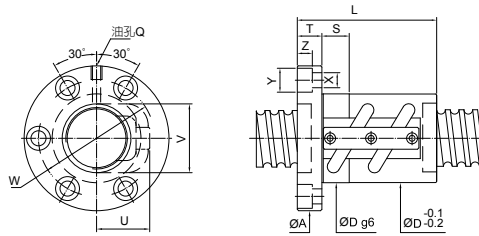

單位:mm



螺桿尺寸		鋼珠 直徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭		配合		螺絲孔		循環管凸出部		油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)	Dg6	L	A	T	W	S	×	Y	Z	U	V	Q	kgf/ μm
40	5	3.175	1.5×2	1280	4270	55											41
			2.5×1	1090	3560	50											34
			2.5×2	1980	7120	58	65	92	16	72	15	9	14	8.5	34	46	66
			2.5×3	2800	10680	80											98
			3.5×1	1450	4980	55											47
	6	3.969	1.5×2	1750	5300	60											42
			2.5×1	1500	4420	54											35
			2.5×2	2720	8840	60	72	94	16	76	15	9	14	8.5	36	47	69
			2.5×3	3850	13260	90											101
			3.5×1	2000	6190	60											49
	8	4.762	1.5×2	2220	6320	70											43
			2.5×1	1900	5270	62	62										36
			2.5×2	3450	10540	86	96	16	78	15	9	14	85	38	48	PT1/8"	70
			3.5×1	2540	7380	70											50
	10	6.35	1.5×2	3370	8335	82											45
			2.5×1	2880	6950	72											35
			2.5×2	5220	13900	102	106	18	85	20	11	17.5	11	42	52	PT1/8"	74
			3.5×1	3840	9730	82											52
45	10	6.35	2.5×1	3020	7850	74	112	18	90	20	11	17.5	11	48	58	PT1/8"	42
			2.5×2	5480	15700	104											81
	12	7.144	2.5×1	3550	8950	87	122	18	97	20	14	20	13	49	60	PT1/8"	43
			2.5×2	6440	17900	123											82

FSVC

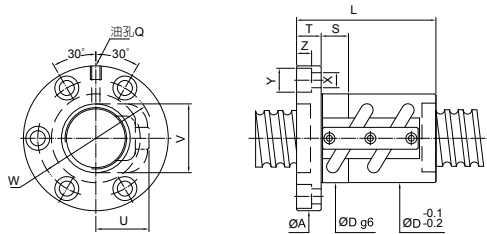

單位:mm


螺桿尺寸		鋼珠 直徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭			配 合	螺絲孔				循環管凸出部		油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)	Dg6	L	A	T	W	S		X	Y	Z	U	V	Q		
50	5	3.175	1.5×2	1410	5305	63													49
			1.5×3	2000	7960	70	73	104	16	86	15	9	14	8.5	40	56	PT1/8"	72	
			3.5×1	1610	6190	63												57	
	6	3.969	2.5×2	2980	11000	72	75	106	16	88	15	9	14	8.5	43	57	PT1/8"	82	
			2.5×3	4220	16500	93												121	
	8	4.762	2.5×2	3900	13020	75	88	116	18	95	20	11	17.5	11	45	59	PT1/8"	85	
			2.5×3	5520	19530		112										125		
	10	6.35	1.5×2	3725	10450	84												54	
			2.5×1	3190	8710	74											45		
			2.5×2	5790	17420	78	104	119	18	98	20	11	17.5	11	48	62	PT1/8"	88	
			2.5×3	8200	26130	134											130		
	12	7.144	3.5×1	4260	12190	84												63	
			2.5×1	3700	10050	82	87	128	22	105	20	14	20	13	52	64	PT1/8"	46	
			2.5×2	6710	20100	123											89		
55	10	6.35	2.5×2	6005	19540	84	100	125	18	103	20	11	17.5	11	54	68	PT1/8"	95	
			2.5×3	8150	29310		130										140		
63	10	6.35	2.5×1	3510	11200	77												55	
			2.5×2	6370	22400	90	107	132	20	110	20	11	17.5	11	53	74	PT1/8"	106	
			2.5×3	9020	33600	137											156		
	12	7.938	2.5×1	4770	13780	88												59	
			2.5×2	8650	27560	94	124	142	22	117	20	14	20	13	57	76	PT1/8"	113	
			2.5×3	12250	41340	160											167		
	16	9.525	2.5×1	8050	23100	100	105	150	22	123	20	14	20	13	62	78	PT1/8"	72	
			2.5×2	14600	46200		153										140		
80	10	6.35	2.5×2	7130	28500	115	109	163	22	137	20	14	20	13	64	91	PT1/8"	129	
			2.5×3	10100	42750		139										190		
	12	7.938	2.5×2	9710	35560	120	125	169	22	143	25	14	20	13	67	93	PT1/8"	137	
			2.5×3	13760	53340		159										202		
	16	9.525	2.5×2	16450	59280	125	156	190	28	154	25	18	26	17.5	70	94	PT1/8"	170	
			2.5×3	23300	88920		204										250		

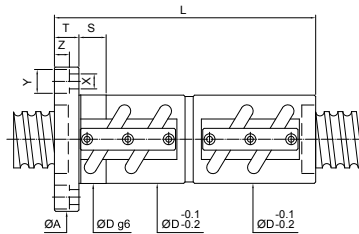

單位:mm


螺桿尺寸		鋼珠 直徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭			配 合	螺絲孔				循環管凸出部		油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W		S	X	Y	Z	U	V		
16	5	3.175	1.5×2	805	1525	90													39
			2.5×1	690	1270	31	80	54	12	41	15	5.5	9.5	5.5	20	23	M6×1P	33	
			2.5×2	1250	2540	110												63	
			3.5×1	920	1780	90												45	
20	5	3.175	1.5×2	965	2070	90				15								47	
			2.5×1	830	1730	35	80	58	12	46	10	5.5	9.5	5.5	22	27	M6×1P	40	
			2.5×2	1510	3460	110				15								77	
			3.5×1	1110	2420	90				15								55	
	6	3.969	1.5×2	1285	2545	104				15								49	
			2.5×1	1100	2120	36	92	60	12	47	10	5.5	9.5	5.5	23	28	M6×1P	41	
25	5	3.175	3.5×1	1470	2970	104				15								56	
			1.5×2	1065	2575	90													57
			2.5×1	910	2150	40	80	64	12	52	15	5.5	9.5	5.5	26	31	M6×1P	48	
			2.5×2	1650	4300	110												92	
	6	3.969	3.5×1	1210	3010	90												65	
			1.5×2	1420	3215	104													58
			2.5×1	1210	2680	42	92	68	12	55	15	5.5	9.5	5.5	28	33	M6×1P	49	
			2.5×2	2190	5360	128												94	
	10	4.762	3.5×1	1610	3750	104												67	
			1.5×2	1820	3840	136													60
28	5	3.175	2.5×1	1560	3200	45	122	72	16	58	15	6.6	11	6.5	29	34	M6×1P	50	
			2.5×2	2080	4480	136													69
			1.5×2	1110	2960	90													62
			2.5×1	950	2470	44	80	70	12	56	15	6.6	11	6.5	28	34	M6×1P	52	
	6	3.969	2.5×2	1720	4940		110												101
			3.5×1	1270	3460	90													72
			1.5×2	1480	3605	110													63
			2.5×1	1270	3000	44	98	70	12	56	15	6.6	11	6.5	28	36	M6×1P	53	
			2.5×2	2300	6000	134													103
			3.5×1	1690	4200	110													73

FDVC

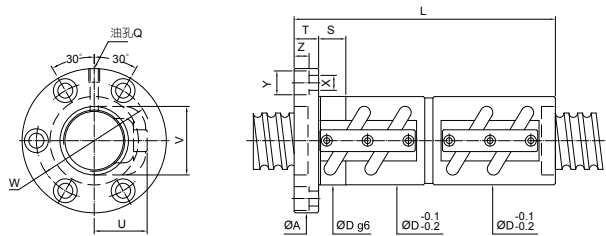

單位:mm


螺桿尺寸		鋼珠 直徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭			配 合		螺絲孔				循環管凸出 部		油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	S	X	Y	Z	U	V	Q	kgf/ μm		
32	5	3.175	1.5×2	1180	3410		90												69	
			2.5×1	1010	2840		80												58	
			2.5×2	1830	5680	50	110	76	12	63	15	6.6	11	6.5	30	38	M6×1P	112		
			2.5×3	2590	8520		140												164	
			3.5×1	1350	3980		90												80	
	6	3.969	1.5×2	1560	4135		104												70	
			2.5×1	1330	3450	52	92	78	12	65	15	6.6	11	6.5	32	39	M6×1P	59		
			2.5×2	2410	6900		128												114	
			3.5×1	1770	4830		104												81	
	8	4.762	1.5×2	2010	5010		126												73	
			2.5×1	1720	4180	54	110	88	16	70	15	9	14	8.5	33	40	M6×1P	61		
			2.5×2	3120	8360		158												118	
			3.5×1	2300	5850		126												84	
10	6.35	1.5×2	3000	6530		142												76		
		2.5×1	2570	5440	57	122	91	16	73	15	9	14	8.5	37	44	M8×1P	64			
		2.5×2	4660	10880		182												123		
36	6	3.969	3.5×1	3430	7620		142											88		
			2.5×1	1430	3950	55	92	82	12	68	15	6.6	11	6.5	32	42	M6×1P	65		
			2.5×2	2600	7900		128												126	
	10	6.35	1.5×2	3180	7410		144												83	
			2.5×1	2720	6180	62	124	104	18	82	20	11	17.5	11	40	49	M6×1P	70		
			2.5×2	4930	12360		184												136	
			3.5×1	3630	8650		144												90	

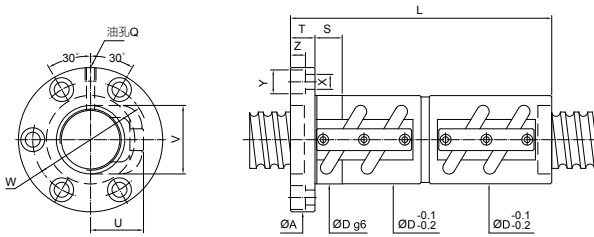

單位:mm



螺桿尺寸		鋼珠 直徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭		配 合	螺絲孔				循環管凸出部		油孔	剛性
外徑	導程			(1×10 ⁶ REV) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T		W	S	X	Y	Z	U		
40	5	3.175	1.5×2	1280	4275	94												82
			2.5×1	1090	3560	84												69
			2.5×2	1980	7120	58	114	92	16	72	15	9	14	8.5	34	46	M8×1P	133
			2.5×3	2800	10680	144												196
			3.5×1	1450	4980	94												95
	6	3.969	1.5×2	1750	5300	108												85
			2.5×1	1500	4420	96												71
			2.5×2	2720	8840	60	132	94	16	76	15	9	14	8.5	36	47	PT1/8"	138
			2.5×3	3850	13260	168												202
			3.5×1	2000	6190	108												98
	8	4.762	1.5×2	2220	6320	126												86
			2.5×1	1900	5270	110												73
			2.5×2	3450	10540	62	158	96	16	78	15	9	14	8.5	38	48	PT1/8"	141
			3.5×1	2540	7380	126												100
	10	6.35	1.5×2	3370	8335	152												91
			2.5×1	2880	6950	65	132	106	18	85	20	11	17.5	11	42	52	PT1/8"	71
			2.5×2	5220	13900	192												148
			3.5×1	3840	9730	152												105
45	10	6.35	2.5×1	3020	7850	70	134	112	18	90	20	11	17.5	11	48	58	PT1/8"	84
			2.5×2	5480	15700	194												163
	12	7.144	2.5×1	3550	8950	74	158	122	18	97	20	14	20	13	49	60	PT1/8"	85
			2.5×2	6440	17900	230												165

FDVC

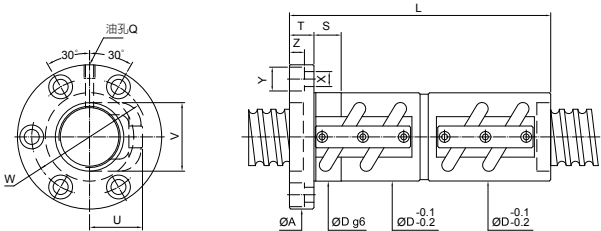

單位:mm


螺桿尺寸		鋼珠 直徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭			配 合		螺絲孔			循環管凸出部		油孔	剛性			
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	S	X	Y	Z	U	V	Q	kgf/ μm				
50	5	3.175	1.5×2	1410	5305														107			98
			1.5×3	2000	7960	70	127	104	16	86	15	9	14	8.5	40	56	PT1/8"	144				
			3.5×1	1610	6190														107			114
	6	3.969	2.5×2	2980	11000	72	134	106	16	88	15	9	14	8.5	43	57	PT1/8"	164				
			2.5×3	4220	16500	170	242															
	8	4.762	2.5×2	3900	13020	75	160	116	18	95	20	11	17.5	11	45	59	PT1/8"	170				
			2.5×3	5520	19530													208	250			
	10	6.35	1.5×2	3725	10450														154			119
			2.5×1	3190	8710														134			91
			2.5×2	5790	17420	78	194	119	18	98	20	11	17.5	11	48	62	PT1/8"	177				
			2.5×3	8200	26130														254			261
	12	7.144	3.5×1	4260	12190														154			126
			2.5×1	3700	10050	82	160	128	22	105	20	14	20	13	52	64	PT1/8"	92				
			2.5×2	6710	20100													232	179			
55	10	6.35	2.5×2	6005	19540	84	194	125	18	103	20	11	17.5	11	54	68	PT1/8"	191				
			2.5×3	8510	29310													254	281			
63	10	6.35	2.5×1	3510	11200														136			110
			2.5×2	6370	22400	90	196	132	20	110	20	11	17.5	11	53	74	PT1/8"	213				
			2.5×3	9020	33600														256			313
	12	7.938	2.5×1	4760	13820														160			112
			2.5×2	8650	27560	94	232	142	22	117	20	14	20	13	57	76	PT1/8"	218				
			2.5×3	12250	41340														304			322
16	9.528	2.5×1	8050	23100	100	200	150	22	123	20	14	20	13	62	78	PT1/8"	144					
		2.5×2	14600	46200													296	280				
80	10	6.35	2.5×2	7130	28500	115	200	163	22	137	20	14	20	13	64	91	PT1/8"	258				
			2.5×3	10100	42750													260	380			
	12	7.938	2.5×2	9710	35560	120	232	169	22	143	25	14	20	13	67	93	PT1/8"	265				
			2.5×3	13760	53340													302	391			
	16	9.525	2.5×2	16450	59280	125	302	190	28	154	25	18	26	17.5	70	94	PT1/8"	339				
			2.5×3	23300	88920													398	500			

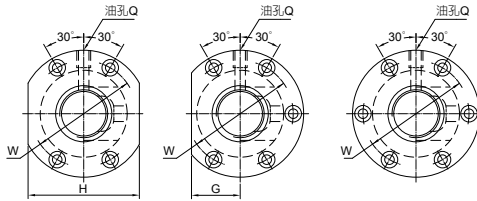

單位:mm

螺桿尺寸		鋼珠 直徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭						配合	螺絲孔				油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	G	H	S	X	Y	Z	Q	kgf/ μm		
20	4	2.381	2.5×1×(2) 3.5×1×(2)	450 600	1060 1480	40	50 60	63.5	11	51	21	42	10	5.5	9.5	5.5	M6×1P	32 49		
	5	3.175	2.5×1×(2) 3.5×1×(2)	830 1110	1730 2420	44	56 65	67	11	55	26	52	15	5.5	9.5	5.5	M6×1P	40 55		
	6	3.969	2.5×1×(2)	1100	2120	48	67	71	11	59	27	54	15	5.5	9.5	5.5	M6×1P	41		
	8	3.969	2.5×1×(2)	1100	2120	48	78	75	13	61	27	54	15	6.6	11	6.5	M6×1P	41		
25	4	2.381	2.5×1×(2) 2.5×2×(2)	510 930	1355 2710	46	50 74	69	11	57	26	52	15	5.5	9.5	5.5	M6×1P	43 84		
	5	3.175	2.5×1×(2) 2.5×2×(2)	910 1650	2150 4300	50	55 85	73	11	61	28	56	15	5.5	9.5	5.5	M6×1P	48 92		
	6	3.969	2.5×1×(2) 2.5×2×(2)	1210 2190	2680 5360	53	62 98	76	11	64	29	58	15	5.5	9.5	5.5	M6×1P	49 94		
	8	4.762	2.5×1×(2)	1560	3200	58	77	85	13	71	32	64	15	6.6	11	6.5	M6×1P	50		
	10	4.762	2.5×1×(2)	1560	3200	58	100	85	15	71	32	64	15	6.6	11	6.5	M6×1P	50		
	28	5	3.175	2.5×1×(2) 2.5×2×(2)	950 1720	2470 4940	55	56 86	83	12	69	31	62	15	6.6	11	6.5	M8×1P	52 101	
6		3.969	2.5×1×(2) 2.5×2×(2)	1270 2300	3000 6000	55	63 100	83	12	69	31	62	15	6.6	11	6.5	M8×1P	53 103		
10		4.762	1.5×1×(2)	1045	2120	60	74	93	15	76	36	72	15	9	14	8.5	M8×1P	34		
32		4	2.381	2.5×1×(2) 2.5×2×(2)	565 1020	1750 3500	54	50 76	81	12	67	32	64	15	6.6	11	6.5	M6×1P	52 101	
	5	3.175	2.5×1×(2) 2.5×2×(2)	1010 1830	2840 5680	58	57 87	85	12	71	32	64	15	6.6	11	6.5	M8×1P	58 112		
	6	3.969	2.5×1×(2) 2.5×2×(2)	1330 2410	3450 6900	62	63 99	88	12	75	34	68	15	6.6	11	6.5	M8×1P	59 114		
	8	4.762	1.5×1×(2) 2.5×1×(2)	1110 1720	2510 4180	66	64 80	100	15	82	38	76	15	9	14	8.5	M8×1P	37 61		
	10	6.35	1.5×1×(2) 2.5×1×(2)	1660 2570	3260 5440	74	78 97	108	15	90	41	82	15	9	14	8.5	M6×1P	39 64		
	12	6.35	1.5×1×(2) 2.5×1×(2)	1660 2570	3260 5440	74	88 110	108	18	90	41	82	15	9	14	8.5	M8×1P	39 64		


FOWC

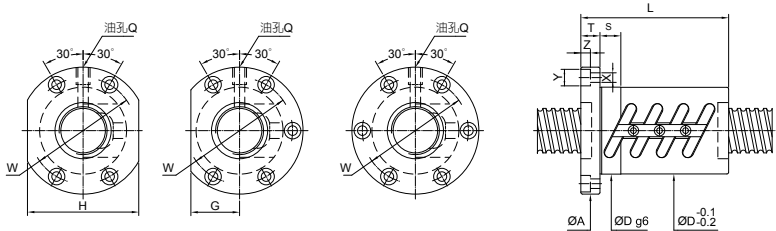

單位:mm



螺桿尺寸		鋼珠 直徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭						配 合	螺絲孔				油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)	Dg6	L	A	T	W	G	H	S	X	Y	Z	Q	kgf/ μm			
36	5	3.175	2.5×1×(2)	1060	3210	65	60	98	15	82	38	76	15	9	14	8.5	M8×1P	64		
			2.5×2×(2)	1920	6420		90											123		
	6	3.969	2.5×1×(2)	1430	3950	65	66	98	15	82	38	76	15	9	14	8.5	M8×1P	65		
			2.5×2×(2)	2600	7900		102											126		
	10	6.35	1.5×1×(2)	1750	3710	75	81	118	18	98	45	90	15	11	17.5	11	M8×1P	43		
			2.5×1×(2)	2720	6180		103											70		
40	5	3.175	2.5×1×(2)	1090	3560	67	60	101	15	83	39	78	15	9	14	8.5	M8×1P	69		
			2.5×2×(2)	1980	7120		90											133		
	6	3.969	2.5×1×(2)	1500	4420	70	66	104	15	86	40	80	15	9	14	8.5	PT1/8"	71		
			2.5×2×(2)	2720	8840		102											138		
	8	4.762	2.5×1×(2)	1900	5270	74	83	108	15	90	41	82	15	9	14	8.5	PT1/8"	73		
			2.5×2×(2)	3450	10540		131											141		
		10	6.35	1.5×1×(2)	1860	4710	82	81	103	124	18	102	47	94	20	11	17.5	11	PT1/8"	47
				2.5×1×(2)	2880	6950		103												76
			3.5×1×(2)	3850	9730		121											105		
45	12	6.35	2.5×1×(2)	2880	6950	86	112	128	18	106	48	96	20	11	17.5	11	PT1/8"	76		
	10	6.35	2.5×1×(2)	3020	7850	88	101	132	18	110	50	100	20	11	17.5	11	PT1/8"	84		
	12	7.144	2.5×1×(2)	3550	8950	90	112	132	18	110	50	100	20	11	17.5	11	PT1/8"	85		
50	5	3.175	2.5×1×(2)	1210	4420	80	60	114	15	96	43	86	15	9	14	8.5	PT1/8"	83		
	6	3.969	2.5×2×(2)	2980	11000	84	103	118	15	100	45	90	15	9	14	8.5	PT1/8"	164		
	8	4.762	2.5×2×(2)	3900	13020	87	134	129	18	107	49	98	20	11	17.5	11	PT1/8"	170		
	10	6.35	2.5×1×(2)	3190	8710	93	101	161	135	18	113	51	102	20	11	17.5	11	PT1/8"	91	
			2.5×2×(2)	5790	17420		161												177	
			3.5×1×(2)	4260	12190		121												126	
12	7.144	2.5×1×(2)	3700	10050	100	116	146	22	122	55	110	20	14	20	13	PT1/8"	92			
55	10	6.35	2.5×1×(2)	3310	9770	102	101	144	18	122	54	108	20	11	17.5	11	PT1/8"	98		
			2.5×2×(2)	6005	19540		161											191		
63	10	6.35	2.5×1×(2)	3510	11200	108	105	154	22	130	58	116	20	14	20	13	PT1/8"	110		
			2.5×2×(2)	6370	22400		165											213		
	12	7.938	2.5×1×(2)	4770	13780	115	124	161	22	137	61	122	20	14	20	13	PT1/8"	113		

FSWE

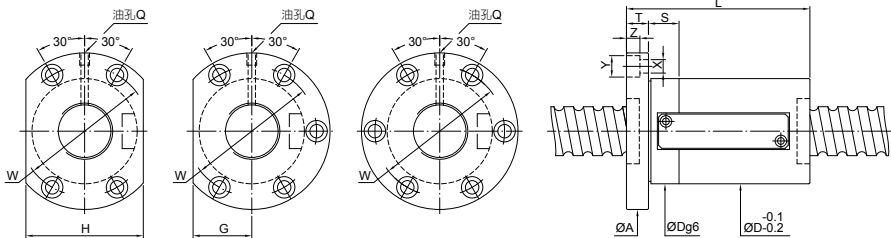

單位:mm


螺桿尺寸		珠徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭					配合	螺絲孔			油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	G	H	S	X	Y	Z	Q	kgf/ μm
12	10	2.381	2.5×1	420	720	30	50	50	10	40	16	32	10	4.5	8	4.4	M6×1P	20
	20	3.969	2.5×1	1210	2380	46	63	73.5	13	59	25	50	10	5.5	9.5	5.5	M6×1P	34
			3.5×1	1580	3230	73	79											45
			1.5×1	830	1530	63	79											24
	20	3.969	2.5×1	1210	2380	46	79											34
25	20	4.762	1.5×1	830	1530	46	70	73	13	59	25	50	10	5.5	9.5	5.5	M6×1P	24
			2.5×1	1210	2380	70	79											34
			1.5×1	920	1930	54	62											28
			2.5×1	1340	3000	78	78											40
32	16	3.969	1.5×1	920	1930	54	62	76	15	64	32	64	15	6.6	11	6.5	M6×1P	28
			2.5×1	1340	3000	78	78											40
			1.5×1	1170	2300	74	74											29
			2.5×1	1710	3580	58	94											42
	16	3.969	3.5×1	2220	4860	114	114											55
			1.5×1	1010	2480	63	63	88	15	75	34	68	15	6.6	11	6.5	M8×1P	33
			2.5×1	1470	3860	79	79											48
			3.5×1	1910	5240	95	95											63
			5×1	2340	6620	111	111											77
	16	6.35	2.5×1	2830	6090	92	92											54
			3.5×1	3680	8270	74	108	108	18	90	41	82	15	11	17.5	11	M8×1P	69
			5×1	4490	10450	124	124											85
			1.5×1	1010	2480	70	70											33
	20	3.969	2.5×1	1470	3860	90	90	88	15	75	34	68	15	6.6	11	6.5	M8×1P	48
			3.5×1	1910	5240	110	110											63
			5×1	2350	6610	130	130											77
			2.5×1	2830	6090	104	104											54
	20	6.35	3.5×1	3680	8270	74	124	108	18	90	41	82	15	11	17.5	11	M8×1P	69
			5×1	4490	10450	144	144											85

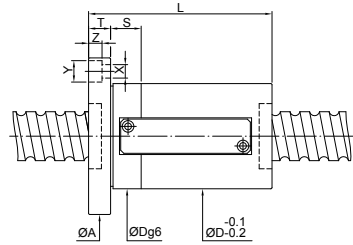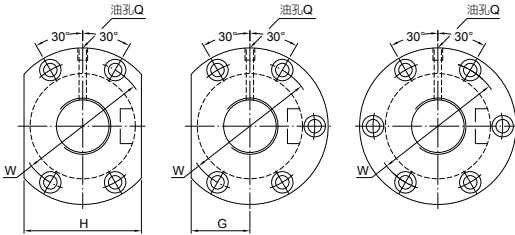

單位:mm


螺桿尺寸		珠徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭					配合	螺絲孔				油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	G	H		S	X	Y	Z		
36	10	6.35	3.5×1 5×1	3890 4750	9390 11860	75	84 94	118	18	98	45	90	15	11	17.5	11	M8×1P	76 93	
	12	6.35	2.5×1	2990	6920		85											58	
			3.5×1 5×1	3890 4750	9390 11860	75	97 109	118	18	98	45	90	15	11	17.5	11	M8×1P	76 93	
	16	6.35	2.5×1	2990	6920		91											58	
			3.5×1 5×1	3890 4750	9390 11860	75	107 123	118	18	98	45	90	15	11	17.5	11	M8×1P	76 93	
	20	6.35	1.5×1	2050	4450		91												41
			2.5×1	2990	6920	75	111	118	18	98	45	90	15	11	17.5	11	PT1/8"	58	
			3.5×1	3890	9390		131											76	
			5×1	4750	11860		151											93	
	40	10	6.35	3.5×1 5×1	4130 5050	10560 13340	86	86 96	128	18	106	49	98	15	11	17.5	11	PT1/8"	82 101
				2.5×1	3180	7780		86											63
		12	6.35	3.5×1 5×1	4130 5050	10560 13340	86	98 110	128	18	106	49	98	15	11	17.5	11	PT1/8"	82 101
2.5×1				3180	7780		93											63	
16		6.35	3.5×1 5×1	4130 5050	10560 13340	86	109 125	128	18	106	49	98	15	11	17.5	11	PT1/8"	82 101	
			2.5×1	3740	8790		92											65	
16		7.144	3.5×1 5×1	4870 5950	11930 15070	86	108 124	128	18	106	49	98	15	11	17.5	11	PT1/8"	84 103	
			1.5×1	2180	5000		84											43	
20		6.35	2.5×1	3180	7780	86	104	128	18	106	49	98	15	11	17.5	11	PT1/8"	63	
			3.5×1	4130	10560		124											82	
			5×1	5050	13340		144											101	
			40	6.35	1.5×1		2180											5000	86

FSWE

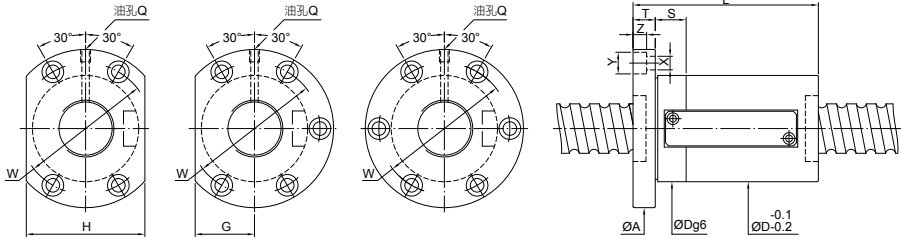

單位:mm


螺桿尺寸		珠徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭					配 合	螺絲孔			油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	G	H		S	X	Y		
50	10	6.35	3.5×1	4560	13230	93	85	135	18	113	51	102	20	11	17.5	11	PT1/8"	97
			5×1	5580	16710		95											119
	12	6.35	2.5×1	3510	9750	93	80	135	18	113	51	102	20	11	17.5	11	PT1/8"	74
			3.5×1	4560	13230		92											97
			5×1	5580	16710		104										119	
	12	7.144	2.5×1	4080	11260	100	93	146	25	122	55	110	20	14	20	13	PT1/8"	75
			3.5×1	5300	15280		105											99
			5×1	6480	19300		117											121
	16	6.35	2.5×1	3510	9750	93	94	135	18	113	51	102	20	11	17.5	11	PT1/8"	74
			3.5×1	4560	13230		110											97
			5×1	5580	16710		126											119
	16	7.144	2.5×1	4080	11260	100	100	146	25	122	55	110	20	14	20	13	PT1/8"	75
			3.5×1	5300	15280		116											99
			5×1	6480	19300		132											121
	20	7.144	1.5×1	2790	7240	100	98	146	25	122	55	110	20	14	20	13	PT1/8"	52
			2.5×1	4080	11260		118											75
			3.5×1	5300	15280		138											99
			5×1	6480	19300		158											121
20	7.938	2.5×1	4750	12090	105	119	152	25	128	58	116	20	14	20	13	PT1/8"	78	
		3.5×1	6180	16400		139											101	
		5×1	7550	20720		159											124	
50	7.938	1.5×1	3250	7770	105	115	152	25	128	58	116	20	14	20	13	PT1/8"	53	

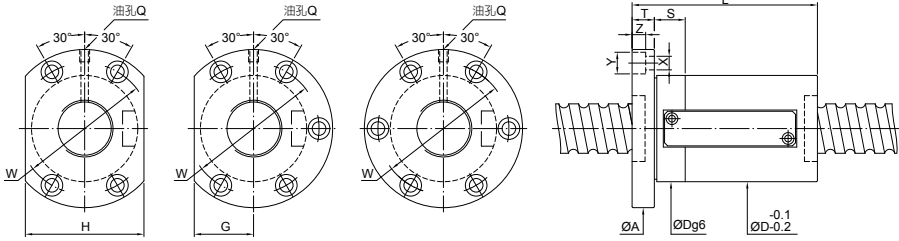

單位:mm


螺桿尺寸		珠徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭						配合	螺絲孔				油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	G	H	S		X	Y	Z	Q		
63	10	6.35	3.5×1	5030	17020	108	86	154	22	130	58	116	20	14	20	13	PT1/8"		115	
			5×1	6150	21500		96												141	
	12	6.35	2.5×1	3870	12540	108	84	154	22	130	58	116	20	14	20	13	PT1/8"		87	
			3.5×1	5030	17020		96												115	
			5×1	6150	21500		108												141	
	12	7.144	2.5×1	4540	14460	115	90	161	22	137	61	122	20	14	20	13	PT1/8"		89	
			3.5×1	5900	19620		102												117	
			5×1	7210	24780		114												145	
	16	7.144	2.5×1	4540	14460	115	97	161	22	137	61	122	20	14	20	13	PT1/8"		89	
			3.5×1	5900	19620		113												117	
			5×1	7210	24780		129												145	
	16	7.938	2.5×1	5260	15430	120	112	180	28	150	72	144	25	18	26	17.5	PT1/8"		91	
			3.5×1	6840	20940		128												120	
			5×1	8360	26450		144												147	
20	6.35	2.5×1	3870	12540	108	104	154	22	130	58	116	20	14	20	13	PT1/8"		87		
		3.5×1	5030	17020		124												115		
		5×1	6150	21500		144												141		
20	9.525	2.5×1	8870	25870	122	120	182	28	150	72	144	25	18	26	17.5	PT1/8"		105		
		3.5×1	11530	35110		140												136		
		5×1	14090	44350		160												167		
80	10	6.35	3.5×1	5630	21660	130	90	176	22	152	66	132	20	14	20	13	PT1/8"		133	
			5×1	6880	27360		100												164	
	12	7.938	3.5×1	7670	27030	136	101	182	22	158	68	136	20	14	20	13	PT1/8"		143	
			5×1	9380	34140		113												177	
	16	9.525	2.5×1	9400	33100	143	108	204	28	172	77	154	30	18	26	17.5	PT1/8"		124	
			3.5×1	12220	44920		124												162	
			5×1	14940	56740		140												201	
	20	9.525	2.5×1	9400	33100	143	120	204	28	172	77	154	30	18	26	17.5	PT1/8"		124	
3.5×1			12220	44920	140		162													
		5×1	14940	56740		160												201		
100	16	9.525	2.5×1	9990	33200	170	115	243	32	205	91	182	30	22	32	21.5	PT1/8"		139	
			3.5×1	12990	45050		131												182	
			5×1	15880	71320		147												226	
	20	9.525	2.5×1	9990	33200	170	128	243	32	205	91	182	30	22	32	21.5	PT1/8"		139	
3.5×1			12990	45050	148		182													
		5×1	15880	71320		168												226		

FDWE

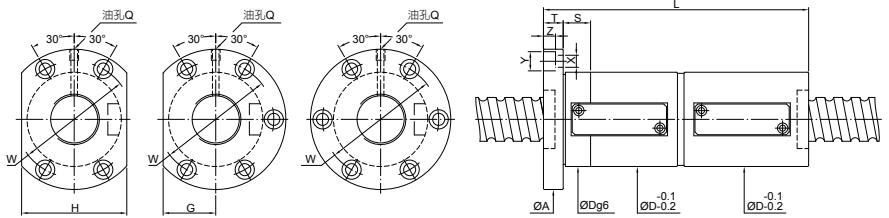

單位:mm


螺桿尺寸		珠徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭					配 合	螺絲孔			油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	G	H	S	X	Y	Z	Q	kgf/ μm
12	10	2.381	2.5×1	420	720	30	102	50	10	40	16	32	10	4.5	8	4.4	M6×1P	30
20	10	3.969	2.5×1 3.5×1	1210 1580	2380 3230	46	113 133	73.5	13	59	25	50	10	5.5	9.5	5.5	M6×1P	51 68
	16	3.969	1.5×1 2.5×1	830 1210	1530 2380	46	128 160	73.5	13	59	25	50	10	5.5	9.5	5.5	M6×1P	35 51
	20	3.969	1.5×1	830	1530	46	130	73	13	59	25	50	10	5.5	9.5	5.5	M6×1P	35
	25	16	3.969	1.5×1 2.5×1	920 1340	1930 3000	54	126 158	76	15	64	32	64	15	6.6	11	6.5	M6×1P
25	20	4.762	1.5×1 2.5×1 3.5×1	1170 1710 2220	2300 3580 4860	58	154 194 234						15	6.6	11	6.5	M6×1P	43 63 83
	16	3.969	1.5×1	1010	2480		130	88	15	75	34	68	15	6.6	11	6.5	M8×1P	49
			2.5×1	1470	3860	62	162											73
			3.5×1	1910	5240	194	96											
5×1			2340	6620	226	120												
32	16	6.35	2.5×1	2830	6090		173	108	18	90	41	82	15	11	17.5	11	M8×1P	80
			3.5×1	3680	8270	74	205											105
			5×1	4490	10450	237	131											
	20	3.969	1.5×1	1010	2480		93	88	15	75	34	68	15	6.6	11	6.5	M8×1P	49
			2.5×1	1470	3860	62	133											73
			3.5×1	1910	5240	173	96											
			5×1	2350	6610	213	120											
	20	6.35	2.5×1	2830	6090		204	108	18	90	41	82	15	11	17.5	11	M8×1P	80
3.5×1			3680	8270	74	244	105											
			5×1	4490	10450		284											131

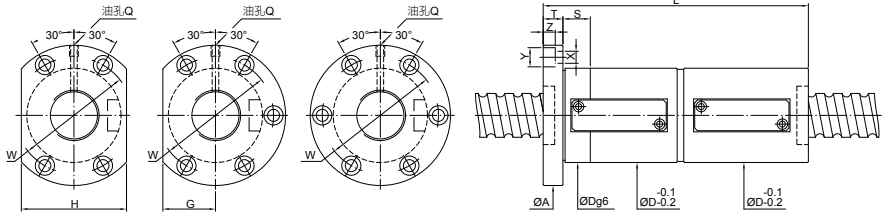

單位:mm



螺桿尺寸		珠徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭					配合	螺絲孔				油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	G	H		S	X	Y	Z		
36	10	6.35	3.5×1	3890	9390	75	155	118	18	98	45	90	15	11	17.5	11	M8×1P	115	
			5×1	4750	11860		175											143	
	12	6.35	2.5×1	2990	6920	75	140	118	18	98	45	90	15	11	17.5	11	M8×1P	88	
			3.5×1	3890	9390		164											115	
			5×1	4750	11860		188											143	
	16	6.35	2.5×1	2990	6920	75	171	118	18	98	45	90	15	11	17.5	11	M8×1P	88	
			3.5×1	3890	9390		203											115	
			5×1	4750	11860		235												143
	20	6.35	1.5×1	2050	4450	75	164	118	18	98	45	90	15	11	17.5	11	PT1/8"		59
			2.5×1	2990	6920		204											88	
			3.5×1	3890	9390		244											115	
			5×1	4750	11860		284											143	
40	10	6.35	3.5×1	4130	10560	86	155	128	18	106	49	98	15	11	17.5	11	PT1/8"	125	
			5×1	5050	13340		175											155	
	12	6.35	2.5×1	3180	7780		141	128	18	106	49	98	15	11	17.5	11	PT1/8"	95	
			3.5×1	4130	10560	86	165											189	125
			5×1	5050	13340		189										155		
	16	6.35	2.5×1	3180	7780		173	128	18	106	49	98	15	11	17.5	11	PT1/8"	95	
			3.5×1	4130	10560	86	205											125	
			5×1	5050	13340		237											155	
	16	7.144	2.5×1	3740	8790		173	128	18	106	49	98	15	11	17.5	11	PT1/8"	98	
			3.5×1	4870	11930	86	205											128	
			5×1	5950	15070		237											159	
	20	6.35	1.5×1	2180	5000	86	164	128	18	106	49	98	15	11	17.5	11	PT1/8"		64
			2.5×1	3180	7780		204											95	
			3.5×1	4130	10560		244											125	
			5×1	5050	13340		284											155	
	40	6.35	1.5×1	2180	5000	86	242	128	18	106	49	98	15	11	17.5	11	PT1/8"	64	

FDWE

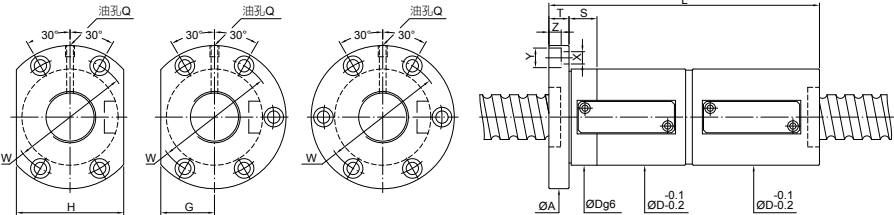

單位:mm


螺桿尺寸		珠徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭						配 合	螺絲孔				油孔	剛性		
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	G	H	S	X	Y	Z	Q	kgf/ μm				
50	10	6.35	3.5×1	4560	13230	93	155	135	18	113	51	102	20	11	17.5	11	PT1/8"		149			
			5×1	5580	16710		175												185			
	12	6.35	2.5×1	3510	9750	93	141	165	135	18	113	51	102	20	11	17.5	11	PT1/8"		112		
			3.5×1	4560	13230		165													149		
			5×1	5580	16710	189														185		
			2.5×1	4080	11260															161	114	
	12	7.144	3.5×1	5300	15280	100	185	146	25	122	55	110	20	14	20	13	PT1/8"				151	
			5×1	6480	19300		209														187	
	16	6.35	2.5×1	3510	9750	93	174	206	135	18	113	51	102	20	11	17.5	11	PT1/8"				112
			3.5×1	4560	13230		206															149
			5×1	5580	16710	238																185
			2.5×1	4080	11260																	180
	16	7.144	3.5×1	5300	15280	100	212	146	25	122	55	110	20	14	20	13	PT1/8"					151
			5×1	6480	19300		244															187
			1.5×1	2790	7240	100	179	146	25	122	55	110	20	14	20	13	PT1/8"					77
			2.5×1	4080	11260		219															114
			3.5×1	5300	15280	259																151
			5×1	6480	19300																	299
			2.5×1	4750	12090	105	219	152	25	128	58	116	20	14	20	13	PT1/8"					117
			3.5×1	6180	16400		259															154
			5×1	7550	20720	299																191
50			7.938	1.5×1	3250																	7770

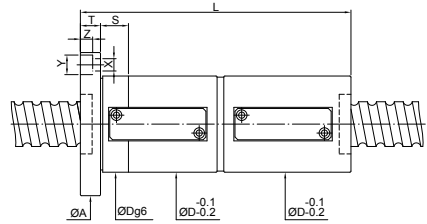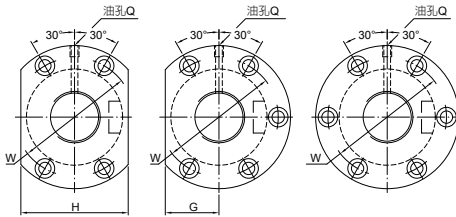

單位:mm


螺桿尺寸		珠徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭					配合	螺絲孔				油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	G	H		S	X	Y	Z		
63	10	6.35	3.5×1	5030	17020	108	155	154	22	130	58	116	20	14	20	13	PT1/8"	178	
			5×1	6150	21500		175											220	
	12	6.35	2.5×1	3870	12540	108	153											134	
			3.5×1	5030	17020		177											178	
			5×1	6150	21500	108	201											220	
			2.5×1	4540	14460		158											136	
	12	7.144	3.5×1	5900	19620	115	182	161	22	137	61	122	20	14	20	13	PT1/8"	180	
			5×1	7210	24780		206											224	
	16	7.144	2.5×1	4540	14460	115	177											136	
			3.5×1	5900	19620		209	161	22	137	61	122	20	14	20	13	PT1/8"	180	
	5×1	7210	24780	241	224														
	16	7.938	2.5×1	5260	15430		120											207	139
3.5×1			6840	20940	239	180		28	150	72	144	25	18	26	17.5	PT1/8"	184		
5×1	8360	26450	271	228															
20	6.35	2.5×1	3870	12540	108		205										134		
		3.5×1	5030	17020		245	154	22	130	58	116	20	14	20	13	PT1/8"	178		
		5×1	6150	21500		285											220		
		2.5×1	8870	25870		219											158		
20	9.525	3.5×1	11530	35110	122	259	182	28	150	72	144	25	18	26	17.5	PT1/8"	208		
		5×1	14090	44350		299											258		
80	10	6.35	3.5×1	5630	21660	130	159	176	22	152	66	132	20	14	20	13	PT1/8"	207	
			5×1	6880	27360		179											256	
	12	7.938	3.5×1	7670	27030	136	184											222	
			5×1	9380	34140		208											275	
	16	9.525	2.5×1	9400	33100	143	188	189											
			3.5×1	12220	44920		220	204	28	172	77	154	30	18	26	17.5	PT1/8"	251	
	5×1	14940	56740	252	311														
	20	9.525	2.5×1	9400	33100		143											220	189
3.5×1			12220	44920	260	204		28	172	77	154	30	18	26	17.5	PT1/8"	251		
5×1	14940	56740	300	311															
100	16	9.525	2.5×1	9990	33200		170										211	213	
			3.5×1	12990	45050	243		243	32	205	91	182	30	22	32	21.5	PT1/8"	283	
			5×1	15880	71320	259												351	
	20	9.525	2.5×1	9990	33200	170	228											213	
3.5×1	12990	45050	268	243	32		205	91	182	30	22	32	21.5	PT1/8"	283				
5×1	15880	71320	308			351													

FSVE

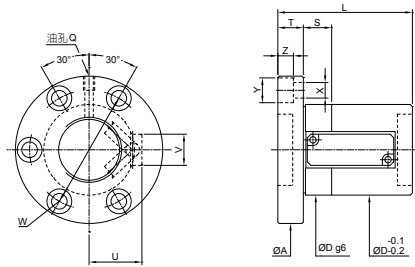

單位:mm


螺桿尺寸		珠徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭			配 合	螺絲孔				循環管凸出 部		油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W		S	X	Y	Z	U	V	Q	
12	10	2.381	2.5×1	420	720	25	50	48	10	36	10	4.5	8	4.4	14	12	M6×1P	20	
20	10	3.969	2.5×1 3.5×1	1210 1580	2380 3230	38	63 73	62	13	50	10	5.5	9.5	5.5	23	15	M6×1P	34 45	
	16	3.969	1.5×1 2.5×1	830 1210	1530 2380	38	63 79	62	13	50	10	5.5	9.5	5.5	23	15	M6×1P	34 24	
	20	3.969	1.5×1	830	1530	38	70	62	13	50	10	5.5	9.5	5.5	23	15	M6×1P	24	
	25	3.969	1.5×1	920	1930	42	62	68	15	55	15	6.6	11	6.6	26	14	M6×1P	28 40	
25	4.762		1.5×1	1170	2300	44	74	72	15	59	15	6.6	11	6.5	27	16	M6×1P	29	
			2.5×1	1710	3580		94											42	
			3.5×1	2220	4860		114											55	
			5×1	2830	8200		92											54	
32	16	3.969	1.5×1	1010	2480	49	63	78	15	63	15	6.6	11	6.6	29	15	M8×1P	33	
			2.5×1	1470	3860		79											48	
			3.5×1	1910	5240		95											63	
			5×1	2340	6610		111											77	
	16	6.35	2.5×1	2830	8200	57	92	98	18	77	20	11	17.5	11	34	22	M8×1P	54	
			3.5×1	3680	11120		108											69	
			5×1	4490	14050		124											85	
	20	3.969	1.5×1	1010	2480	49	70	78	15	63	15	6.6	11	6.6	29	15	M8×1P	33	
			2.5×1	1470	3860		90											48	
			3.5×1	1910	5240		110											63	
			5×1	2350	6610		130											77	
	20	6.35	2.5×1	2830	8200	57	104	98	18	77	20	11	17.5	11	34	22	M8×1P	54	
			3.5×1	3680	11120		124											69	
				5×1	4490	14050		144											85

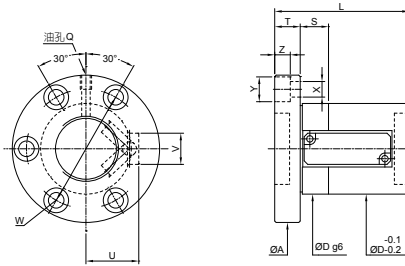

單位:mm


螺桿尺寸		珠徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭			配 合		螺絲孔		循環管凸出 部		油孔	剛性	
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	S	X	Y	Z	U	V	Q	kgf/ μm	
36	10	6.35	3.5×1	3890	9390	60	84	100	18	80	20	11	17.5	11	36	22	M8×1P	76	
			5×1	4750	11860		94												
	12	6.35	2.5×1	2990	6920	60	85	97	100	18	80	20	11	17.5	11	36	22	M8×1P	58
			3.5×1	3890	9390		97												
			5×1	4750	11860	60	109												
			2.5×1	2990	6920		91												
	16	6.35	3.5×1	3890	9390	60	107	100	18	80	20	11	17.5	11	36	22	M8×1P	76	
			5×1	4750	11860		123												
	20	6.35	1.5×1	2050	4450	60	91	100	18	80	20	11	17.5	11	36	22	M8×1P	41	
			2.5×1	2990	6920		111												
			3.5×1	3890	9390		131												
			5×1	4750	11860		151												
40	10	6.35	3.5×1	4130	10560	64	84	104	18	84	20	11	17.5	11	38	22	PT1/8"	82	
			5×1	5050	13340		96												
	12	6.35	2.5×1	3180	7780	64	86	98	104	18	84	20	11	17.5	11	38	22	PT1/8"	63
			3.5×1	4130	10560		98												
			5×1	5050	13340	64	110												
			2.5×1	3180	7780		93												
	16	6.35	3.5×1	4130	10560	64	109	104	18	84	20	11	17.5	11	38	22	PT1/8"	82	
			5×1	5050	13340		125												
	16	7.144	2.5×1	3740	8790	64	92	108	104	18	84	15	11	17.5	11	38	22	PT1/8"	65
			3.5×1	4870	11930		108												
			5×1	5950	15070	64	124												
			1.5×1	2180	5000		84												
	20	6.35	2.5×1	3180	7780	64	104	104	18	84	20	11	17.5	11	38	22	PT1/8"	43	
			3.5×1	4130	10560		124												
			5×1	5050	13340	64	144												
			40	6.35	1.5×1		2180												

FSVE

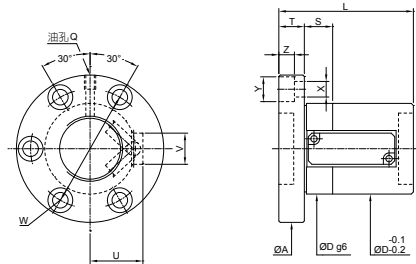

單位:mm


螺桿尺寸		珠徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭			配 合		螺絲孔				循環管凸出 部		油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	S	X	Y	Z	U	V	Q	kgf/ μm		
50	10	6.35	3.5×1	4560	13230	73	85	118	18	96	20	11	17.5	11	43	22	PT1/8"	97		
			5×1	5580	16710		95											119		
	12	6.35	2.5×1	3510	9750	73	82	94	118	18	96	20	11	17.5	11	43	22	PT1/8"	74	
			3.5×1	4560	13230		94												97	
			5×1	5580	16710		106											119		
	12	7.144	2.5×1	4080	11260	75	93	105	122	20	98	15	14	20	13	44	24	PT1/8"	75	
			3.5×1	5300	15280		105												99	
			5×1	6480	19300		117											121		
	16	6.35	2.5×1	3510	9750	73	94	110	118	18	96	20	11	17.5	11	43	22	PT1/8"	74	
			3.5×1	4560	13230		110												97	
			5×1	5580	16710		126											119		
	16	7.144	2.5×1	4080	11260	75	100	116	122	20	98	15	14	20	13	44	24	PT1/8"	75	
			3.5×1	5300	15280		116												99	
			5×1	6480	19300		132											121		
	20	7.144	1.5×1	2790	7240	75	98	118	122	20	98	15	14	20	13	44	20	PT1/8"	52	
			2.5×1	4080	11260		118												75	
			3.5×1	5300	15280		138												99	
			5×1	6480	19300		158												121	
20	7.938	2.5×1	4750	12090	76	119	139	123	25	99	20	14	20	13	46	25	PT1/8"	78		
		3.5×1	6180	16400		139												101		
		5×1	7550	20720		159											124			
50	7.938	1.5×1	3250	7770	76	115	123	25	99	20	14	20	13	46	25	PT1/8"	53			

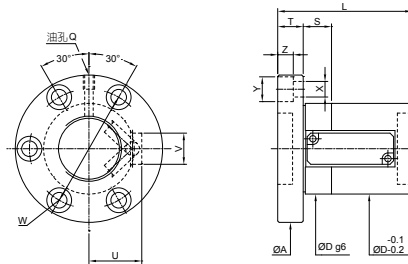

單位:mm


螺桿尺寸		珠徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭			配合		螺絲孔			循環管凸出部		油孔	剛性	
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	S	X	Y	Z	U	V	Q	kgf/ μm		
63	10	6.35	3.5×1 5×1	5030 6150	17020 1500	86	86 96	133	22	108	20	14	20	13	49	24	PT1/8"	115 141		
	12	6.35	2.5×1	3870	12540		84											87		
			3.5×1 5×1	5030 6150	17020 1500	86	96 108	133	22	108	20	14	20	13	49	24	PT1/8"	115 141		
	12	7.144	2.5×1	4540	14460		90											89		
			3.5×1 5×1	5900 7210	7210 24780	87	102 114	134	22	110	20	14	20	13	50	25	PT1/8"	117 145		
	16	7.144	2.5×1	4540	14460		97												89	
			3.5×1 5×1	5900 7210	7210 24780	87	113 129	134	22	110	20	14	20	13	50	25	PT1/8"	117 145		
	16	7.938	2.5×1	5260	15430		112													91
			3.5×1 5×1	6840 8360	20940 26450	89	128 144	148	28	118	25	18	26	17.5	52	25	PT1/8"	120 147		
	20	6.35	2.5×1	3870	12540		104													87
			3.5×1 5×1	5030 6150	17020 1500	86	124 144	133	22	108	20	14	20	13	49	24	PT1/8"	115 141		
	20	7.938	2.5×1	5260	15430		120													91
3.5×1 5×1			6840 8360	20940 26450	89	140 160	148	28	118	25	18	26	17.5	52	25	PT1/8"	120 147			
80	10	6.35	2.5×1 5×1	8870 11530 14090	25870 35110 44350		120												105	
	12	7.938	3.5×1 5×1	11530 14090	35110 44350	93	140 160	152	28	122	25	18	26	17.5	54	28	PT1/8"	136 167		
			3.5×1 5×1	11530 14090	35110 44350	93	140 160	152	28	122	25	18	26	17.5	54	28	PT1/8"	136 167		
80	16	9.525	2.5×1 5×1	8870 11530 14090	25870 35110 44350		120												105	
			3.5×1 5×1	11530 14090	35110 44350	93	140 160	152	28	122	25	18	26	17.5	54	28	PT1/8"	136 167		
	20	9.525	2.5×1 5×1	8870 11530 14090	25870 35110 44350		120											105		
			3.5×1 5×1	11530 14090	35110 44350	93	140 160	152	28	122	25	18	26	17.5	54	28	PT1/8"	136 167		
100	16	9.525	2.5×1 5×1	8870 11530 14090	25870 35110 44350		120												105	
			3.5×1 5×1	11530 14090	35110 44350	93	140 160	152	28	122	25	18	26	17.5	54	28	PT1/8"	136 167		
	20	9.525	2.5×1 5×1	8870 11530 14090	25870 35110 44350		120											105		
			3.5×1 5×1	11530 14090	35110 44350	93	140 160	152	28	122	25	18	26	17.5	54	28	PT1/8"	136 167		

FDVE

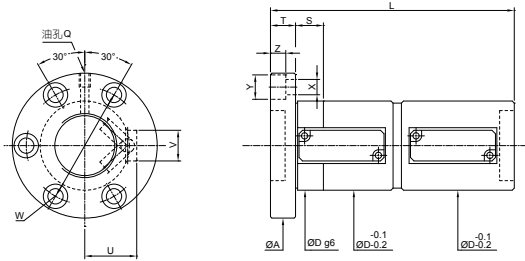

單位:mm


螺桿尺寸		珠徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭			配 合	螺絲孔				循環管凸出 部		油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	S	X	Y	Z	U	V	Q	kgf/ μm	
12	10	2.381	2.5×1	420	720	25	102	48	10	36	10	4.5	8	4.4	14	12	M6×1P	30	
20	10	3.969	2.5×1 3.5×1	1210 1580	2380 3230	38	113 133	62	13	50	10	5.5	9.5	5.5	23	15	M6×1P	51 68	
	16	3.969	1.5×1 2.5×1	830 1210	1530 2380	38	128 160	62	13	50	10	5.5	9.5	5.5	23	15	M6×1P	35 51	
	20	3.969	1.5×1	830	1530	38	130	62	13	50	10	5.5	9.5	5.5	23	15	M6×1P	35	
	25	16	3.969	1.5×1 2.5×1	920 1340	1930 3000	42	126 158	68	15	55	15	6.6	11	6.6	26	14	M6×1P	41 61
25	20	4.762	1.5×1 2.5×1 3.5×1	1170 1710 2220	2300 3580 4860	44	154 194 234				15	6.6	11	6.5	27	16	M6×1P	43 63 83	
	32	16	3.969	1.5×1	1010	2480		130											49
2.5×1				1470	3860		162											73	
3.5×1				1910	5240	49	194	78	15	63	15	6.6	11	6.6	29	15	M8×1P	96	
5×1				2340	6610		226											120	
16		6.35	2.5×1	2830	8200		173											80	
			3.5×1	3680	11120	57	205	98	18	77	20	11	17.5	11	34	22	M8×1P	105	
			5×1	4490	14050		237											131	
20		3.969	1.5×1	1010	2480		133											49	
			2.5×1	1470	3860		173											73	
			3.5×1	1910	5240	49	213	78	15	63	15	6.6	11	6.6	29	15	M8×1P	96	
			5×1	2350	6610		253											120	
20		6.35	2.5×1	2830	8200		204											80	
			3.5×1	3680	11120	57	244	98	18	77	20	11	17.5	11	34	22	M8×1P	105	
			5×1	4490	14050		284											131	

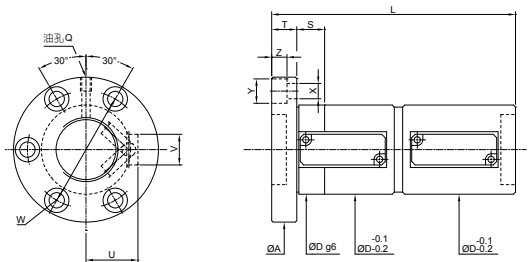

單位:mm


螺桿尺寸		珠徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭			配合	螺絲孔				循環管凸出部		油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	S	X	Y	Z	U	V	Q	kgf/ μm	
36	10	6.35	3.5×1	3890	9390	60	155	100	18	80	20	11	17.5	11	36	22	M8×1P	115	
			5×1	4750	11860		175											143	
	12	6.35	2.5×1	2990	6920	60	152	176	100	18	80	20	11	17.5	11	36	22	M8×1P	88
			3.5×1	3890	9390		200												115
			5×1	4750	11860													143	
	16	6.35	2.5×1	2990	6920	60	173	205	100	18	80	20	11	17.5	11	36	22	M8×1P	88
			3.5×1	3890	9390		237												115
			5×1	4750	11860														143
	20	6.35	1.5×1	2050	4450	60	164	100	18	80	20	11	17.5	11	36	22	M8×1P	59	
			2.5×1	2990	6920		204											88	
			3.5×1	3890	9390		244											115	
			5×1	4750	11860		284											143	
40	10	6.35	3.5×1	4130	10560	64	155	104	18	84	20	11	17.5	11	38	22	PT1/8"	125	
			5×1	5050	13340		175											155	
			2.5×1	3180	7780		141											95	
	12	6.35	3.5×1	4130	10560	64	165	104	18	84	20	11	17.5	11	38	22	PT1/8"	125	
			5×1	5050	13340		189											155	
			2.5×1	3180	7780		173											95	
	16	6.35	3.5×1	4130	10560	64	205	104	18	84	20	11	17.5	11	38	22	PT1/8"	125	
			5×1	5050	13340		237											155	
	16	7.144	2.5×1	3740	8790		173											98	
			3.5×1	4870	11930		205											128	
			5×1	5950	15070		237											159	
			1.5×1	2180	5000		164											64	
			2.5×1	3180	7780	64	204	104	18	84	20	11	17.5	11	38	22	PT1/8"	95	
			3.5×1	4130	10560		244											125	
			5×1	5050	13340		284											155	
	40	6.35	1.5×1	2180	5000	64	242	104	18	84	20	11	17.5	11	38	22	PT1/8"	64	

FDVE

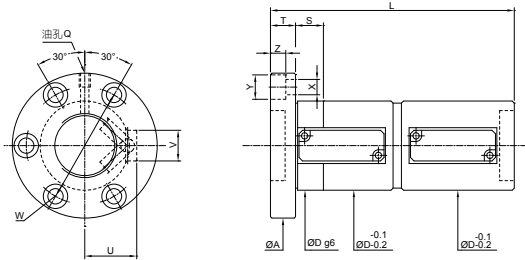

單位:mm

螺桿尺寸		珠徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭		配合	螺絲孔				循環管凸出部		油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	S	X	Y	Z	U	V	Q	kgf/ μm
50	10	6.35	3.5×1	4560	13230	73	155	118	18	96	20	11	17.5	11	43	22	PT1/8"	149
			5×1	5580	16710		175											185
			2.5×1	3510	9750		152											112
	12	6.35	3.5×1	4560	13230	73	176	118	18	96	20	11	17.5	11	43	22	PT1/8"	149
			5×1	5580	16710		200											185
			2.5×1	4080	11260		161											114
	12	7.144	3.5×1	5300	15280	75	185	122	20	98	15	14	20	13	44	24	PT1/8"	151
			5×1	6480	19300		209											187
			2.5×1	3510	9750		174											112
	16	6.35	3.5×1	4560	13230	73	206	118	18	96	20	11	17.5	11	43	22	PT1/8"	149
			5×1	5580	16710		238											185
			2.5×1	4080	11260		180											114
	16	7.144	3.5×1	5300	15280	75	212	122	20	98	15	14	20	13	44	24	PT1/8"	151
			5×1	6480	19300		244											187
			2.5×1	2790	7240		179											77
	20	7.144	2.5×1	4080	11260	75	219	122	20	98	15	14	20	13	44	20	PT1/8"	114
			3.5×1	5300	15280		259											151
			5×1	6480	19300		299											187
	20	7.938	2.5×1	4750	12090	76	219	123	25	99	20	14	20	13	46	25	PT1/8"	117
			3.5×1	6180	16400		259											154
			5×1	7550	20720		299											191
	50	7.938	1.5×1	3250	7770	76	305	123	25	99	20	14	20	13	46	25	PT1/8"	79

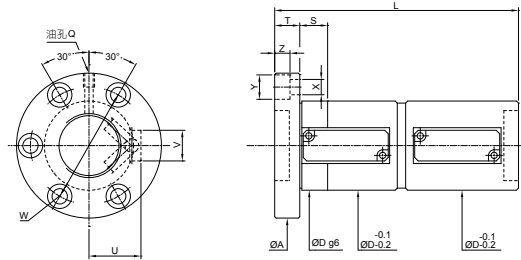


單位:mm


螺桿尺寸		珠徑	循環圈數 圈×列	基本額定負荷(kgf)		螺帽		法蘭		配合	螺絲孔				循環管凸出部		油孔	剛性
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)Co(靜負荷)		Dg6	L	A	T	W	S	X	Y	Z	U	V	Q	kgf/ μm
63	10	6.35	3.5×1	5030	17020	86	155	133	22	108	20	14	20	13	49	24	PT1/8"	178
			5×1	6150	1500		175											220
			2.5×1	3870	12540		153											134
	12	6.35	3.5×1	5030	17020	86	177	133	22	108	20	14	20	13	49	24	PT1/8"	178
			5×1	6150	1500		201											220
			2.5×1	4540	14460		158											136
	12	7.144	3.5×1	5900	7210	87	182	134	22	110	20	14	20	13	50	25	PT1/8"	180
			5×1	7210	24780		206											224
			2.5×1	4540	14460		177											139
	16	7.144	3.5×1	5900	7210	87	209	134	22	110	20	14	20	13	50	25	PT1/8"	184
			5×1	7210	24780		241											228
			2.5×1	5260	15430		207											134
	16	7.938	3.5×1	6840	20940	89	239	148	28	118	25	18	26	17.5	52	25	PT1/8"	178
			5×1	8360	26450		271											220
			2.5×1	3870	12540		205											134
	20	6.35	3.5×1	5030	17020	86	245	133	22	108	20	14	20	13	49	24	PT1/8"	178
			5×1	6150	1500		285											220
			2.5×1	5260	15430		221											139
	20	7.938	3.5×1	6840	20940	89	261	148	28	118	25	18	26	17.5	52	25	PT1/8"	184
			5×1	8360	26450		301											228
			2.5×1	8870	25870		219											158
	20	9.525	3.5×1	11530	35110	93	259	152	28	122	25	18	26	17.5	54	28	PT1/8"	208
			5×1	14090	44350		299											258
80	10	6.35	3.5×1	5030	17020	103	159	150	22	126	20	14	20	13	58	25	PT1/8"	207
			5×1	6150	1500		179											256
			2.5×1	7670	27030		184											222
	12	7.938	3.5×1	9380	34140	123	208	170	22	146	20	14	20	13	66	28	PT1/8"	275
			5×1	9380	34140		208											222
			2.5×1	9400	33100		188											189
	16	9.525	3.5×1	12220	44920	126	220	185	28	155	30	18	26	17.5	70	28	PT1/8"	251
			5×1	14940	56740		252											311
			2.5×1	9400	33100		220											189
	20	9.525	3.5×1	12220	44920	126	260	185	28	155	30	18	26	17.5	70	28	PT1/8"	251
			5×1	14940	56740		300											311
			2.5×1	9990	33200		211											213
100	16	9.525	3.5×1	12990	45050	146	243	217	32	181	30	22	32	21.5	82	35	PT1/8"	283
			5×1	15880	71320		259											351
			2.5×1	9990	33200		228											213
	20	9.525	3.5×1	12990	45050	146	268	217	32	181	30	22	32	21.5	82	35	PT1/8"	283
			5×1	15880	71320		308											351
			2.5×1	9990	33200		228											213

FSVH

型式Ⅰ


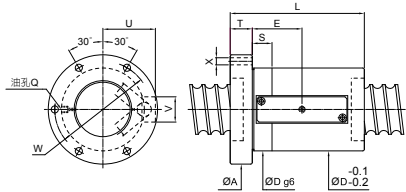


型式Ⅱ

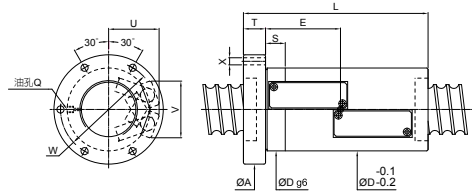

單位:mm

螺桿尺寸		鋼珠 尺寸	循環圈 數圈×列	基本額定負荷(kgf)		螺帽		法蘭			配合	油孔		螺絲 孔	循環管凸 出部		型 式
外徑	導 程			動負荷 (1×10 ⁶ REV.) Ca	靜負荷 Co	Dg6	L	A	T	W	S	Q	E	X	V	U	
40	10	7.938	3.5×2	15000	41800	66	124	98	18	83	20	M6×1P	50.75	9	51	43	Ⅱ
	12	9.525	3.5×2	18600	48200	70	156	93	18	86	20	M6×1P	58	9	55	45	Ⅱ
45	10	7.938	3.5×2	15900	47300	70	134	104	18	87	20	M6×1P	54.2	9	54	45	Ⅱ
50	10	7.938	3.5×2	16700	52900	77	133	109	18	92	20	M6×1P	53.7	9	60	48	Ⅱ
	16	12.7	6×1	24800	63700	95	168	128	28	112	20	PT1/8"	70.5	9	32	60	I
		12.7	3.5×2	31200	83500		200	128	28	112	20		86	9	72	62	Ⅱ
	20	12.7	3.5×2	31200	84800	95	235	128	28	112	20	PT1/8"	97	9	72	62	Ⅱ
55	10	7.938	3.5×2	17500	58500	80	153	114	28	97	20	PT1/8"	62.1	9	61	49	Ⅱ
	16	12.7	6×1	25800	71800	100	168	133	28	115	20	PT1/8"	69.5	9	32	63	I
			3.5×2	32600	94000	100	200	133	28	115	20		84.5	9	77	64	Ⅱ
63	16	12.7	6×1	27800	81700	105	168	138	28	122	25	PT1/8"	65.25	9	32	66	I
			3.5×2	35000	107000	105	202	138	28	122	25		82.25	9	80	67	Ⅱ
			6×2	50300	164000	105	266	138	28	122	25		114.25	9	80	67	Ⅱ
	20	15.875	2.5×2	35900	99300	117	210	157	32	137	25	PT1/8"	96	11	88	74	Ⅱ
			3.5×2	46600	134700	117	246	157	32	137	25		105.5	11	88	74	Ⅱ
	25	15.875	2.5×2	35900	99300	117	235	157	32	137	25	PT1/8"	91	11	86	75	Ⅱ
80	16	12.7	6×1	30900	104400	120	172	158	32	139	25	PT1/8"	66	9	36	73	I
			3.5×2	39000	136700	120	205	158	32	139	25		84	9	89	74	Ⅱ
			6×2	56000	208700	120	275	158	32	139	25		122	9	89	74	Ⅱ
	20	15.875	2.5×2	40100	127000	130	210	168	32	150	25	PT1/8"	87.5	11	90	83	Ⅱ
			3.5×2	52100	172400	130	250	168	32	150	25		107.5	11	90	83	Ⅱ
			6×2	75000	263200	130	330	168	32	150	30		147.5	11	90	83	Ⅱ
	25	19.05	3.5×2	67700	206100	145	305	188	40	165	25	PT1/8"	119	11	108	94	Ⅱ
			6×2	97200	314600	145	402	188	40	165	30		169	11	108	94	Ⅱ

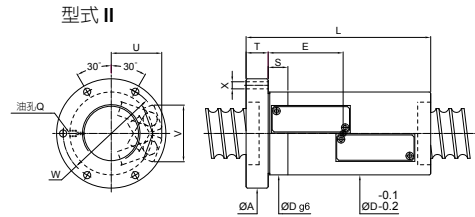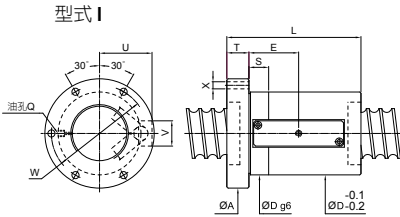

單位:mm

螺桿尺寸		鋼珠 尺寸	循環圈 數圈×列	基本額定負荷(kgf)		螺帽		法蘭			配 合	油孔		螺絲 孔	循環管凸 出部		型 式
外徑	導 程			動負荷 (1×10 ⁶ REV.) Ca	靜負荷 Co	Dg6	L	A	T	W	S	Q	E	X	V	U	
100	16	12.7	6×1	34200	133200	145	172	185	32	165	25	PT1/8"	63.5	11	38	85	I
			3.5×2	43200	174500	145	205	185	32	165	25		79.5	11	98	85	II
			6×2	62000	266300	145	275	185	32	165	25		117.5	11	98	85	II
	20	15.875	2.5×2	44800	160900	150	205	194	32	172	30	PT1/8"	82	11	107	92	II
			3.5×2	58300	218400	150	245	194	32	172	30		102	11	107	92	II
			6×2	83800	333300	150	330	194	32	172	30		147	11	107	92	II
25	19.05	3.5×2	74900	260200	165	305	218	40	190	30	PT1/8"	122	11	111	102	II	
		6×2	107700	397100	165	410	218	40	190	30		177	11	111	102	II	
120	16	12.7	6×1	34100	130200	173	205	213	40	193	30	PT1/8"	84	11	38	93	I
			3.5×2	43000	170700	173	230	213	40	193	30		101	11	108	94	II
	20	15.875	6×1	46000	160800	173	222	213	40	193	30	PT1/8"	95	11	54	100	I
			3.5×2	58100	210700	173	260	213	40	193	30		116	11	121	104	II
	25	19.0	6×1	59200	194500	173	261	213	40	193	30	PT1/8"	109.5	11	50	106	I
			3.5×2	74700	254800	173	314	213	40	193	30		135.5	11	129	109	II



13.7 端蓋型系列

FSKC

型號

BALLSCREWS

規格
端蓋型系列



單位:mm

螺桿尺寸		鋼珠 直徑	循環圈數 圈×螺紋數	基本額定負荷(kgf)		螺帽尺寸									
外徑	導程			(1×10 ⁶ REV.) Ca(動負荷)	Co(靜負荷)	螺帽		法蘭				螺絲 孔 X	油孔 Q	剛性 kgf/μm	
				Dg6		L	A	T	H	W					
15	10	3.715	2.8×2	1410	2800	34	44	57	10	40	45	5.5	M6×1P	34	
16	16	3.175	1.8×2	700	1400	32	38	53	10	38	42	4.5	M6×1P	18	
20	20	3.175	1.8×2	1100	2500	39	52	62	10	46	50	5.5	M6×1P	29	
25	25	3.969	1.8×2	1650	3900	47	62	74	12	56	60	6.6	M6×1P	35	
			1.8×4	2830	7800									69	
32	32	4.762	1.8×2	2360	5940	58	78	92	15	68	74	9	M6×1P	44	
			1.8×4	4280	11800									87	
36	24	7.144	2.8×2	6450	15220	75	94	115	18	86	94	11	M6×1P	77	
40	40	6.35	1.8×2	3860	9900	73	95	114	17	84	93	11	M6×1P	55	
			1.8×4	7000	19880									108	
50	50	7.938	1.8×2	5800	15800	90	120	135	20	104	112	14	M6×1P	68	
			1.8×4	10520	31600									135	