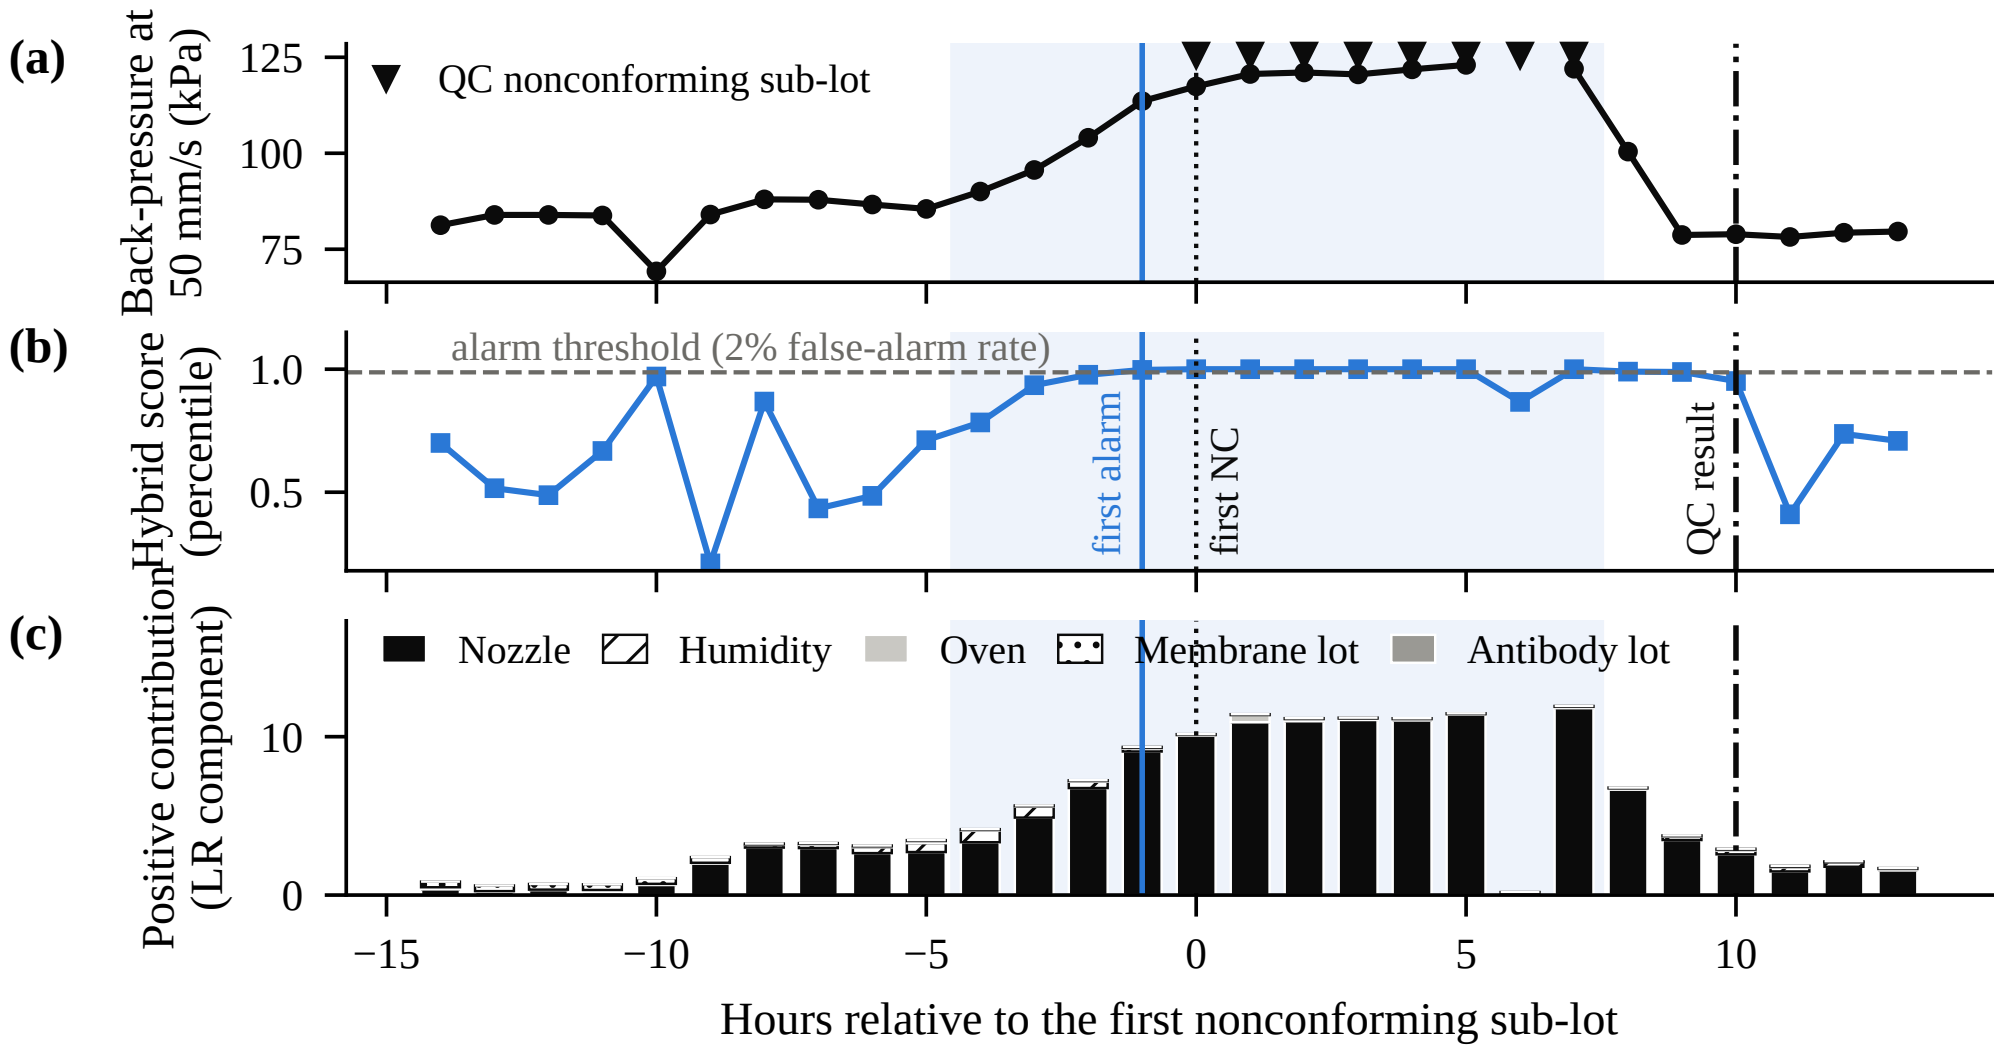

(a)
Back-pressure at 50 mm/s (kPa)
125
100
75
QC nonconforming sub-lot
(b)
Hybrid score (percentile)
1.0
0.5
alarm threshold (2% false-alarm rate)
first alarm
first NC
QC result
(c)
Positive contribution (LR component)
Nozzle
Humidity
Oven
Membrane lot
Antibody lot
10
0
−15
−10
−5
0
5
10
Hours relative to the first nonconforming sub-lot