



headers for chaining
multiple boards



heatsinks for
voltage regulators

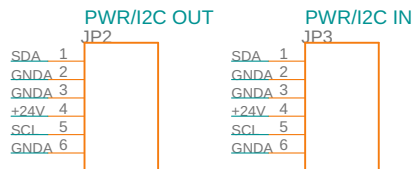

voltage regulator for
shifting 24V down to 10V
(2 regulators to prevent overheating)

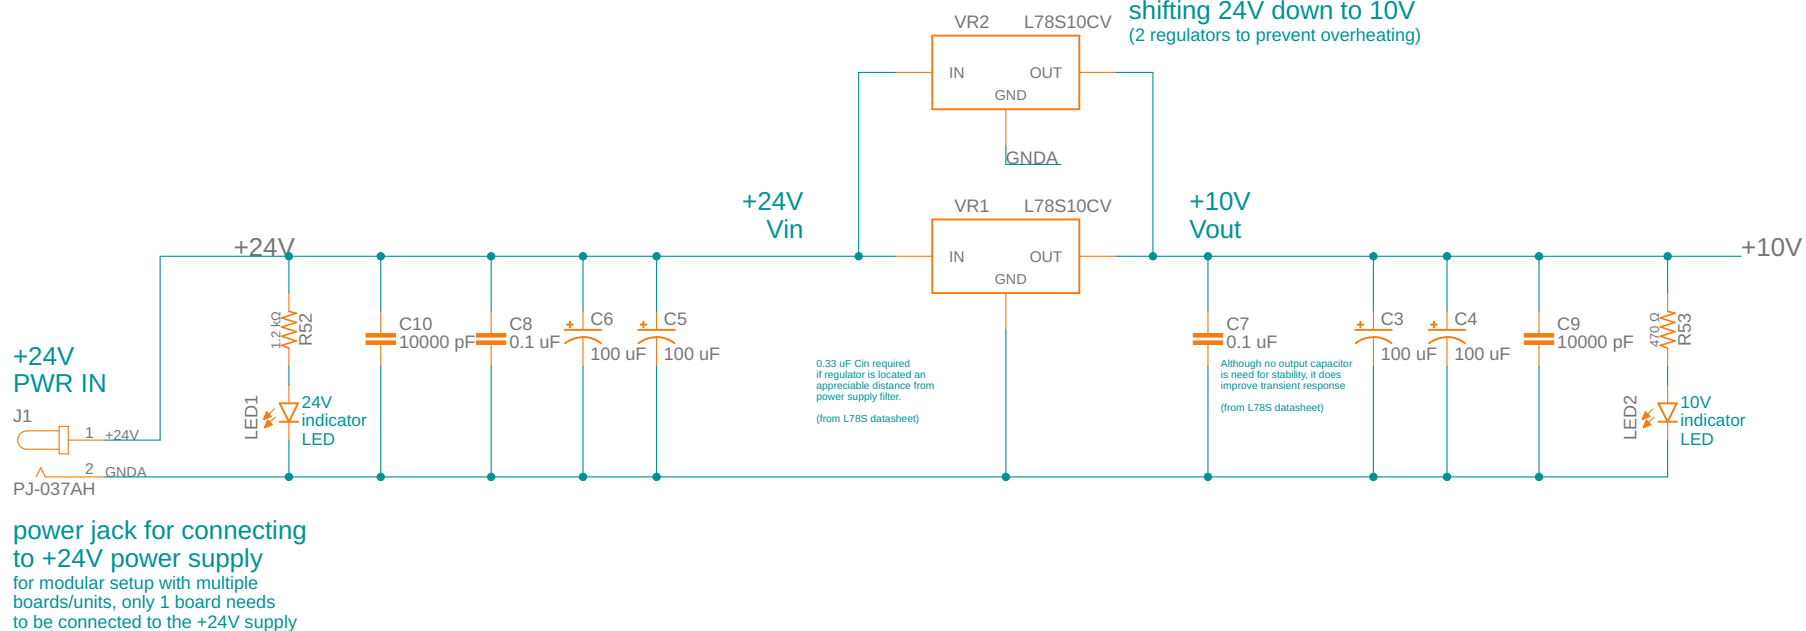

TITLE: MAIN CNTRL_v2 v166


Document Number:

REV:

Date: 6/25/2026 4:19 PM

Sheet: 1/6


HEADER PINS FOR FLOW SENSORS

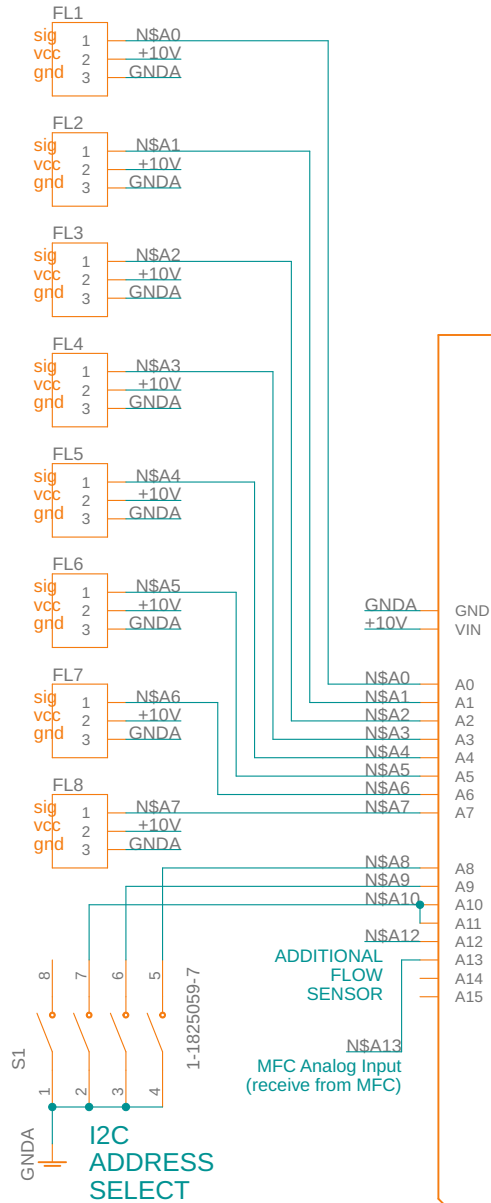


SLAVE MEGA. USE 0.1" (2.54 MM) MALE HEADERS FROM PCB TO FEMALE HEADERS ON MEGA BOARD

PLEASE NOTE THAT ALL SLAVE I2C PULLUP RESISTORS SHOULD BE REMOVED BEFORE INTERCONNECTION WITH OTHER BOARDS AND MASTER

ARDUINO MEGA 2560

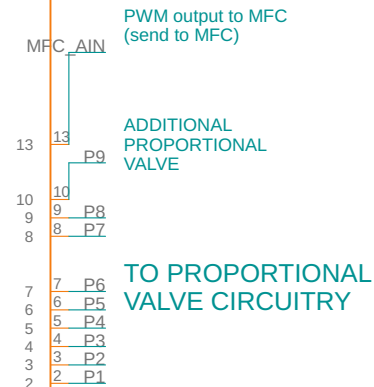

HEADER FOR MASTER I2C PINS




TITLE: MAIN CNTRL_v2 v166

Document Number:


REV:

Date: 6/25/2026 4:19 PM


Sheet: 2/6

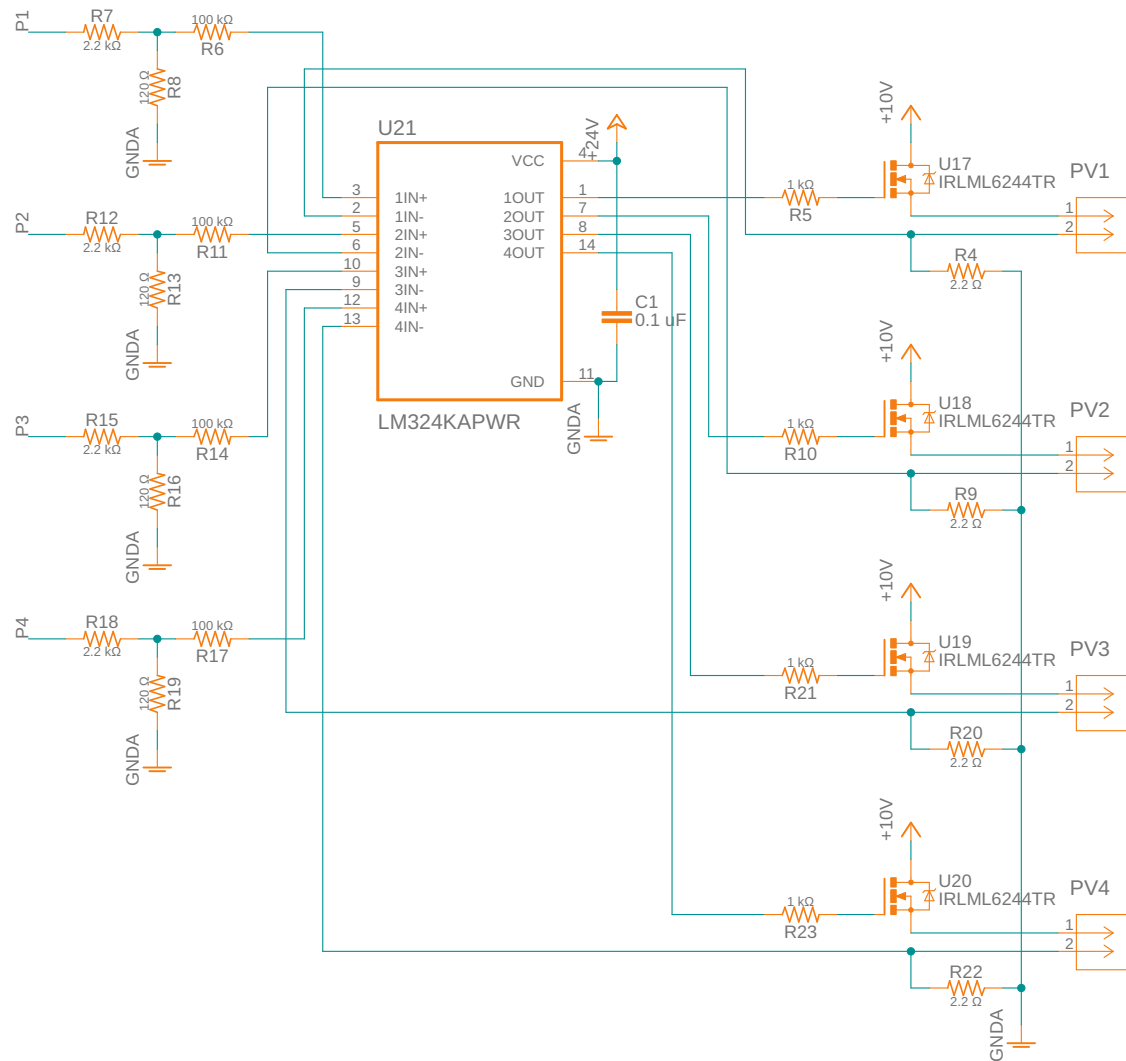

TITLE: MAIN CNTRL_v2 v166		
Document Number:		REV:
Date: 6/25/2026 4:19 PM	Sheet: 3/6	

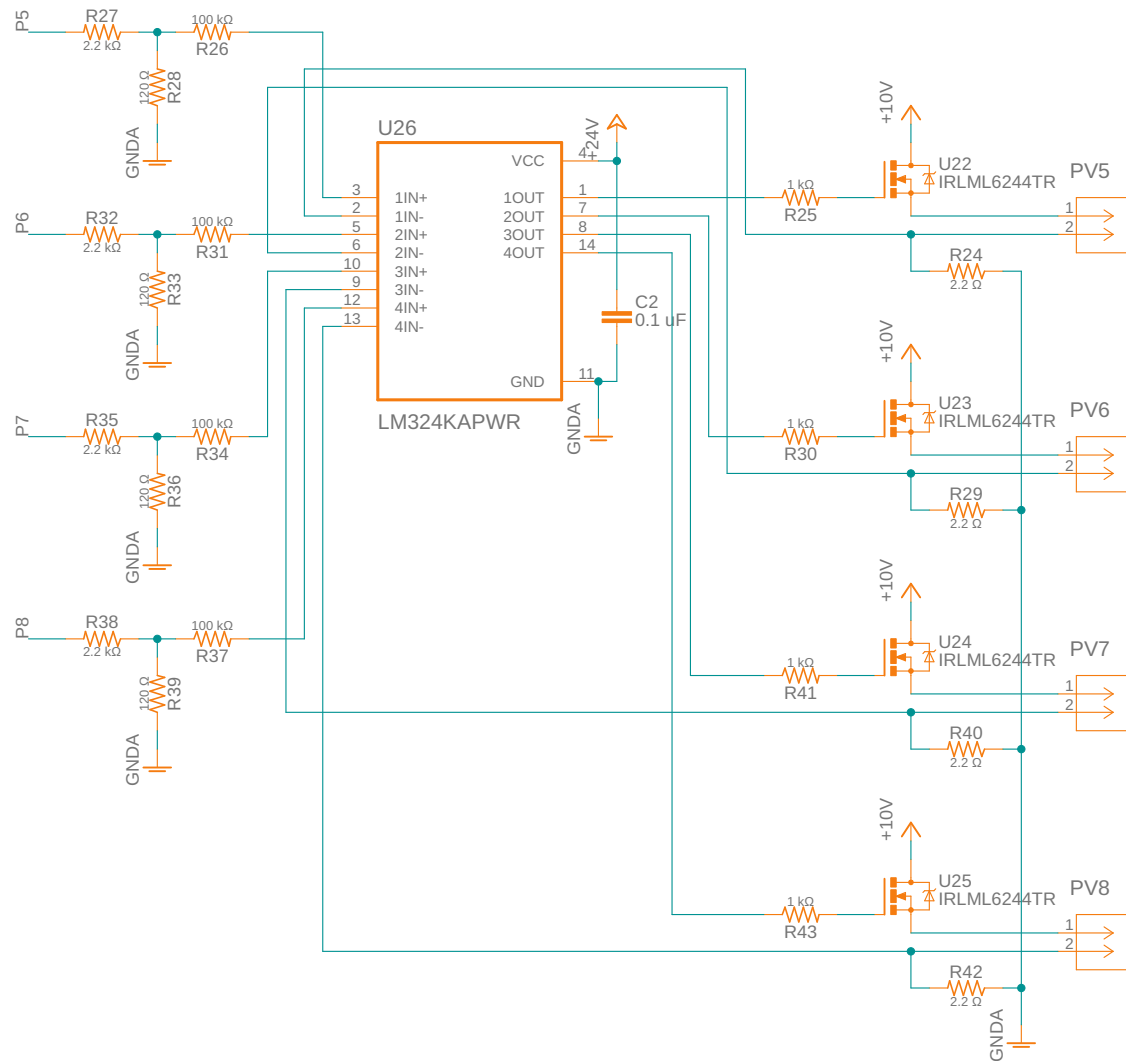

TITLE: MAIN CNTRL_v2 v166	
Document Number:	REV:
Date: 6/25/2026 4:19 PM	Sheet: 4/6

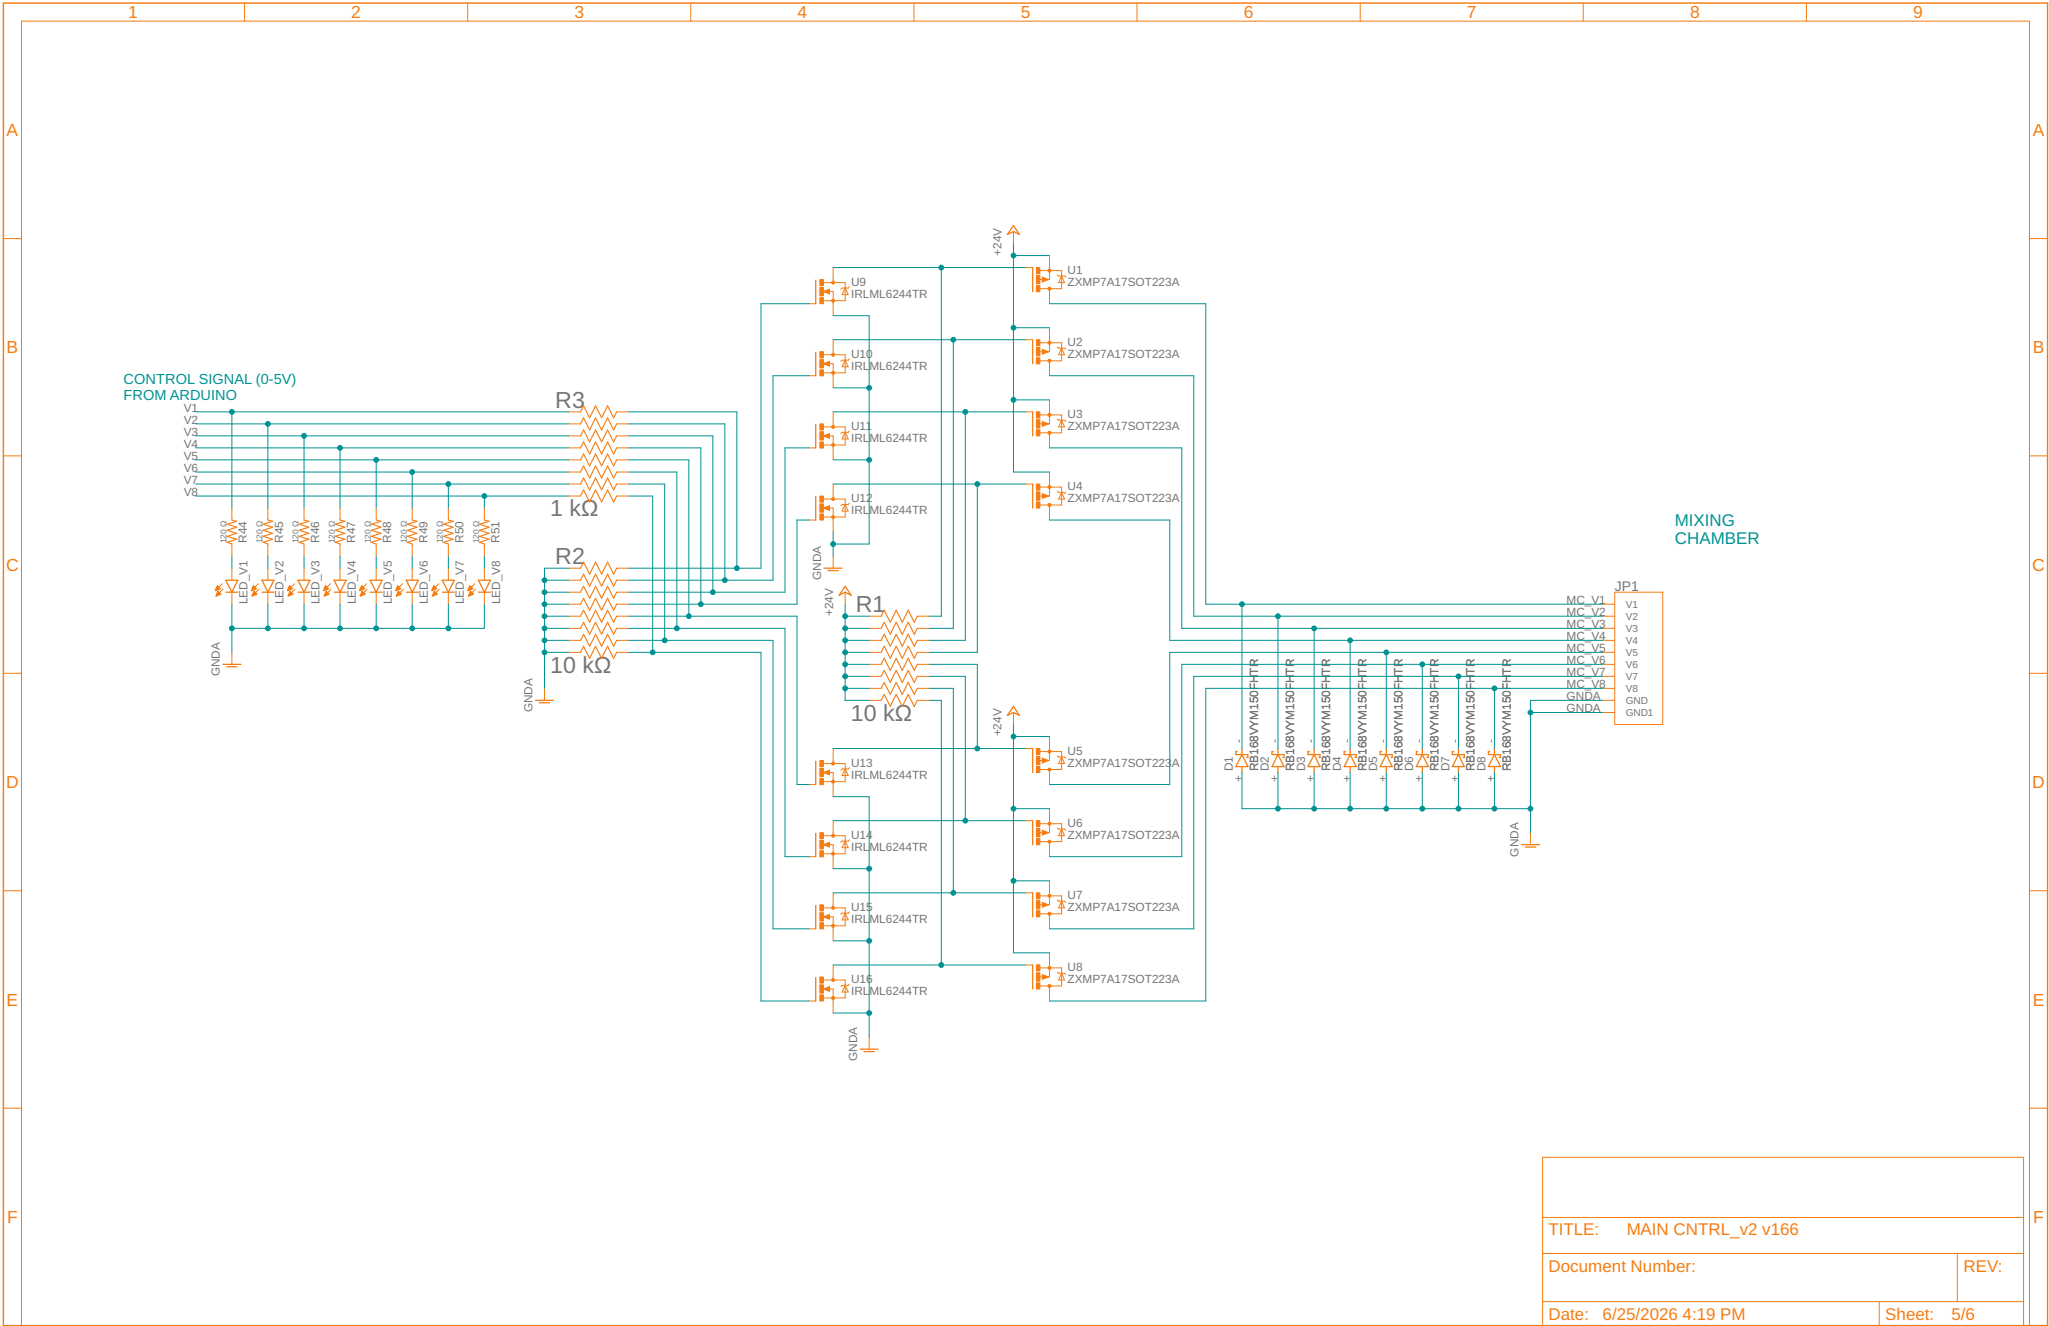

TITLE: MAIN CNTRL_v2 v166


Document Number:

REV:


Date: 6/25/2026 4:19 PM

Sheet: 5/6


(x2) isolation valves

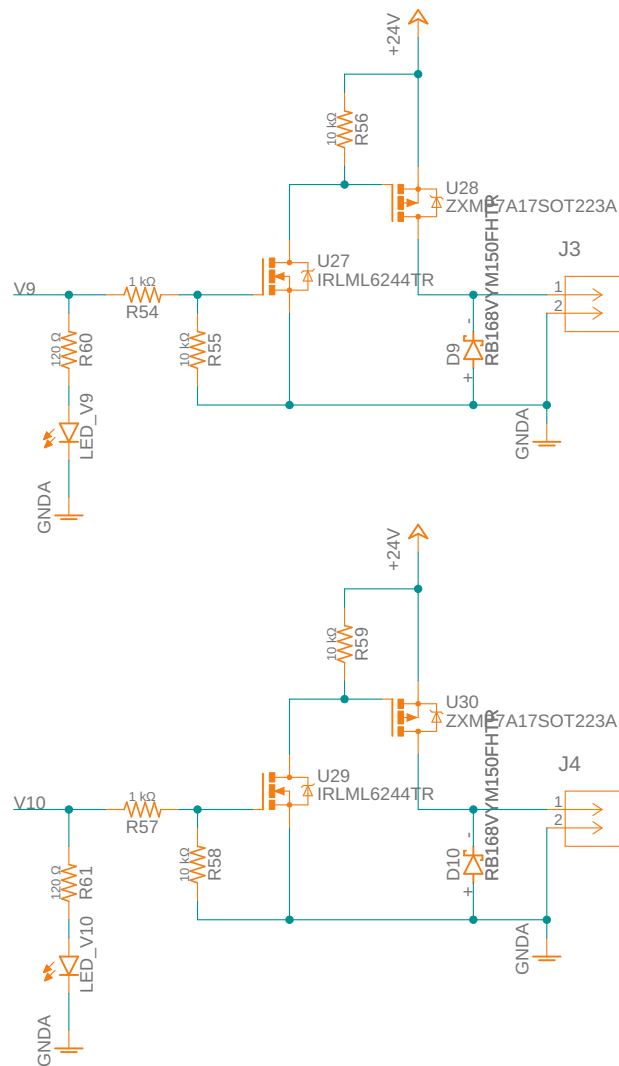


extra
proportional
valve

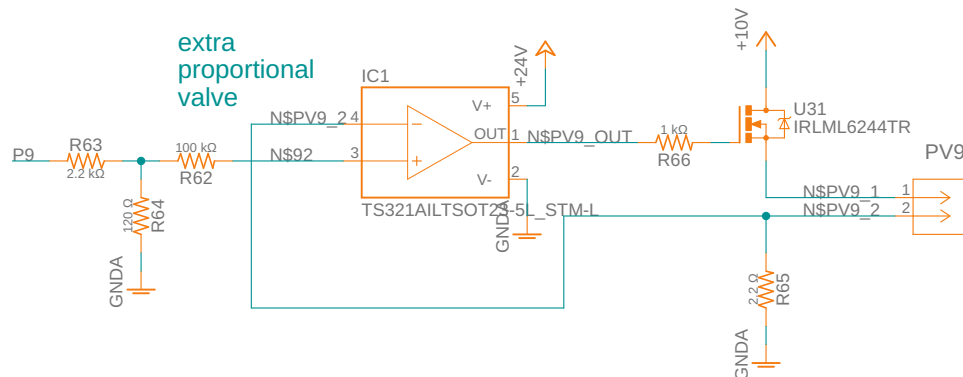

header pins for
extra flow sensor



header to
MFC board



TITLE: MAIN CNTRL_v2 v166

Document Number:

REV:

Date: 6/25/2026 4:19 PM

Sheet: 6/6