

BD2-AK2M2/F TAP-OFF UNIT

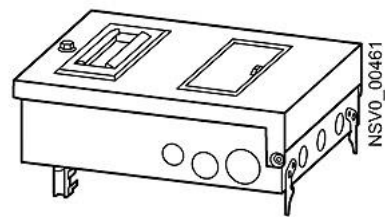


Figure similar

Model	
product designation	tap-off unit for BD2 busbar trunking system
operating voltage at AC	
• at 50 Hz rated value maximum	690 V
• at 60 Hz rated value maximum	690 V
Protection class	
protection class IP	IP54
Dissipation	
power loss [V·A] maximum	30 VA
Main circuit	
operating frequency rated value	
• minimum	50 Hz
• maximum	60 Hz
operational current	
• for circuit 1 at AC at 50 Hz rated value maximum	63 A
• for circuit 1 at AC at 60 Hz rated value maximum	63 A
Tap-off points	
outgoing unit version	cable entry
size of the outgoing unit	2
number of poles of the outgoing unit	5
Mechanical Design	
height	160 mm
width	205 mm
length	320 mm
number of modular width units	9
product component locking mechanism	Yes
Net Weight	3.9 kg
Approvals Certificates	
General Product Approval	



Further information	
Information on the packaging	
<a href="https://support.industry.siemens.com/cs/ww/en/view/109813875">https://support.industry.siemens.com/cs/ww/en/view/109813875</a>	
Information- and Downloadcenter (Catalogs, Brochures,...)	

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=BVP:203252>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/BVP:203252>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=BVP:203252](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=BVP:203252)

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

---

last modified:

9/2/2024 

