


Estimated ISO-TP Frames per UDS 0x29 Authentication

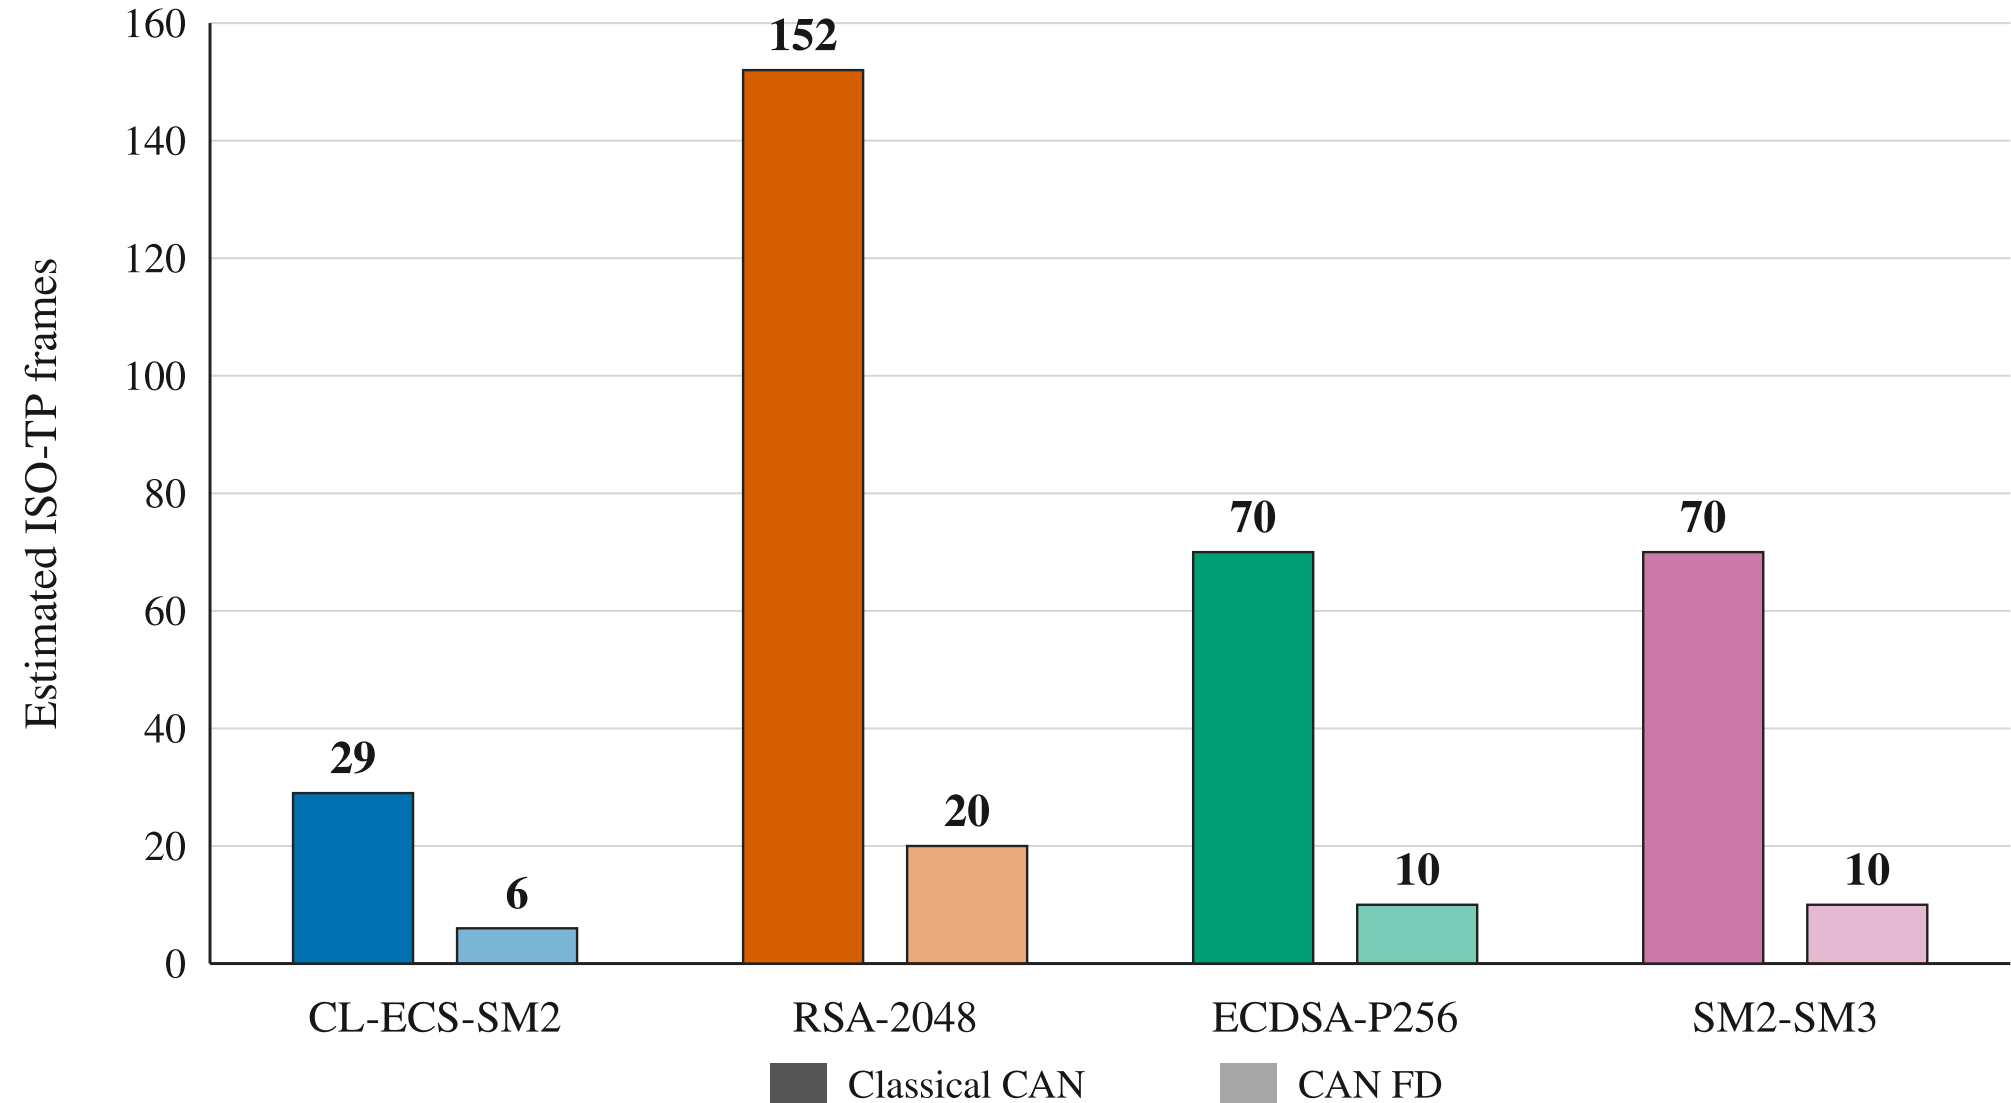

Normal addressing; simplified payload capacities; excludes flow-control frames