


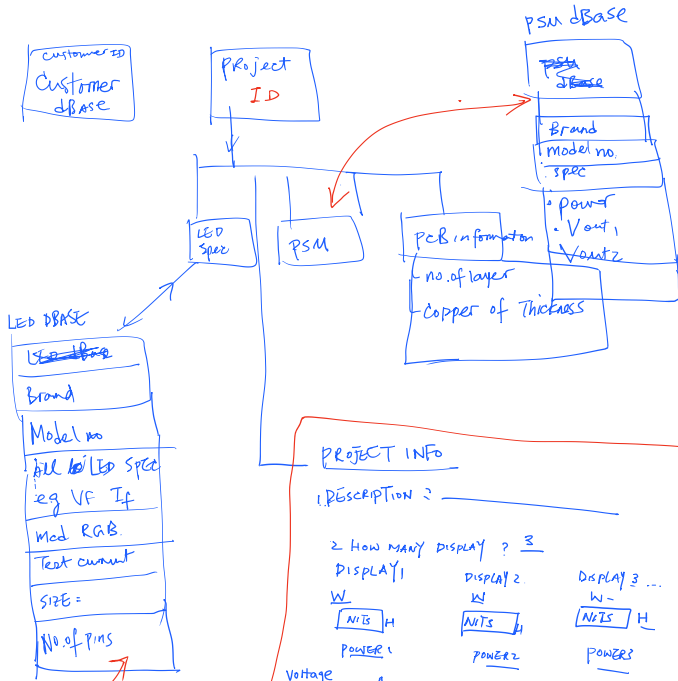

PROJECT INFO

1. Description :

2. How many display ? 3

Display 1

W NITS H

POWER

Voltage eg 120V @ A
no. of input

Display 2

W NITS H

POWER

Voltage eg 120V @ A
no. of input

Display 3 ...

W NITS H

POWER

Voltage eg 120V @ A
no. of input

Drag and drop : drawing

符号 symbol	项目 Item	单位 Units	发光颜色 Device	最小值 Min	典型值 Typ	最大值 Max	测试条件 Test Conditions
VF	正向电压 Forward Voltage	V	Red	1.6	2.1	2.4	IF=2mA
			Green	2.5	2.8	3.5	IF=2mA
			Blue	2.5	2.8	3.5	IF=2mA
Δ1/2	发光角度 Viewing Angle	°	/	/	110	/	/
Iv	发光强度 Luminous Intensity	md	Red	24	32	50	IF=2mA
			Green	90	116	150	IF=2mA
			Blue	15	21	28	IF=2mA
			Red	615	683	630	IF=2mA
λD	主波长 Dominate Wavelength	nm	Green	525	534	540	IF=2mA
			Blue	470	475	480	IF=2mA
			Blue	470	475	480	IF=2mA

符号	参数	条件	最小值	典型值	最大值	单位
V _{cc}	工作电压		3		5.5	V
I _{cc}	静态工作电流	ALL INPUT=0, 所有输出关闭 REXT=2K		5	7	mA
I _{ss}	输出恒流及偏差	V _{out} =0.55V REXT=2K		8.6		mA
V _{ref}	恒流输出所需电压	I _{ref} =15mA		550		mV
%V _m	恒流输出变化 (VS V _{ref})	I _{ref} =10mA		±1.5		%/V
%V _{ref}	恒流输出变化 (VS V _{ref})	I _{ref} =10mA		±0.1		%/V
逻辑电气参数 (DIN, DCLK, GCLK, LATCH&DOUT)						
V _{ih}	输入高电平电压	VDD=5V	3.5			V
V _{il}	输入低电平电压	VDD=5V			1.5	V
I _{il}	输入低电平电流	VINUT=0V (DCLK, GCLK, DIN,			10	nA