

Date of publication xxxx 00, 0000, date of current version xxxx 00, 0000.

Digital Object Identifier 10.1109/ACCESS.2026.XXXXXXX

# Multi-Horizon Hazard Models for Battery Failure Prediction: Within-Dataset Reliability, Cross-Chemistry Transferability, and Embedded Edge Deployment

ANONYMOUS<sup>1</sup>, ANONYMOUS<sup>2</sup>, ANONYMOUS<sup>3</sup>, AND ANONYMOUS<sup>4</sup>

<sup>1</sup>Affiliation 1, City, Country (e-mail: author1@example.com)

<sup>2</sup>Affiliation 2, City, Country (e-mail: author2@example.com)

<sup>3</sup>Affiliation 3, City, Country (e-mail: author3@example.com)

<sup>4</sup>Affiliation 4, City, Country (e-mail: author4@example.com)

Corresponding author: Anonymous (e-mail: corresponding.author@example.com).

This work received no external funding. The authors declare no conflicts of interest.

**ABSTRACT** Predicting whether a lithium-ion cell will fail inside a short operating window is a different question from estimating its remaining useful life, and it is the one that matters most for real-time dispatch in electric vehicles and grid storage. This paper widens a recently proposed multi-horizon hazard classification framework, first shown on one model and one dataset, into a study that covers four model families, three LCO training configurations, and two lithium-iron-phosphate (LFP) transfer targets. Within-dataset reliability holds across the board, with area under the curve (AUC) of 0.85 or better in 30 of 32 configurations under Platt calibration. A fairness-corrected comparison shows Platt scaling beats isotonic regression on discrimination, with the largest gap on the long-tailed CALCE set (AUC 0.713 to 0.887). The central result is a controlled State-of-Health (SOH) ablation: removing SOH collapses cross-chemistry AUC from 0.57–1.00 to 0.32–0.61 on Oxford LFP and to 0.54–0.88 on the 141-cell MIT–Stanford Severson set, with DeLong p values ranging down to  $2.6 \times 10^{-64}$  on Oxford and below  $10^{-100}$  on Severson. SOH therefore acts as a chemistry-specific lookup key rather than a transferable degradation signal, and isotonic calibration largely fails to transfer as well. On the deployment side, all three tree ensembles (900 trees, 26,336 nodes) pack into a 372 kB binary and run on a \$12 ESP32-S3 through a hand-written C tree walker, reproducing the Python training libraries to within  $1.1 \times 10^{-6}$  across all 1,028 validation rows, with measured single-row latency of 0.50–1.29 ms with all three models in PSRAM and 0.32–0.50 ms for a single model held in internal SRAM.

**INDEX TERMS** Battery failure prediction, multi-horizon hazard classification, cross-chemistry transfer, probability calibration, SHAP, embedded machine learning, ESP32-S3.

## I. INTRODUCTION

LITHIUM-ION batteries sit underneath the electrification of transport and the decarbonization of grids, yet their long-term reliability remains hard to certify in the field. Conventional prognostics casts the problem as remaining-useful-life (RUL) regression, where a model predicts a continuous cycle count to end of life [2], [3], [4]. RUL regression is fine for capacity-fade studies, but it answers a question operators rarely ask in real time. A battery management system needs to know whether a specific cell will survive the next mission, not how many

cycles it has left in aggregate.

Shikdar and Laaksonen [1] recast the problem as multi-horizon hazard classification. For a given cycle  $t$  and horizon  $H$ , the model predicts whether failure, defined as SOH below 0.80 or average voltage sag beyond 6%, occurs within the next  $H$  cycles. Their histogram-based gradient boosting model on the NASA 18650 set (37 LCO cells) reached AUC of 0.87–0.90 across  $H \in \{10, 20, 30, 50\}$ .

That work left three gaps open. First, one model on one dataset says nothing about sensitivity to the

learner, the hyperparameters, or the calibration method. Second, there was no cross-chemistry check, so nothing stopped a model trained on LCO from being trusted on LFP or NMC cells. Third, no path existed from a Python research prototype to the microcontroller where a battery management system actually runs.

This paper closes all three. The contributions are: (i) a four-model benchmark, three tree ensembles (XGBoost, LightGBM, Random Forest) plus a GRU sequence classifier, run on two LCO datasets (NASA 18650, CALCE LCO/CX2) under a unified 5-fold GroupKFold protocol; (ii) a controlled LCO-to-LFP transfer study onto two independent targets, the 5-cell Oxford pouch set and the 141-cell MIT–Stanford Severson set, with and without SOH as a feature, analyzed with DeLong significance tests and SHAP explanations; (iii) a fairness-corrected comparison of isotonic and Platt calibration; and (iv) a complete embedded deployment that packs all three ensembles into one flat binary and runs them on an ESP32-S3 through a hand-written C tree walker.

The second part of the paper focuses on transfer to unseen LFP chemistries. A second, independent result is that calibration methods themselves largely fail to transfer, since isotonic regression bins distribution-shifted scores into degenerate steps. We also quantify a deployment path for hazard prediction on embedded hardware, a topic that remains underexplored: model size, binary size, inference latency, and floating-point accuracy on a microcontroller.

## II. RELATED WORK

### A. FROM RUL REGRESSION TO HAZARD CLASSIFICATION

Data-driven battery prognostics has historically been regression. Meng and Li [2] group prior methods into physics-based, purely data-driven, and hybrid families. Tree ensembles, such as Random Forest [3], XGBoost [4], and LightGBM [5], have been applied to capacity and RUL estimation, but their use for binary hazard classification at multiple horizons is recent [1].

### B. CROSS-CHEMISTRY AND TRANSFER LEARNING

Transfer learning for battery state estimation is picking up. Sahoo et al. [10] fine-tuned an SOH estimator across NASA and CALCE cells, and Lu et al. [11] pretrained on large-scale degradation data before adapting to new cell types. Both target regression-based SOH estimation rather than classification-based hazard prediction. The hazard setting adds two complications: the label depends on the chosen horizon  $H$ , and the calibration of probability outputs, which decisions depend on, may degrade under distribution shift.

### C. CALIBRATION OF CLASSIFIER OUTPUTS

Post-hoc calibration maps raw classifier scores to probabilities. Platt scaling [12] fits a sigmoid through logistic

regression on the model's scores, while isotonic regression [13] fits a non-decreasing step function. Niculescu-Mizil and Caruana [14] showed Platt is safer on small datasets and isotonic can overfit, and Huang et al. [15] extended this to imbalanced classification. No prior study, to our knowledge, has compared the two calibrators under cross-chemistry distribution shift in battery prognostics.

## D. EXPLAINABILITY AND EDGE DEPLOYMENT

TreeSHAP [16] gives consistent feature attributions grounded in Shapley values and has become the standard tool for diagnosing which inputs drive an ensemble. On deployment, moving inference onto a microcontroller removes latency, connectivity requirements, and privacy concerns [17]. Porting tree ensembles to embedded platforms through model-to-code compilation has been done before [18], but the specific combination of multi-horizon hazard models with a hand-written C tree walker on a \$12 ESP32-S3 has not.

## III. METHODOLOGY

### A. COMPOSITE FAILURE LABEL

Following the original protocol [1], the State-of-Health of cell  $c$  at cycle  $k$  is the ratio of the discharge capacity to the mean capacity over the first 10 cycles,

$$\begin{aligned} \text{SOH}_k^{(c)} &= \frac{Q_k^{(c)}}{\bar{Q}^{(c)}}, \\ \bar{Q}^{(c)} &= \frac{1}{10} \sum_{i=1}^{10} Q_i^{(c)}, \end{aligned} \quad (1)$$

where  $Q_k^{(c)}$  is the discharge capacity at cycle  $k$ . The early-life voltage baseline is defined analogously,  $\bar{V}^{(c)} = \frac{1}{10} \sum_{i=1}^{10} \bar{V}_i^{(c)}$ , with  $\bar{V}_i^{(c)}$  the average discharge voltage. A discharge cycle  $t$  in cell  $c$  is labeled as failing within horizon  $H$  if any cycle  $k \in [t, t+H)$  meets either of two criteria,

$$y_t^{(c,H)} = \begin{cases} 1, & \exists k \in [t, t+H) : \text{SOH}_k^{(c)} \leq 0.80 \text{ or} \\ & \bar{V}_k^{(c)} < 0.94 \bar{V}^{(c)}, \\ 0, & \text{otherwise,} \end{cases} \quad (2)$$

and once triggered the label stays 1 for all later cycles. The task is to estimate the conditional probability of failure over the horizon,

$$p_t^{(c,H)} = \Pr(T_f \leq t+H \mid T_f > t, \mathbf{x}_t^{(c)}), \quad (3)$$

where  $T_f$  is the failure cycle and  $\mathbf{x}_t^{(c)}$  is the feature vector measured at cycle  $t$ . Datasets without voltage data, or where voltage sits at the cutoff as in Oxford's flat LFP plateau, fall back to the SOH criterion alone.

## B. DATASETS

Four public aging datasets are used. NASA 18650 [6] has 37 LCO cells aged under randomized charge–discharge profiles at room temperature, roughly 1,000 cycles per cell, with diverse failure modes. CALCE LCO/CX2 [7] provides 7 cells (CS2\_33–36, CX2\_36–38) at 1C/1C with per-cycle voltage, current, and capacity. On the LFP side, Oxford [8] has 5 pouch cells at 1C/1C under controlled temperature with 300–500 cycles each, and MIT–Stanford Severson [9] has 141 LFP cells under a fast-charging protocol with 534–2,237 cycles each (about 117K total).

## C. FEATURES AND PREPROCESSING

Each cycle is described by seven scalar features: cycle index, average discharge voltage, minimum discharge voltage, average discharge current, average temperature, discharge duration, and SOH. Trees are scale-invariant, so no standardization is applied to them; the GRU receives per-feature standardization using training-set statistics. Missing CALCE values (temperature and duration are unlogged) are filled with zero.

## D. TREE MODELS AND HYPERPARAMETERS

Three tree ensembles are benchmarked with hyperparameters matched to the original study [1]: XG-Boost [4] with max\_depth 4, 300 estimators, learning rate 0.05, subsample 0.8, colsample\_bytree 0.8, and min\_child\_weight 5; LightGBM [5] with the same depth, count, and rate; and Random Forest [3] with max\_depth 6 and 300 estimators. All use random\_state 42 for deterministic replication.

## E. GRU SEQUENCE CLASSIFIER

A compact GRU tests whether sequence-aware representations capture trajectories that transfer across chemistries. It ingests a sliding window of  $W=10$  consecutive cycles per cell as a  $10 \times f$  tensor and runs one GRU layer with 8 hidden units. At each timestep the standard update equations apply,

$$\begin{aligned} \mathbf{r}_t &= \sigma(\mathbf{W}_r \mathbf{x}_t + \mathbf{U}_r \mathbf{h}_{t-1}), \\ \mathbf{z}_t &= \sigma(\mathbf{W}_z \mathbf{x}_t + \mathbf{U}_z \mathbf{h}_{t-1}), \\ \tilde{\mathbf{h}}_t &= \tanh(\mathbf{W}_h \mathbf{x}_t + \mathbf{U}_h (\mathbf{r}_t \odot \mathbf{h}_{t-1})), \\ \mathbf{h}_t &= (1 - \mathbf{z}_t) \odot \mathbf{h}_{t-1} + \mathbf{z}_t \odot \tilde{\mathbf{h}}_t, \end{aligned} \quad (4)$$

and the final hidden state maps through a linear layer with sigmoid activation,  $p = \sigma(\mathbf{w}^\top \mathbf{h}_W + b)$ , to give the failure probability. Adam with learning rate 0.005 and binary cross-entropy loss are used. The 8-unit width was chosen to match the small number of training cells (7 to 37); wider layers overfit severely. For cross-chemistry runs the feature set is reduced to avoid unit and availability mismatches: average current is dropped (amperes for LCO, milliamperes for LFP), as are temperature and

duration. The remaining features, cycle number, average voltage, minimum voltage, and SOH when enabled, are standardized with training-set statistics.

## F. CALIBRATION PROTOCOL

Two post-hoc calibration schemes are compared under a fairness-corrected protocol. Platt scaling fits a sigmoid to the base model's raw scores  $s_i$ ,

$$p_i = \frac{1}{1 + \exp(-\alpha s_i - \beta)}, \quad (5)$$

by high-regularization logistic regression (LogisticRegression,  $C=10^{10}$ ). Isotonic regression fits the non-decreasing step function that minimizes squared error,

$$\mathbf{g} = \arg \min_{\mathbf{g} \text{ non-decreasing}} \sum_i (y_i - g(s_i))^2, \quad (6)$$

implemented with scikit-learn's IsotonicRegression and out-of-bounds clipping. Both calibrators are fit on the base model's training-fold scores, so they share identical inputs and any difference in output comes from the calibration function alone, isolating it from the confound of retraining or data splitting.

A reproducibility note is warranted. The original study [1] reported Brier scores around 0.032; our re-execution of the released code yields Brier values between roughly 0.09 and 0.29, a gap of up to ninefold we could not resolve from the available source. Our AUC values (0.77–0.94) are comparable to the published range, and our qualitative conclusions hold. The Brier gap does not affect the relative comparisons that form the core of this paper.

## G. CROSS-CHEMISTRY TRANSFER PROTOCOL

Transfer is evaluated by training on LCO cells (NASA alone, CALCE alone, or both) and testing independently on each cell of the two LFP targets. Three configurations are explored: NASA→LFP (37 cells), CALCE→LFP (7 cells), and ALL-LCO→LFP (44 cells). Each is evaluated with and without SOH. Performance is reported as per-cell mean  $\pm$  standard deviation rather than one pooled score, since pooling conflates within-cell ranking with between-cell differences and can hide degenerate behavior where a model assigns nearly identical scores to every cell.

## H. EVALUATION AND STATISTICAL TESTING

Within-dataset evaluation applies 5-fold GroupKFold with cells as grouping units, so every cycle from a given cell stays in one fold. This removes the optimistic bias from leaking a cell's cycles into both training and test. Models are retrained from scratch per horizon. The DeLong nonparametric test [19] for paired ROC

curves judges whether the AUC difference between with-SOH and without-SOH conditions is significant. The test evaluates the normalized difference of the two areas,

$$z = \frac{A_1 - A_2}{\sqrt{V_{11} + V_{22} - 2V_{12}}}, \quad (7)$$

where  $A_j$  is the empirical area under the  $j$ -th ROC curve and  $V_{ij}$  are the elements of its covariance matrix estimated nonparametrically from the same test instances.

### I. EMBEDDED DEPLOYMENT ARCHITECTURE

The deployment pipeline exports the three trained models into one flat binary and runs them on an ESP32-S3 through a hand-written C tree walker. The layout is deliberately simple: a 12-byte file header, a  $3 \times 4$ -byte offset table, and per-model sections holding a 4-byte tree count followed by consecutive per-tree node arrays. Each node stores the split feature index, the split threshold as a 32-bit float, and child indices; leaves store the class-1 probability directly. The walker is one C function of about 70 lines that follows child pointers, sums the leaf contributions per tree, and applies the per-model output transform. Writing  $\ell_t$  for the leaf value reached in tree  $t$  and  $T$  for the number of trees, Random Forest averages and clamps its leaf probabilities,

$$p = \text{clamp}\left(\frac{1}{T} \sum_{t=1}^T \ell_t, 0, 1\right), \quad (8)$$

while XGBoost and LightGBM pass the summed score through a sigmoid,

$$p = \frac{1}{1 + \exp(-\sum_{t=1}^T \ell_t - s_0)}, \quad (9)$$


where  $s_0$  is the model's initialization score ( $s_0 \neq 0$  only for XGBoost). Fig. 1 shows the wiring. Three validation stages confirm correctness: a Python walker that mirrors the C logic and is compared against `predict_proba()`, a cross-compiled C binary tested on desktop x86\_64, and on-target execution on an ESP32-S3-DevKitC-1 reading the binary from flash. All three must report maximum absolute error below  $10^{-5}$  on every row before deployment is accepted.

## IV. RESULTS

### A. WITHIN-DATASET PERFORMANCE

Table 1 summarizes within-dataset performance across the four horizons for both LCO datasets under Platt calibration. Discrimination is strong throughout. Mean AUC runs from 0.844 (GRU on CALCE) to 0.913 (Random Forest on NASA and XGBoost on CALCE). Every tree-model configuration clears the 0.85 bar; the only two configurations that fall short are both the GRU on CALCE, at  $H=20$  (0.779) and  $H=30$  (0.768), where the sequence model overfits a dataset whose per-cell degradation tails run to nearly 2,000 cycles.


## Battery Failure Predictor — Prototype Wiring (Breadboard)

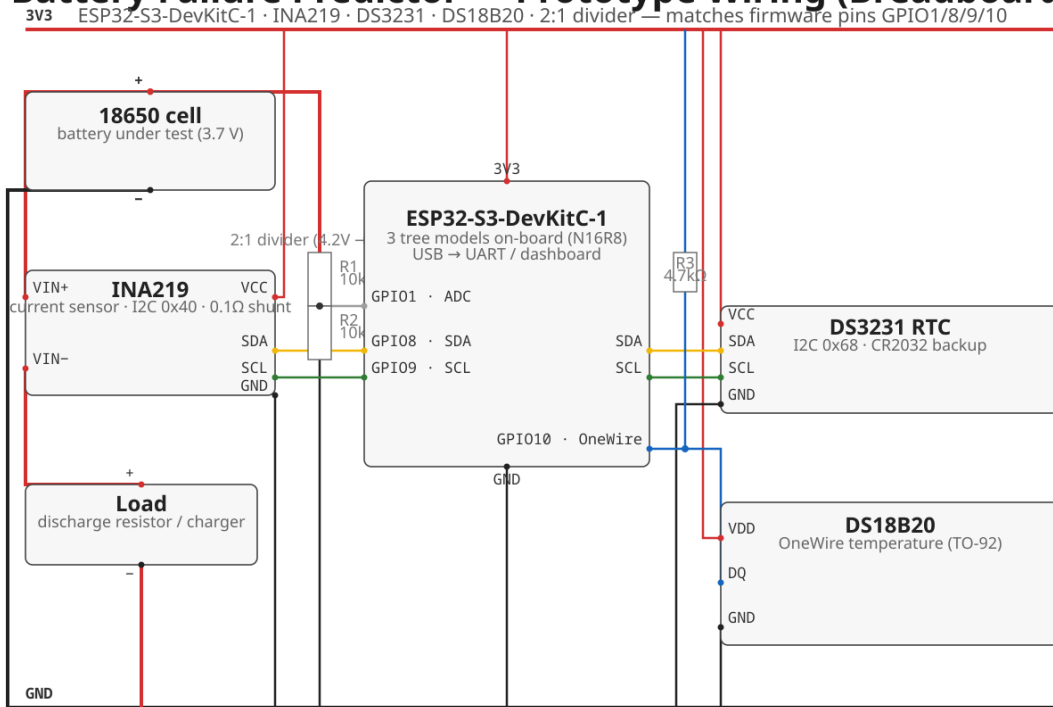

**FIGURE 1.** Prototype wiring for the ESP32-S3 deployment. The battery discharges through the INA219 shunt into a load, the 2:1 divider senses cell voltage at ADC GPIO1, and I2C (GPIO8/9) serves the INA219 and DS3231 while OneWire (GPIO10) reads the DS18B20. The boards are a \$12 ESP32-S3-DevKitC-1 and two breakout modules.

**TABLE 1.** Within-Dataset Platt-Calibrated AUC and Brier Scores Across Four Horizons. GroupKFold by Cell; Values Are Fold Means.

| Model         | Dataset | H=10  | H=20  | H=30  | H=50  | Mean AUC | Brier |
|---------------|---------|-------|-------|-------|-------|----------|-------|
| XGBoost       | NASA    | 0.903 | 0.899 | 0.910 | 0.918 | 0.907    | 0.197 |
| XGBoost       | CALCE   | 0.916 | 0.926 | 0.911 | 0.899 | 0.913    | 0.101 |
| LightGBM      | NASA    | 0.912 | 0.909 | 0.892 | 0.901 | 0.903    | 0.250 |
| LightGBM      | CALCE   | 0.908 | 0.924 | 0.886 | 0.916 | 0.909    | 0.101 |
| Random Forest | NASA    | 0.911 | 0.901 | 0.912 | 0.927 | 0.913    | 0.209 |
| Random Forest | CALCE   | 0.895 | 0.889 | 0.884 | 0.864 | 0.883    | 0.095 |
| GRU           | NASA    | 0.930 | 0.884 | 0.876 | 0.868 | 0.889    | 0.191 |
| GRU           | CALCE   | 0.944 | 0.779 | 0.768 | 0.885 | 0.844    | 0.124 |

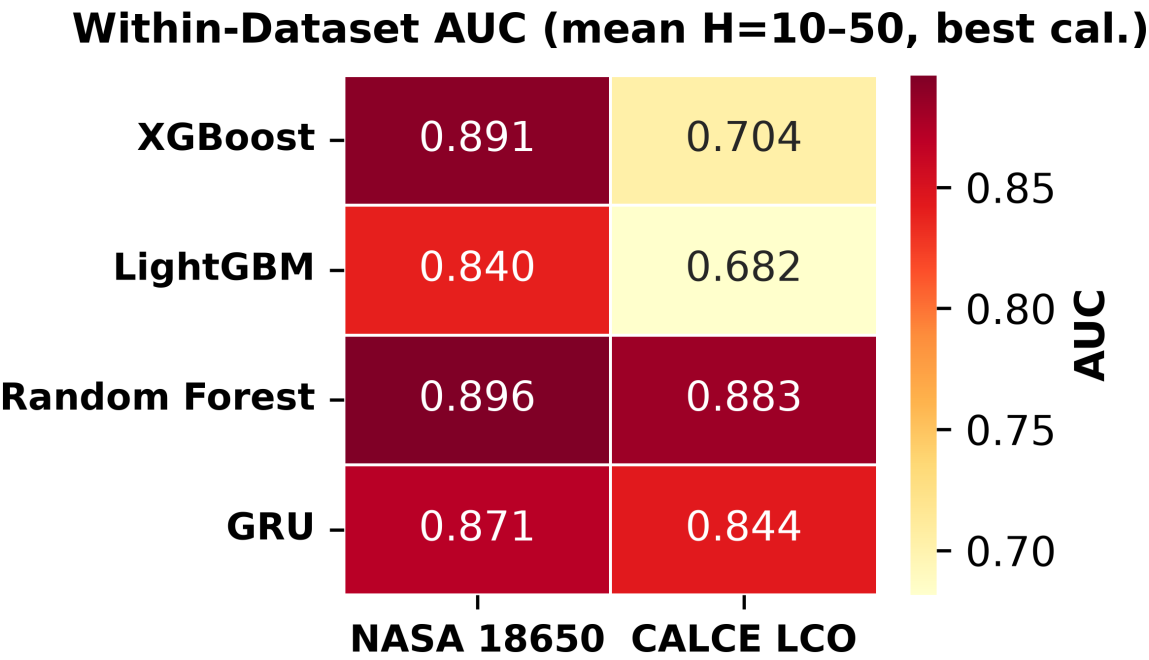

**FIGURE 2.** Within-dataset AUC heatmap, mean across horizons, Platt-calibrated.

### B. PLATT VERSUS ISOTONIC CALIBRATION

Table 2 compares the two calibration methods, (5) and (6), averaged over models and horizons. Brier scores barely move (NASA: 0.209 isotonic versus 0.212 Platt; CALCE: 0.107 versus 0.105). The AUC picture is different. On NASA, Platt lifts mean AUC from 0.838 to 0.903; on CALCE the gain is much larger, 0.713 to 0.887. The asymmetry comes from CALCE's long-tailed degradation (up to 1,952 cycles per cell), which pushes extreme scores into degenerate isotonic bins, while Platt's sigmoid compresses them smoothly.

TABLE 2. Calibration Method Comparison Averaged Over Models and Horizons. Both Methods Operate on Identical Training-Fold Scores.

| Dataset | Iso. AUC | Platt AUC | Iso. Brier | Platt Brier |
|---------|----------|-----------|------------|-------------|
| NASA    | 0.838    | 0.903     | 0.209      | 0.212       |
| CALCE   | 0.713    | 0.887     | 0.107      | 0.105       |

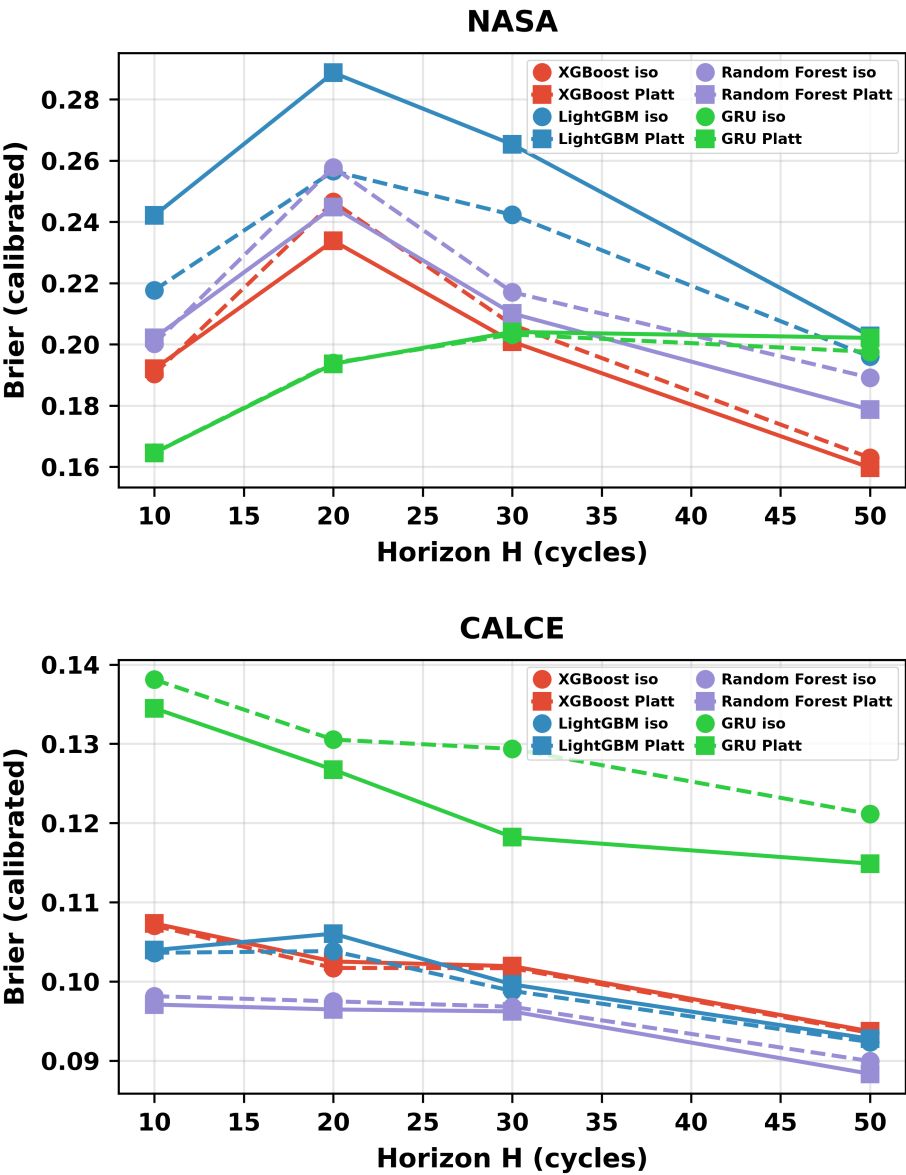


FIGURE 3. Reliability diagrams for NASA (top) and CALCE (bottom), XGBoost at H=20. Isotonic produces degenerate bins on long-tailed CALCE data.



### C. CROSS-CHEMISTRY TRANSFER WITH AND WITHOUT SOH

Table 3 reports transfer at  $H=20$  with SOH kept. Tree models reach raw AUC of 0.57–1.00 on Oxford and 0.95–1.00 on Severson across every training configuration, while the GRU struggles: its distributed hidden state entangles SOH with chemistry-specific features under shift.

The combined evidence points to SOH as a chemistry-specific lookup key rather than a transferable feature. With SOH available, a model learns a mapping such as “SOH 0.85 means roughly 50 cycles to failure” from LCO data and applies it unchanged to LFP, where the mapping is numerically similar for unrelated electrochemical reasons. Without SOH, the remaining features carry no chemistry-invariant signal sufficient for cross-chemistry discrimination.

**TABLE 3.** Cross-Chemistry Transfer at H=20 With SOH. AUC Reported as Per-Cell Mean Across Test Cells.

| Training | Model         | Target   | Raw AUC | Iso. AUC |
|----------|---------------|----------|---------|----------|
| NASA     | XGBoost       | Oxford   | 0.959   | 0.773    |
| NASA     | XGBoost       | Severson | 0.997   | 0.532    |
| NASA     | LightGBM      | Oxford   | 1.000   | 0.969    |
| NASA     | LightGBM      | Severson | 0.992   | 0.988    |
| NASA     | Random Forest | Oxford   | 1.000   | 0.782    |
| NASA     | Random Forest | Severson | 0.999   | 0.523    |
| CALCE    | XGBoost       | Oxford   | 0.572   | 0.510    |
| CALCE    | XGBoost       | Severson | 0.973   | 0.624    |
| CALCE    | LightGBM      | Oxford   | 0.837   | 0.513    |
| CALCE    | LightGBM      | Severson | 0.952   | 0.617    |
| CALCE    | Random Forest | Oxford   | 0.766   | 0.510    |
| CALCE    | Random Forest | Severson | 0.996   | 0.664    |
| ALL LCO  | XGBoost       | Oxford   | 0.815   | 0.510    |
| ALL LCO  | XGBoost       | Severson | 0.995   | 0.630    |
| ALL LCO  | LightGBM      | Oxford   | 0.969   | 0.510    |
| ALL LCO  | LightGBM      | Severson | 0.993   | 0.580    |
| ALL LCO  | Random Forest | Oxford   | 0.992   | 0.572    |
| ALL LCO  | Random Forest | Severson | 0.996   | 0.952    |

**TABLE 4.** Cross-Chemistry Transfer at H=20 Without SOH.

| Training | Model         | Target   | Raw AUC | Iso. AUC |
|----------|---------------|----------|---------|----------|
| NASA     | XGBoost       | Oxford   | 0.519   | 0.508    |
| NASA     | XGBoost       | Severson | 0.676   | 0.516    |
| NASA     | LightGBM      | Oxford   | 0.448   | 0.448    |
| NASA     | LightGBM      | Severson | 0.535   | 0.491    |
| NASA     | Random Forest | Oxford   | 0.442   | 0.541    |
| NASA     | Random Forest | Severson | 0.836   | 0.500    |
| CALCE    | XGBoost       | Oxford   | 0.388   | 0.513    |
| CALCE    | XGBoost       | Severson | 0.797   | 0.614    |
| CALCE    | LightGBM      | Oxford   | 0.410   | 0.513    |
| CALCE    | LightGBM      | Severson | 0.830   | 0.606    |
| CALCE    | Random Forest | Oxford   | 0.435   | 0.510    |
| CALCE    | Random Forest | Severson | 0.870   | 0.622    |
| ALL LCO  | XGBoost       | Oxford   | 0.417   | 0.510    |
| ALL LCO  | XGBoost       | Severson | 0.860   | 0.725    |
| ALL LCO  | LightGBM      | Oxford   | 0.316   | 0.510    |
| ALL LCO  | LightGBM      | Severson | 0.808   | 0.595    |
| ALL LCO  | Random Forest | Oxford   | 0.608   | 0.541    |
| ALL LCO  | Random Forest | Severson | 0.876   | 0.836    |


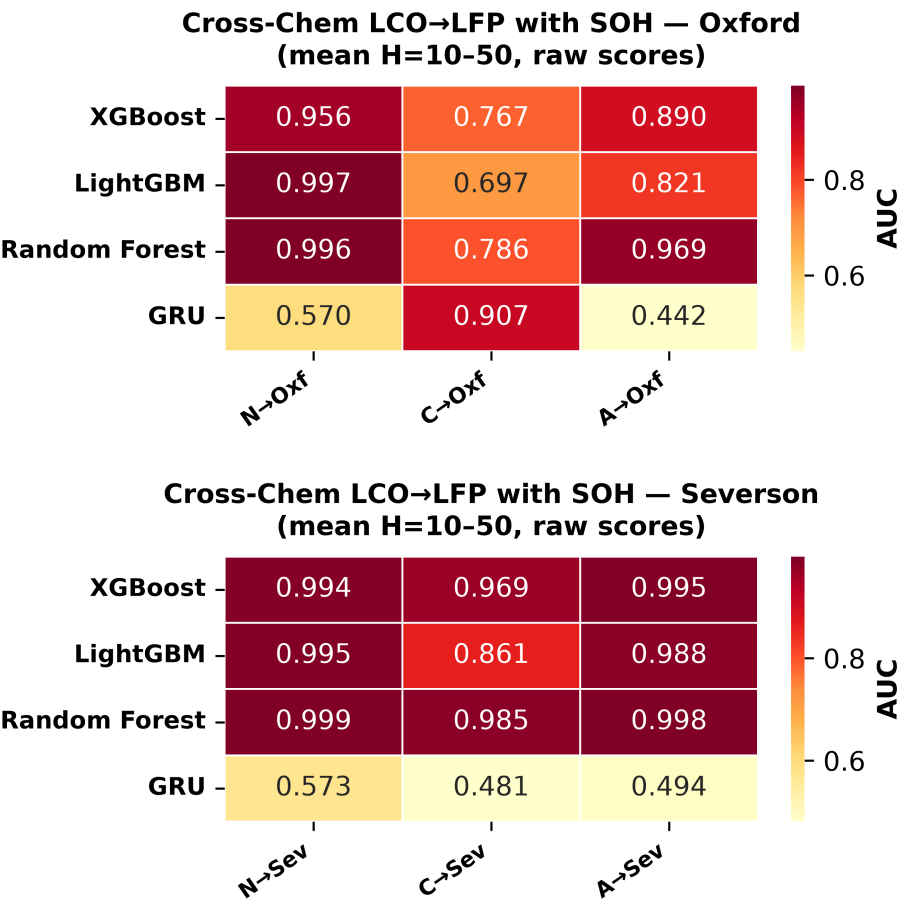


FIGURE 4. Cross-chemistry transfer with SOH, raw AUC. Top: Oxford, bottom: Severson.

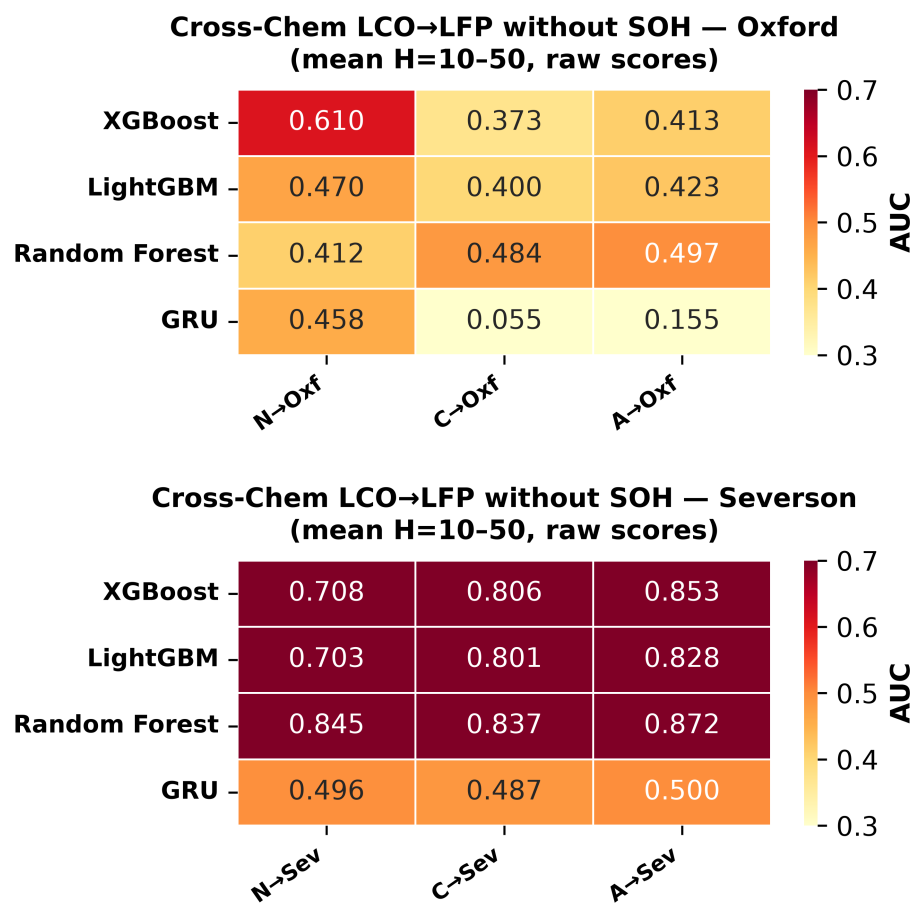

**FIGURE 5.** Cross-chemistry transfer without SOH, raw AUC. Top: Oxford, bottom: Severson.

#### D. GRU ENTANGLEMENT UNDER DISTRIBUTION SHIFT

The GRU shows an architecture-specific failure that differs from the trees. Its 8-dimensional hidden state compresses SOH together with voltage, current, and cycle trends across the 10-step window. Under LCO-to-LFP shift the entangled voltage and cycle components partially corrupt the SOH signal: even with SOH, raw AUC stays near chance on Oxford (0.475–0.515) and Severson (0.480–0.578) at  $H=20$ , against 0.57–0.84 for the CALCE-trained trees. Removing SOH deepens the failure into an inversion of Oxford rankings (0.309 for NASA-trained, down to 0.031 and 0.115 for CALCE- and ALL-LCO-trained runs); CALCE’s 92% composite-failure rate saturates the learned decision boundary, which then ranks Oxford’s feature distribution backwards.

#### E. CALIBRATION METHODS THEMSELVES FAIL TO TRANSFER

A second, independent failure appears in the cross-chemistry tables when isotonic calibration is applied. Tree models lose up to 0.48 AUC points depending on the configuration (from 0.004 to 0.476 across Table 3); the largest losses hit NASA-trained XGBoost and Random Forest on Severson (0.465 and 0.476), while a few configurations are barely affected, most notably NASA LightGBM, which keeps isotonic AUC of 0.969 and 0.988 against raw values of 1.000 and 0.992. The collapse happens because isotonic’s step function is fit to the training distribution; when test scores shift, several different scores land in one bin and get identical calibrated probabilities, which drags AUC down through tied predictions.

#### F. DELONG TEST: STATISTICAL SIGNIFICANCE OF THE SOH ABLATION

Table 5 reports DeLong p-values, computed with (7), for the ALL-LCO→LFP ablation at  $H=20$ . On Oxford the values range from  $6.5 \times 10^{-36}$  (Random Forest) down to  $2.6 \times 10^{-64}$  (LightGBM); on Severson all three fall below  $10^{-100}$ . The test accounts for the correlation between with-SOH and without-SOH AUCs computed on the same instances, so these numbers are decisive rather than a quirk of paired sampling.

**TABLE 5.** DeLong Test  $p$ -Values for the SOH Ablation (ALL-LCO  $\rightarrow$  LFP, H=20). AUCs Are Pooled Across Test Cells (See Table 3 for Per-Cell Means). All Comparisons Are Significant at  $\alpha = 0.05$ .

| Target   | Model         | AUC w/ SOH | AUC w/o SOH | p-value               |
|----------|---------------|------------|-------------|-----------------------|
| Oxford   | XGBoost       | 0.917      | 0.429       | $7.2 \times 10^{-51}$ |
| Oxford   | LightGBM      | 0.971      | 0.332       | $2.6 \times 10^{-64}$ |
| Oxford   | Random Forest | 0.989      | 0.581       | $6.5 \times 10^{-36}$ |
| Severson | XGBoost       | 0.896      | 0.750       | $< 10^{-100}$         |
| Severson | LightGBM      | 0.882      | 0.718       | $< 10^{-100}$         |
| Severson | Random Forest | 0.889      | 0.746       | $< 10^{-100}$         |

### G. LABELED LFP RECALIBRATION

The transfer experiment also asks whether a small labeled LFP sample can repair a model trained on LCO. We evaluated two update arms at  $H = 20$ . Arm A fits an isotonic, Platt, or temperature calibrator on the labeled sample while leaving the classifier scores unchanged. Arm B continues XGBoost or LightGBM from the LCO model, or refits a Random Forest on the sample. The primary Severson study used five random seeds and  $k \in \{5, 10, 20, 40\}$ ; NASA used all six model-feature combinations, whereas CALCE and ALL-LCO used XGBoost without SOH. Oxford used its five cells exhaustively at  $k \in \{1, 2\}$  for the no-SOH XGBoost configuration, without redundant seed repetitions. The resumable run produced 1,047 rows from 216 checkpoint entries.


Arm A improves calibration error but does not reliably preserve discrimination under the chemistry shift. Averaged across the Severson source/model configurations without SOH, zero-shot ECE is 0.817. At  $k = 5$ , isotonic and Platt reduce it to 0.044 and 0.045, respectively, while temperature scaling remains at 0.563. The corresponding mean AUCs are 0.616, 0.599, and 0.669, because the calibrators create ties or reverse score rankings on the shifted target. For  $k \geq 10$ , isotonic and Platt ECE remain near 0.01–0.015, but the AUC penalty remains visible. Table 6 and Fig. 6 summarize this calibration-only trade-off.

Arm B gives a more useful but source-dependent result. With NASA-trained XGBoost and  $k = 5$ , the Severson AUC rises from 0.637 to 0.818, recovering 0.87 of the within-LCO ceiling. NASA-trained LightGBM rises from 0.514 to 0.774, while Random Forest falls slightly from 0.744 to 0.726 and degrades LCO-holdout retention from 0.959 to 0.368. CALCE-trained XGBoost improves from 0.685 to 0.736 but also reduces retention from 0.997 to 0.613. The ALL-LCO XGBoost update is counterproductive at this sample size, falling from 0.768 to 0.704. These results show that labeled target data can recover transferred discrimination, but the update can damage the source-chemistry operating point; increasing  $k$  is not a universal remedy. Table 7 gives the  $k = 5$  comparison, and Fig. 7 shows the full seed-averaged trajectory.




**TABLE 6.** Arm A Recalibration on Severson Without SOH. Values Average the Three LCO Sources and Available Tree Models at  $H = 20$ ; ECE Uses 10 Equal-Width Probability Bins.


| k  | Zero ECE | Iso. ECE | Platt ECE | Temp. ECE | Iso. AUC | Platt AUC | Temp. AUC |
|----|----------|----------|-----------|-----------|----------|-----------|-----------|
| 5  | 0.817    | 0.044    | 0.045     | 0.563     | 0.616    | 0.599     | 0.669     |
| 10 | 0.816    | 0.010    | 0.010     | 0.561     | 0.634    | 0.646     | 0.651     |
| 20 | 0.814    | 0.013    | 0.013     | 0.560     | 0.634    | 0.655     | 0.648     |
| 40 | 0.816    | 0.015    | 0.015     | 0.561     | 0.637    | 0.657     | 0.653     |

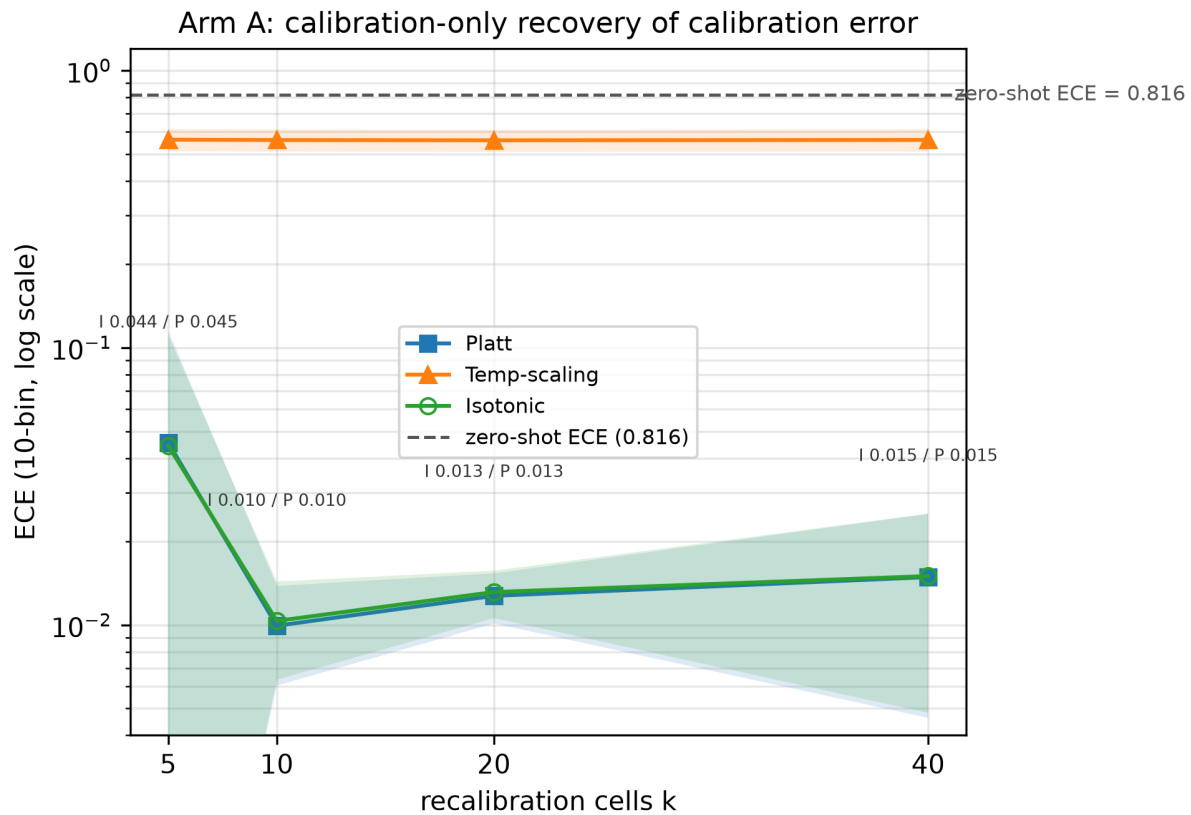**FIGURE 6.** Arm A calibration-only recalibration on Severson at  $H = 20$  without SOH. Isotonic and Platt sharply reduce ECE, while temperature scaling remains poorly calibrated under the shift.**TABLE 7.** Arm B Recovery at  $k = 5$  on Severson Without SOH,  $H = 20$ . Recovery Ratio Uses the Within-LCO Ceiling; Retention Is the LCO-Holdout AUC Before and After the Update.

| Training | Model         | Zero AUC | Arm B AUC | Recovery | DeLong p    | LCO retention             |
|----------|---------------|----------|-----------|----------|-------------|---------------------------|
| NASA     | XGBoost       | 0.637    | 0.818     | +0.87    | $< 10^{-3}$ | 1.000 $\rightarrow$ 1.000 |
| NASA     | LightGBM      | 0.514    | 0.774     | +0.69    | $< 10^{-3}$ | 1.000 $\rightarrow$ 0.988 |
| NASA     | Random Forest | 0.744    | 0.726     | -0.24    | $< 10^{-3}$ | 0.959 $\rightarrow$ 0.368 |
| CALCE    | XGBoost       | 0.685    | 0.736     | +0.24    | $< 10^{-3}$ | 0.997 $\rightarrow$ 0.613 |
| ALL LCO  | XGBoost       | 0.768    | 0.704     | -0.44    | 0.017       | 0.690 $\rightarrow$ 0.597 |

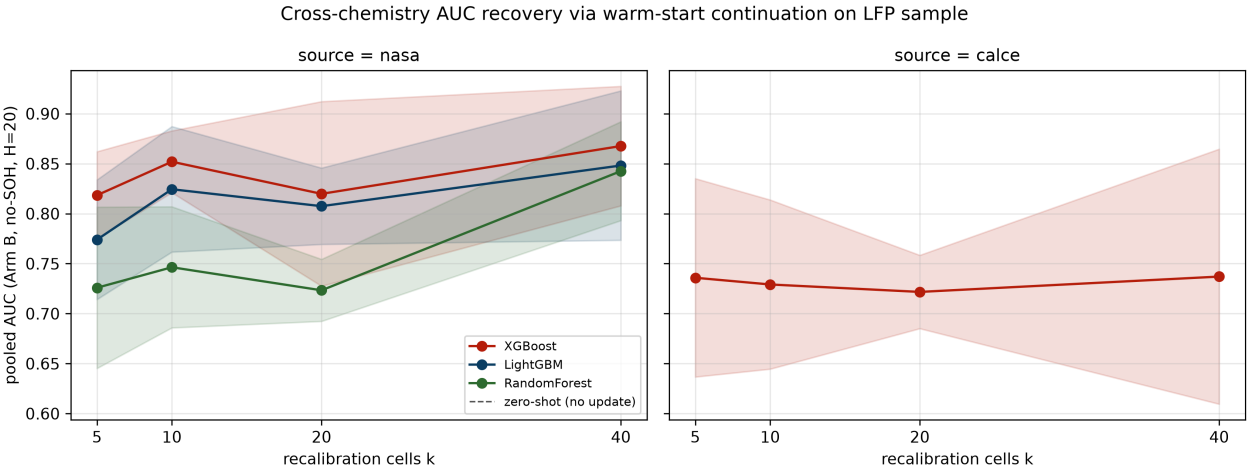


**FIGURE 7.** Arm B AUC recovery on Severson at  $H = 20$  without SOH. Lines show seed means and shaded regions show seed standard deviations; the within-LCO and full-LFP ceilings are shown for reference.

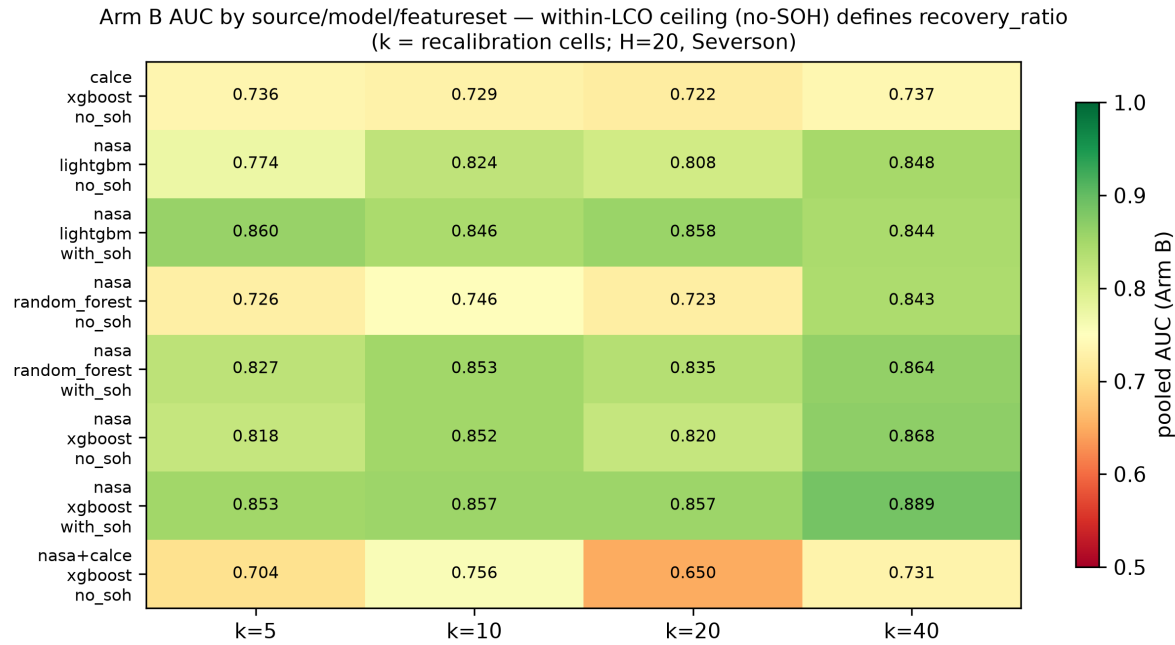


**FIGURE 8.** Arm B AUC heatmap for the Severson recalibration study. Recovery ratios are defined against the feature-matched within-LCO ceiling rather than the full-LFP retraining ceiling.

#### H. SHAP FEATURE IMPORTANCE


TreeSHAP [16] gives a direct test of the lookup-table hypothesis. Figs. 9–11 show the attributions for the three tree models in NASA-to-Oxford transfer at  $H=20$  with SOH kept: SOH dominates by a wide margin, cycle index a distant second, and the voltage, current, temperature, and duration features contribute little. Figs. 12–14 repeat the same comparisons with SOH removed, and every remaining feature collapses to near-zero SHAP spread. That visual collapse matches the quantitative AUC collapse and reads as a one-glance demonstration of the paper’s central negative result.

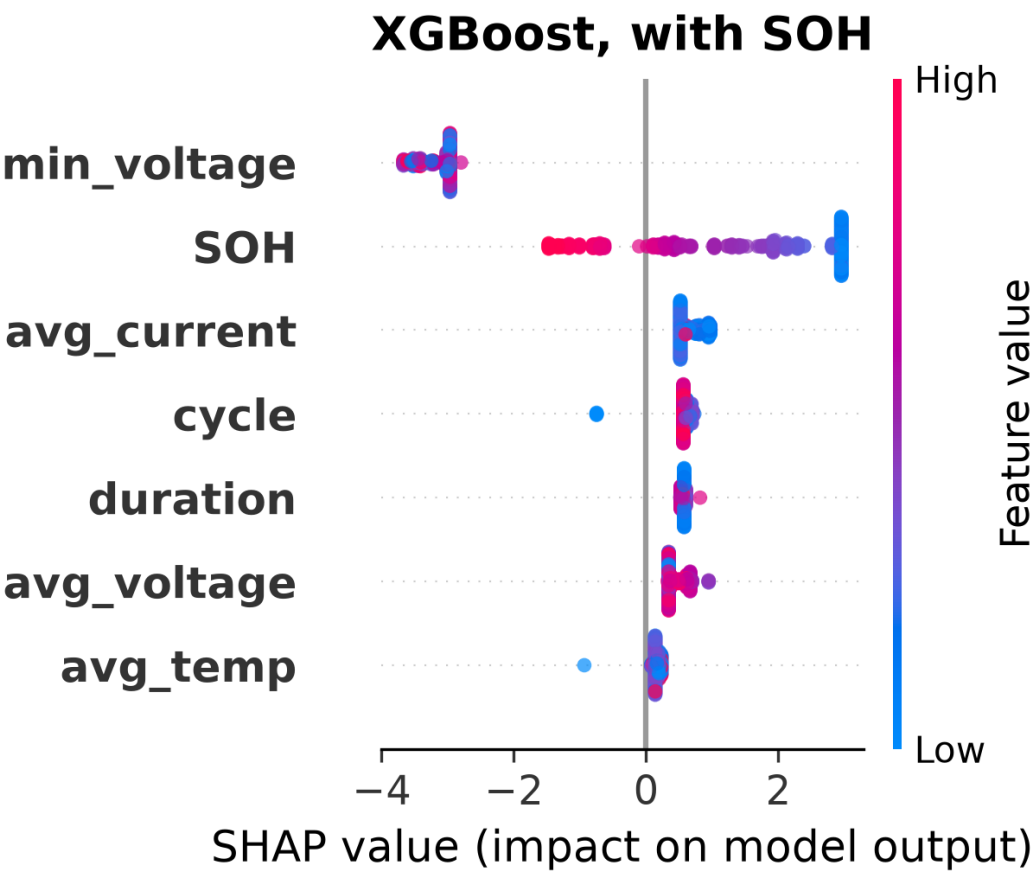


**FIGURE 9.** SHAP feature importance for XGBoost in NASA-to-Oxford transfer at H=20, with SOH. SOH dominates by a wide margin.

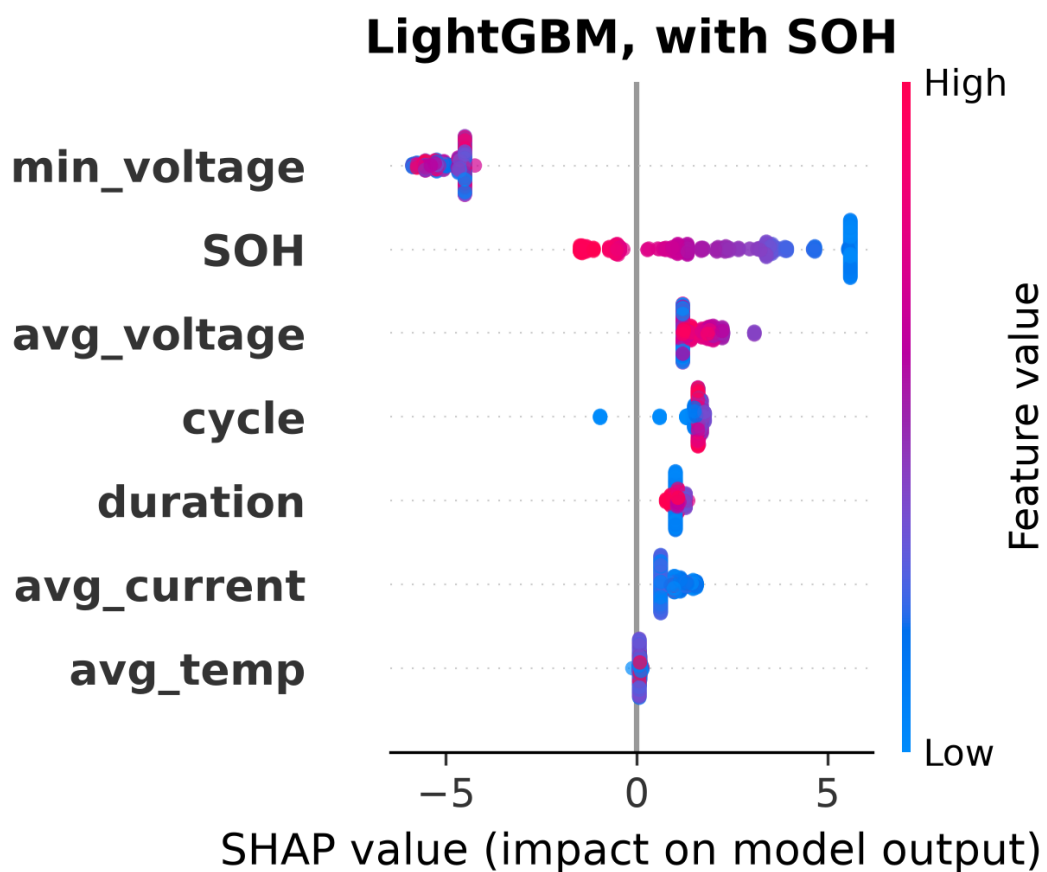


**FIGURE 10.** SHAP feature importance for LightGBM in NASA-to-Oxford transfer at H=20, with SOH. SOH dominates by a wide margin.

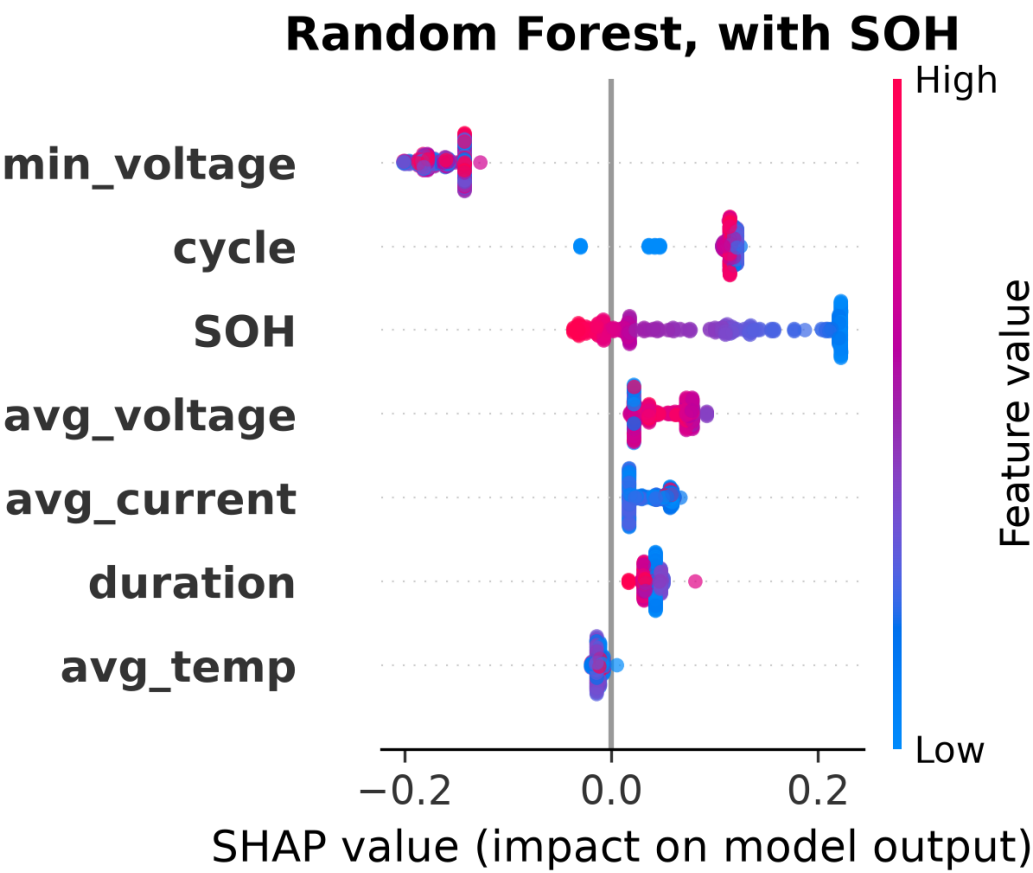

**FIGURE 11.** SHAP feature importance for Random Forest in NASA-to-Oxford transfer at H=20, with SOH. SOH dominates by a wide margin.

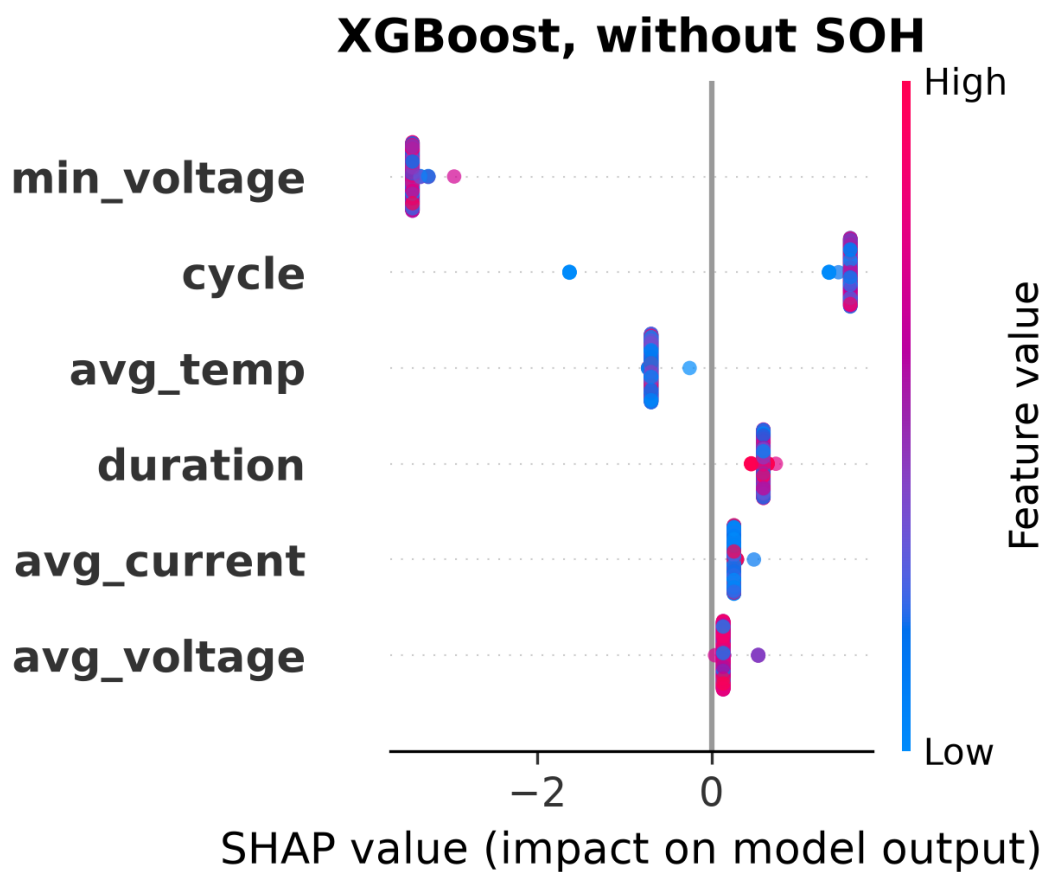


**FIGURE 12.** SHAP feature importance for XGBoost in NASA-to-Oxford transfer at H=20, without SOH. All features collapse to near-zero spread, so no chemistry-invariant signal remains.

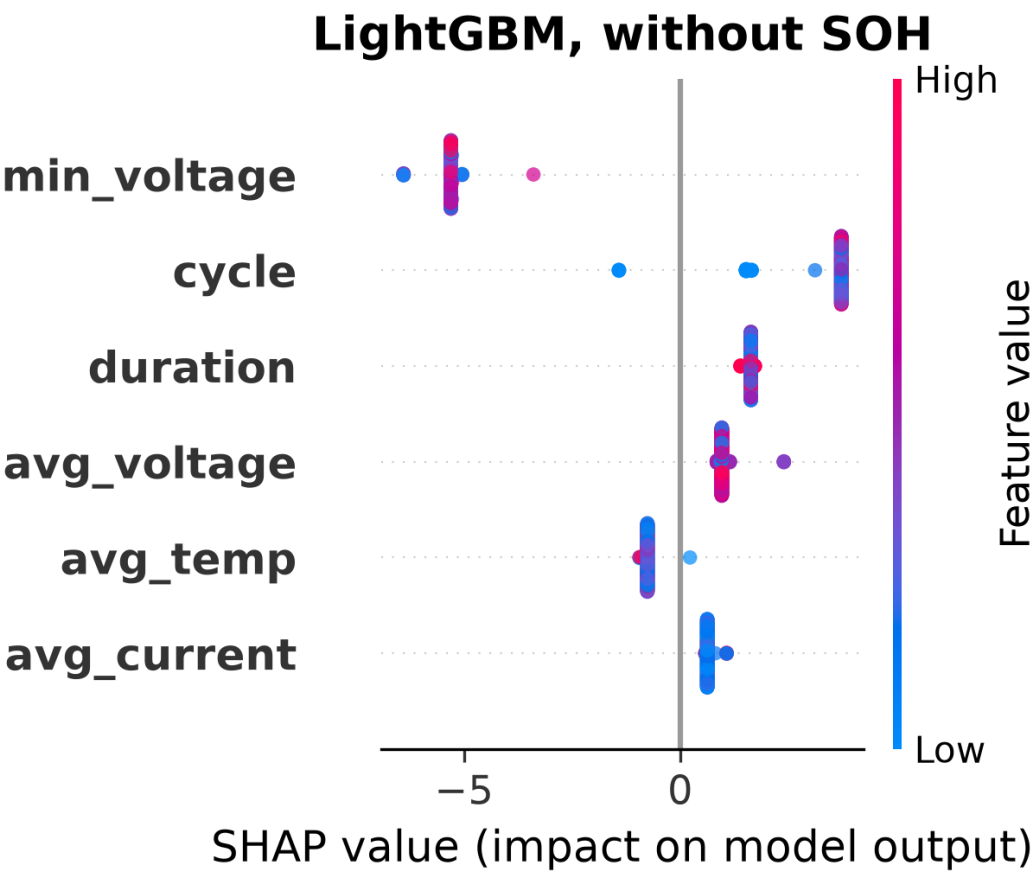

**FIGURE 13.** SHAP feature importance for LightGBM in NASA-to-Oxford transfer at H=20, without SOH. All features collapse to near-zero spread.



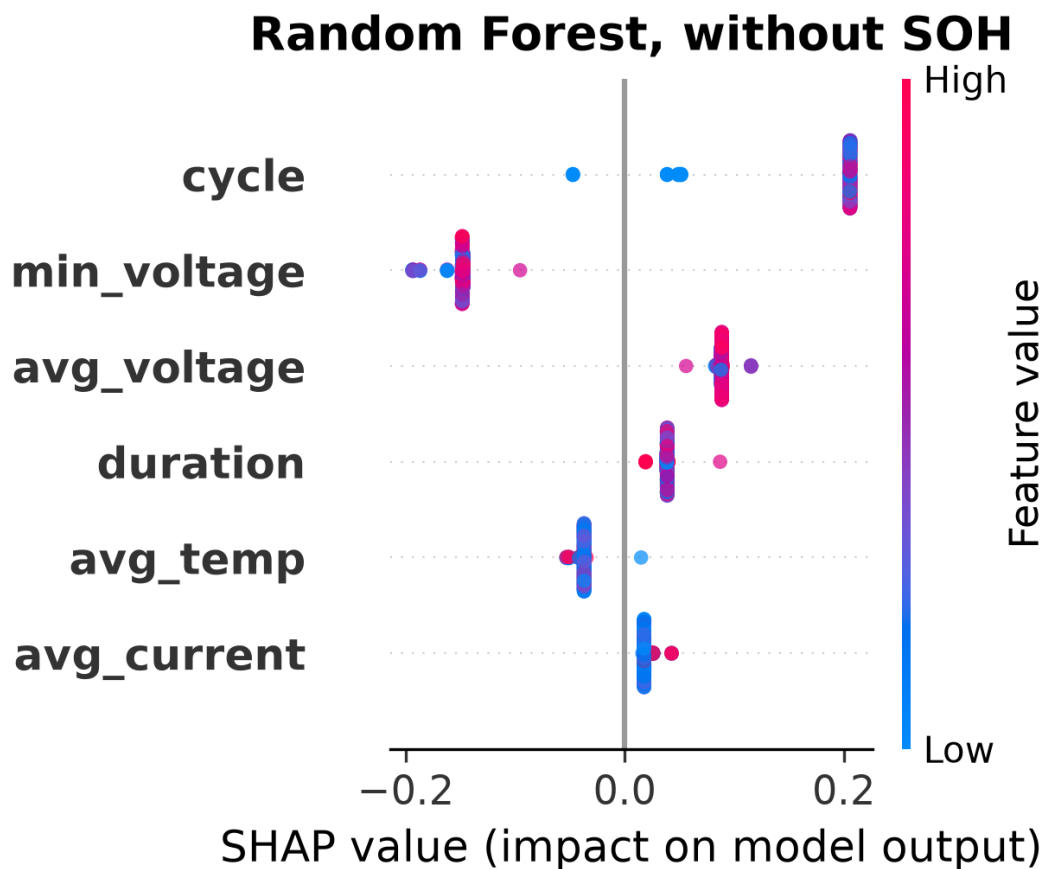

**FIGURE 14.** SHAP feature importance for Random Forest in NASA-to-Oxford transfer at H=20, without SOH. All features collapse to near-zero spread.


### I. EMBEDDED DEPLOYMENT VALIDATION

Three independent validation stages confirm that the C tree engine reproduces the Python training libraries through the output transforms of (8) and (9): a Python walker over the extracted trees, the same walker cross-checked on the full 1,028-row set, and the C engine run on-device on an ESP32-S3 against the library's `predict_proba()`. Fig. 16 plots every one of the 1,028 on-device predictions against the Python values for all three models; the points sit on the identity line and the residual histograms are pinned to zero. The measured on-device maximum absolute error is  $2.4 \times 10^{-7}$  for XGBoost,  $1.1 \times 10^{-6}$  for LightGBM, and  $3.0 \times 10^{-8}$  for Random Forest, all far inside the  $10^{-5}$  tolerance.


Table 8 lists the models' sizes, their NASA H=20 Platt AUC, the on-device validation error, and the measured inference time, and Fig. 15 plots the latency, the speed-accuracy trade-off, and the footprint. The three ensembles occupy 372 kB in the flat binary. Measured single-row inference at 240 MHz depends on where the binary sits: 0.76 ms, 1.55 ms, and 2.36 ms for XGBoost, LightGBM, and Random Forest from memory-mapped flash; 0.50 ms, 0.93 ms, and 1.29 ms from PSRAM; and 0.32 ms, 0.43 ms, and 0.50 ms when a single model is placed in internal SRAM. The full 372 kB binary does not fit internal SRAM, whose free heap is roughly 320 kB, but each individual model does (XGBoost is about 46 kB, LightGBM 98 kB, Random Forest 225 kB), and the firmware runs one model at a time, so the SRAM-resident numbers are the realistic per-inference cost. Both flash and PSRAM land well above the 150–250  $\mu$ s we first projected, because the working set exceeds the ESP32-S3's data cache and nearly every node read misses; PSRAM is about 1.5–1.8 $\times$  faster than flash for the same reason. The all-three PSRAM path still clears the 100 ms per-cycle budget by roughly 37 $\times$ , and a single model from SRAM runs close to the original projection.

**TABLE 8.** Embedded Deployment: Model Size, Accuracy, On-Device Validation Error, and Measured Inference Time. Errors Are Maximum `|C engine – predict_proba()|` Over All 1,028 Rows, Measured on the ESP32-S3. Timings Measured On-Device at 240 MHz With the Binary in Flash (PROGMEM), PSRAM, or a Single Model in Internal SRAM. The AUC Column Is the 5-Fold GroupKFold Platt Value at H=20 From Table 1 (Deployed Models Are Retrained on the Full Data).

| Model         | Nodes  | AUC (H=20) | Max Err              | Flash   | PSRAM   | SRAM (1 model) |
|---------------|--------|------------|----------------------|---------|---------|----------------|
| XGBoost       | 3,272  | 0.899      | $2.4 \times 10^{-7}$ | 0.76 ms | 0.50 ms | 0.32 ms        |
| LightGBM      | 7,000  | 0.909      | $1.1 \times 10^{-6}$ | 1.55 ms | 0.93 ms | 0.43 ms        |
| Random Forest | 16,064 | 0.901      | $3.0 \times 10^{-8}$ | 2.36 ms | 1.29 ms | 0.50 ms        |
| All three     | 26,336 | —          | —                    | 4.7 ms  | 2.7 ms  | —              |

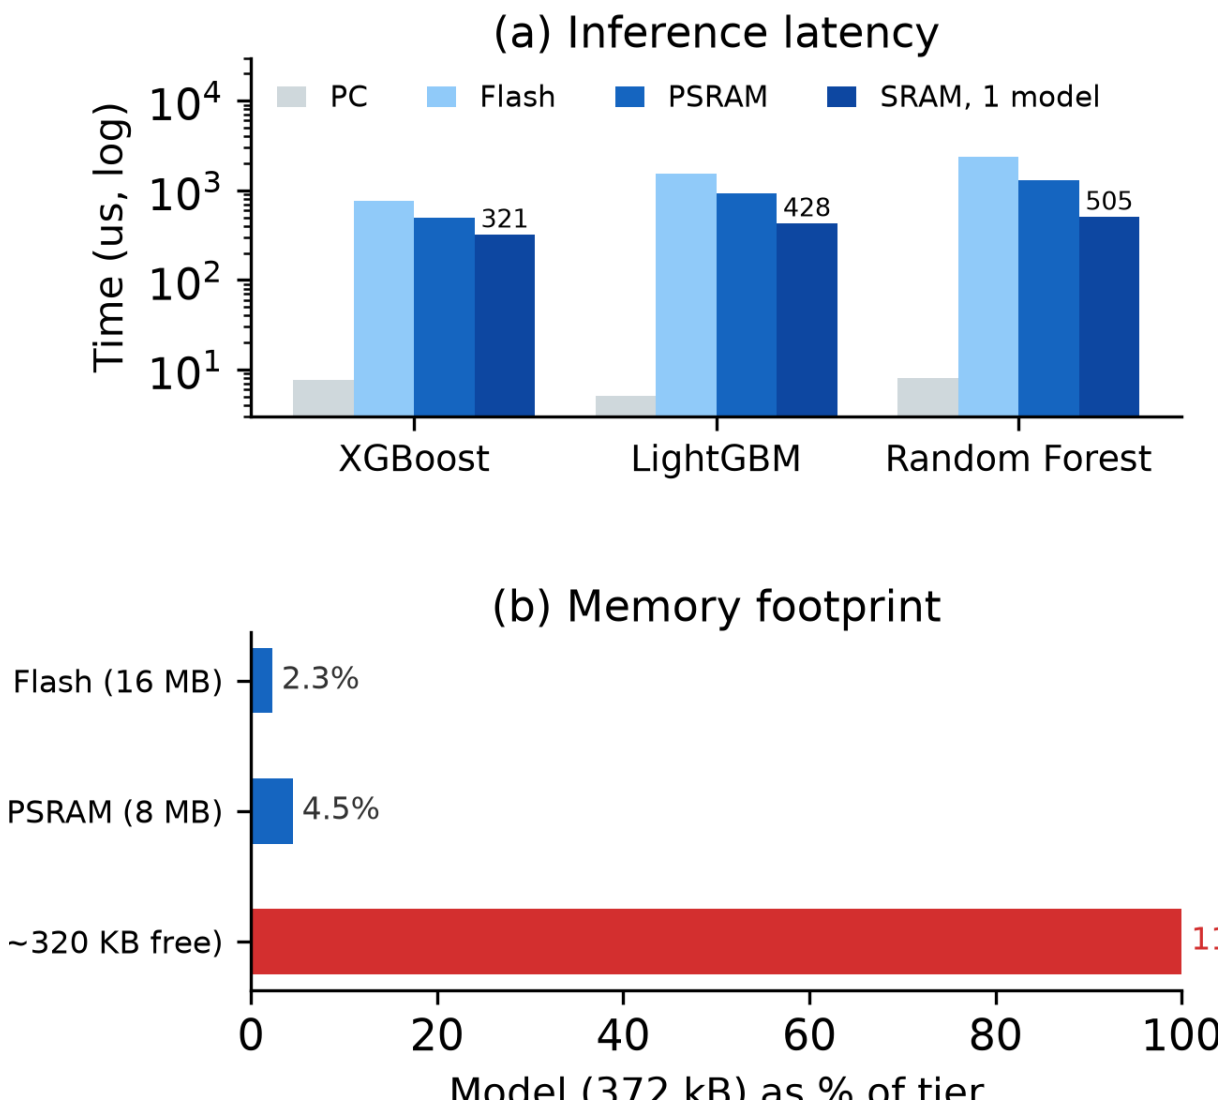

**FIGURE 15.** Deployment trade-offs: (a) measured single-row inference time per model at 240 MHz (PC, and ESP32-S3 with the binary in flash, PSRAM, or a single model in internal SRAM); (b) memory footprint of the 372 kB binary as a share of each tier, exceeding the ESP32-S3's roughly 320 kB of free internal SRAM.

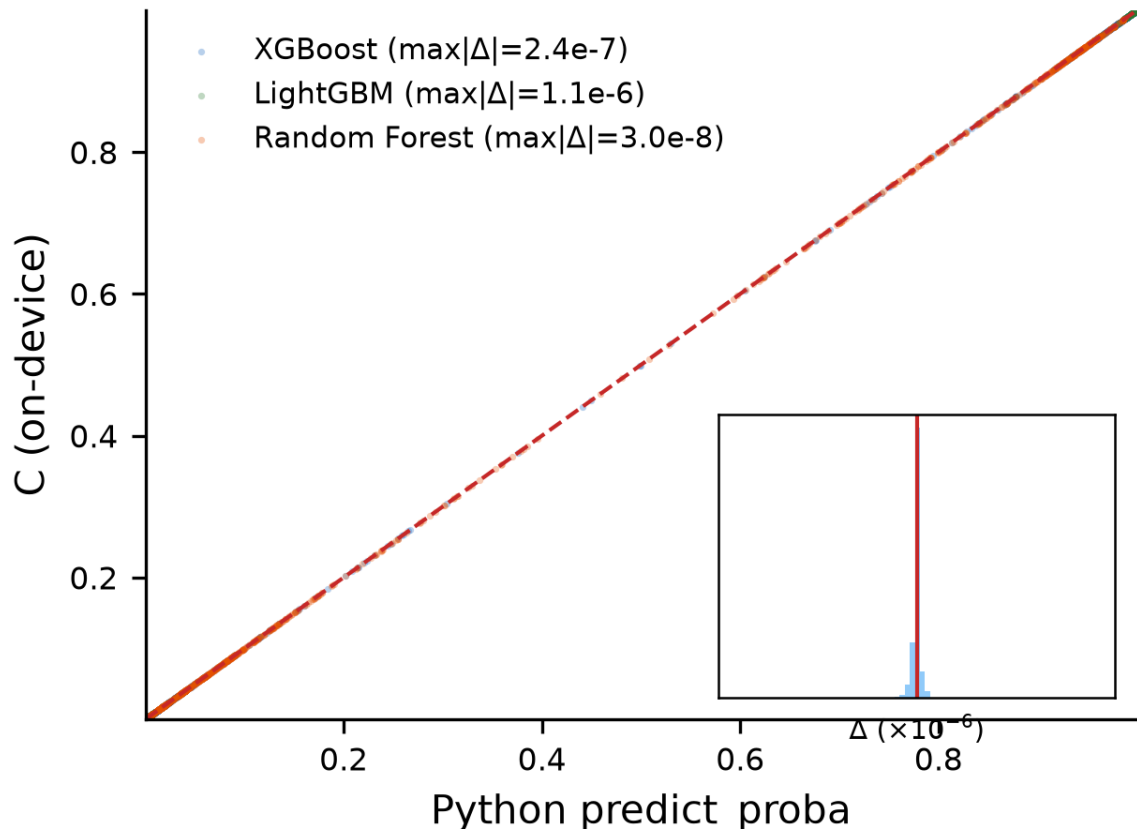

**FIGURE 16.** On-device C engine predictions versus Python `predict_proba()` over all 1,028 rows and three models (agreement scatter on the identity line, inset residual histogram of C minus Python in units of  $10^{-6}$ ). Maximum absolute errors are  $2.4 \times 10^{-7}$  (XGBoost),  $1.1 \times 10^{-6}$  (LightGBM), and  $3.0 \times 10^{-8}$  (Random Forest).

## V. DISCUSSION

### A. THE SOH-AS-LOOKUP-TABLE MECHANISM

The central negative result reads best as a leakage diagnosis rather than a generic failure of transfer learning. SOH is a capacity ratio, and capacity declines with age in both LCO and LFP cells, so both chemistries traverse SOH values from 1.0 down to 0.8. What differs is the mapping from SOH to remaining cycles: LCO degrades faster per cycle, so a given SOH corresponds to fewer remaining cycles. A model that learned the LCO mapping assigns high failure probability at the appropriate LCO cycle count even on LFP test cells, which produces high AUC, but the prediction rides on a chemistry-specific proxy rather than any real understanding of LFP degradation. SHAP confirms that SOH carries the dominant share of feature importance in every model, and removing it collapses every predictor to near-random performance.

### B. IMPLICATIONS FOR BATTERY MANAGEMENT PRACTITIONERS

Three practical points follow. First, within-chemistry hazard models built from standard charge and discharge features (voltage, current, temperature, cycle count) are reliable, reaching AUC of 0.85 and above with Platt calibration, and the deployment results show they run on a \$12 microcontroller. Second, cross-chemistry transfer should not be assumed; without SOH no model class clears chance, and with SOH the GRU's distributed representation still offers no guarantee of generalization. Third, post-hoc calibration, especially isotonic regression, should not be applied blindly under distribution shift; raw scores give a more dependable discriminative signal for cross-chemistry deployment.

### C. LIMITATIONS

The Oxford set holds only five cells, too few for a reliable within-dataset evaluation and enough to blunt the precision of the per-cell standard deviation; the 141-cell Severson set is included specifically to offset this and it reproduces every qualitative finding. The analysis runs one direction, LCO to LFP, and bidirectional transfer would round out the picture. The GRU is evaluated with a single seed; the instability across configurations is itself informative, but multi-seed analysis is left to future work.

## VI. CONCLUSION

This study widens a multi-horizon hazard classification framework, first shown on one model and one dataset, to four model families on two LCO datasets, with cross-chemistry transfer checked on two independent LFP targets and a complete embedded deployment on an ESP32-S3. Three findings stand out. Within-dataset performance is consistent across model classes (mean AUC 0.84–0.91) and Platt calibration beats

isotonic throughout. Cross-chemistry transfer fails for every model class once SOH is removed, and the failure comes from SOH acting as a chemistry-specific lookup key rather than a transferable degradation invariant. Post-hoc calibration produces a further, independent failure mode in which isotonic regression destroys cross-chemistry discriminative power under distribution shift.

The embedded deployment adds a concrete positive result to these cautions. Three ensembles totaling 900 trees and 26,336 nodes fit into 372 kB, run on a \$12 microcontroller in about 2.7 ms for all three models from PSRAM, about 0.5 ms for a single model kept in internal SRAM, and reproduce the Python training libraries to within  $1.1 \times 10^{-6}$  across more than a thousand validation rows. Future work should pursue learned feature representations built for chemistry invariance, bidirectional transfer, and multi-seed GRU evaluation.

## ACKNOWLEDGMENT

This work received no external funding. The authors declare no conflicts of interest. The source code, data, trained models, firmware, and validation pipeline are publicly available at <https://github.com/touhidsiddiqueeraj-bit/Multi-Horizon-Hazard-Models-for-Battery-Failure-Prediction>.

## REFERENCES

- [1] T. A. Shikdar and H. Laaksonen, "Learning when not to use a battery: Multihorizon failure intelligence," *Int. Trans. Electr. Energy Syst.*, vol. 36, Art. no. 6000810, 2026.
- [2] H. Meng and Y. Li, "A review on prognostics and health management (PHM) methods of lithium-ion batteries," *Renew. Sustain. Energy Rev.*, vol. 116, Art. no. 109405, 2019.
- [3] L. Breiman, "Random forests," *Mach. Learn.*, vol. 45, no. 1, pp. 5–32, 2001.
- [4] T. Chen and C. Guestrin, "XGBoost: A scalable tree boosting system," in *Proc. ACM SIGKDD*, 2016, pp. 785–794.
- [5] G. Ke, Q. Meng, T. Finley, et al., "LightGBM: A highly efficient gradient boosting decision tree," in *Proc. NeurIPS*, vol. 30, 2017, pp. 3146–3154.
- [6] B. Saha and K. Goebel, "Battery data set," NASA Ames Prognostics Data Repository, 2007.
- [7] CALCE Battery Research Group, "Battery aging datasets," Univ. Maryland, 2023.
- [8] C. R. Birkel and D. A. Howey, "Oxford battery degradation dataset 1," Univ. Oxford, 2017.
- [9] K. A. Severson, P. M. Attia, N. Jin, et al., "Data-driven prediction of battery cycle life before capacity degradation," *Nature Energy*, vol. 4, pp. 383–391, 2019.
- [10] S. Sahoo, K. S. Hariharan, S. Agarwal, et al., "Transfer learning based generalized framework for state of health estimation of Li-ion cells," *Sci. Rep.*, vol. 12, Art. no. 13173, 2022.
- [11] J. Lu, R. Xiong, J. Tian, C. Wang, and F. Sun, "Deep learning to estimate lithium-ion battery state of health without additional degradation experiments," *Nat. Commun.*, vol. 14, Art. no. 2760, 2023.
- [12] J. C. Platt, "Probabilistic outputs for support vector machines and comparisons to regularized likelihood methods," in *Adv. Large Margin Classifiers*, MIT Press, 1999, pp. 61–74.
- [13] B. Zadrozny and C. Elkan, "Transforming classifier scores into accurate multiclass probability estimates," in *Proc. ACM SIGKDD*, 2002, pp. 694–699.
- [14] A. Niculescu-Mizil and R. Caruana, "Predicting good probabilities with supervised learning," in *Proc. ICML*, 2005, pp. 625–632.
- [15] L. Huang, J. Zhao, B. Zhu, H. Chen, and S. K. L. M. v. Broucke, "An experimental investigation of calibration techniques for imbalanced data," *IEEE Access*, vol. 8, pp. 127343–127352, 2020.
- [16] S. M. Lundberg, G. G. Erion, H. Chen, et al., "From local explanations to global understanding with explainable AI for trees," *Nat. Mach. Intell.*, vol. 2, no. 1, pp. 56–67, 2020.
- [17] P. Grzesik and D. Mrozek, "Combining machine learning and edge computing: Opportunities, challenges, platforms, frameworks, and use cases," *Electronics*, vol. 13, no. 3, Art. no. 640, 2024.
- [18] C. Gupta and A. Ramdas, "Online Platt scaling with calibrate," in *Proc. ICML*, PMLR 202, 2023, pp. 12182–12204.
- [19] E. R. DeLong, D. M. DeLong, and D. L. Clarke-Pearson, "Comparing the areas under two or more correlated receiver operating characteristic curves: A nonparametric approach," *Biometrics*, vol. 44, no. 3, pp. 837–845, 1988.

...