

BOM List Type (1)						CHANGES FOLLOW-UP TABLE					
Baloon	MIC P/N	Description	Mfr.	Mfr. p/n	Quantity	ECO #	REV	REVISION DESCRIPTION	CHANGED BY	DATE	REVIEWED BY
1	M80-4140498	CONN RCPT HSG 4POS 2.00MM	Harwin	M80-4140498	1	EC26000275	-	First release	Tzah L.	26.02.25	---
2	M80-0110005	CONN SOCKET 22AWG CRIMP GOLD	Harwin	M80-0110005	4						---
3	BP-214R	BANANA PLUG - RED	ANY	BP-214R	1						---
4	BP-214B	BANANA PLUG - BLACK	ANY	BP-214B	1						---
5		22AWG Flex UL1061 RED wire	ANY		300cm						
6		22AWG Flex UL1061 BLACK wire	ANY		300cm						
7		Connector number label	ANY		1						
8		DR25 1/8"	ANY		1						
9		Text Label	ANY		1						

50mm ± 3mm

1500mm ± 3mm

30mm ± 3mm

3

4

5

6

9

8

7

8

PIN 1

PIN 2

PIN 4

PIN 3

P2

1

2

NOTES:

1. USE THE LATEST REVISION OF THE STANDARDS AND SPECIFICATIONS, UNLESS SPECIFIC REVISION IS SPECIFIED IN DRAWING. IF SPECIFICATION IS INACTIVE OR CANCELLED ASK FOR APPROVED ALTERNATIVE.

2. ENVIROMENT: NORMAL

3. FOR INTERCONNECTION SEE PAGE 2

4. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETER.

5. WORKMANSHIP REQUIRES:

5.1 WIRING I.A.W IPC / WHMA-A-620

5.2 ALL WIRES AND OTHER COMPONENTS PREPARATION AND ASSEMBLY SHALL BE DONE ACCORDING TO MANUFACTURE'S WORK INSTRUCTIONS

7. IDENTIFICATION MARKING CHARACTERS:

COLOR : BLACK

LETTER HEIGHT : AT LEAST 1.5 MM

8. POTTING WITH DP190

8.1. THE POTTING SHALL NOT EXCEED THE CONTOUR OF THE CONNECTOR

8.2. THE POTTING HEIGHT SHALL NOT EXCEED 5 MM

8.3. APPLY POTTING USING SHRINK TUBING ABOVE THE CONNECTOR HOOKS, AS ILLUSTRATED ABOVE.

9. LACE USING NYLON LACING TAPE

10. Use labels and heat shrinks as specified or approved equivalent.

11. Use UL1061 Flex wires as mentioned

GENERAL TOLERANCES:				ALL DIMENSIONS ARE IN MM. UNLESS OTHERWISE SPECIFIED			
LINEAR DIMS.		ANGULAR		DATE:		DATE:	
X.	X.X	X.XX		26/02/26		26/02/26	
±0.2	±0.1	±0.05	±0°25'	DRAWN: Tzah L.		CHECKED: Roy N.	
				DESIGNED: Tzah L.		APPROVED: Roy N.	
This document contains proprietary information of Microcon Vision, Ltd. (hereinafter: Microcon). No person may use this information for any purpose other than for which it has been delivered, without prior consent from Microcon. If you are not the intended recipient of this document, you may not use any of the information contained herein in any manner or for any purpose whatsoever and are requested to return the document immediately to Microcon.							

MICROCON

DESCRIPTION:

MS60/MS30-0102 Power Harness

POB 611, Hod Hasharon, Israel: 5410502, Tel: 09-7440661

P/N: MS60-2992-00-0107


REV. -

PAGE SIZE A4

SCALE: 1:1

SHEET NO. 1 OF 2

CHANGES FOLLOW-UP TABLE					
ECO #	REV	REVISION DESCRIPTION	CHANGED BY	DATE	REVIEWED BY
EC26000275	-	First release	Tzah L.	26.02.25	---

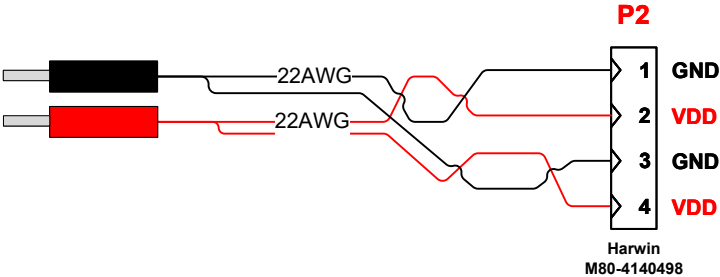

- NOTES:
- USE THE LATEST REVISION OF THE STANDARDS AND SPECIFICATIONS, UNLESS SPECIFIC REVISION IS SPECIFIED IN DRAWING. IF SPECIFICATION IS INACTIVE OR CANCELLED ASK FOR APPROVED ALTERNATIVE.
 - ENVIROMENT: NORMAL
 - FOR INTERCONNECTION SEE PAGE 2
 - UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETER.
 - WORKMANSHIP REQUIRES:
 - WIRING I.A.W IPC / WHMA-A-620
 - ALL WIRES AND OTHER COMPONENTS PREPARATION AND ASSEMBLY SHALL BE DONE ACCORDING TO MANUFACTURE'S WORK INSTRUCTIONS
 - IDENTIFICTION MARKING CHARACTERS:

COLOR : BLACK
LETTER HEIGHT : AT LEAST 1.5 MM
- 8

POTTING WITH DP190
THE POTTING SHALL NOT EXCEED THE CONTOUR OF THE CONNECTOR
THE POTTING HEIGHT SHALL NOT EXCEED 5 MM
APPLY POTTING USING SHRINK TUBING ABOVE THE CONNECTOR HOOKS,
AS ILLUSTRATED ABOVE.
- 9

LACE USING NYLON LACING TAPE
- Use labels and heat shrinks as specified or approved equivalent.
 - Use UL1061 Flex wires as mentioned

GENERAL TOLERANCES: LINEAR DIMS. ANGULAR X. X.X X.XX ±0.2 ±0.1 ±0.05 ±0°25'		ALL DIMENSIONS ARE IN MM. UNLESS OTHERWISE SPECIFIED	
DATE:	26/02/26	DATE:	26/02/26
DRAWN:	Tzah L.	CHECKED:	Roy N.
DESIGNED:	Tzah L.	APPROVED:	Roy N.

This document contains proprietary information of Microcon Vision, Ltd. (hereinafter: Microcon). No person may use this information for any purpose other than for which it has been delivered, without prior consent from Microcon.

If you are not the intended recipient of this document, you may not use any of the information contained herein in any manner or for any purpose whatsoever and are requested to return the document immediately to Microcon.

DESCRIPTION:

MS60/MS30-0102 Power Harness

POB 611, Hod Hasharon, Israel: 5410502, Tel: 09-7440661

P/N: MS60-2992-00-0107

	PAGE SIZE A4	SCALE: 1:1	SHEET NO. 2 OF 2
--	-----------------	---------------	---------------------

REV.
-