


# MICRO 300



Miniature ISR System for sUAS

**MICROCON**  
UNLEASH YOUR MICRO **POWER**

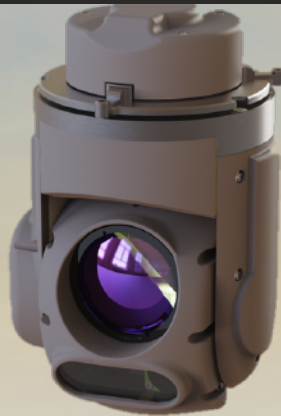

## Operational Impact Enhancement

- Two FHD Global Shutter VIS cameras
- Uncooled IR camera - 12 $\mu$ m
- Simultaneous Video output
  - Parallel / PIP / Raw
- LOS Stabilization
  - Opto-mechanical stabilization
  - Digital stabilization
- Airborne ISR Tracker
- H.265 encoder
- Advanced Two Axis Gimbal Architecture
  - Brushless motors and precision encoders
  - Aerodynamics
- MOSA / Seamless Integration
  - Ethernet interface
  - SDK for fast platform integration
  - Optional - H.265 decoder SDK
  - MavLink - Optional
- Inertial Navigation - Optional
- Optional AI Functionality
  - VMD -Video Motion Detection
  - ATR-Automatic Target Recognition
  - Homing tracker
- IP66
- Non-ITAR

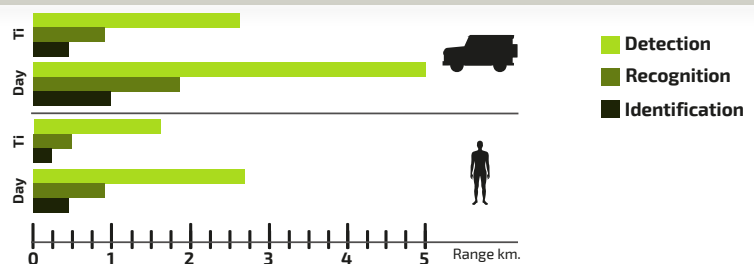

## Electro-Mechanical

Type: 2 Gimbal Gyro-stabilized System  
 Field of Regard: Elevation: -140° to +90°  
 Azimuth  $\pm 175^\circ$   
 Angular Velocity: Up to 120 °/sec on both axes

## Thermal Nighttime Channel

Spectral Range: 8-12 $\mu$ m  
 Detector Type: LWIR uncooled 640x480  
 Zoom: Continuous zoom x4  
 Field of view: 12.5° - 3.1°

## VIS Daytime Channel

Detector Types: FHD CMOS Global Shutter  
 Zoom: Continuous zoom x20  
 Field of View: 45° - 2°

## Electrical Interface

Power Supply: 24-32 VDC, 12 VDC- Optional  
 Power Consumption: Nominal - 20W  
 Video Outputs: H.265 over Ethernet

## Environmental Conditions

Operating Temperature: -30°C to +55°C  
 Ingress Protection: IP66

Let's Talk



Microcon Vision Ltd.  
 POBox 611, Hod Hasharon  
 Israel 4510502

**MICROCON**