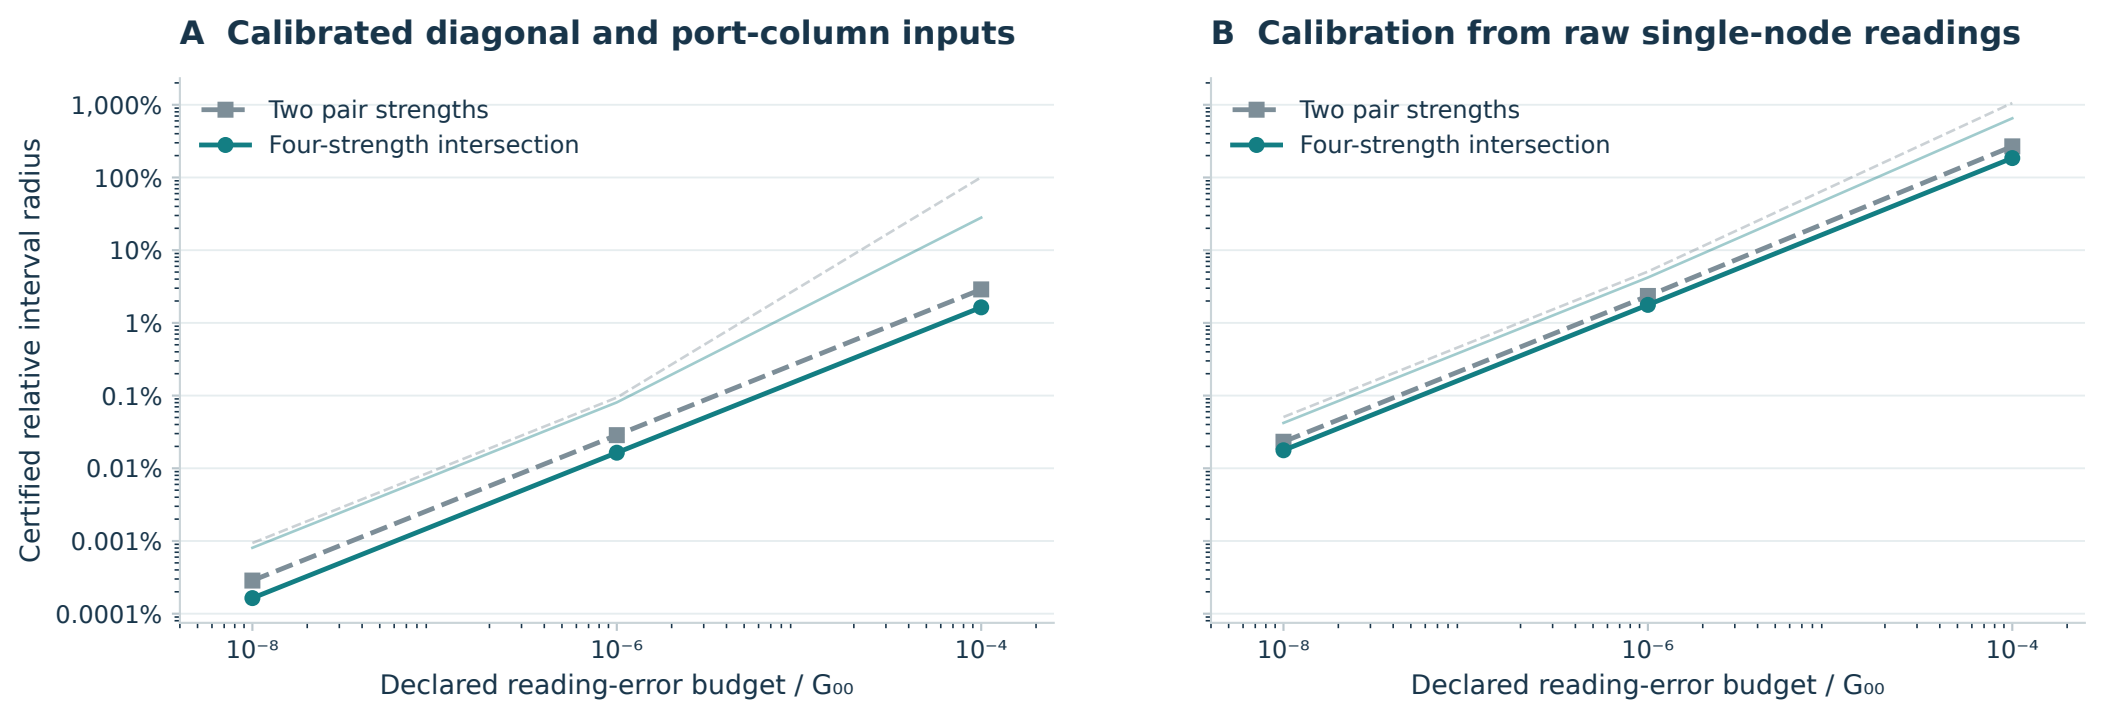
A Calibrated diagonal and port-column inputs
B Calibration from raw single-node readings
Two pair strengths
Four-strength intersection
Certified relative interval radius
1,000%
100%
10%
1%
0.1%
0.01%
0.001%
0.0001%
10⁻⁸
10⁻⁶
10⁻⁴
Declared reading-error budget / G₀₀
Heavy curves: median radius · thin curves: 90th-percentile radius