
1. MCU & Radio Interface




2. Battery & Switch




5. 1-Wire Temperature



3. Switched 5V Boost + LDO

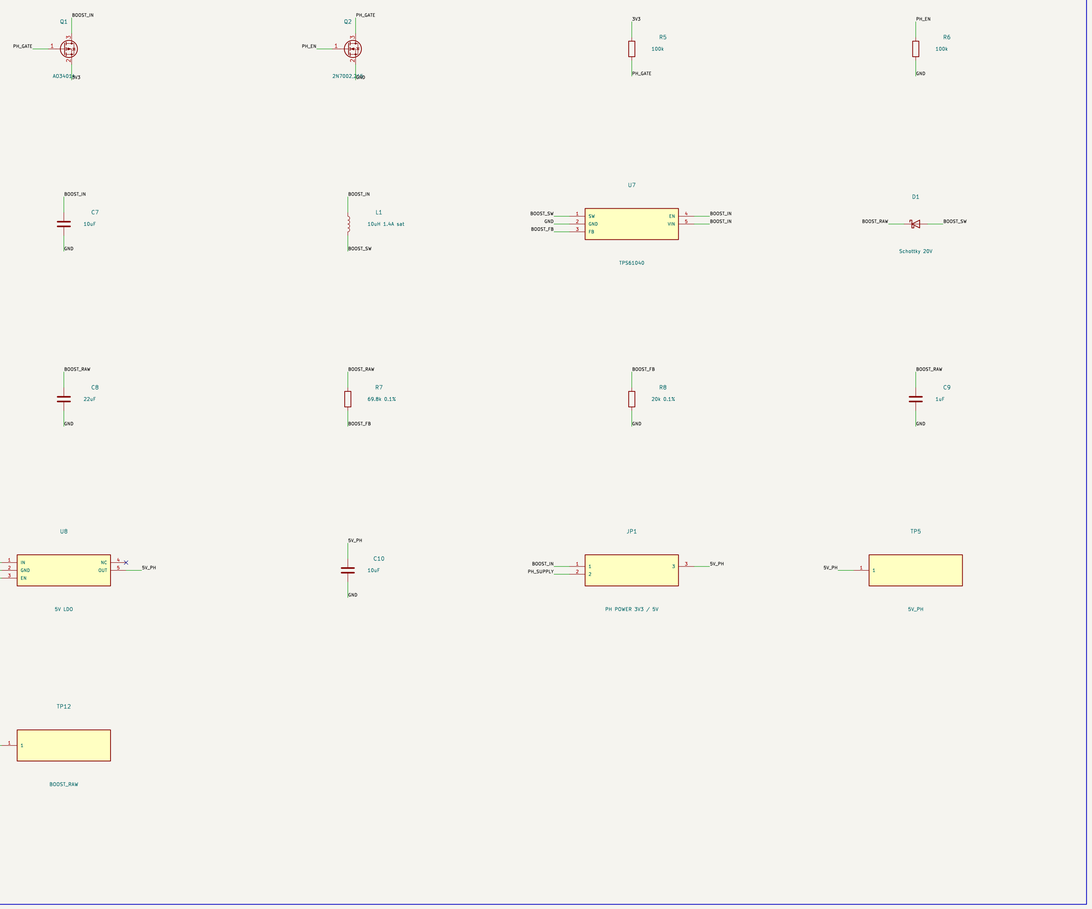

4. Analog Front-End & ADC

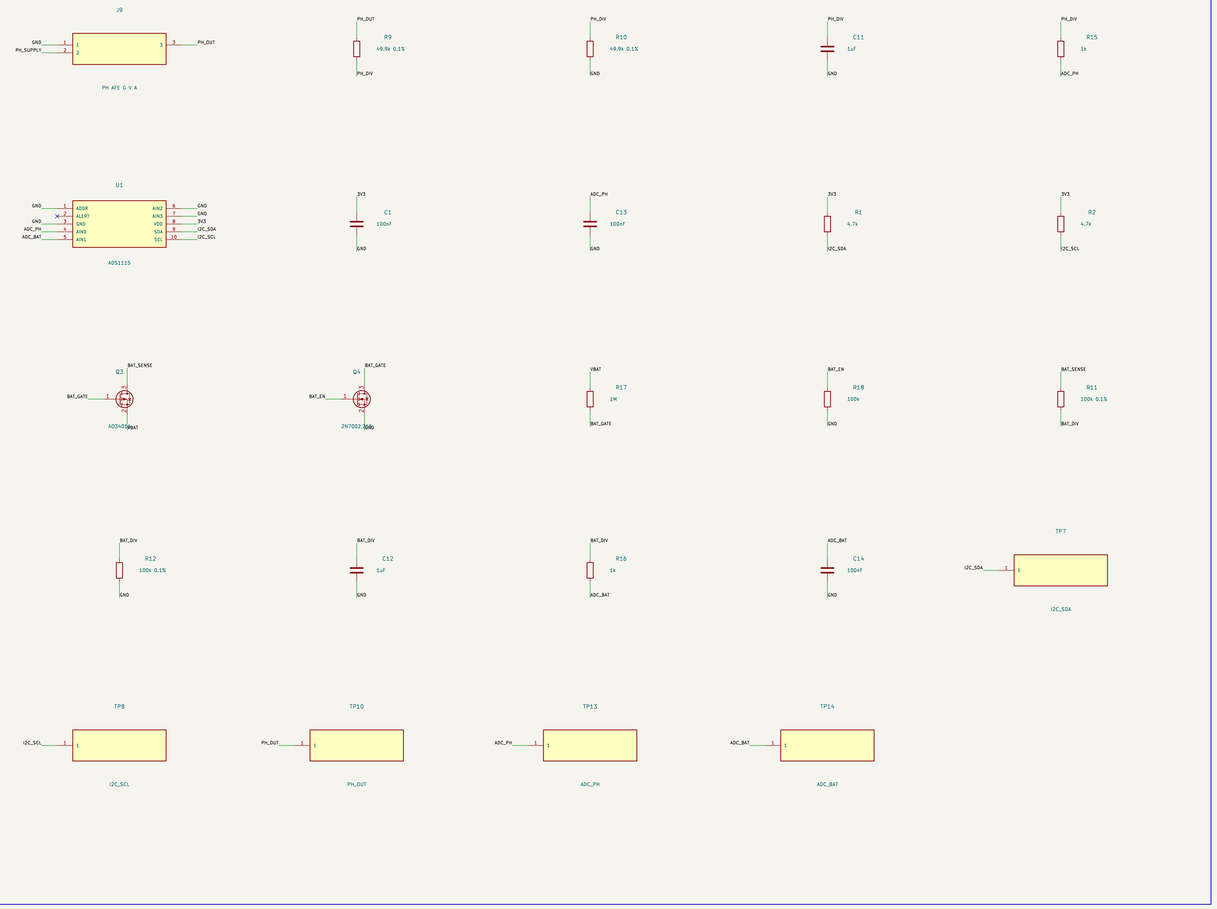

R0.3: J9 = GND / VCC / OUT. Assembly A: R9=R10=49.9k. Assembly B (0..3V AFE): R9=10k, R10=DNP.
Wio connects to XIAO through B2B ONLY. Never bridge Wio left row to XIAO D0-D5.
16 SPS + RC reduces ripple, not DC input-loading error; see Analog_calculations_ru.md.
PCB is a reviewed prototype design. Mechanical fit and powered tests remain required.

Sheet: /	
File: AquaNode.kicad_sch	
Title: AquaNode R0.3 — PROTOTYPE DESIGN	
Size: A1	Date: 2026-10-20
KiCad E.D.A. 8.0.9	**Rev: R0.3**
	Id: 1/1