

1. Description


1.1. Project

Project Name	zegarStm
Board Name	plytka_f103c8t6_ebay
Generated with:	STM32CubeMX 4.15.1
Date	12/29/2016

1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103C8Tx
MCU Package	LQFP48
MCU Pin number	48

2. Pinout Configuration

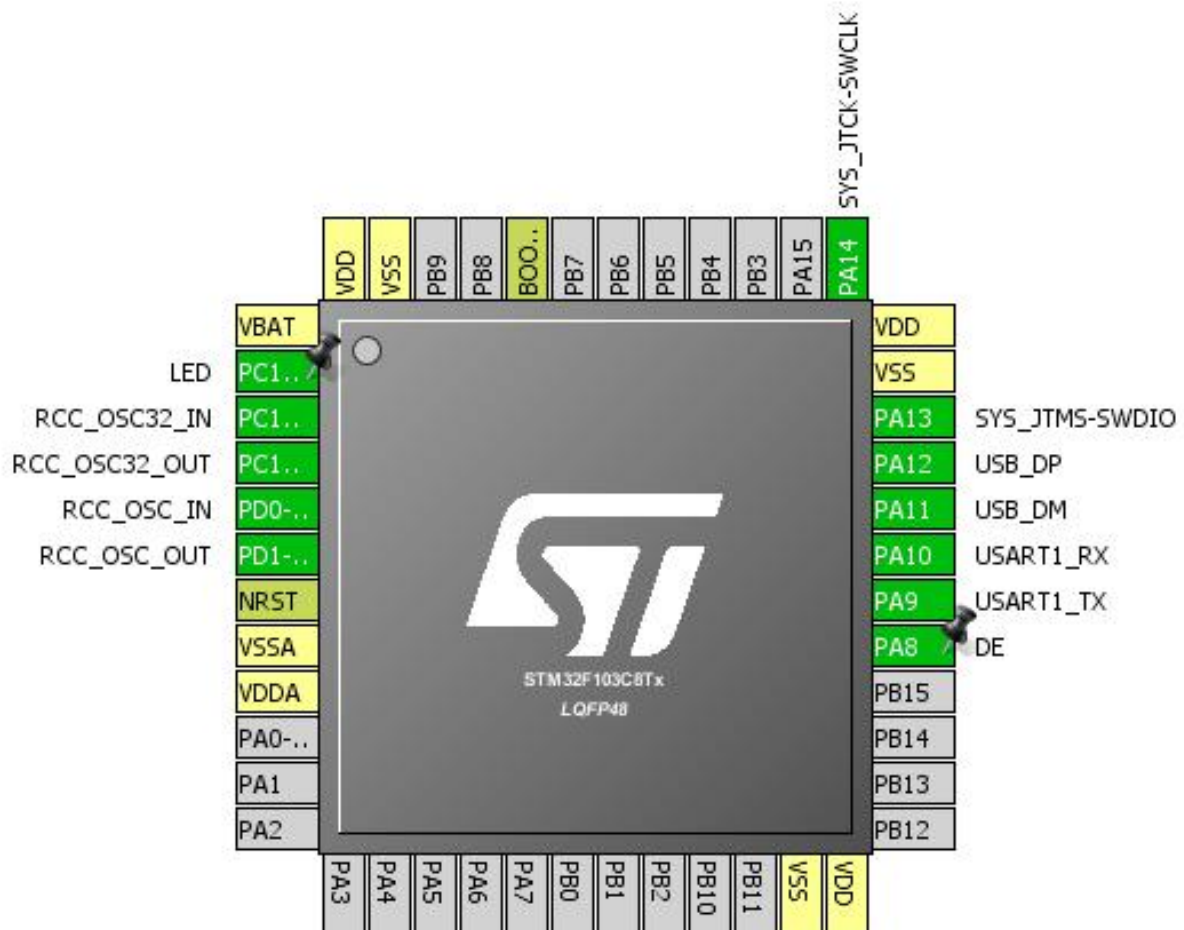


3. Pins Configuration

Pin Number LQFP48	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13-TAMPER-RTC *	I/O	GPIO_Output	LED
3	PC14-OSC32_IN	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT	I/O	RCC_OSC32_OUT	
5	PD0-OSC_IN	I/O	RCC_OSC_IN	
6	PD1-OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
8	VSSA	Power		
9	VDDA	Power		
23	VSS	Power		
24	VDD	Power		
29	PA8 *	I/O	GPIO_Output	DE
30	PA9	I/O	USART1_TX	
31	PA10	I/O	USART1_RX	
32	PA11	I/O	USB_DM	
33	PA12	I/O	USB_DP	
34	PA13	I/O	SYS_JTMS-SWDIO	
35	VSS	Power		
36	VDD	Power		
37	PA14	I/O	SYS_JTCK-SWCLK	
44	BOOT0	Boot		
47	VSS	Power		
48	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

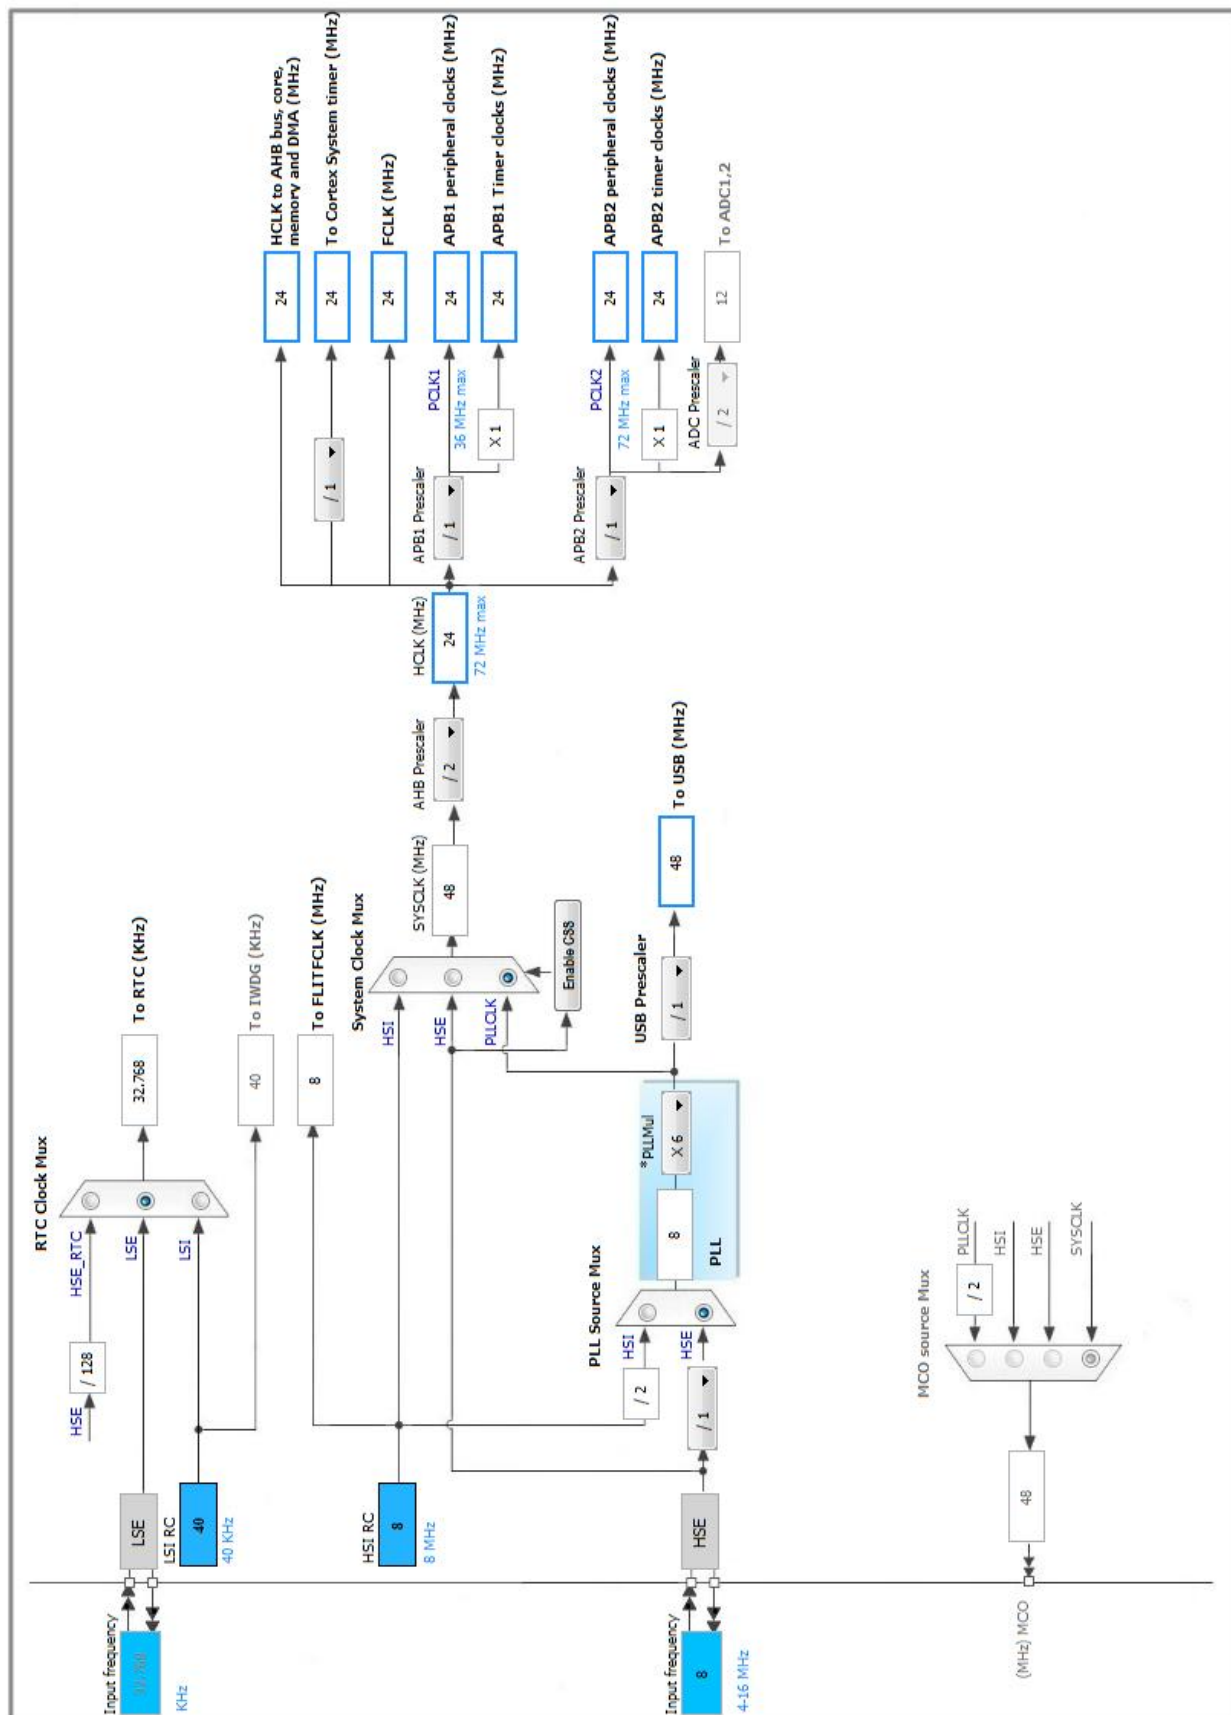

5. IPs and Middleware Configuration

5.1. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

5.1.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	0 WS (1 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

5.2. RTC

RTC OUT: No RTC Output

5.2.1. Parameter Settings:

General:

Auto Predivider Calculation	Enabled
Asynchronous Predivider value	Automatic Predivider Calculation Enabled
Output	No output on the TAMPER pin

Calendar Time:

Data Format	BCD data format
Hours	1
Minutes	0
Seconds	0

Calendar Date:

Week Day	Monday
Month	January
Date	1
Year	0

5.3. SYS

Debug: Serial Wire

Timebase Source: TIM1

5.4. TIM2

Clock Source : Internal Clock

5.4.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	0
Internal Clock Division (CKD)	No Division

Trigger Output (TRGO) Parameters:

Master/Slave Mode	Disable (no sync between this TIM (Master) and its Slaves
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

5.5. TIM3

mode: Clock Source

5.5.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	24 *
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	860 *
Internal Clock Division (CKD)	No Division

Trigger Output (TRGO) Parameters:

Master/Slave Mode	Disable (no sync between this TIM (Master) and its Slaves
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

5.6. TIM4

mode: Clock Source

5.6.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	0
Internal Clock Division (CKD)	No Division

Trigger Output (TRGO) Parameters:

Master/Slave Mode	Disable (no sync between this TIM (Master) and its Slaves
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

5.7. USART1

Mode: Asynchronous

5.7.1. Parameter Settings:

Basic Parameters:

Baud Rate	19200 *
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

5.8. USB

mode: Device (FS)

5.8.1. Parameter Settings:

Basic Parameters:

Speed	Full Speed 12MBit/s
-------	---------------------

Endpoint 0 Max Packet size 8 Bytes

Power Parameters:

Low Power	Disabled
Link Power Management	Disabled
Battery Charging	Disabled

5.9. FREERTOS

mode: Enabled

5.9.1. Config parameters:

Versions:

CMSIS-RTOS version	1.02
FreeRTOS version	8.2.3

Kernel settings:

USE_PREEMPTION	Enabled
CPU_CLOCK_HZ	SystemCoreClock
TICK_RATE_HZ	1000
MAX_PRIORITIES	7
MINIMAL_STACK_SIZE	128
MAX_TASK_NAME_LEN	16
USE_16_BIT_TICKS	Disabled
IDLE_SHOULD_YIELD	Enabled
USE_MUTEXES	Enabled
USE_RECURSIVE_MUTEXES	Disabled
USE_COUNTING_SEMAPHORES	Disabled
QUEUE_REGISTRY_SIZE	8
USE_APPLICATION_TASK_TAG	Disabled
TOTAL_HEAP_SIZE	3072
Memory Management scheme	heap_4
USE_ALTERNATIVE_API	Disabled
ENABLE_BACKWARD_COMPATIBILITY	Enabled
USE_PORT_OPTIMISED_TASK_SELECTION	Disabled
USE_TICKLESS_IDLE	Disabled
USE_TASK_NOTIFICATIONS	Enabled

Hook function related definitions:

USE_IDLE_HOOK	Enabled *
USE_TICK_HOOK	Disabled
USE_MALLOC_FAILED_HOOK	Disabled

CHECK_FOR_STACK_OVERFLOW Disabled

Run time and task stats gathering related definitions:

USE_TRACE_FACILITY Enabled

GENERATE_RUN_TIME_STATS Disabled

Co-routine related definitions:

USE_CO_ROUTINES Disabled

MAX_CO_ROUTINE_PRIORITIES 2

Software timer definitions:

USE_TIMERS Disabled

TIMER_TASK_PRIORITY 2

TIMER_QUEUE_LENGTH 10

TIMER_TASK_STACK_DEPTH 256

Interrupt nesting behaviour configuration:

LIBRARY_LOWEST_INTERRUPT_PRIORITY 15

LIBRARY_MAX_SYSCALL_INTERRUPT_PRIORITY 5

5.9.2. Include parameters:

Include definitions:

vTaskPrioritySet	Enabled
uxTaskPriorityGet	Enabled
vTaskDelete	Enabled
vTaskCleanUpResources	Disabled
vTaskSuspend	Enabled
vTaskDelayUntil	Enabled *
vTaskDelay	Enabled
xTaskGetSchedulerState	Enabled
xTaskResumeFromISR	Enabled
xQueueGetMutexHolder	Disabled
xSemaphoreGetMutexHolder	Disabled
pcTaskGetTaskName	Disabled
uxTaskGetStackHighWaterMark	Disabled
xTaskGetCurrentTaskHandle	Disabled
eTaskGetState	Disabled
xEventGroupSetBitFromISR	Disabled
xTimerPendFunctionCall	Disabled

5.10. USB_DEVICE

Class For FS IP: Communication Device Class (Virtual Port Com)

5.10.1. Parameter Settings:

Basic Parameters:

USBD_MAX_NUM_INTERFACES (Maximum number of supported interfaces)	1
USBD_MAX_NUM_CONFIGURATION (Maximum number of supported configuration)	1
USBD_MAX_STR_DESC_SIZ (Maximum size for the string descriptors)	512
USBD_SUPPORT_USER_STRING (Enable user string descriptor)	Disabled
USBD_SELF_POWERED (Enabled self power)	Enabled
USBD_DEBUG_LEVEL (USBD Debug Level)	0: No debug message

Class Parameters:

USBD_CDC_INTERVAL (Number of micro-frames interval)	1000
---	------

5.10.2. Device Descriptor:

Device Descriptor:

VID (Vendor Identifier)	1155
LANGID_STRING (Language Identifier)	English(United States)
MANUFACTURER_STRING (Manufacturer Identifier)	STMicroelectronics

Device Descriptor FS:

PID (Product Identifier)	22336
PRODUCT_STRING (Product Identifier)	STM32 Virtual ComPort
SERIALNUMBER_STRING (Serial number)	00000000001A
CONFIGURATION_STRING (Configuration Identifier)	CDC Config
INTERFACE_STRING (Interface Identifier)	CDC Interface

* User modified value

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PD0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PD1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
USART1	PA9	USART1_TX	Alternate Function Push Pull	n/a	High *	
	PA10	USART1_RX	Input mode	No pull-up and no pull-down	n/a	
USB	PA11	USB_DM	n/a	n/a	n/a	
	PA12	USB_DP	n/a	n/a	n/a	
GPIO	PC13-TAMPER-RTC	GPIO_Output	Output Push Pull	n/a	Low	LED
	PA8	GPIO_Output	Output Push Pull	n/a	Low	DE

6.2. DMA configuration

DMA request	Stream	Direction	Priority
USART1_RX	DMA1_Channel5	Peripheral To Memory	Low
USART1_TX	DMA1_Channel4	Memory To Peripheral	Low

USART1_RX: DMA1_Channel5 DMA request Settings:

Mode: **Circular ***
Peripheral Increment: Disable
Memory Increment: **Enable ***
Peripheral Data Width: Byte
Memory Data Width: Byte

USART1_TX: DMA1_Channel4 DMA request Settings:

Mode: Normal
Peripheral Increment: Disable
Memory Increment: **Enable ***
Peripheral Data Width: Byte
Memory Data Width: Byte

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	15	0
System tick timer	true	15	0
DMA1 channel4 global interrupt	true	5	0
DMA1 channel5 global interrupt	true	5	0
USB low priority or CAN RX0 interrupts	true	5	0
TIM1 update interrupt	true	0	0
TIM3 global interrupt	true	0	0
USART1 global interrupt	true	5	0
PVD interrupt through EXTI line 16	unused		
RTC global interrupt	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
USB high priority or CAN TX interrupts	unused		
TIM2 global interrupt	unused		
TIM4 global interrupt	unused		
RTC alarm interrupt through EXTI line 17	unused		

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103C8Tx
Datasheet	13587_Rev17

7.2. Parameter Selection

Temperature	25
Vdd	3.3

8. Software Project

8.1. Project Settings

Name	Value
Project Name	zegarStm
Project Folder	F:\TP-moje dokumenty\Programowanie\ST\sw_workspace\zegarStm
Toolchain / IDE	SW4STM32
Firmware Package Name and Version	STM32Cube FW_F1 V1.4.0

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No