



Vivado SDK 2019.1 - Application Project

Vivado SDK is a sub-application of Vivado.

Launch SDK

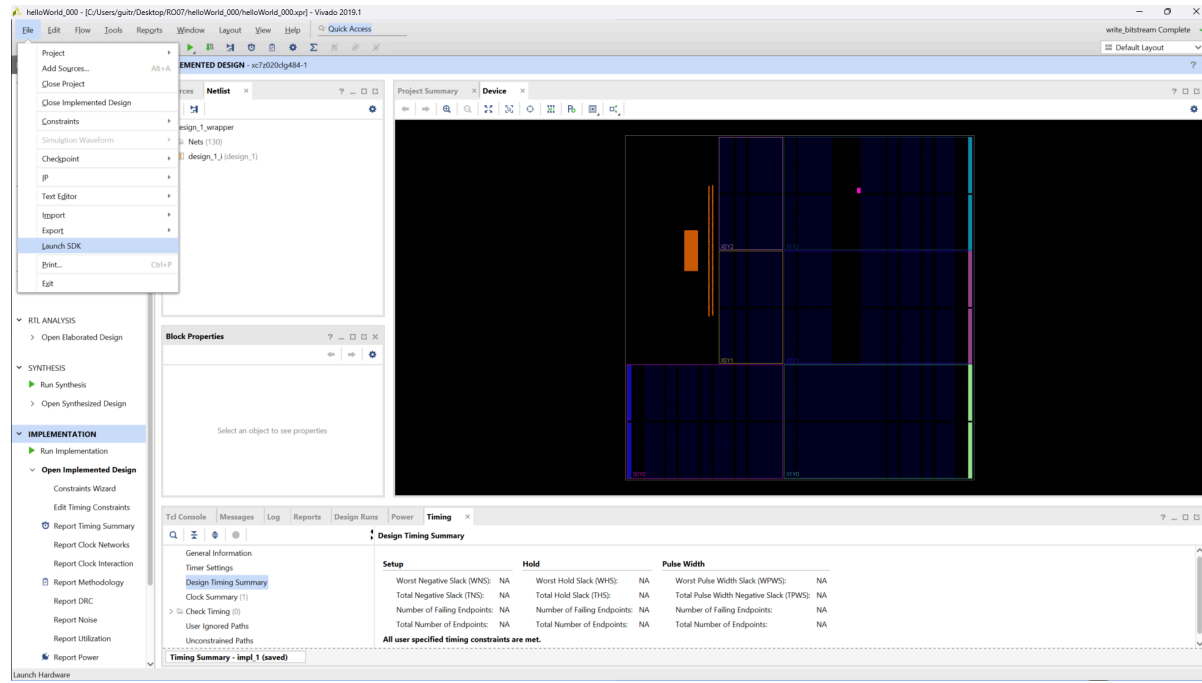

Create Application Project

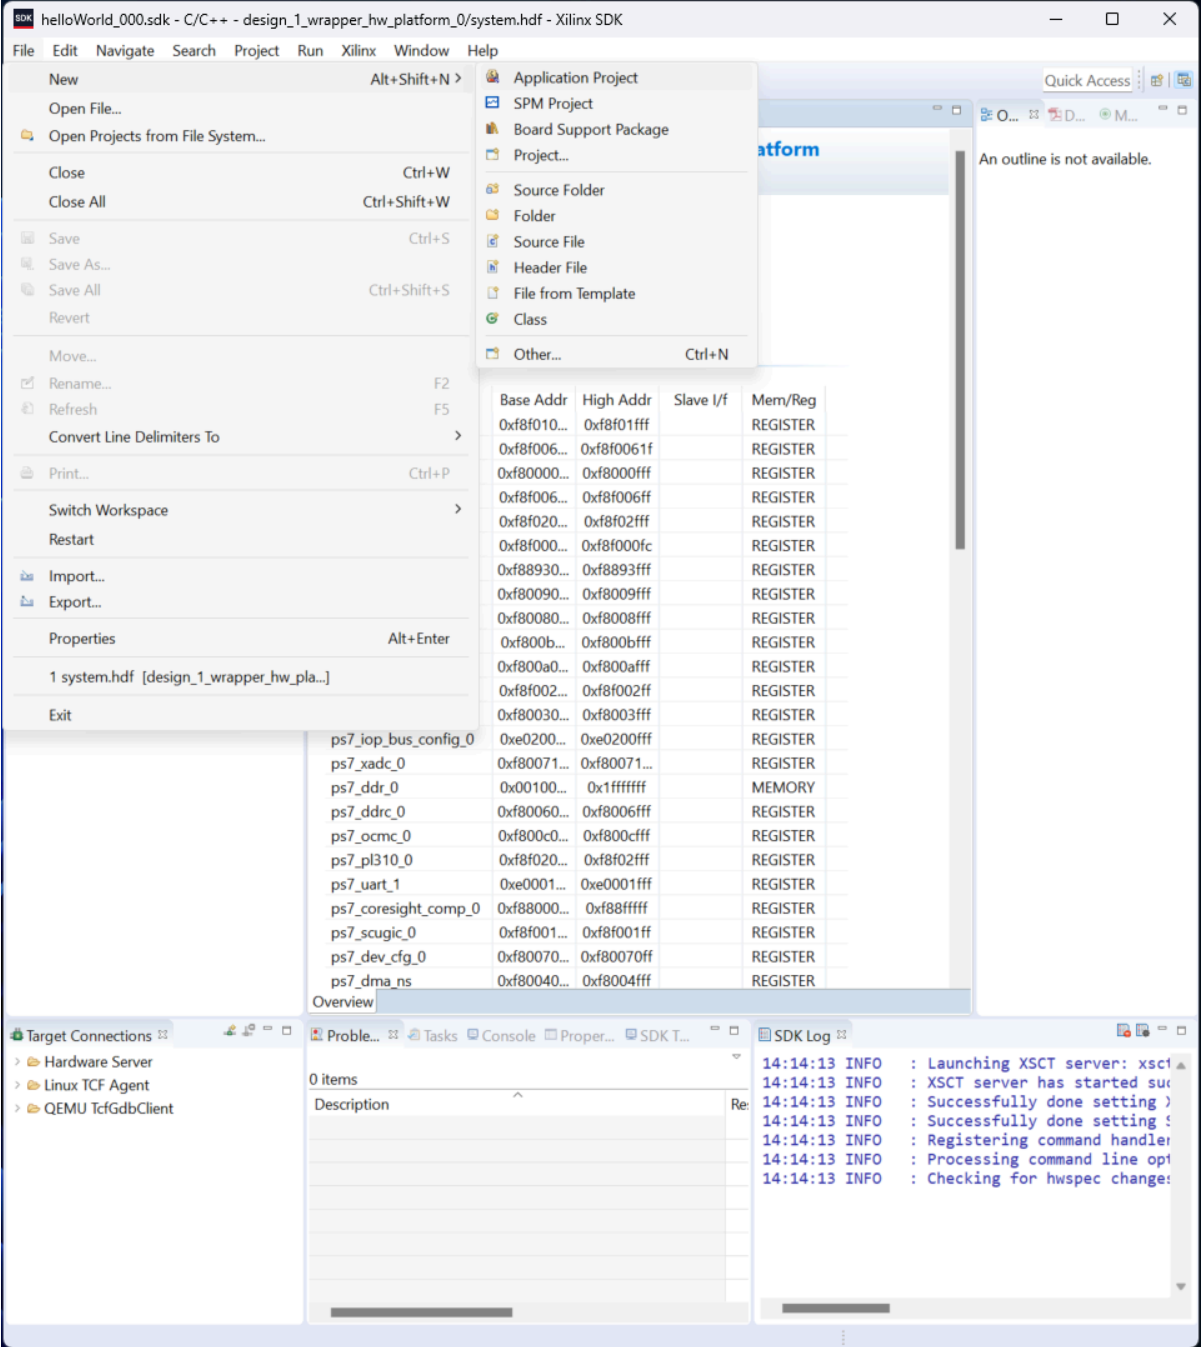

Application Project

Create a managed make application project.



Project name:

☒ Use default location

Location:

[Browse...](#)

Choose file system:

OS Platform:

Target Hardware

Hardware Platform:

[New...](#)

Processor:

Target Software

Language: ☒ C ☐ C++

Compiler:

Hypervisor Guest:

Board Support Package: ☒ Create New

☐ Use existing



< Back

Next >

Finish

Cancel

Templates

Create one of the available templates to generate a fully-functioning application project.



Available Templates:

Dhrystone
Empty Application
Hello World
lwIP Echo Server
lwIP TCP Perf Client
lwIP TCP Perf Server
lwIP UDP Perf Client
lwIP UDP Perf Server
Memory Tests
OpenAMP echo-test
OpenAMP matrix multiplication Demo
OpenAMP RPC Demo
Peripheral Tests
RSA Authentication App
Zynq DRAM tests
Zynq FSBL

Let's say 'Hello World' in C.



< Back

Next >

Finish

Cancel

helloWorld_000.sdk - C/C++ - helloWorld_000/src/helloworld.c - Xilinx SDK

File Edit Navigate Search Project Run Xilinx Window Help

Project Explorer

- design_1_wrapper_hw_platform_0
 - design_1_wrapper.bit
 - ps7_init_gpl.c
 - ps7_init_gpl.h
 - ps7_init.c
 - ps7_init.h
 - ps7_init.html
 - ps7_init.tcl
 - system.hdf
- helloWorld_000
 - Binaries
 - Includes
 - Debug
 - src
 - helloworld.c
 - platform_config.h
 - platform.c
 - platform.h
 - Iscrip.tcl
 - Xilinx.spec
 - helloWorld_000_bsp
 - BSP Documentation
 - ps7_cortexa9_0
 - Makefile
 - system.mss

system.hdf system.mss helloworld.c

```
/* Copyright (C) 2009 - 2014 Xilinx, Inc. All rights reserved.

/*
 * helloworld.c: simple test application
 *
 * This application configures UART 16550 to baud rate 9600.
 * PS7 UART (Zynq) is not initialized by this application, since
 * bootrom/bsp configures it to baud rate 115200
 *
 * -----
 * | UART TYPE   BAUD RATE |
 * -----
 * * uartns550   9600
 * * uartlite    Configurable only in HW design
 * * ps7_uart    115200 (configured by bootrom/bsp)
 */

#include <stdio.h>
#include "platform.h"
#include "xil_printf.h"

int main()
{
    init_platform();

    print("Hello World\n\r");

    cleanup_platform();
    return 0;
}
```

Quick Access

- stdio.h
- platform.h
- xil_printf.h
- main() : int

Target Connections

- Hardware Server
- Linux TCF Agent
- QEMU TcfGdbClient

Problem... Tasks Console Proper... SDK T...

1 items

Description	Re:
> Infos (1 item)	

SDK Log

```
14:14:13 INFO : Launching XSCT server: xsct
14:14:13 INFO : XSCT server has started suc
14:14:13 INFO : Successfully done setting )
14:14:13 INFO : Successfully done setting !
14:14:13 INFO : Registering command handler
14:14:13 INFO : Processing command line opt
14:14:13 INFO : Checking for hwspec change:
```

Writable Smart Insert 3 : 1