Meridian Rift Tower

Qianhai, Shenzhen, China / Skyscraper


A–05–01

GENERAL ARRANGEMENT

CONCEPT ISSUE · METRES · A0

B1 · Two cores


-4.00

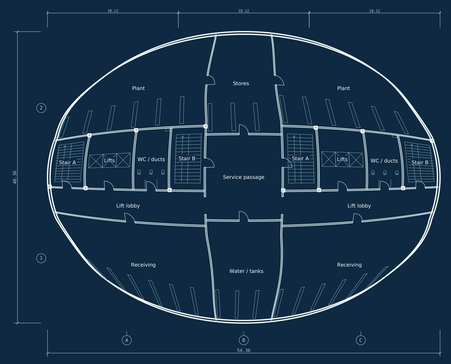

1:300 0 10 m

L01 · Atrium plaza


±0.00

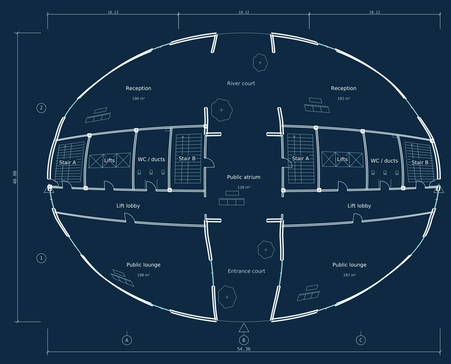

1:300 0 10 m

L02–44 · Typical plates

+4.00 / 4 m repeat

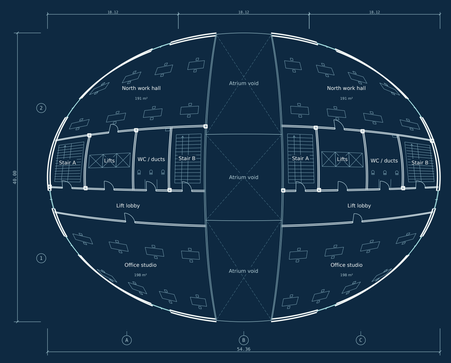


1:300 0 10 m

Typical plate rotates at its edge. The two cores stay fixed.

L12 / 24 / 36 · Bridges


+44 / +92 / +140

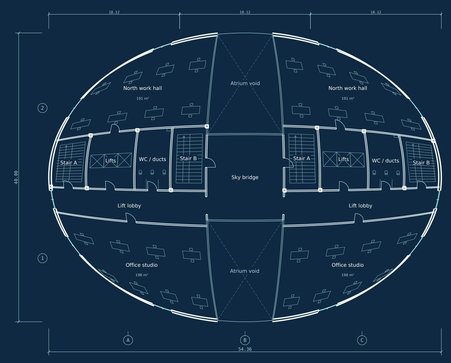

1:300 0 10 m

R · Roof envelope

ROOF

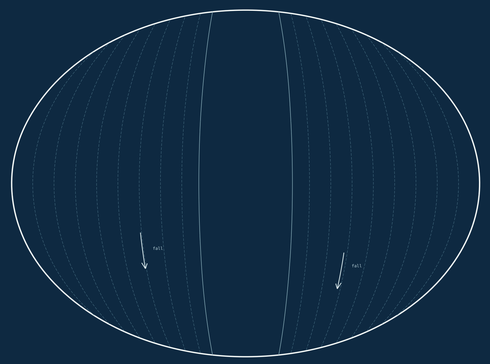


ROOF ENVELOPE / FALL ARROWS

1:250 0 5 m

Shell edges, exposed courts and roof drainage direction.

S · Site and approach

SITE

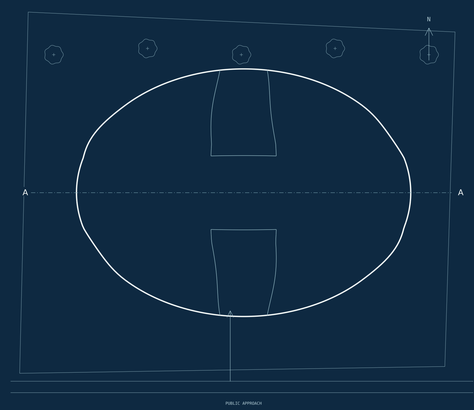


PUBLIC APPROACH

1:350 0 10 m


Indicative setting. North is up. Section line A-A is marked.

A–A Section

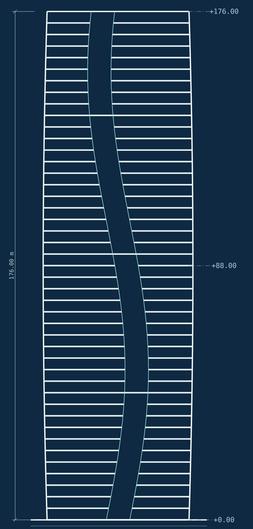


1:750 0 20 m

E1 Elevation

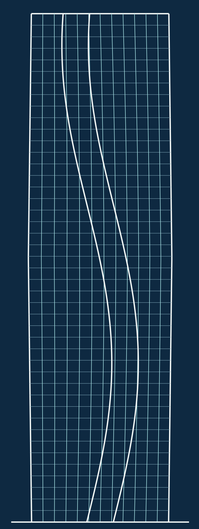

1:750 0 20 m

D1 Bridge door at the atrium rift



01 Bronze guard cap

02 Curved sealed glazing

03 Movement joint

04 Independent slab edge

1:20 0 0.5 m

Envelope and structure

Two independent cores reach ground on opposite sides of the atrium. Curved floor edges are carried back to each core. Bridges at L12, L24 and L36 bridge the fissure and can accommodate relative movement.

Environment and access

Study wind and stack effect, fire compartments and smoke extraction through the tall atrium. Separate bridge movement from glazed enclosure tolerances.

Drawing key

- Cut envelope
- Glass / seal
- Section datum
- Internal wall
- Furniture / fitting
- Overhead / projected

54 × 40 m; 44 occupied floors at 4 m; 176 m crest.

Proposed dimensions and levels. Site surveys, engineering, fire strategy, accessibility and local approvals require project-specific verification before construction.