River Confluence Hotel

Kallang Basin, Singapore / Hotel

A–13–01

GENERAL ARRANGEMENT

CONCEPT ISSUE · METRES · A0

B1 · Back of house

-4.00



1:350 0 10 m

L01 · River arrival

±0.00



1:350 0 10 m

L02–03 · Podium

+4.00 / +8.00



1:350 0 10 m

L04–18 · Both wings


+12.00 / 4 m repeat



1:350 0 10 m

L19–26 · City wing


+72.00 / 4 m repeat

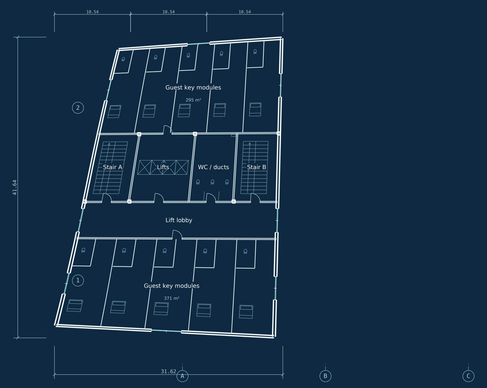

1:300 0 10 m

R · Roof envelope

ROOF

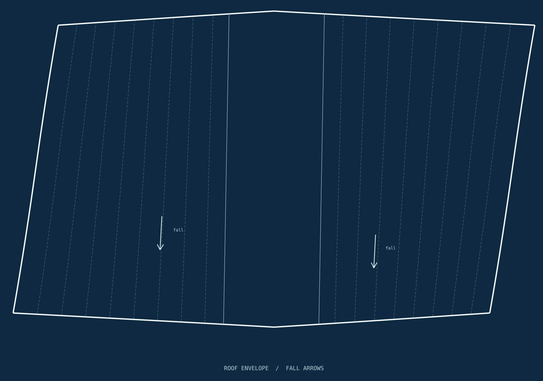


ROOF ENVELOPE / FALL ARROWS

1:300 0 10 m


Shell edges, exposed courts and roof drainage direction.

A–A Section




1:750 0 20 m

E1 Elevation

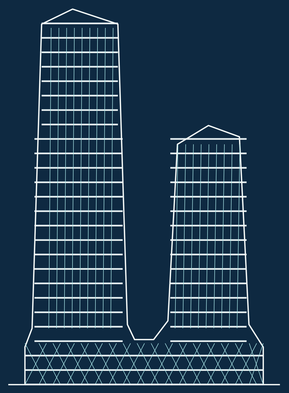

1:600 0 20 m


D1 Diamond podium-to-tower joint

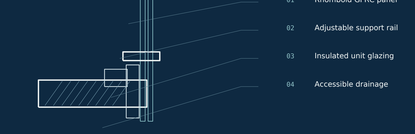

1:20 0 0.5 m

S · Site and approach

SITE

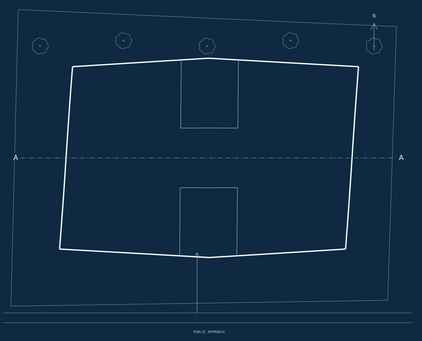

1:500 0 10 m

Indicative setting. North is up. Section line A–A is marked.

I · Furniture study

INTERIOR



1:125 0 5 m

Enlarged room layout from the principal inhabited floor.

Envelope and structure

The three-level podium gathers both hotel cores and a public waterfront stair. Diamond fibre-concrete panels open progressively into glazing at the two tower bases. The taller city wing continues above the river wing.

Environment and access

Test wind-driven rain at the glazed throat. Keep receiving and linen routes on the city edge, and separate the two guest lift groups through the public base.

Drawing key

- Cut envelope
- Internal wall
- Glass / seal
- Furniture / fitting
- Section datum
- Overhead / projected

66 × 46 m podium; river wing 18 floors / 72 m; city wing 26 floors / 104 m.

Proposed dimensions and levels. Site surveys, engineering, fire strategy, accessibility and local approvals require project-specific verification before construction.