Artisan Materials

Made in China

Thermoplastic Sheet

Shenyang Artisan Supplies Co.,Ltd

Introduction of Company and Thermoplastic Sheet

Artisan is a Chinese factory established in 2021, specializing in FR4/G10 insulation board, colored G10 insulation board, FR5/G11 insulation board, anti-static FR4/G10 insulation board, Epoxy resin cloth insulation board,3240 insulation board, copper clad laminate FR4/G10 CNC processing products, thermoplastic board,carbon fiber board, carbon fiber tube and carbon fiber CNC processing products. We can develop and produce a variety of high-standard and personalized products according to customer needs.

Our products are mainly used in high-end insulation parts processing, FPC (flexible printed circuit board) reinforcement sheets, battery covers, planetary gears, transformer insulation baffles, electronic insulation parts, insulation gaskets, insulation washers, motors, generators, transformers, high-voltage switches and other electrical equipment, precision test fixtures, ICT test fixtures, FCT fixtures, surf fins, hydrofoils and other water sports equipment, knife handle materials, slingshots, golf forks and other outdoor sports goods, as well as transformer oil and other humid environments. Carbon fiber products have been used in many fields such as aviation, automobile decoration, precision machinery parts, high-end sports equipment and surface decoration, aircraft models, car models, etc.

.

Thermoplastic Sheet is specially used for interior parts in the rail transit fields such as aerospace,aircraft, high-speed rail trains, subways, cloud rails, urban rails, high-end cars, RVs, yachts, cruise ships, etc. The thermoplastic sheet is also suitable formedical equipment, robots, outdoor equipment, scabbard holsters, lampshades, base stations, trolley boxes, trash cans and other shell shields, space capsules, clean rooms and public mobile equipment, commercialfurniture, bathroom and other building materials.

Product Features

1. High flame resistance---FAR 25.853, CCAR 25.853, UL94-V0/5VA 、EN 45545-2,TB/T 3237-2010,GB 8410

2. High impact resistance---After non-destructive external forces such as high impact, scratching, abrasion, etc., will not be damaged and will not change shape.

3. High stretchability---under the same size, the tensile ductility after heating is 2-3 times that of similar thermoplastic panels.

4. Acid and alkali resistance, chemical resistance, corrosion resistance---It is more resistant to the erosion of concentratedchemicals than other thermoplastic panels, and can be adapted to a wider range of chemical agents. It is especially suitable for interiors in medical and health fields such as chemical laboratories, clean rooms, and antibacterial spaces.Super toughness and high elasticity, destructive resistance, safety, and durability | It is safer and more practical in areas such as airplanes, high-speed rails, subways, and buses.

5. Low density and light weight --- 1.28- 1.41g/cm3.

6. Paint-free coloring---A variety of textures and dozens of colors to choose from, environmentally friendly and non-toxic, increase the demand for product colors in various fields of use, save labor costs and improve production efficiency than materials that need to be painted and colored.

7. Environmentally friendly and recyclable---The scrapped recycled products can be reshaped bya dding additives and other methods, which is environmentally friendly and saves costs.

Technical Parameters

Physical Property	Value	Unit	Testing Method
Density	1.33	g/cm3	ASTMD792
Rockwell hardness	98	R	ASTMD785
Elastic Modulus	2400	Mpa	ASTMD790
Tensile Strength	42	Mpa	ASTMD638
Impact resistance	700	J/m	ASTMD256
Thermal Change Temperature	76	℃	ASTMD648
Vicat Softening Point	105	℃	ASTMD1525-09
UI Flame Retardant Grade	5VA		UL94


Applicable Processing Equipment

1.Conventional vacuum molding equipment.

2.The oven temperature is set at 160-170'C, when the temperature stabilizes and then put the thermoplastic sheet into the oven, heating, pay attention to observe the oven changes.

3.The thickness of 1.5mm heating about 2min, 2mm heating 4min, and so on.

Product Size & Thick

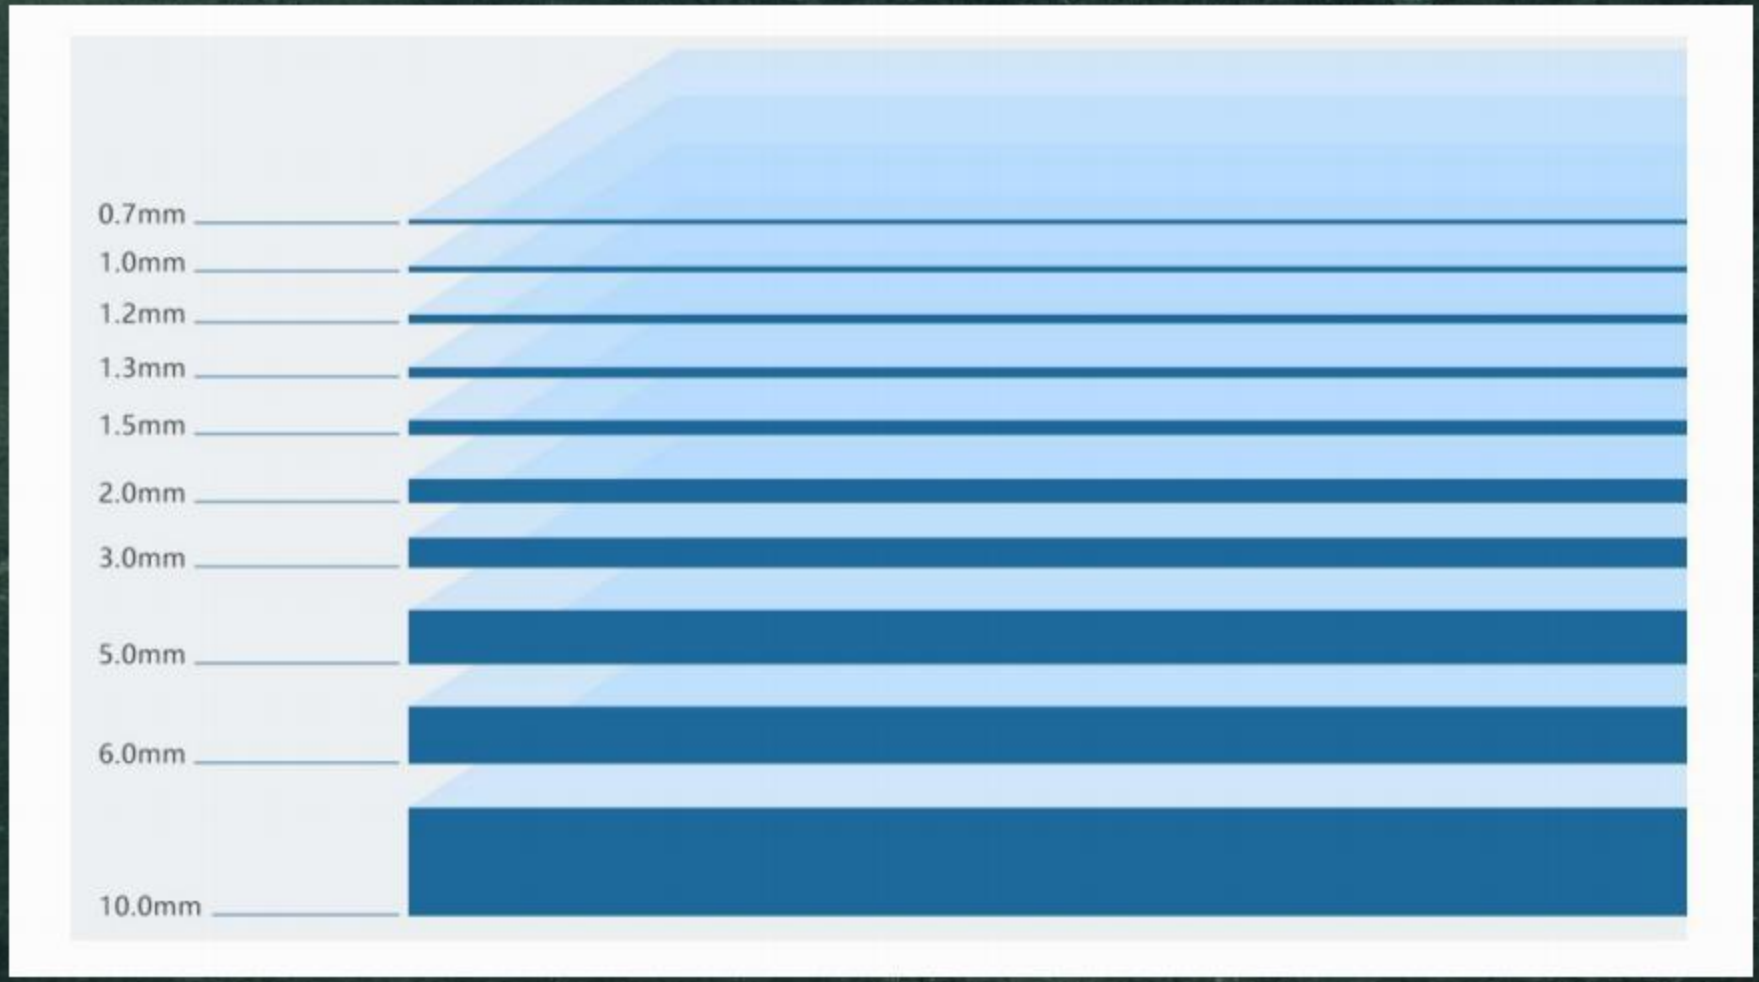


Standard sheet size:1220 × 2440mm
Thick range:0.7mm to 10mm

Color Swatch-Coarse Surface




Black-Coarse Surface

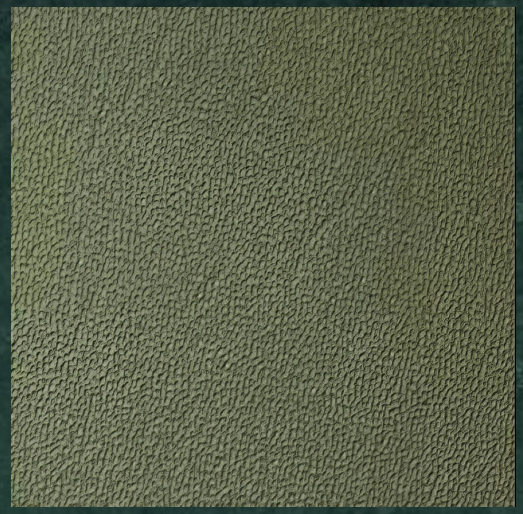

OD Green



American OD Green

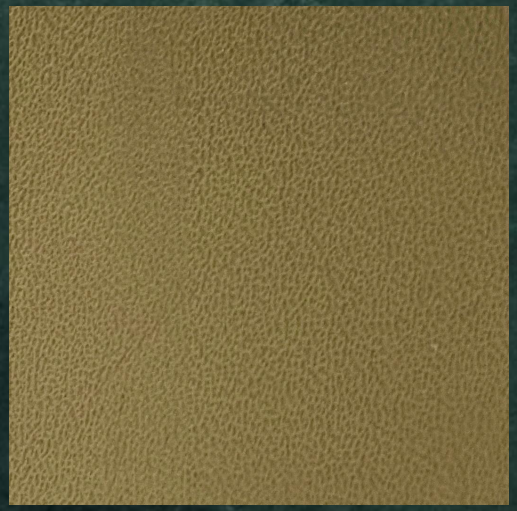

Light Desert Yellow



Deep Desert Yellow



Reddish Desert Yellow

Color Swatch-Coarse Surface



Light Red



Deep Red



Light Pink



Deep Pink



Light Orange



Deep Orange


Color Swatch-Coarse Surface



Light Blue



Deep Blue

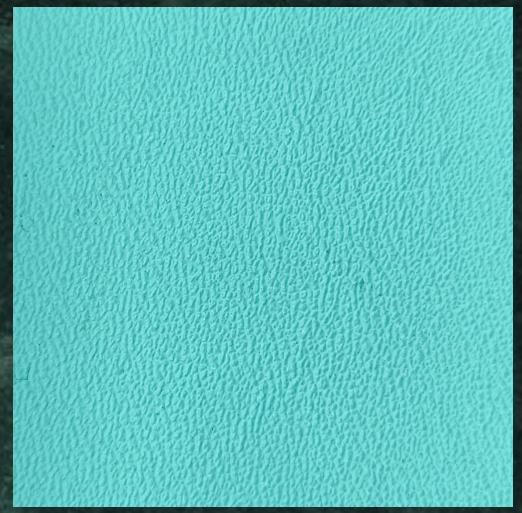

Sky Blue



Gray Blue



Gray



Violet

Color Swatch-Coarse Surface



Khaki



Chocolate




Brown



White



Neon Yellow

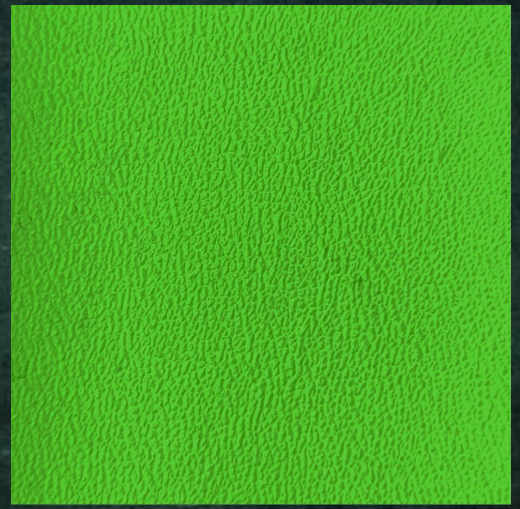

Neon Green

Color Swatch-Coarse Surface



Purple

Color Swatch-Fine Surface



Black-Fine Surface




Transparent Color

Color Swatch-Carbon Surface



Black- Carbon Surface

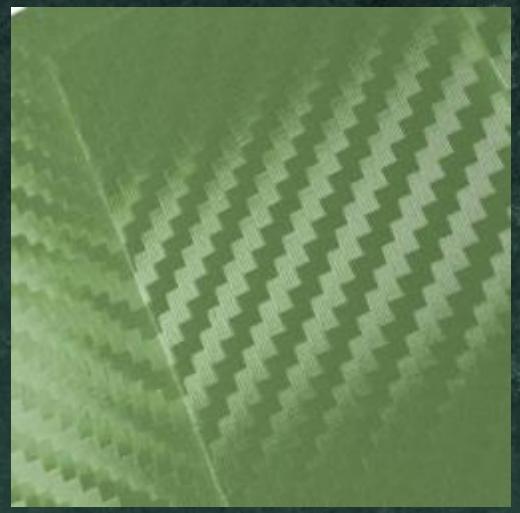

Olive Green Carbon Surface



Red Carbon Surface



Light Orange Carbon Surface




Deep Orange Carbon Surface



Blue Carbon Surface

Color Swatch-Carbon Surface

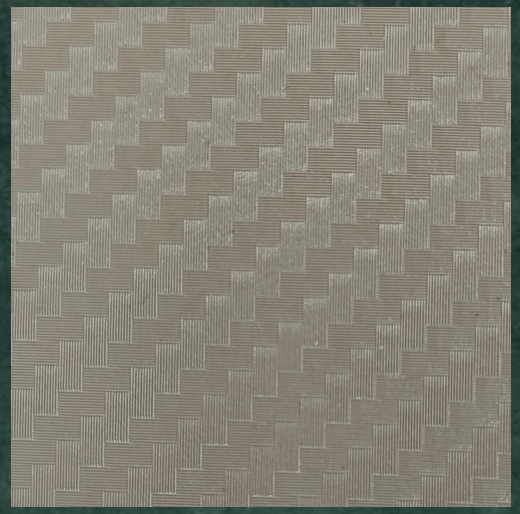

Khaki Carbon Surface



Green Carbon Surface

Color Swatch-Cowhide / Rhino Skin Surface



Black-Cowhide Surface



Black-Rhino Skin Surface



Orange-Cowhide Surface




Brown-Rhino Skin Surface

Color Swatch-Weave Surface



Black - Weave Surface

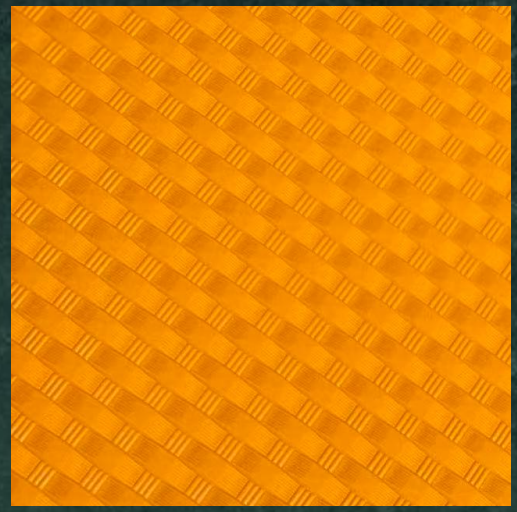

Orange - Weave Surface

Customized Surface

If you like other patterns, please send us high-definition pictures. We can customize the surface according to your pictures. A flower, a small animal you like, a flame, a sea, any picture you like will do.

The minimum order quantity for customization is 2 pcs in size 1220×2440mm (cutting to 300×600mm is recommended to reduce the international shipping cost.

Cutting fee is 0.44/small piece.For example, a standard plate of 1220 × 2440 mm can be cut into 16 small pieces of 300 × 600 mm.Cutting fee is $0.44* ×16 =$7.04

Some Customized Cases




Price,Moq & Delivery

Size	Black color	Other color	Cowhide surface Rhino skin surface	Weave surface	Carbon surface	Customized surfece
1220×2440×1.0mm	$42.86/pc	/	/	/	$51.42/pc	/
1220×2440×1.5mm	$49.69/pc	$62.78/pc	$61.54/pc	/	$78.46/pc	$101.23/pc
1220×2440×2.0mm	$65.23/ pc	$77.55/ pc	$79.08/ pc	$89.23/ pc	$101.58/ pc	$119.08/ pc
1220×2440×2.5mm	$77.37/pc	/	/	$109.49/pc	/	/
Other thick	Please send detailed requirements for thick, we will quote accordingly					
Cutting fee	$0.44/small pc Eg. 1220×2440×1.5mm can be cut to 8 pcs of 600×600×1.5 mm cutting fee=$0.44/pc ×8=$3.52					

MOQ	For the color and thick which in this catalog	MOQ=1 pc	Delivery within 7 working days
	For customized color and thick	MOQ=50 pcs	Delivery within 15 working days

Application Feld



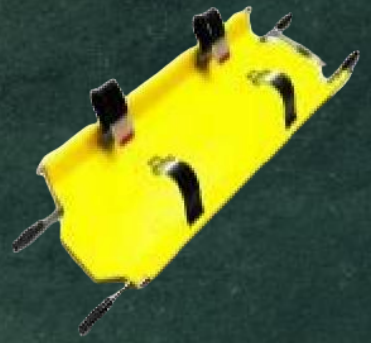














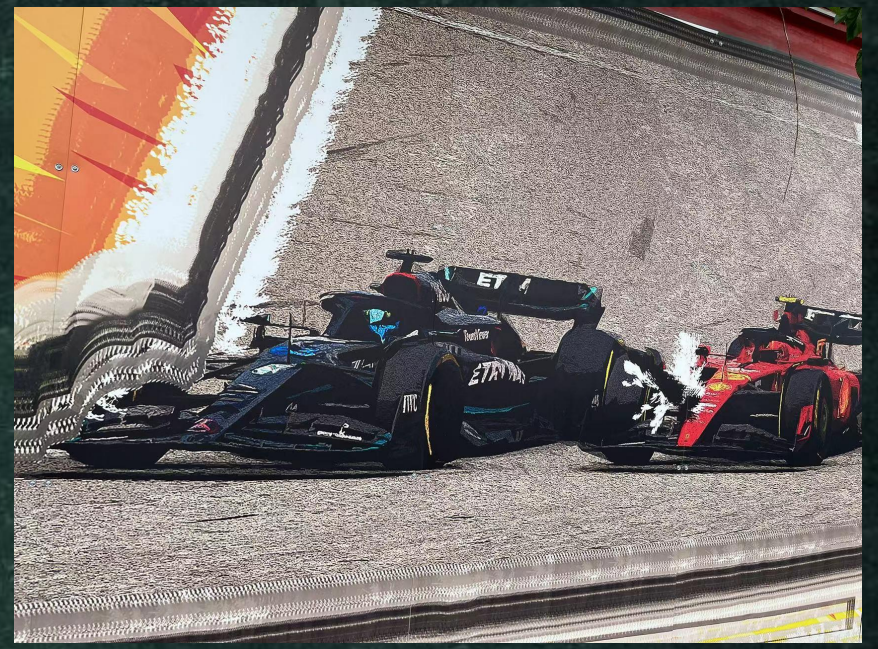



Artisan Supplies l China

Contact Information:

Tel: +8615250334831(wechat/whatsapp)

Email: tinainsulation@gmail.com

info@artisanmaterial.com

95112697@qq.com

WhatsApp QR Code

Artisan© 2026