

CS3640

Transport Layer (4): TCP


Prof. Supreeth Shastri

Computer Science
The University of Iowa

Lecture goals

from principles to practice: design and operation of TCP


- Connection management
- Reliable data transfer
- Flow and congestion control

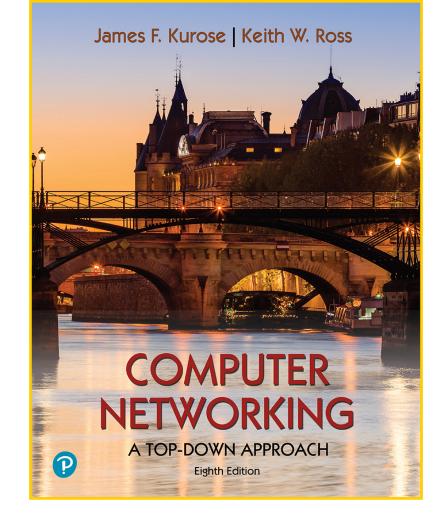

Chapters 3.5, 3.7



Structure of the TCP segment

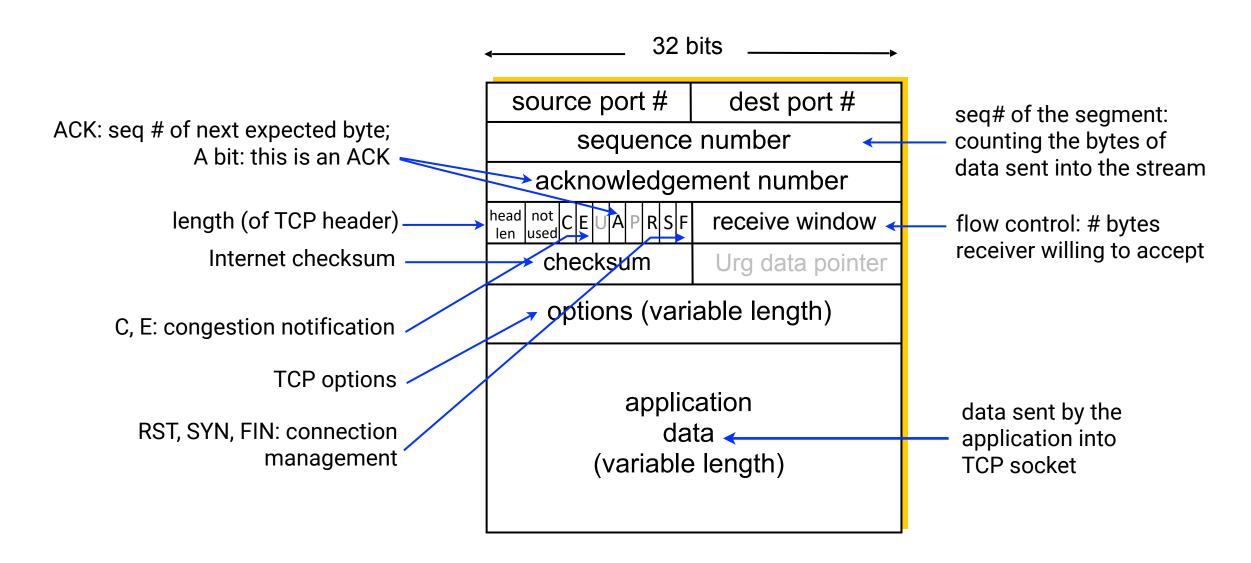


TCP Connection Management



TCP 3-way handshake

TCP is connection-oriented, thus needs a "handshake" before exchanging data

- Goal-1: sender and receiver determine that the other side is willing to establish connection
- Goal-2: sender and receiver agree on connection parameters (e.g., starting sequence #)

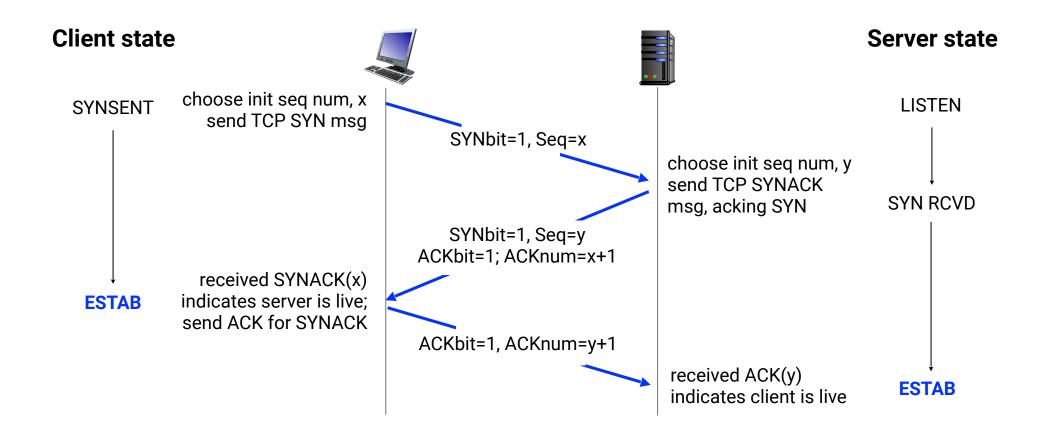


Round Trip Time (RTT) and TCP Timeout

- SampleRTT: time between a segment's transmission until its ACK receipt
- Such SampleRTT will vary over time, so we want estimated RTT to be "smoother"

```
EstimatedRTT = (1-\alpha)*EstimatedRTT + \alpha*SampleRTT
```

- exponential weighted moving average (EWMA)
- influence of past sample decreases exponentially fast
- typical value: α = 0.125

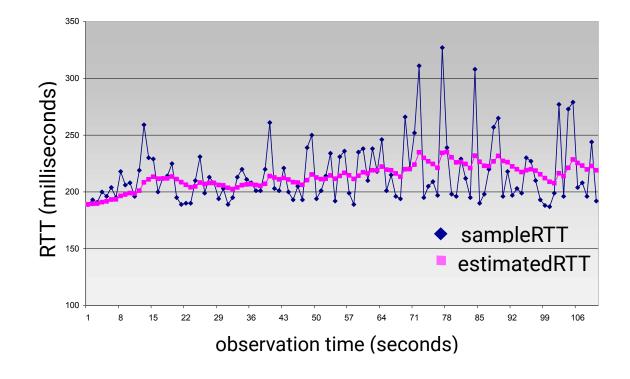

Round Trip Time (RTT) and TCP Timeout

Underestimating timeout value ⇒ unnecessary retransmissions

Overestimating timeout value ⇒ slower loss recovery

TimeoutInterval = EstimatedRTT + 4*DevRTT



safety margin

DevRTT: EWMA of SampleRTT deviation from EstimatedRTT

DevRTT = $(1-\beta)*DevRTT + \beta*|SampleRTT-EstimatedRTT|$

(typically, $\beta = 0.25$)

TCP Reliable Transfer

TCP is a hybrid between GBN and SR protocols

	Go-Back-N	Selective Repeat
ACKs	Cumulative i.e., ACK(k) will ACK all packets up to and including #k	Individual i.e., ACK(k) just ACKs packet #k
Out of order packets	Receiver discards all out of order packets	Buffers out-of-order packet for later delivery
Buffer size	Sender buffer = N; receiver buffer = 1	Sender buffer = N; Receiver buffer = M
Sender timer	Set for only the oldest unacknowledged packet	Set for every transmitted packet


Understanding Sequence and ACK Numbers

Sequence numbers


byte stream "number" of first byte in segment's data


Acknowledgement numbers


sequence# of next byte expected from the other side

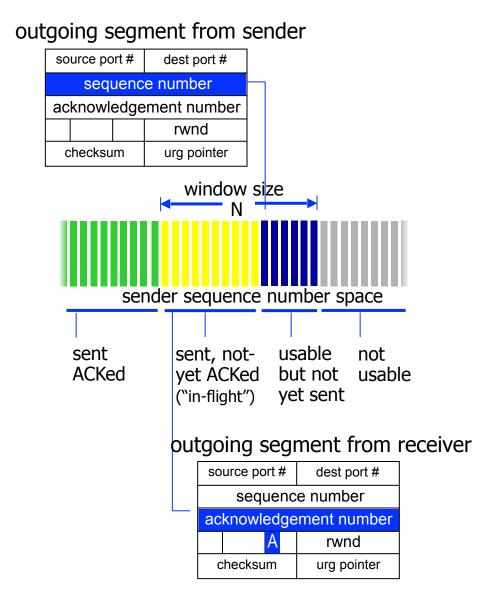

Example Retransmission Scenarios

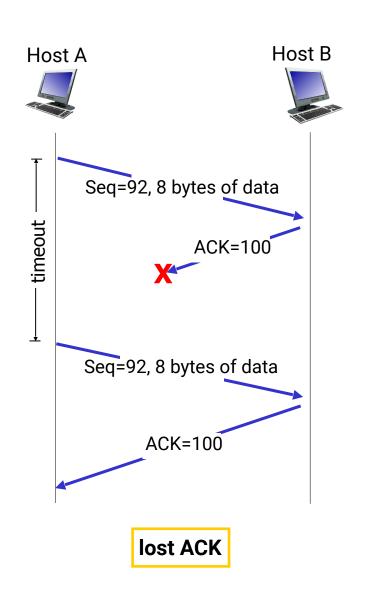


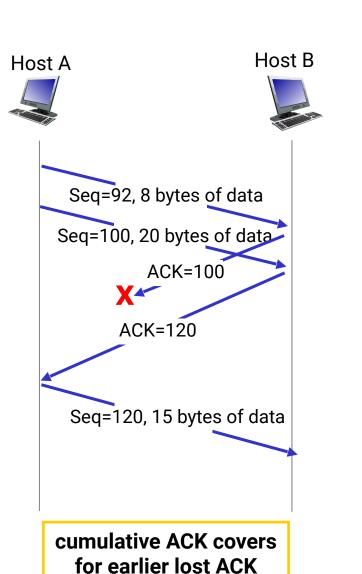

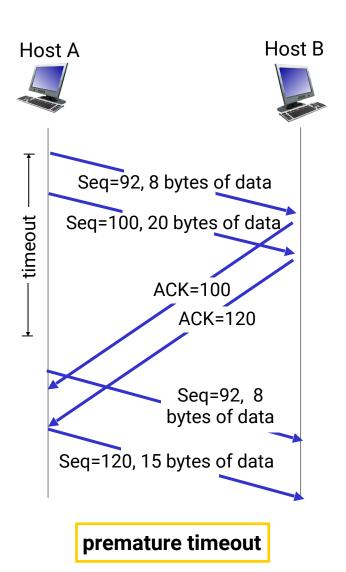

TCP fast retransmit

if sender receives 3 ACKs for same data ("triple duplicate ACKs"), it is likely that unacknowledged segment is lost, so don't wait for timeout, instead resend that segment now

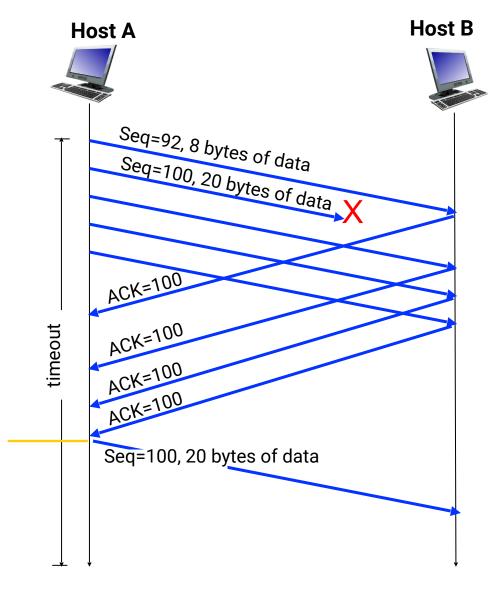



Receipt of triple duplicate ACKs indicates 3 segments received after a missing segment, so lost segment is likely. Retransmit!

TCP Flow Control








Key idea

let the receiver control the sender, so sender won't overflow receiver's buffer by transmitting too much, too fast

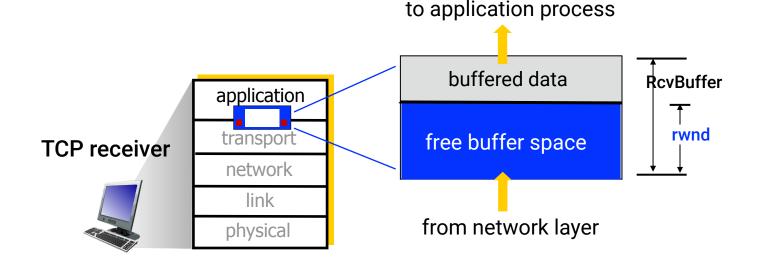

- TCP receiver advertises its free buffer space in rwnd field in TCP header
- rwnd is typically set to 4kB, while its full range is 0 to 64kB (16-bit field)
- managed internally by the TCP/IP stack, and could be modified via socket options()
- sender limits amount of unacknowledged, in-flight data to receiver's rwnd, thereby guaranteeing that receive won't experience buffer overflow

TCP Congestion Control








Key idea: senders can increase sending rate until packet loss (congestion) occurs, then decrease sending rate on loss event

Additive Increase

increase sending rate by 1 maximum segment size every RTT until loss detected

Multiplicative Decrease

cut sending rate in half at each loss event (e.g., triple dup ACKs)

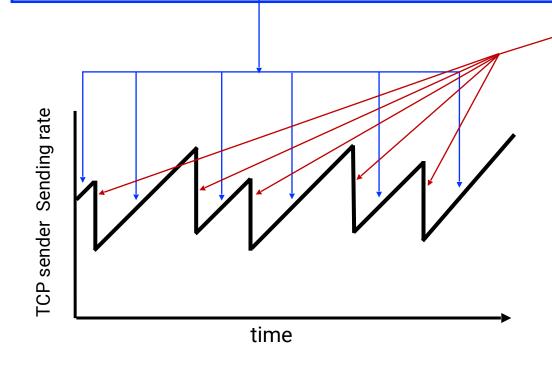


AIMD

- sawtooth behavior: probing for bandwidth
- a distributed, asynchronous algorithm
- shown to optimize network-wide flow rates

Classical TCP Implementation

sender sequence number space

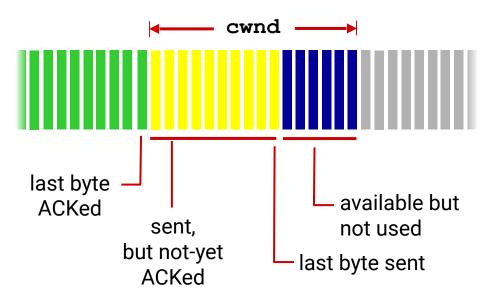

TCP sender limits transmission:

LastByteSent - LastByteAcked ≤ cwnd

cwnd is dynamically adjusted in response to observed network congestion events

send cwnd bytes, wait RTT for ACKS, then send more bytes


Two Phases: Slow Start and Congestion Avoidance

Slow Start: when a connection begins, increase sending rate exponentially until the first loss event

- start with cwnd = 1 MSS
- double cwnd every RTT i.e., increment cwnd for every ACK received

Congestion Avoidance: switch from exponential increase to linear increase when the connection hits first timeout

- set ss-threshold = cwnd/2
- switch to additive increase anytime cwnd reaches this level in the future

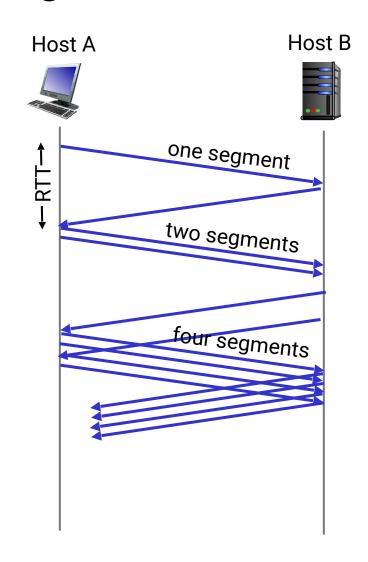

There is an RFC about TCP RFCs!

Internet Engineering Task Force (IETF)
Request for Comments: 7414

Obsoletes: 4614

Category: Informational

ISSN: 2070-1721

M. Duke
F5
R. Braden
ISI
W. Eddy
MTI Systems
E. Blanton
Interrupt Sciences
A. Zimmermann
NetApp, Inc.
February 2015

A Roadmap for Transmission Control Protocol (TCP) Specification Documents

Abstract

This document contains a roadmap to the Request for Comments (RFC)

(TCP). This roadmap provides a brief summary of the documents defining TCP and various TCP extensions that have accumulated in the RFC series. This serves as a guide and quick reference for both TCP implementers and other parties who desire information contained in the TCP-related RFCs.

Preparations and logistics







Revisit the **lectures and slides**:

https://shastri.info/teaching/cs3640

Read the **textbook**:

Kurose-Ross chapters 1-3

Midterm **schedule**:

3/9 Thursday at 6:30PM in **100 PH**

It is a 1-hour pen-and-paper exam (closed book, closed notes, closed electronics)

Spot Quiz (ICON)