

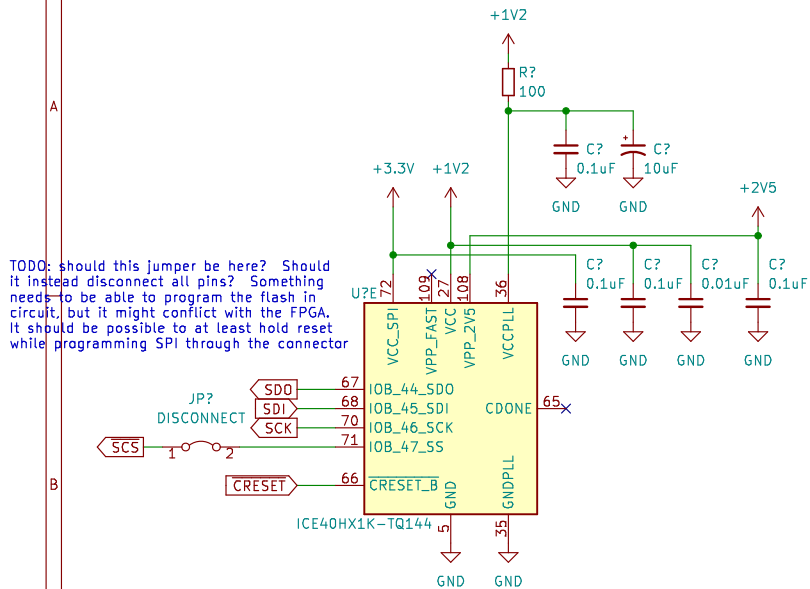




ICE40HX1K FPGA




POWER SUPPLY

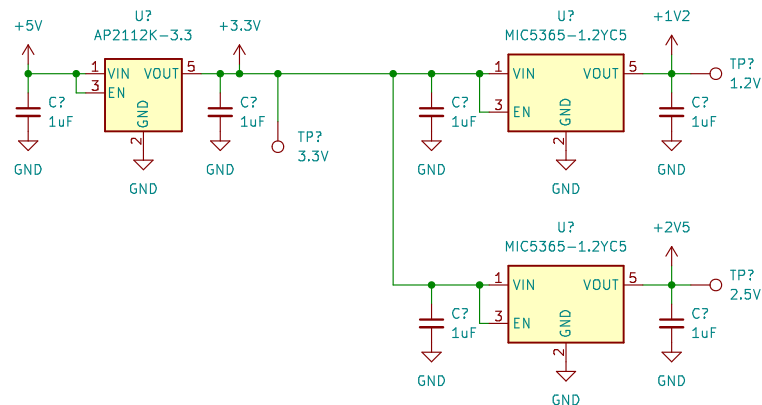


SPI FLASH

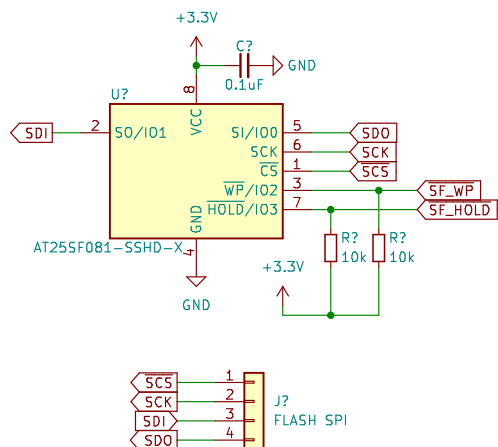


USB

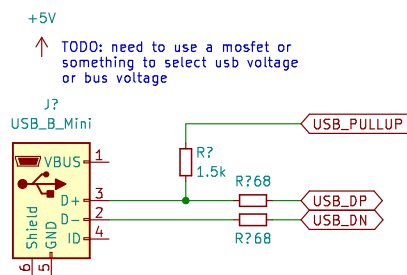

POWER & RESET



OSCILLATORS

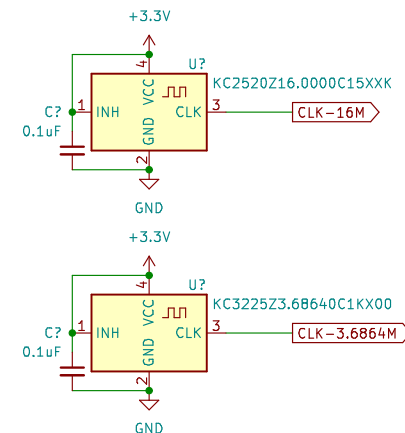



Sheet: /
File: Fidget.kicad_sch


Title: Fidget

Size: A4 Date:
KiCad E.D.A. kicad 6.0.10+dfsg-2

Rev: 1
Id: 1/4

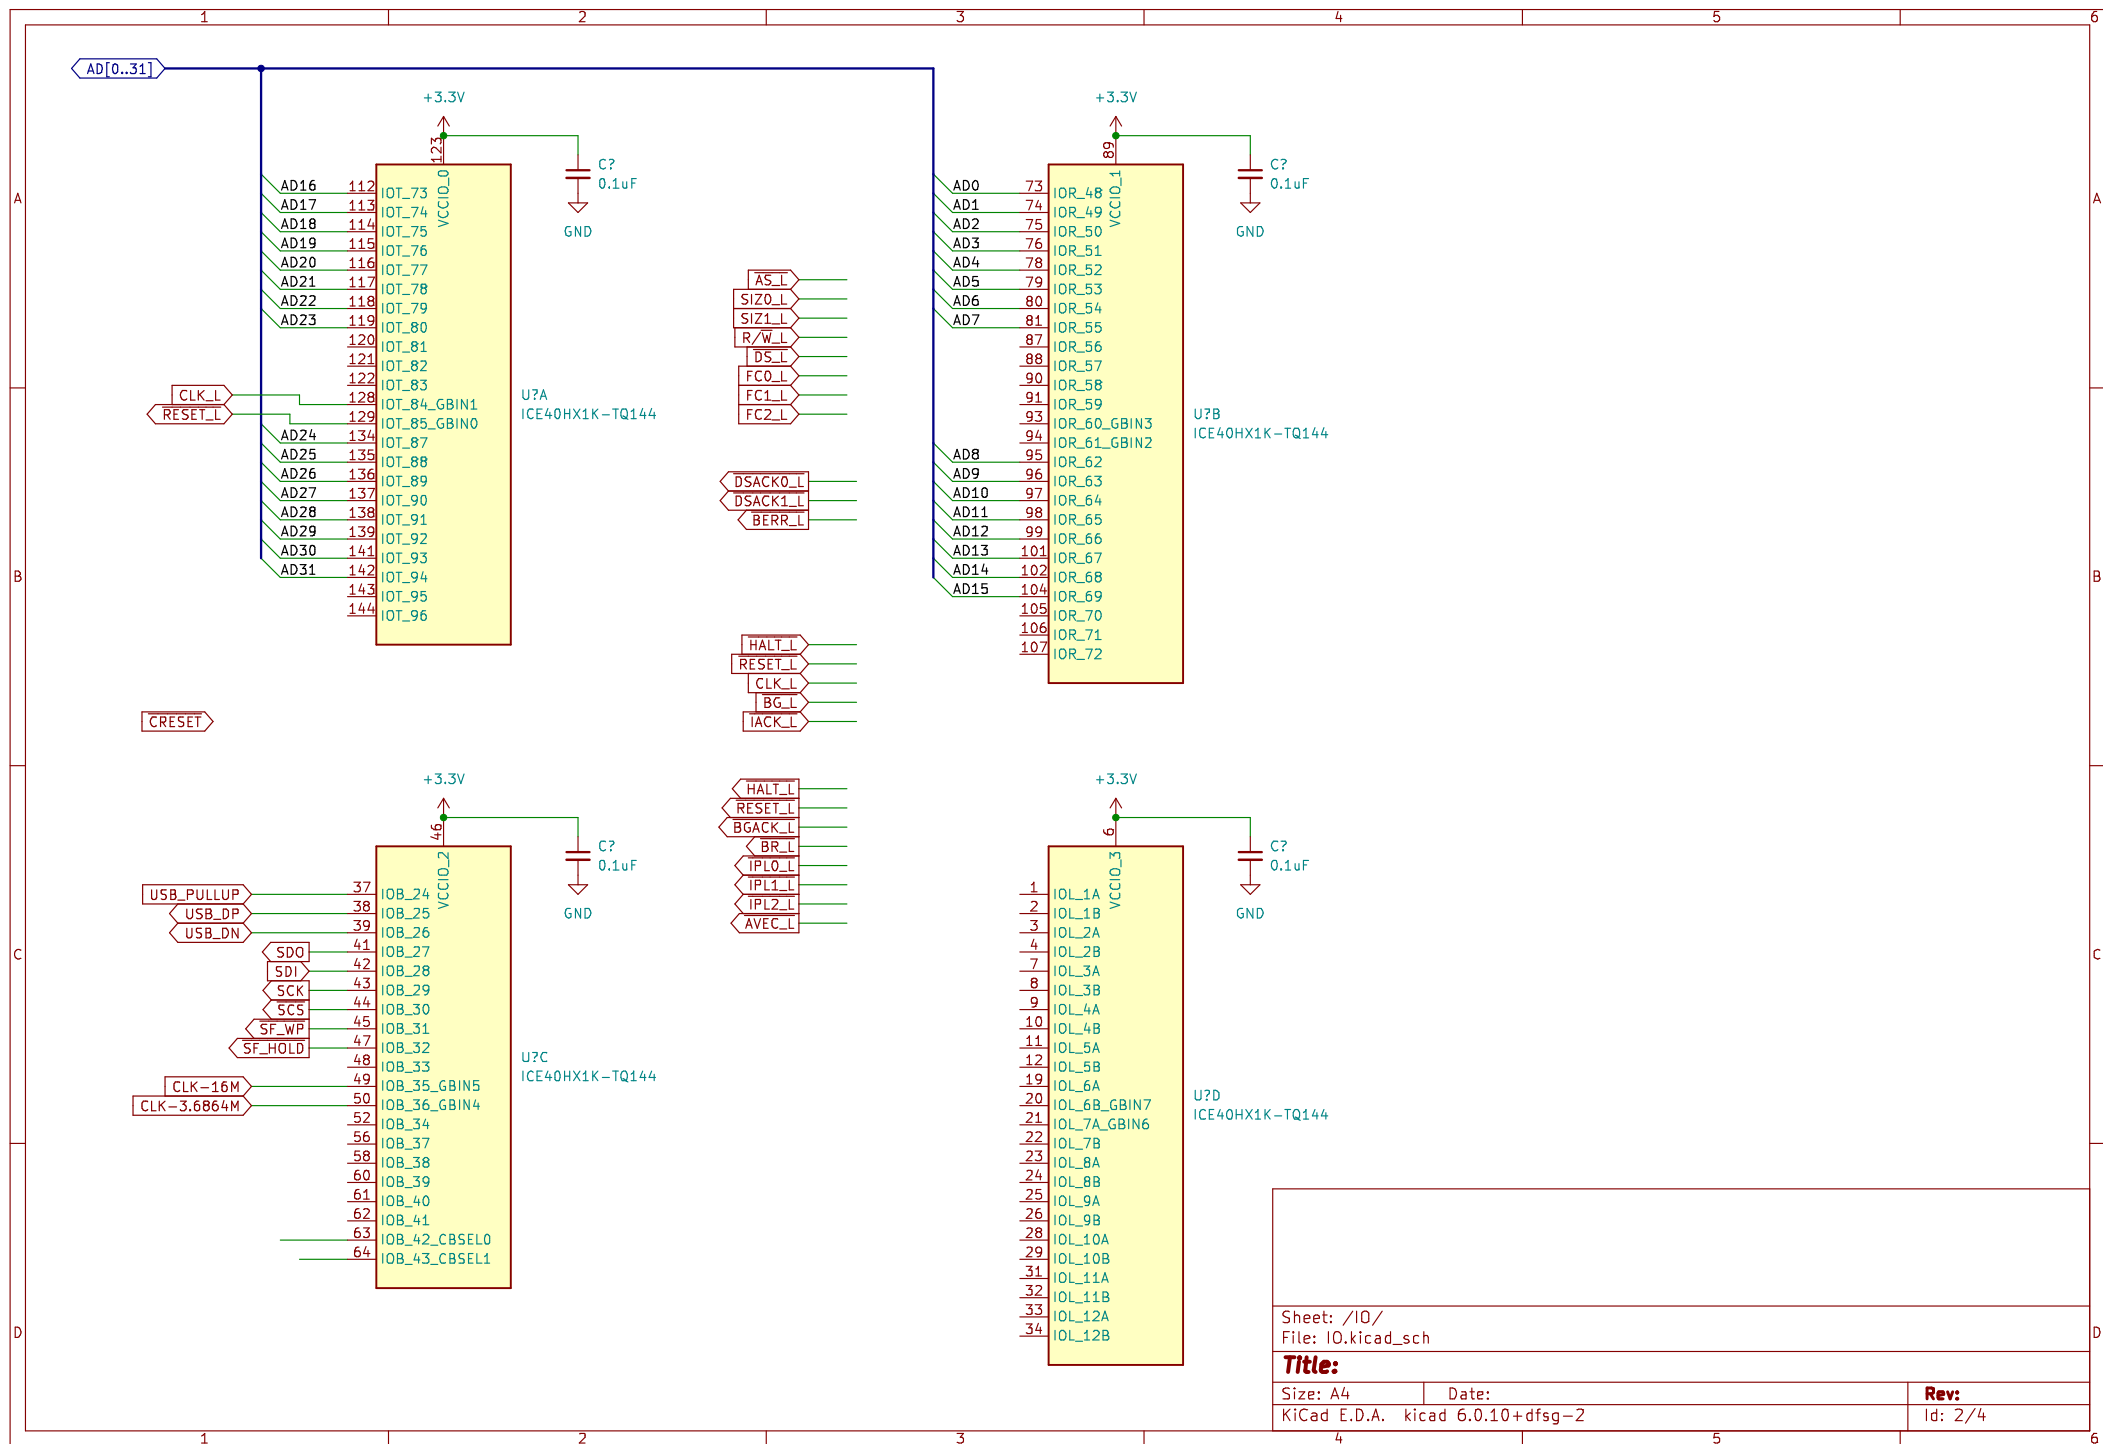

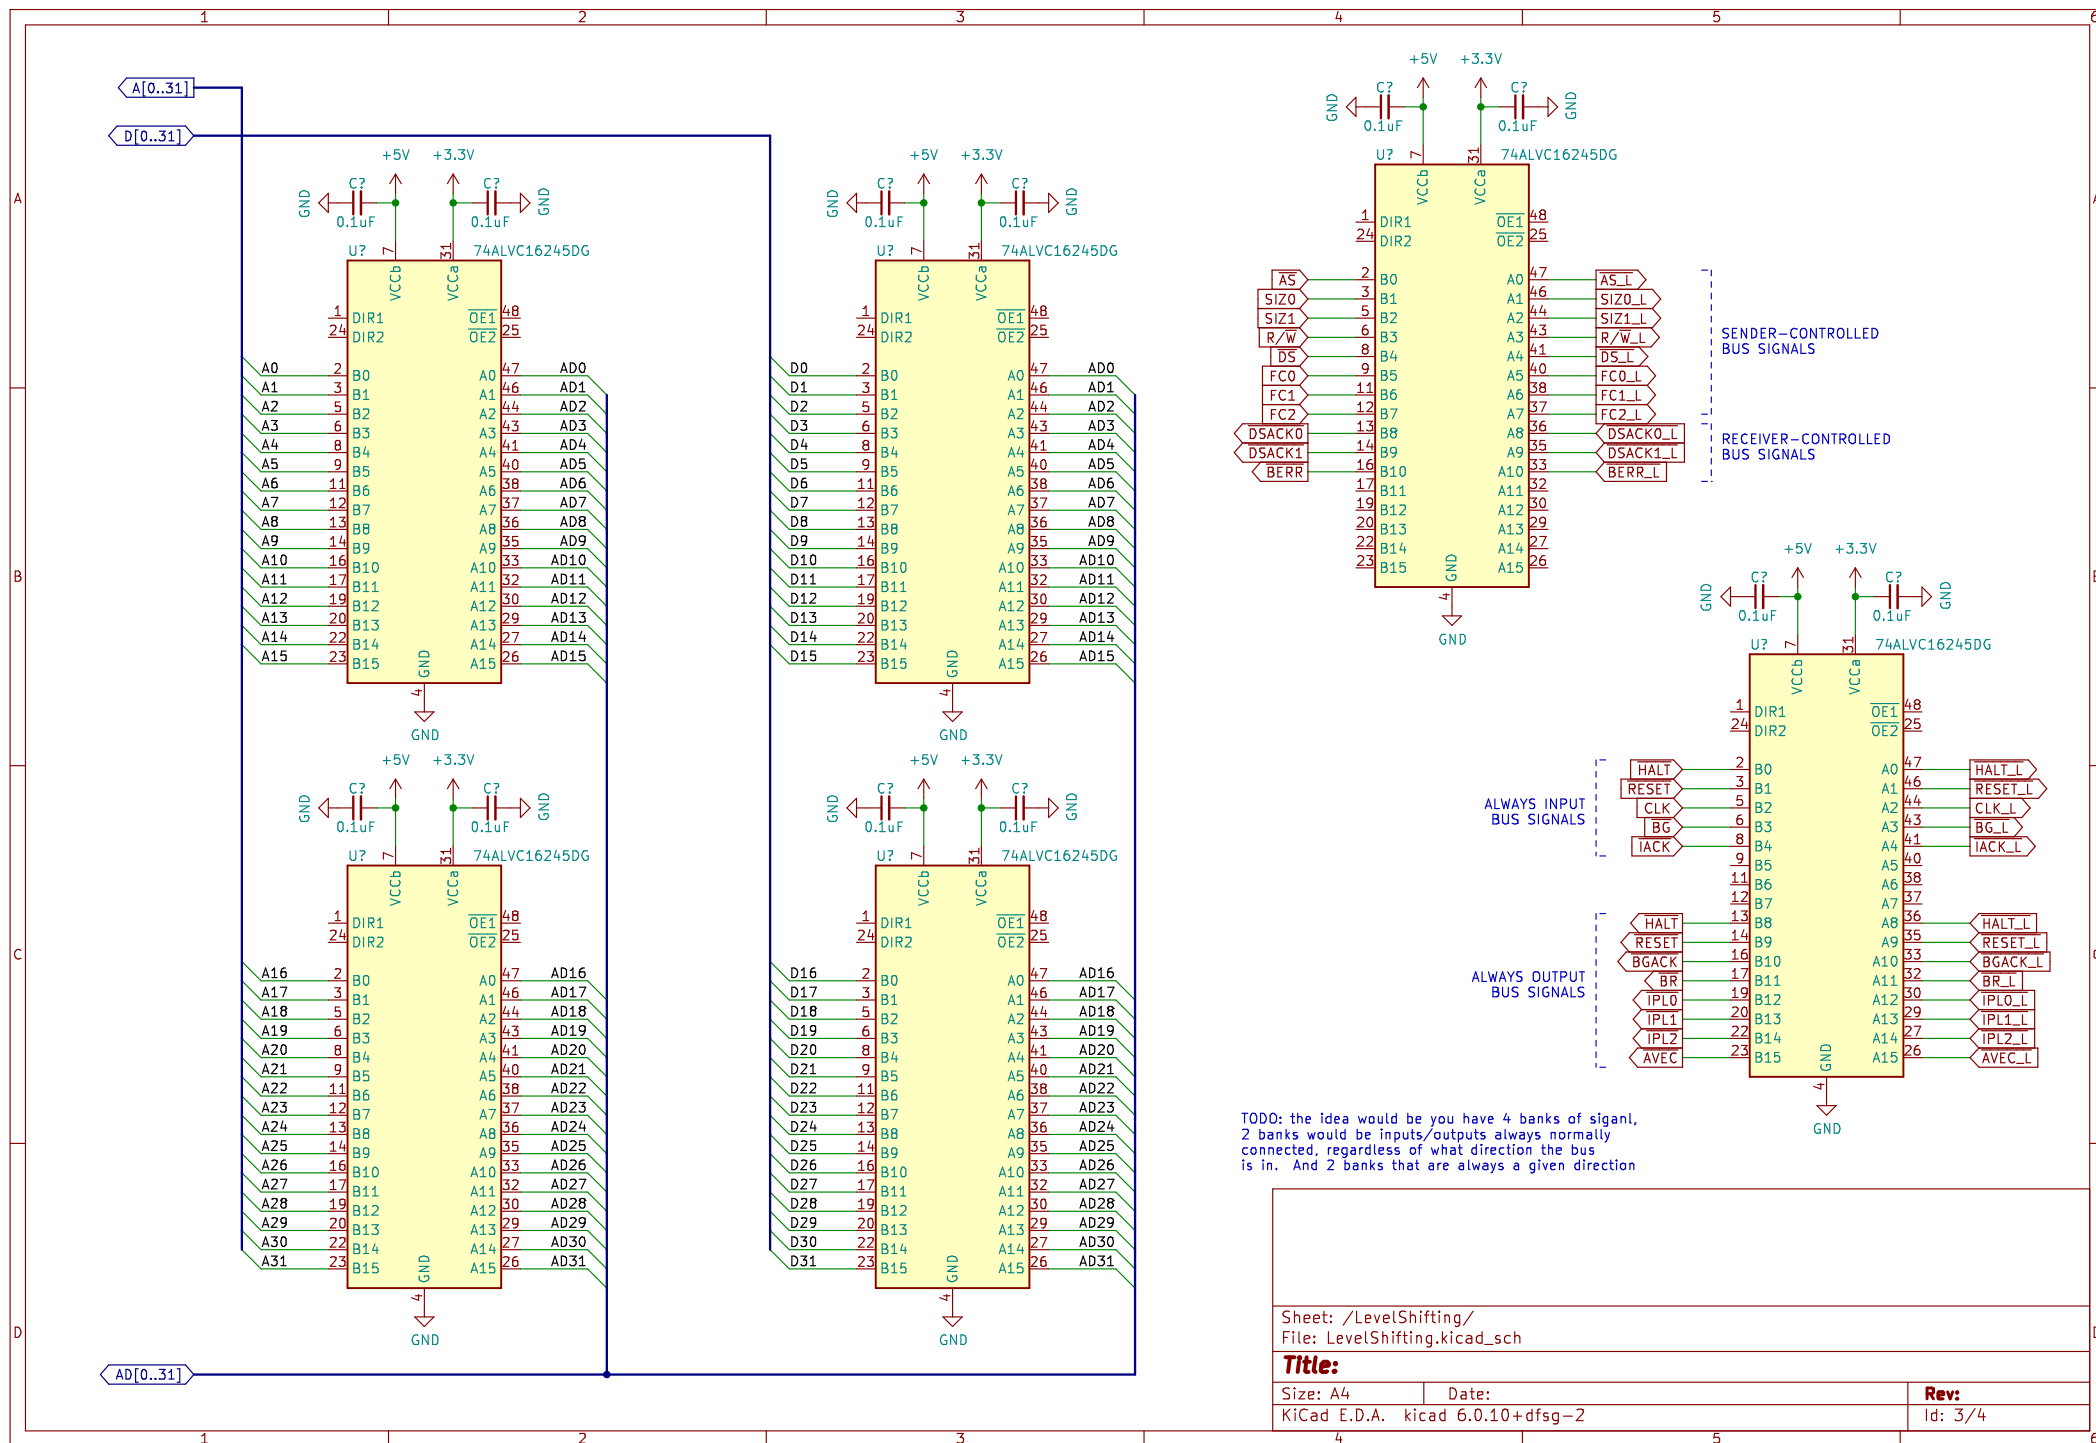

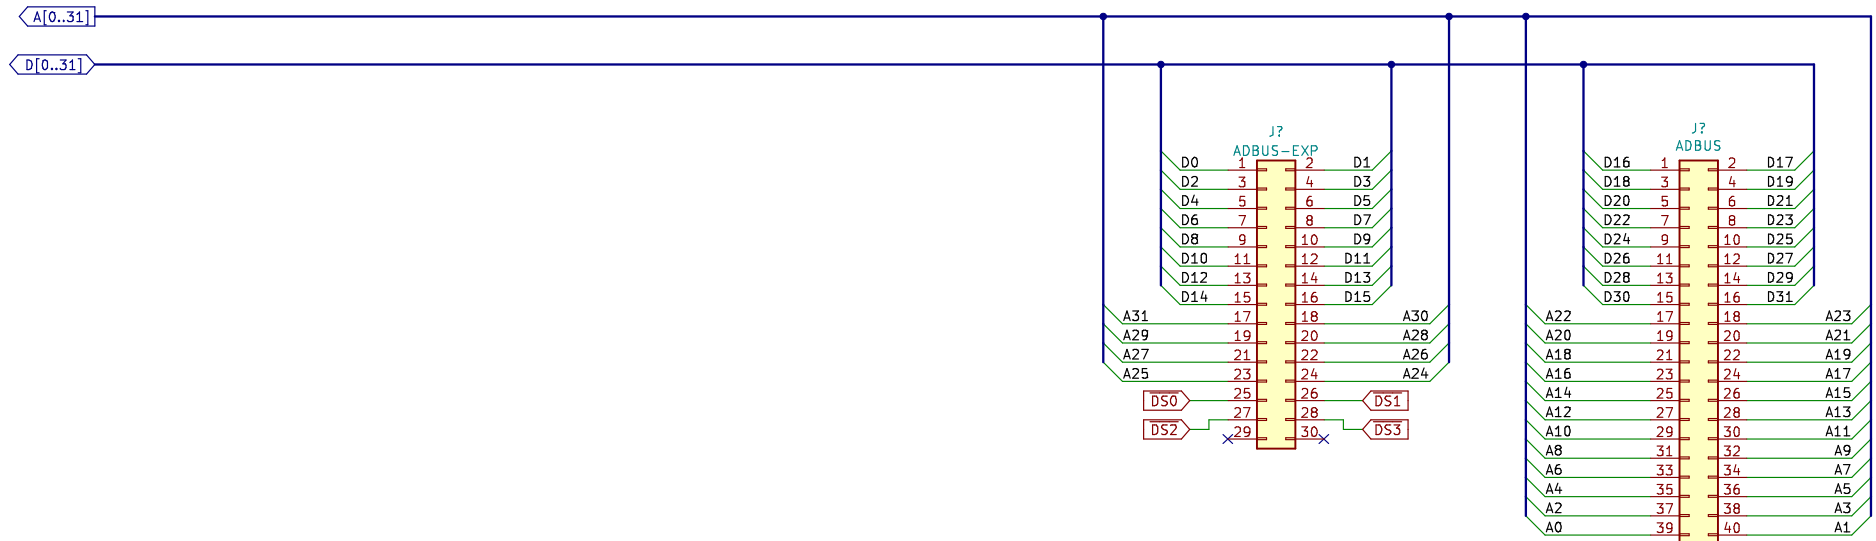

TODD: should this be disconnected,
taking 5V from the bus, or
feeding 5V into the bus? -->

