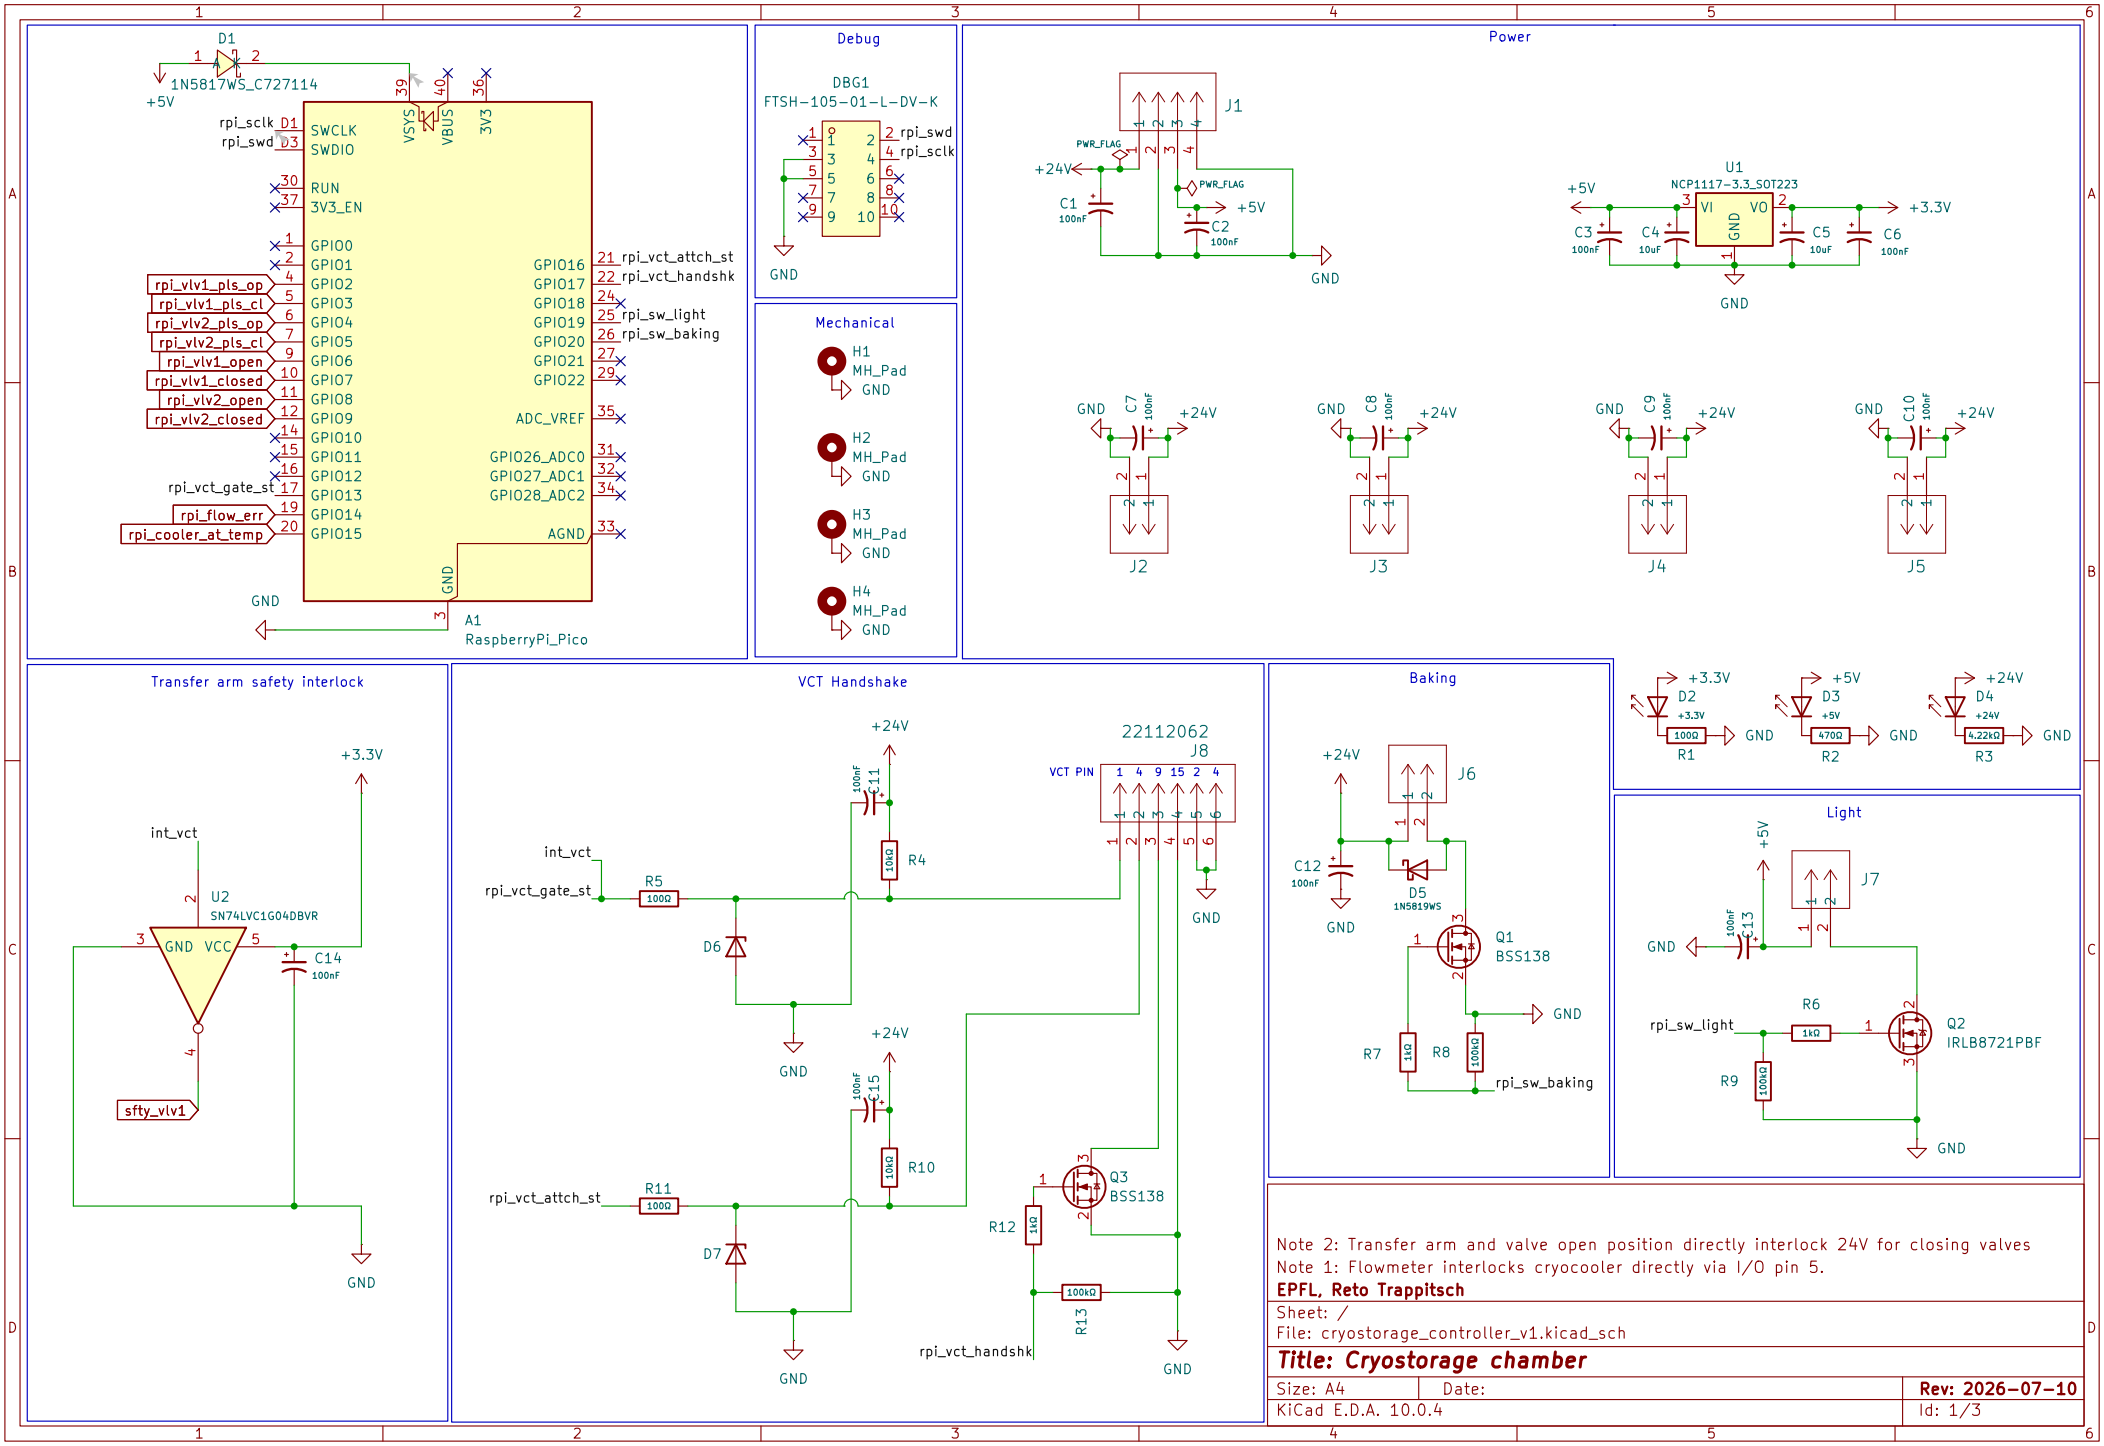
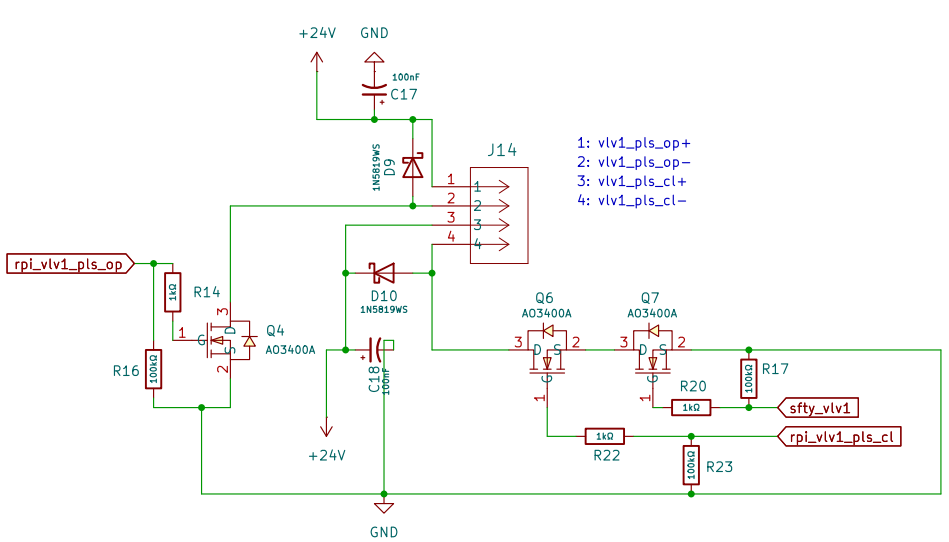
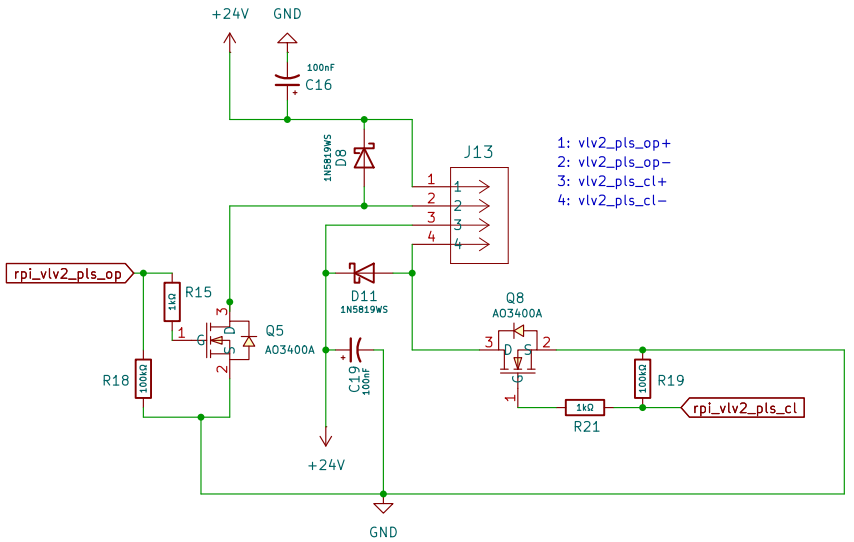
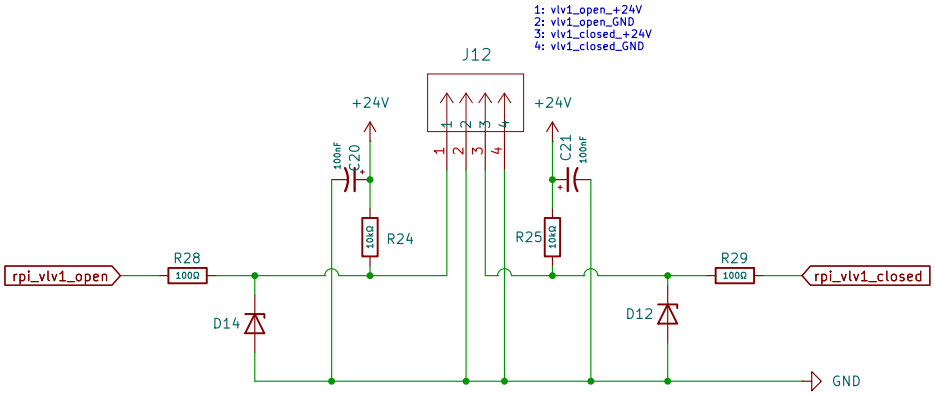
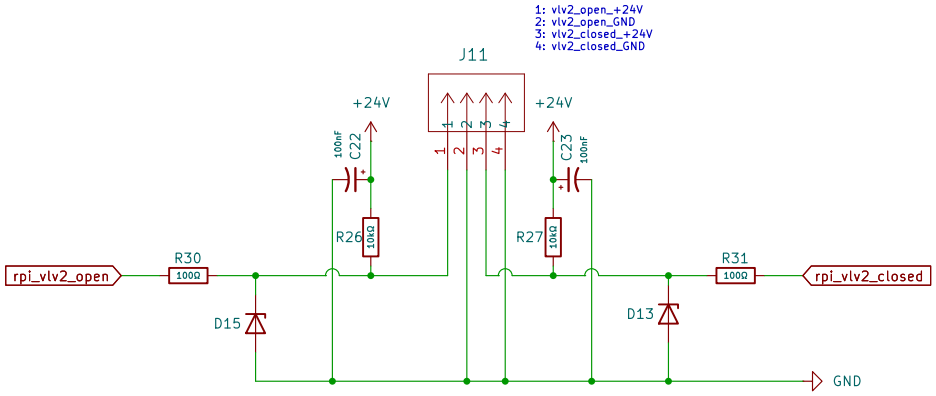

Debug
Power
Mechanical
Transfer arm safety interlock
VCT Handshake
Baking
Light
RaspberryPi_Pico
SN74LVC1G04DBVR
NCP1117-3.3_SOT223
1N5817WS_C727114
FTSH-105-01-L-DV-K
1N5819WS
BSS138
IRLB8721PBF
22112062
Note 2: Transfer arm and valve open position directly interlock 24V for closing valves
Note 1: Flowmeter interlocks cryocooler directly via I/O pin 5.
EPFL, Reto Trappitsch
Sheet: /
File: cryostorage_controller_v1.kicad_sch
Title: Cryostorage chamber
Size: A4
Date:
Rev: 2026-07-10
KiCad E.D.A. 10.0.4
Id: 1/3

Gate valves
Left: Valve1 (transfer) / Right: Valve2 (pump)









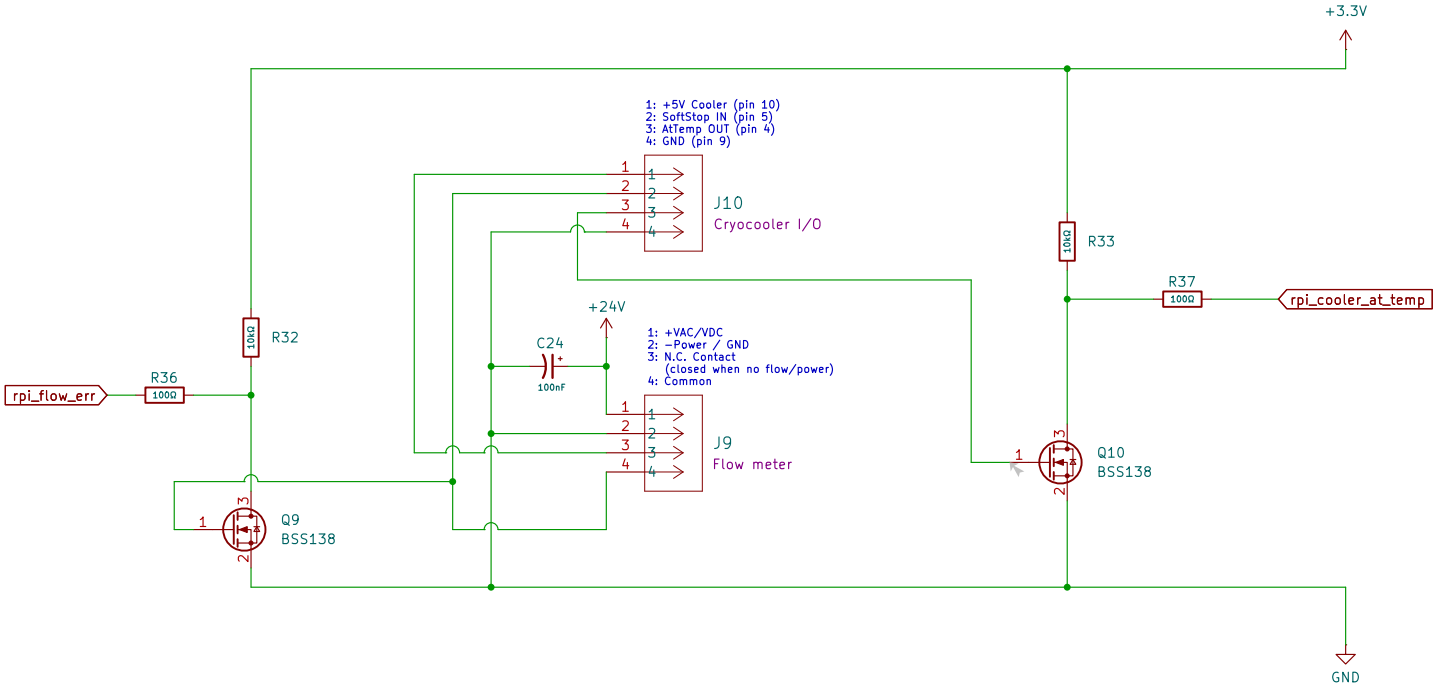
Note 2: Transfer arm and valve open position directly interlock 24V for closing valves

EPFL, Reto Trappitsch

Sheet: /gate_valves/
File: gate_valves.kicad_sch

Title: Cryostorage chamber

Size: A4	Date:	**Rev: 2026-07-10**
KiCad E.D.A. 10.0.4		Id: 2/3



EPFL, Reto Trappitsch	
Sheet: /cryocooler_safety/	
File: cryocooler_safety.kicad_sch	
Title: Cryostorage chamber	
Size: A4	Date:
KiCad E.D.A. 10.0.4	Rev: 2026-07-10
	Id: 3/3