

AUTOMOTIVE DIAGNOSTIC AND ACTIVITY MONITORING SYSTEM

Travis Samson Fernandes	202107388
Chetan Naik	202107334
Mangesh Phadte	202107328
Gaurang Madkaikar	202107285

Dissertation submitted in partial fulfillment of the requirements for the degree of

BACHELOR OF ENGINEERING

IN

COMPUTER ENGINEERING

OF GOA UNIVERSITY



2024 - 2025

COMPUTER ENGINEERING

PADRE CONCEICAO COLLEGE OF ENGINEERING

VERNA GOA – 403722

AUTOMOTIVE DIAGNOSTIC AND ACTIVITY MONITORING SYSTEM

Travis Samson Fernandes	202107388
Chetan Naik	202107334
Mangesh Phadte	202107328
Gaurang Madkaikar	202107285

Dissertation submitted in partial fulfillment of the requirements for the degree of

BACHELOR OF ENGINEERING

IN

COMPUTER ENGINEERING

OF GOA UNIVERSITY



2024 - 2025

COMPUTER ENGINEERING

PADRE CONCEICAO COLLEGE OF ENGINEERING

VERNA GOA – 403722

PADRE CONCEICAO COLLEGE OF ENGINEERING

VERNA GOA – 403722



AUTOMOTIVE DIAGNOSTIC AND ACTIVITY MONITORING (ADAM) SYSTEM

Bona fide record of work done by

Travis Samson Fernandes	202107388
Chetan Naik	202107334
Gaurang Madkaikar	202107328
Mangesh Phadte	202107285

Dissertation submitted in partial fulfillment of the requirements for the degree of Bachelor of Engineering in Computer Engineering under Goa University.

2024 - 2025

Approved By:

.....
Vijaykumar Naik Pawar
Guide

.....
Dr. Supriya Patil
Head of the Department

.....
Dr. Mahesh Parappagoudar
Principal

Examined By:

Examiner 1:
(Name / Signature / Date)

Examiner 2:
(Name / Signature / Date)

PADRE CONCEICAO COLLEGE OF ENGINEERING
VERNA GOA – 403722



STUDENT DECLARATION

We hereby declare that the project report titled **"AUTOMOTIVE DIAGNOSTIC AND ACTIVITY MONITORING SYSTEM"** submitted by us to Padre Conceição College of Engineering, Verna in partial fulfillment of the requirement for the award of the degree of Bachelor of Engineering in Computer Engineering under Goa University is a record of bonafide project work carried out by us under the guidance of Vijaykumar Naik Pawar.

We further declare that the work reported in this project has not been submitted and will not be submitted, either in part or in full, for the award of any other degree or diploma in this institute or any other institute or university.

Student Name and Roll No.

Signature with Date

- | | |
|----------------------------|-----------|
| 1. Travis Samson Fernandes | 202107388 |
| 2. Chetan Naik | 202107334 |
| 3. Mangesh Phadte | 202107328 |
| 4. Gaurang Madkaikar | 202107285 |

CONTENTS

ACKNOWLEDGMENT	i
ABSTRACT	ii
LIST OF FIGURES	iii
LIST OF TABLES	iv
LIST OF ABBREVIATIONS	v
1 INTRODUCTION	1
1.1 PURPOSE	1
1.2 PROJECT SCOPE	2
1.3 LITERATURE SURVEY	3
1.4 CHAPTER SUMMARY	16
2 OVERALL DESCRIPTION	17
2.1 PROJECT PERSPECTIVE	17
2.2 PROJECT FUCNCTIONS	17
2.3 USER CLASSES AND CHARACTERISTICS	18
2.4 OPERATING ENVIROMENT	20
2.5 CHAPTER SUMMARY	21
3 REQUIREMENTS	22
3.1 FUCNTION REQUIREMENTS	22
3.2 OTHER NONFUCNTIONAL REQUIREMENTS	23
3.3 HARDWARE REQUIREMENTS	23
3.4 SOFTWARE REQUIREMENTS	24
3.5 CHAPTER SUMMARY	26
4 SYSTEM DESIGN	27
4.1 SYSTEM ARCHITECTURE OVERVIEW	28
4.2 CHAPTER SUMMARY	32

5	IMPLEMENTATION	34
5.1	INTRODUCTION	34
5.2	GOLANG	38
5.3	POSTGRES DB	39
5.4	FASTAPI	40
5.5	MOBILE APPLICATION	41
6	CONCLUSION	44
7	BIBLIOGRAPHY	46

etoolbox

ACKNOWLEDGMENT

We take this opportunity to whole-heartedly thank those who were instrumental in helping us achieve our goals. We extend our heartfelt gratitude to our Principal, **Dr. Mahesh Parapagoudar**, for his unwavering support and encouragement throughout the duration of this project. His visionary leadership and constant motivation have been invaluable to us.

We are equally grateful to our Head of Department, **Dr. Supriya Patil**, for providing us with the necessary resources, facilities, and guidance that played a crucial role in the successful completion of our work. We would like to express our deepest appreciation to our project guide, **Vijaykumar Naik Pawar**, whose insightful suggestions, constructive feedback, and dedicated support were instrumental in shaping this project. Their expertise and constant encouragement inspired us to push our limits and achieve the desired outcomes.

We would also like to thank the staff of the **Department of Computer Engineering** for their cooperation and support. We also wish to acknowledge the valuable contributions of the faculty members, whose knowledge and guidance have enriched our understanding throughout the course of this endeavour. Additionally, we are thankful to our peers and friends for their encouragement, collaboration, and constructive feedback, which motivated us to refine our work and strive for excellence.

ABSTRACT

The Automotive Diagnostic and Activity Monitoring (ADAM) System is a ground-breaking initiative aimed at revolutionizing the way vehicles are operated, monitored, and maintained. Leveraging advanced technologies, ADAM seeks to enhance road safety, streamline user convenience, and offer robust forensic support. By collecting and analysing critical vehicular data prior to accidents, the system proactively identifies and addresses potential risks, reducing the likelihood of road incidents. This preventive mechanism not only safeguards drivers and passengers but also contributes to building safer roadways through timely and effective risk mitigation strategies.

One of the standout features of the ADAM System lies in its utility for forensic investigations. By automating the monitoring and recording of vehicle activities, the system becomes an indispensable tool for law enforcement agencies and insurance companies. It facilitates the reconstruction of accident scenarios with high accuracy, aiding in the determination of liability and the resolution of disputes. This functionality ensures greater transparency and fairness in investigations, accelerating claims processing and fostering trust among stakeholders.

In addition to its safety and forensic applications, the ADAM System empowers vehicle owners by providing advanced diagnostic tools to detect and address mechanical issues with precision. By equipping users with reliable insights into their vehicle's condition, it enables informed maintenance decisions, protects them from potential scams by unscrupulous mechanics, and minimizes repair costs. These capabilities ensure that vehicles remain in peak operating condition, reducing downtime and extending their lifespan.

The ADAM System represents a paradigm shift in vehicle operation by seamlessly integrating data collection, real-time analysis, and system automation. Its intelligent features not only enhance vehicle security but also simplify routine processes, making it an indispensable tool for modern-day vehicle owners. By prioritizing safety, convenience, and efficiency, ADAM aspires to redefine the relationship between drivers and their vehicles. Through its innovative and user-focused approach, the system aims to create a driving experience that is safer, smarter, and more intuitive, ultimately contributing to a more connected and secure transportation ecosystem.

LIST OF FIGURES

Figure	Name	Page No.
Fig. 4.1	System Design Overview	(27)
Fig. 5.1	Automotive Diagnostic And Activity Monitoring	(23)
Fig. 5.2	Flow Diagram Of Raspberry Pi	(35)
Fig. 5.3	Dashboard of the ADAM mobile application	(42)
Fig. 5.4	The dashboard includes direct navigation to four essential modules	(43)
Fig. 5.5	The bottom tab of the ADAM mobile application provides quick access to key features	(43)

LIST OF TABLES

Table	Name	Page No.
Fig. 1.1	Literature Review Summary	(5)
Fig. 4.1	Modules and their Functional Descriptions	(29)
Fig. 4.2	Device to GPIO Pin Connections on Raspberry Pi	(29)

LIST OF ABBREVIATIONS

Name	Description
ADAM:	Automotive Diagnostic and Activity Monitoring
OBD:	On-Board Diagnostics Port
DTC:	Diagnostic Trouble Codes
ECU:	Engine Control Unit
RTO:	Regional Transport Office
GPS:	Global Positioning System
IAT:	Intake Air Temperature
MAF:	Mass Air Flow

INTRODUCTION

The Automotive Diagnostic and Activity Monitoring (ADAM) System is a pioneering project designed to enhance vehicle safety, improve maintenance efficiency, and support forensic investigations. By leveraging technologies such as Raspberry Pi, machine learning, and mobile app integration, ADAM provides real-time diagnostics, driving insights, and data collection capabilities. This comprehensive system aims to empower users, promote safer roads, and establish transparency in automotive operations.

1.1 PURPOSE

The Automotive Diagnostic and Activity Monitoring (ADAM) System is designed to redefine vehicle safety, user convenience, and forensic capabilities through innovative technology. By providing real-time diagnostics and driving insights, ADAM aims to promote safer roads, reduce risks, and ensure efficient vehicle maintenance. The system is also equipped to collect and analyze forensic data for post-accident investigations, aiding in uncovering critical information for law enforcement, insurance companies, and vehicle owners.

ADAM empowers users with the ability to understand and monitor their vehicles, enabling informed decisions about maintenance and repairs while safeguarding against fraudulent practices in the automotive repair industry. This dual focus on proactive prevention and forensic analysis establishes the ADAM System as a transformative tool in modern automotive management.

1.2 PROJECT SCOPE

The ADAM System leverages a blend of hardware and software technologies, including Raspberry Pi, machine learning algorithms, and mobile app integration, to deliver comprehensive solutions for vehicle monitoring and diagnostics. The scope of the project encompasses:

1.2.1 REAL-TIME ENGINE DIAGNOSTIC AND ALERTS

The system continuously retrieves critical data from the vehicle's OBD-II port, such as engine performance metrics, error codes, and fuel efficiency. Real-time analysis of this data ensures that users are promptly alerted to potential issues, enabling timely interventions to prevent severe damage or unsafe conditions.

1.2.2 DRIVING PATTERN ANALYSIS FOR INSURANCE AND GOVERNMENT USE

By analyzing driving behaviors such as speed, acceleration, and braking patterns, ADAM provides valuable insights for insurance companies to customize premiums based on driver performance. Additionally, these analytics can support government initiatives in traffic safety and urban planning.

1.2.3 ENHANCE VEHICLE SAFETY AND ACCIDENT ANALYSIS

Through advanced data collection and secure storage, ADAM functions as a black box for vehicles. It captures pre-accident data, which can be invaluable for forensic investigations, helping to establish circumstances leading to an incident and enhancing overall road safety.

By integrating cutting-edge technologies, the ADAM System aims to revolutionize how vehicles are operated, maintained, and monitored, ensuring a safer and more transparent experience for all stakeholders.

1.3 LITERATURE SURVEY

1.3.1 OVERVIEW

The development of the ADAM System draws on extensive research into OBD-II standards, vehicle diagnostics, and data security. The goal was to identify methodologies and technologies that ensure precise data collection, effective analysis, and secure handling. Studies emphasize the role of standardized protocols like PIDs and CAN in creating robust systems for automotive diagnostics and monitoring.

A thorough review of relevant research papers has refined the project's approach, combining proven methodologies with innovative applications. Key areas include vehicle data collection techniques, the integration of embedded systems like Raspberry Pi, and applications of machine learning for real-time diagnostics and forensic analysis.

1.3.2 Key Research Insights

1. **OBD-II Protocols and Standards:** Le Nguyen et al. (2024) highlight the importance of using standardized Parameter Identifications (PIDs) and CAN protocols for accurate data retrieval and diagnostics. Their research demonstrated the integration of e-black boxes with GPS and cameras to collect critical data for accident investigations, vehicle performance analysis, and driving behavior monitoring.

2. **Embedded System Integration:** Sawant & Mane (2024) explored the use of MSCAN modules with KEAZ128 microcontrollers for vehicle diagnostics. Their system focused on detecting and monitoring malfunctions using wireless communication between the OBD-II connector and external systems. The study's experiments underscored the reliability of integrating microcontrollers and suggested future expansions to include additional diagnostic capabilities.

3. **Data Security and Analysis:** Multiple studies underscore the importance of securing vehicle data using encryption techniques during storage and transmission. This ensures the integrity of sensitive information and prevents unauthorized access, which is vital for both user trust and forensic validity.

1.3.3 Applications of Research

The literature survey directly informed the ADAM System's design and implementation. By leveraging standardized diagnostic protocols, integrating robust embedded systems, and adopting advanced data encryption, the ADAM System ensures accurate, reliable, and secure diagnostics. These insights have guided the creation of a versatile solution for real-time vehicle monitoring and

forensic support.

Table 1.1: Literature Review Summary

PAPER TITLE	DESCRIPTION	EXPERIMENT/ RESULTS	FUTURE WORK
The Design and Implementation of New Vehicle Black Box Using The OBD Information Duy Le Nguyen, Myung-Eui Lee, Artem Lensky (IEEE Xplore)	The Paper discusses E-Black Box that is a combination of a black box and an event-driven recorder that communicates with a vehicle's ECU module through the OBD-II port to collect vehicle status information. It gathers data from various sources, including the OBD-II port, a camera, GPS, and a 9-degree-of-freedom inertial measurement unit (IMU). This data is logged in real-time to a Secure Digital (SD) card at intervals of 100 milliseconds. The recording process stops when the vehicle stops or an accident occurs and if the memory becomes full, the oldest data is automatically overwritten to ensure continuous operation. The E-Black Box comes with two simulation modes: an online simulation mode that runs in real-time when the vehicle is in operation and an offline simulation mode for debugging and analysis of recorded data. It also comes with smartphone connectivity via Bluetooth, which allows it to send the vehicle's status and location in case of an accident. It can also search for nearby service centers or hospitals based on its status and location.	Accident Investigation, Vehicle Performance, Driver Behavior Analysis	Road tracking and obstacle detection algorithms

Design and Development of On-Board Diagnostic (OBD) Device for Cars Pooja Rajendra Sawant, Yashwant B Mane (IEEE Xplore)	This research paper discusses the design and development of an On-Board Diagnostic (OBD) system for cars, based on OBD-II standards established by the Society of Automotive Engineers (SAE). OBD-II standards have been mandatory for all cars sold after 1996. The system provides real-time information about a vehicle, such as engine speed, coolant temperature, pressure, and Diagnostic Trouble Codes (DTCs). DTCs are five-character codes that have a predefined structure, helping users know the actual status of their vehicles in real time and diagnose malfunctions. Codes can be generic or manufacturer-specific. OBD systems communicate with the CAN bus to enable the vehicle's ECU to communicate with the OBD device through the ISO 15765 standard. The device, according to the paper, employs a KEAZ128 microcontroller, an automotive-grade controller, to interpret the OBD-II protocol and act as a bridge between the vehicle and the user's computer.	Wireless communication between OBD connector and PC using Bluetooth, user-friendly GUI	Adding more diagnostic features and data into the device database
--	---	---	--

Design and Implementation of a Wireless OBD II Fleet Management System Reza Malekian, Ntefeng Ruth Moloisane, Lakshmi Nair, BT(Sunil) Maharaj, Uche A.K. Chude-Okonkwo (IEEE Xplore)	This paper introduces a wireless system for fleet management, monitoring vehicle speed and fuel consumption, and computing distance by using an OBD-II module along with GPS data. The system uses the ELM327 IC for decoding OBD-II signaling protocols and communicates using AT commands. The OBD-II protocols implemented are ISO 15765 (CAN), ISO 9141-2, and ISO 14230-4. In this system, speed is coded as "0D" in hexadecimal, and MAF is "10." The fuel is calculated based on the measured MAF, and distance is calculated based on the measured speed. This information is logged along with the GPS data simultaneously. All logged data is transmitted to a remote server via a Carambola2 WiFi module, where it is stored in an SQL database. The analysis of the data is made through a graphical interface. The system was tested on a BMW 125i and an OBD-II emulator. The measurements of distance had an error margin of about 5%, mainly due to a 1-second data sampling interval.	Tested with OBD II emulator and a real vehicle. Able to accurately measure speed, fuel consumption, and distance with approximately 5% error over short and long distances. Communication range is 900 meters for WiFi.	Proposed using GSM instead of WiFi for wider range, adding a backup battery to maintain wireless communication when the vehicle is off, and improving initialization time.
---	---	---	---

Machine Learning Based Automatic Diagnosis in Mobile Communication Networks Kuo-Ming Chen, Tsung-Hui Chang, Kai-Cheng Wang, Ta-Sung Lee (IEEE Xplore)	This paper reports on an ML-based algorithm for automatic fault diagnosis in mobile communication networks. The scheme utilizes SONs, removing the need for expensive hardware by making the networks self-configurable, self-organizing, and self-healing. The presented methodology combines a Softmax NN and SVM models with the aim of improving diagnosis accuracy. It further uses KPIs as well as performance management counters (PMCs) that are used in feature extraction. The combined output from the Softmax NN along with SVM carries out multiclass classification while diagnosing network faults accordingly. Thus the ML-based algorithms are of unsupervised type because they learn the training datasets directly and thereby are malleable in real application scenarios. This dual capability addresses both single and multi-fault scenarios, making the system robust enough for modern mobile networks as an efficient alternative to fault-detection methods.	Achieves high accuracy in both single and multi-fault detection in LTE networks	Explore other models and enhance multi-fault detection.
---	--	---	---

Vehicular Mobile Commerce Authors [Not provided in excerpt] (IEEE Xplore)	Wi-Fi-enabled vehicles enables m-commerce applications, like entertainment and diagnostics. Significant technical, safety, and financial challenges remain	Highlights real-world prototypes, such as Ford's Lincoln and an Atlanta traffic data project. These illustrate potential but underscore connectivity and safety issues.	Calls for solutions to improve stable computing tech in high-speed connectivity, security, privacy, and cost efficiency to make vehicular m-commerce practical and safe.
--	---	--	---

Automotive Internal-Combustion Engine Fault Detection and Classification Using Artificial Neural Network Techniques Ryan Ahmed, Mohammed El Sayed, S. Andrew Gadsden, Jimi Tjong, Saeid Habibi (IEEE Xplore)	This research examines the use of artificial neural networks for the detection and classification of faults in internal combustion engines. The paper has trained such ANNs based on the vibration data measurements in the crank angle domain and with the potential to set up a consistent diagnostic system for dealerships and assembly plants, reducing the cost of manufacturers' warranty. Methodologies in the paper involve feedforward multilayer perceptron ANNs, with the appeal for these learning, adapting, noise rejecting, and handling nonlinear relations. Training algorithms used here include back-propagation, Levenberg-Marquardt, quasi-Newton, extended Kalman filter, and the newest variable structure filter introduced as a smooth variable structure filter. The variable structure filter is notable because of stability, robustness, and the good response to the uncertainties.	SVSF-ANN shows high accuracy and reliability for fault classification.	Expand to real-time applications and add more engine parameters.
---	--	--	--

Automotive Internal-Combustion Engine Fault Detection and Classification Using Artificial Neural Network Techniques	The research benefits the detection process of faults by avoiding special location models of fault. The test bench employed a semi-anechoic chamber with a four-stroke eight-cylinder engine. Triaxial accelerometers were used to collect data of vibrations and then transform this data into the crank angle domain by the help of a cylinder identification sensor. The tested faults included missing bearings, piston chirps, chain tensioners, etc., each of which possesses some specific vibration patterns.	SVSF-ANN shows high accuracy and reliability for fault classification.	Expand to real-time applications and add more engine parameters.
---	---	--	--

Deep Learning Model Based CO2 Emissions Prediction Using Vehicle Telematics Sensors Data Authors [Not provided in excerpt] (IEEE Xplore)	This paper presents an LSTM model that predicts CO2 emissions from OBD-II sensor data in real-time. The model is designed to handle noisy data and improve time-series prediction accuracy. The study demonstrates the model's effectiveness in predicting emissions and suggests its potential for broader deployment in real-time monitoring systems.	Outperforms other methods in handling noisy data and time-series prediction accuracy.	Use diverse datasets for broader deployment in real-time monitoring systems.
--	---	---	--

OBD SecureAlert: An Anomaly Detection System for Vehicles Sandeep Nair, Narayanan, Sudip Mittal, Anupam Joshi (IEEE Xplore)	This paper presents OBD-SecureAlert, a data-driven anomaly detection system for cars designed to identify abnormal behaviors using CAN bus data. The CAN bus is an internal communication network found in vehicles that connects ECUs, sensors, and actuators. Since most CAN buses lack built-in security measures, they are open to cyberattacks that can compromise the safety of automobiles. OBD-SecureAlert eliminates this vulnerability by utilizing a Hidden Markov Model (HMM) for anomaly monitoring and detection against deviations from normal vehicle behavior. This system emphasizes detection instead of prevention, thereby creating an applicative solution to identify possible threats. It collects data from the CAN bus, which carries the values of speed and RPM sensors in the vehicle. After being trained, it analyzes the incoming data using a sliding window and flags data sets based on predefined threshold limits as anomalies or safety/cybersecurity threats. They simulate attack scenarios, like injecting anomalous data into the CAN bus, to detect anomalies.	Effectively uses a Hidden Markov Model (HMM) to detect anomalies in vehicle behavior by analyzing CAN bus data, successfully identifying threats like malicious data injections in real-time.	Integrating with machine learning models like LSTM or Transformer-based architectures for anomaly detection or real-time threat mitigation against early signs of wear or failure.
---	--	--	---

Assessing the Impact of Driving Behavior on Instantaneous Fuel Consumption Javier E. Meseguer, Carlos T. Calafate, Juan Carlos Cano, Pietro Manzoni (IEEE Xplore)	This paper talks about DrivingStyles, a platform whose aim is to analyze and improve driving habits to diminish fuel consumption and greenhouse gases. It uses data directly from the vehicle's Electronic Control Unit (ECU), accessed by an OBD-II Bluetooth interface, and smartphone technology to assess driving behavior and the efficiency of fuel. The research addresses the rising fuel costs and environmental pollution caused by greenhouse gas emissions. Applying data mining and neural networks, the platform classifies driving styles based on speed, acceleration, and engine RPM. It calculates fuel consumption using data from MAF, MAP, and IAT sensors, with alternative methods for cases where direct data is unavailable. The system consists of an Android app, an OBD-II interface, and a web-based data center. The app collects data from the vehicle and phone sensors and sends it to the data center for analysis. A neural network identifies driving styles and road types, while the data center visualizes fuel efficiency and habits using open-source tools. The platform also calculates CO2 emissions based on fuel consumption. The study reveals that driving style is significantly affecting the fuel usage	An efficient driving style can drastically reduce fuel consumption and reduce greenhouse gas emissions, with an estimated saving of 15–20%. The DrivingStyles platform, with smartphone and vehicle data, is one of the practical tools to help raise awareness and improve driving styles for better energy efficiency.	Long Short-Term Memory (LSTM) networks or Transformer models to better capture temporal driving patterns and develop individualized driving style profiles based on user-specific data to provide tailored recommendations.
--	--	--	---

Exploring Fuzzy Logic and Random Forest for Car Drivers' Fuel Consumption Estimation in IoT-Enabled Serious Games Rana Massoud, Francesco Bellotti, Riccardo Berta, Alessandro De Gloria, Stefan Poslad (IEEE Xplore)	This paper explores the use of the Fuzzy Logic (FL) and Random Forest (RF) algorithms to estimate vehicle fuel consumption in the context of providing foundational support for the development of an IoT-enabled driving game which sends real-time feedback to promote good driving habits and minimize consumption using the enviroCar database. This research employs real-time vehicle data that are collected through the OBD-II interface to establish accurate models for FC estimation. Important variables include throttle position sensor (TPS), revolutions per minute (RPM), car speed, and fuel consumption (FC) and tested on a range of car models and driving environments is considered in order to make the system applicable in real-world applications. FL uses "if-then" rules to provide understandable feedback, while RF applies machine learning for high-accuracy predictions. Results show RF outperforms FL, achieving higher R^2 (0.896 vs. 0.65) and lower MSE (1.506 vs. 4.745). Both models operate in real-time, with RF emphasizing speed and RPM as critical predictors. Combining FL for intuitive coaching with RF for precise FC estimates should prove to improve IoT-enabled	Fuzzy Logic (FL) provides interpretable feedback for coaching, while Random Forest (RF) delivers superior predictive accuracy for fuel consumption modeling. The combination of both models benefits from their strengths and makes them ideal for IoT-enabled driving games and applicable to other fields requiring real-time user performance assessment.	Benchmark the performance of RF and FL against newer algorithms, such as Gradient Boosting (e.g., XGBoost) or neural networks, to validate the choice of models.
---	---	--	--

1.4 CHAPTER SUMMARY

1. The introduction presents a smart automotive diagnostic and activity monitoring solution that enhances safety, maintenance efficiency, and forensic investigation using Raspberry Pi, machine learning, and mobile integration.
2. The project scope includes real-time engine diagnostics via the OBD-II interface, driving behavior analysis for insurance and traffic safety, and secure black-box-like accident data storage for forensic support.
3. The literature survey highlights the importance of standardized OBD-II protocols, embedded system integration with microcontrollers, and data encryption to ensure accurate diagnostics and secure data handling.
4. By leveraging standardized diagnostic protocols it ensures compatibility with various vehicle systems, securing wireless communication channels, and maintaining reliable data collection in real-time scenarios.
5. The purpose of the ADAM System is to empower users with informed vehicle insights, promote safer driving, assist in post-accident investigations, and establish transparency in automotive diagnostics and maintenance.

OVERALL DESCRIPTION

This chapter delves into the Automotive Diagnostic and Activity Monitoring (ADAM) System, providing an in-depth exploration of its innovative design, core functions, and user-centric features. It outlines the project's integration of advanced hardware and software components to offer comprehensive solutions in vehicle diagnostics, maintenance, and forensic analysis.

2.1 PROJECT PERSPECTIVE

The Automotive Diagnostic and Activity Monitoring (ADAM) System is a standalone innovation designed to replace traditional diagnostic tools with advanced, integrated solutions. It communicates directly with the car's Engine Control Unit (ECU) via OBD-II protocols, offering a seamless and efficient interface. By collecting real-time data and facilitating in-depth analysis, ADAM provides vehicle owners, insurers, and government bodies with actionable insights to enhance safety, maintenance, and operational transparency.

Unlike conventional diagnostic tools, the ADAM System combines hardware components, such as a Raspberry Pi and GPS modules, with sophisticated software algorithms for predictive diagnostics and forensic capabilities. This ensures reliability, user convenience, and versatility across various use cases. The system's ability to integrate seamlessly with a variety of vehicle models makes it a scalable and forward-compatible solution.

2.2 PROJECT FUNCTIONS

1. **Black Box Data Collection:** The system records key parameters, including RPM, speed, throttle position, engine temperature, and error codes. This data is stored securely and can be analyzed to understand vehicle performance and pre-accident conditions. By functioning as a black box, ADAM serves as a reliable source of information for investigations, aiding

in uncovering critical details about vehicle operations prior to incidents.

2. **Mobile App Visualizations:** Users can access real-time vehicle statistics, diagnostics, and alerts through an intuitive mobile application. The app also provides detailed visualizations and suggestions for maintenance, ensuring users are informed and empowered to take necessary actions. Additionally, the app integrates with cloud services to enable historical data access, trend analysis, and remote monitoring.
3. **Forensic Data Sharing:** ADAM facilitates secure export of vehicle data in CSV format for use by insurance companies and law enforcement agencies. This feature supports claim verification and accident investigations, providing transparency and accountability. Advanced encryption ensures that data remains confidential during transmission, preserving the integrity of sensitive information.

2.3 USER CLASSES AND CHARACTERISTICS

1. Vehicle Owners:

- Monitor real-time vehicle health and performance metrics.
- Receive proactive alerts for maintenance and potential issues.
- Access diagnostic tools to understand and resolve problems effectively.
- Benefit from enhanced transparency in repair processes, reducing the risk of being misled by mechanics.

2. Insurance Agents:

- Utilize driving data to verify claims and assess driver behavior.
- Access pre-accident data to establish liability and streamline claim processing.
- Leverage aggregated data insights for policy adjustments and risk assessment.

3. Government Bodies:

- Analyze anonymized driving habits to inform traffic safety policies.
- Use aggregated data to identify patterns and improve urban planning.
- Incorporate ADAM's analytics into broader smart city initiatives to optimize transportation networks.

2.4 OPERATING ENVIROMENT

1. Hardware Components:

- **Raspberry Pi 5:** Serves as the core processing unit for data collection and analysis, capable of handling high volumes of real-time data efficiently.
- **OBD-II Reader:** Interfaces with the vehicle's ECU to retrieve critical diagnostic data. It supports multiple protocols for compatibility with diverse vehicle models.
- **GPS Module:** Tracks vehicle location and assists in route analysis and forensic investigations, providing geographic context to vehicle data.
- **Storage Devices:** Ensures secure and encrypted storage of vehicle data for analysis and sharing. Options include SD cards and external drives for scalability.

2. Software Components:

- **Raspberry Pi OS:** The operating system managing hardware functions and software execution, optimized for real-time processing tasks.
- **Python Libraries:** TensorFlow for predictive analytics, Flask for application interfacing, and encryption libraries for secure data handling. Libraries for GPS data processing and CAN protocol decoding are also integrated.
- **Mobile Application:** Provides an interface for end-users to access vehicle data, visualize statistics, and receive alerts. Features include cloud synchronization, customizable dashboards, and multi-user support for fleet management.

2.5 CHAPTER SUMMARY

1. The chapter provides an in-depth description of the System architecture, pointing out its mixture of advanced hardware and intelligent software to deliver automotive diagnostics, monitoring, and forensic capabilities
2. The system replaces traditional diagnostic tools by using real-time OBD-II communication, GPS tracking, and data logging on a Raspberry Pi, with analysis via a FastAPI server and results displayed on a mobile app.
3. Key functionalities include black box-style data logging, a feature-rich mobile app for real-time diagnostics, secure forensic data sharing, and support for multiple user roles such as vehicle owners, insurers, and investigators.
4. Distinct user classes, such as individual owners, insurance companies, and government agencies, interact with the system via tailored interfaces to benefit from live monitoring, maintenance, historical data analysis, traffic safety, and forensic investigation.
5. The operating environment integrates robust hardware like Raspberry Pi 5, OBD-II reader, GPS module, and multiple sensors with efficient software technologies including Python, FastAPI, OpenAI, and TensorFlow libraries for secure and scalable deployment.
6. The ADAM system offers a unified platform that ensures real-time data collection, predictive maintenance, secure data transmission, and cloud integration, making it a forward-compatible solution for smart vehicle diagnostics and activity monitoring.

REQUIREMENTS

In this chapter, we will learn about different types of Functional and Non-Functional requirements as well as Hardware and Software requirements, which ensure compatibility, aiding smooth project execution by setting clear expectations and guidelines for development and performance.

3.1 FUNCTION REQUIREMENTS

Functional requirements define the specific operations and functionalities the ADAM System must perform under various conditions. These include:

1. **Real-Time Data Collection:** ADAM continuously retrieves live vehicle data (e.g., RPM, speed, Diagnostic Trouble Codes) from the OBD-II port and ensures reliable, uninterrupted transmission to the Raspberry Pi, even under varying vehicle conditions.
2. **Black Box Functionality:** Acts as a digital event data recorder, persistently storing sensor data during critical events like hard braking or collisions to support forensic analysis and accidents.
3. **Mobile Application Features:** Provides daily logs in interactive graphs, delivers advanced analysis using machine learning algorithms, and features a chatbot interface for users to ask queries and receive instant insights.
4. **Forensic Data Sharing:** Enables controlled sharing of diagnostic data with external parties, ensuring user-defined access and compliance with privacy standards.

3.2 OTHER NONFUNCTIONAL REQUIREMENTS

Nonfunctional requirements describe the system's expected performance and quality attributes. These include:

1. **Reliability:** Ensures high reliability by maintaining continuous uptime, implementing a buffer to securely cache data during connectivity interruptions, and utilizing failover mechanisms to guarantee uninterrupted data collection and secure backup until the data is successfully posted to the database
2. **Security:** security with strong authentication and strict authorization, allowing only verified users appropriate access.
3. **Performance:** The system processes and visualizes vehicle sensor data in real time, ensuring low latency and responsiveness, especially during critical events.
4. **Maintainability:** A modular architecture allows for independent updates to components like the UI, GPS module or other sensors. Well-maintained documentation enables efficient development, debugging, and onboarding.
5. **Scalability:** It supports various vehicle types and OBD-II protocols, allowing the addition of new sensors and integrations with external platforms (e.g., insurance APIs, fleet systems) for enterprise-level expansion.

3.3 HARDWARE REQUIREMENTS

The hardware required to develop and deploy the ADAM System includes:

1. **Raspberry Pi 5:** The Raspberry Pi 5 serves as the central unit for data collection, AI processing, and interfacing with mobile/cloud services, offering high performance and peripheral support.
2. **OBD-II Reader:** Connects to the vehicle's ECU using protocols like CAN to read critical diagnostics data such as RPM, speed, engine temperature, throttle position, etc.
3. **GPS Module:** Provides location tracking for route analysis, theft monitoring, and event tagging to support forensic and insurance purposes.

4. **Storage Devices:** High-endurance SD card is used for scalable storage of large volumes of real-time and historical data.
5. **Power Supply:** Ensures uninterrupted operation using vehicle converters and a relayed battery pack, handling power fluctuations and downtime.
6. **Vibration Module:** Used to detect and transmit vibration or shock occurrences using a spring-based switch, providing a digital output when vibration is present.
7. **Gyroscope and Acceleration:** Combines a 3-axis accelerometer and 3-axis gyroscope to measure movement, orientation, and sudden impacts, enabling accurate motion and accident detection.

3.4 SOFTWARE REQUIREMENTS

To power the ADAM system effectively, a robust software stack is used, covering real-time embedded processing, user interfacing, secure data transmission, and cloud integration.

1. **Raspberry Pi OS:** It is the base system running on the Pi. Chosen for its compatibility with ARM architecture and extensive support for Python libraries and hardware integration, such as GPIO, OBD-II, , etc.
2. **Python:** Primary language for system logic and real-time data handling, chosen for its simplicity and vast ecosystem.
3. **Google Colab** It is a free, cloud-based platform provided by Google that allows users to write and execute Python code in a collaborative environment. It provides access to GPUs, making it popular for machine learning tasks.
4. **TensorFlow/Pytorch/scikit-learn Libraries:** Used for machine learning tasks like building models that detect anomalies or predict component failures based on historical data.

5. **FastAPI** Provides a lightweight web framework to build REST APIs connecting to PostgreSQL and enabling advanced analytics in Python.
6. **PostgreSQL** It is a powerful, open-source relational database known for its reliability, extensibility, ACID compliance, and advanced features that support complex data management and high-performance applications.
7. **Golang:** Uses the Fiber framework to build a high-performance web server, offering an Express-inspired API for rapid development, efficient routing, and minimal resource usage, making it well-suited for creating RESTful APIs and handling concurrent requests with ease
8. **React Native with Expo:** Enables rapid development of cross-platform Android and iOS apps from a single codebase, offering streamlined workflows, easy access to native APIs, and simplified testing and deployment.
9. **Docker:** Containers package the application and its dependencies into isolated, reproducible units, ensuring consistent operation across different systems without requiring cloud integration.
10. **Visual Studio Code:** Visual Studio Code (VS Code) is a free and open-source code editor developed by Microsoft. It supports various programming languages and features a customizable interface and a rich extension ecosystem.
11. **Supabase** It is used for authenticating email, social, and passwordless logins, as well as OAuth, and for storing personal data, functioning like a document store with secure, user-managed access and integrated authorization controls

3.5 CHAPTER SUMMARY

1. The ADAM system requires real-time data collection via the OBD-II port, with secure transmission to a Raspberry Pi for continuous vehicle monitoring.

2. Black box functionality ensures persistent storage of critical vehicle data before and during the incidents for forensic analysis and driver behavior evaluation.
3. A mobile application provides real-time vehicle status, graphical performance metrics, and machine learning analysis
4. Driving behavior is analyzed using machine learning to offer safe driving tips and insights for insurance and regulatory purposes.
5. Nonfunctional requirements include high system reliability, real-time responsiveness, modular maintainability, and scalability for different vehicles and future integrations.
6. Hardware components include Raspberry Pi 5, OBD-II reader, GPS module, encrypted storage (SD/SSD), reliable power supply, MPU6050, and SW420
7. The software stack includes Raspberry Pi OS, Python and its libraries, FastAPIs, React Native, Postgresql, Golang, Docker, and Supabase.

SYSTEM DESIGN

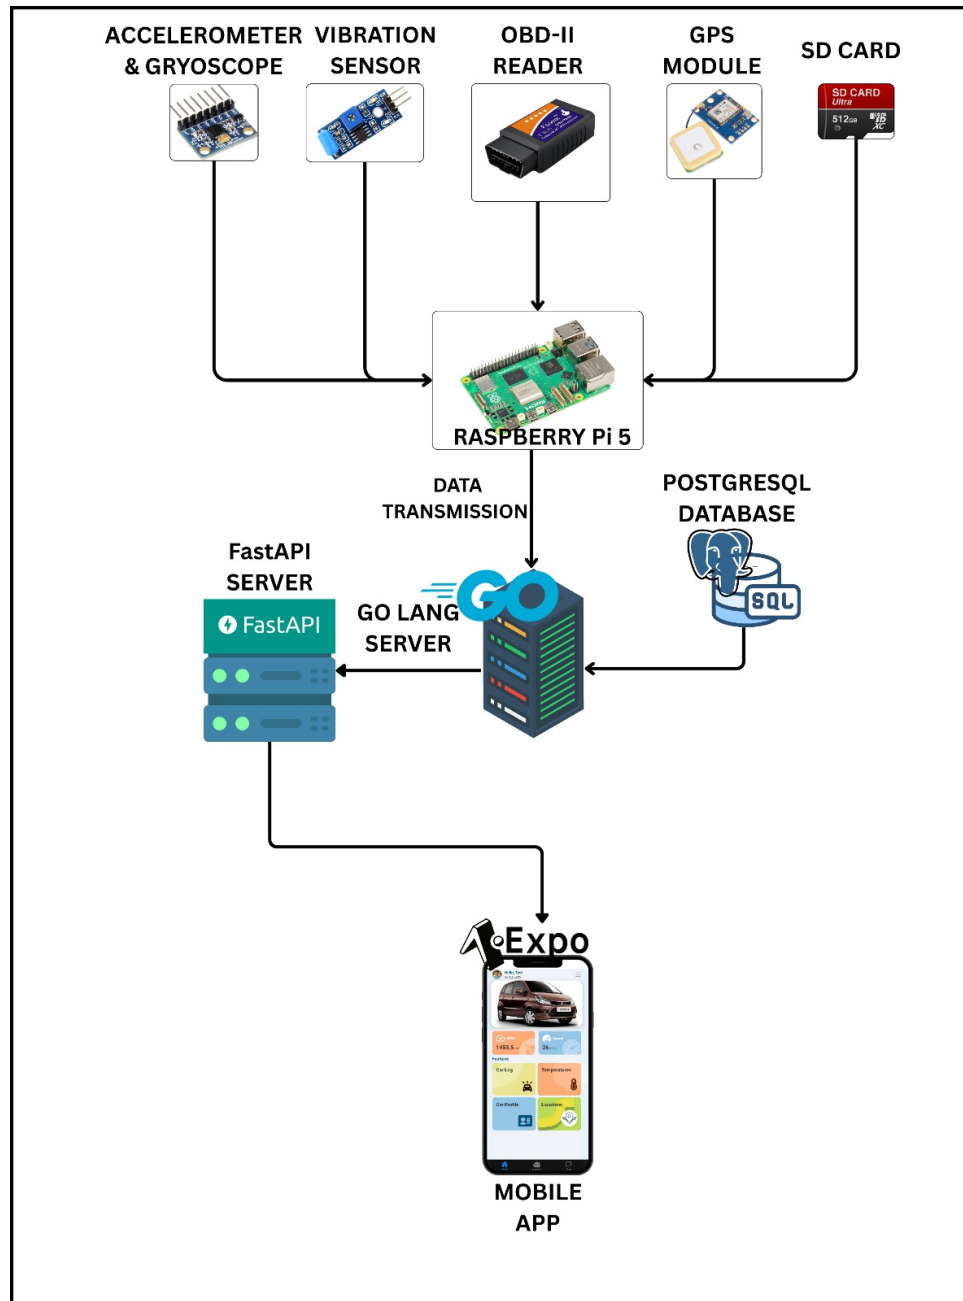


Figure 4.1: System Design Overview

4.1 SYSTEM ARCHITECTURE OVERVIEW

The proposed vehicle diagnostic system integrates various components of hardware and software to collect real-time data for analysis. The architecture is designed to collect vehicle information via the OBD-II port, transmit it wirelessly to a cloud server for processing, and provide a visual representation of processed data through a mobile application. The system consists of 4 primary components: Hardware Implementation, Data processing using machine learning models, Servers and Databases, and a cross-platform mobile application. A block diagram representing the overall system architecture and data flow from vehicle sensors to end user presentation is shown in Fig. 4.1. The diagram illustrates the flow of data and interactions within an automotive diagnostic and monitoring system. The system integrates multiple sensors, data processing units, databases, and APIs to achieve real-time diagnostics and data sharing. Below is a detailed explanation of the components and their interactions:

1. **Sensor and Hardware Layer:** At the core of the system lies the Raspberry Pi 5, which functions as the primary edge computing device. It interfaces with multiple onboard sensors and modules, including:
2. **Edge Device – Raspberry Pi 5** The Raspberry Pi 5 serves as the central processing and data aggregation unit at the vehicle level, collecting and processing real-time data from various onboard sensors and the vehicle's ECU. It interfaces with multiple peripherals connected through its GPIO pins and I2C bus, including a NEO-6M GPS module for acquiring precise geolocation data, an MPU-6050 accelerometer and gyroscope for capturing acceleration, orientation, and motion metrics, and an SW-420 vibration sensor to detect mechanical vibrations indicative of movement or engine activity. Additionally, the system reads critical vehicle operational parameters such as RPM, speed, coolant temperature, and fuel levels via an OBD-II interface using a Python OBD library. The hardware connections for each sensor and module are detailed in the table below: The

Module Name	Description
Accelerometer & Gyroscope (MPU-6050)	Captures motion dynamics, acceleration, and orientation data. Essential for detecting aggressive driving, collisions, rollovers, and handling analysis.
Vibration Sensor (SW-420)	Monitors abnormal vibrations that may indicate impacts, rough terrain, mechanical faults, or engine irregularities.
OBD-II Reader	Communicates with the vehicle's ECU via automotive protocols (CAN, ISO 9141, KWP2000). Extracts critical diagnostic data like RPM, throttle position, engine temperature, and fault codes.
GPS Module (NEO-6M)	Provides precise geolocation data, including latitude, longitude, speed, and timestamp, enabling route tracking, incident mapping, and trip analytics.
SD Card	Offers local and persistent storage for data logging, ensuring continuous record-keeping during network interruptions or when the vehicle is offline.

Table 4.1: Modules and their Functional Descriptions

Device	Connection	GPIO Pins
NEO-6M GPS	VCC	Pin 17 (3.3V)
	GND	Pin 20
	TX	GPIO15 (Pin 10)
	RX	Not Connected
MPU-6050	VCC	Pin 1 (3.3V)
	GND	Pin 6
	SCL	I2C SCL (Pin 5)
	SDA	I2C SDA (Pin 3)
SW-420 Sensor	VCC	Pin 4 (5V)
	GND	Pin 14
	D0	GPIO17 (Pin 11)

Table 4.2: Device to GPIO Pin Connections on Raspberry Pi

Raspberry Pi 5 runs two parallel threads for efficient data handling: one continuously polls OBD-II data every second, while the other simultaneously captures readings from the connected sensors. All collected data is synchronized, merged into a unified Pandas DataFrame with timestamped entries, and stored locally as a CSV file for redundancy. The system then attempts to transmit this data to a Go-based cloud server via HTTP GET requests in real-time. If network connectivity is unavailable, it temporarily saves the data to a local CSV file, ensuring no data loss by queuing the

entries for batch transmission once the connection is re-established. This edge computing framework enables continuous, intelligent vehicle monitoring and secure data management, supporting essential applications such as predictive maintenance, fuel emission analysis, engine health diagnostics, and real-time fleet tracking.

3. **API Interface – Golang server** The Golang Server acts as the intermediate communication layer between the Raspberry Pi 5 edge device and the backend infrastructure, enabling structured, secure, and reliable data exchange. It exposes three RESTful endpoints: /upload, /data, and /health, each designed to handle specific interactions. The /upload endpoint, accessible via a POST request, receives CSV files containing logged telemetry data from the Raspberry Pi. Upon receiving a file, it processes the content using Go's CSV reader package, reads the records line by line, and dynamically constructs SQL queries to insert the data into a PostgreSQL database, ensuring flexibility in handling varying data formats. The /data endpoint, accessible via a GET request, executes predefined SQL queries on the database to fetch the latest stored records and returns the results as a structured HTTP response to the requester. Additionally, a lightweight /health endpoint, using a GET method, provides a quick health check mechanism for monitoring the server's operational status. This Golang-based API server forms a robust and efficient bridge between the vehicle's edge-level data collection systems and centralized backend services, ensuring reliable data ingestion, storage, and retrieval in real-time or batch scenarios.
4. **Database Layer – PostgreSQL** The PostgreSQL Database serves as the central data repository, securely storing all structured and processed telemetry and diagnostic data collected from the vehicle. It maintains comprehensive records, including vehicle diagnostics data such as engine parameters, error codes, and sensor readings retrieved via OBD-II, along with GPS logs for tracking geospatial coordinates, route histories, and vehicle movement timestamps. Additionally, it records continuous temper-

ature data for monitoring engine coolant and other thermal parameters, as well as sensor data like gyroscope readings and vibration events. Deployed as a Docker container within the same Docker bridge network as the Golang API server and FastAPI machine learning server, PostgreSQL ensures seamless, containerized data exchange. A dedicated database named Adam is created to organize this information, featuring structured tables for OBD data, GPS logs, gyroscope readings, vibration events, and user details, each associated with a unique user ID for secure, user-specific data management. PostgreSQL's ACID-compliant transaction handling and advanced querying capabilities guarantee data integrity, consistency, and security, making it an ideal, reliable choice for this mission-critical automotive data management solution.

- 5. Backend Logic – FastAPI Server** The FastAPI Server acts as the backbone of the application, hosting the core business logic and handling machine learning-driven analytics on the collected vehicle data. It processes and analyzes critical parameters such as fuel emissions, engine health, and predictive maintenance requirements, ensuring timely and actionable insights. Additionally, it powers an integrated chatbot service for user interaction and support.

By performing these computations at the API level, the system delivers near real-time analytics and intelligent decision-making at the edge, reducing the dependency on cloud resources and enhancing responsiveness for end users.

- 6. User Interface – Mobile Application (Expo Framework)** Developed using Expo (React Native), the mobile application provides a user-friendly interface for personal vehicle owners. It enables users to:

- View historical vehicle data.
- Tracks trip history, average speed, top speed, fuel logs.
- Displays real-time or historical engine temperature, coolant temperature, or outside ambient temperature.

- Tracks real-time GPS location, and nearby services like petrol pumps and repair centers with navigation.
- Offers tools for monitoring engine health, checking emission compliance, and predicting maintenance needs with detailed insights.
- Displays Car's technical and ownership details
- Provides Chat support or AI help related to car issues.

The application communicates securely with the backend servers, ensuring synchronization of data and a consistent user experience across platforms.

4.2 CHAPTER SUMMARY

1. **Sensor Integration:** The system begins with the integration of multiple sensors that capture real-time vehicle data, including parameters such as engine RPM, GPS coordinates, temperature readings, etc. These sensors transmit raw data directly to the connected Raspberry Pi5.
2. **Raspberry Pi 5 – Edge Processing Unit:** Acting as the central processing unit, the Raspberry Pi 5 receives and pre-processes all incoming data. Interfacing with GPS, accelerometer, gyroscope, and vibration sensors to gather motion and location data. It also retrieves key engine metrics like RPM, speed, and temperature via the OBD-II interface using a Python-based library.
3. **GoLang Server – Backend and Data Management:** The GoLang server is responsible for handling data flow, and ensuring the efficient storage of processed data into the PostgreSQL database. It also supports secure data sharing with authorized stakeholders and enables smooth communication with external systems.
4. **PostgreSQL Database – Central Data Repository:** All vehicle diagnostics, GPS logs, behavioral insights, and incident data are stored in the PostgreSQL database. Its ACID compliance ensures data integrity and

reliability, while advanced querying capabilities support efficient data retrieval and analytics.

5. **FastAPI Server – API and Analytics Layer:** The FastAPI server acts as the application’s API layer, receiving structured data from the Raspberry Pi. It performs validation and additional analytics such as predictive maintenance using machine learning models. The processed data is then forwarded to the Mobile Application for display
6. **Mobile Application – User Interface Layer:** The mobile app serves as the primary user-facing component. It connects with the FAST API backend to display real-time vehicle stats, historical data visualizations, and alerts for issues like overheating or abnormal driving behavior. The app supports role-based access for vehicle owners, fleet managers, and insurance personnel, ensuring a user-friendly and secure experience.

IMPLEMENTATION

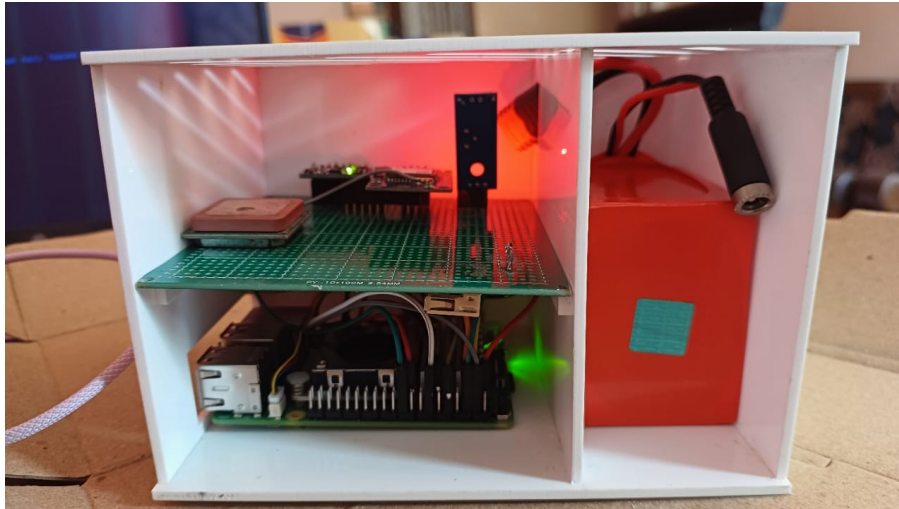


Figure 5.1: Automotive Diagnostic And Activity Monitoring (ADAM) BOX

5.1 INTRODUCTION

This chapter discusses the implementation of our system, which consists of three primary components: the hardware setup, cloud-based storage and analysis, and a mobile application for user interaction.

5.1.1 HARDWARE IMPLEMENTATION

The hardware implementation consists of multiple sensors connected to a Raspberry Pi 5, serving as the central edge computing unit for real-time data acquisition, local processing, and cloud transmission. The system integrates several key components:

- Raspberry Pi 5: Acts as the central processing unit, efficiently handling real-time data acquisition, local computation, and sensor coordination
- GPS Module (NEO-6M): Enables accurate vehicle location tracking and route history monitoring

- Vibration Sensor (SW-420): Detects collision events and unusual vibrations indicative of accidents or aggressive driving patterns
- Gyroscope Module: Monitors vehicle orientation, tilt, and angular motion for advanced motion analysis, including rollover detection and abrupt turn identification
- Power Management: Connected to the vehicle battery via a relay system to prevent direct current cut-off when the car is turned off, ensuring continuous monitoring capability

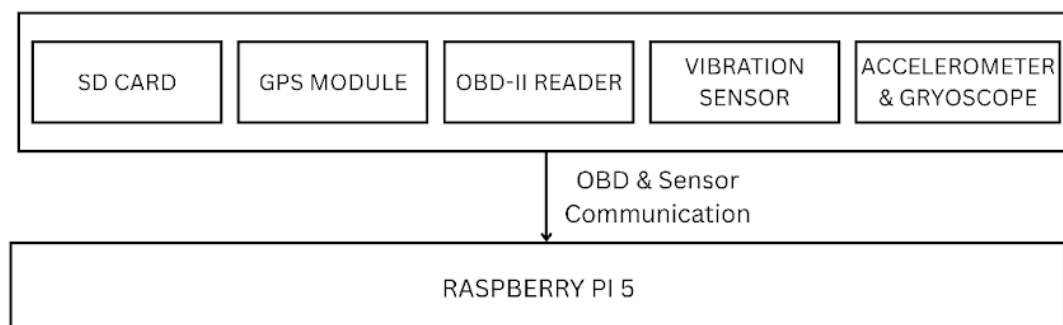


Figure 5.2: Flow Diagram Of Raspberry pi

Listing 5.1: Main Hardware Implementation Function

```

1  def main():
2      """
3      Main hardware implementation function for
4      edge-based automotive data collection
5      Demonstrates parallel sensor data acquisition
6      , local preprocessing, and cloud
7      transmission
8      """
9      global Async_conn, esp_conn, running
10     print("Initializing ADAM - Automotive Data
        Acquisition Module")
11     # Read configuration parameters
  
```

```

11         obd_port, esp8266_port, esp8266_baud,
12         sensor_file, temp_csv_path, data_csv_path,
13         server_url = read_config()
14
15     try:
16         # Initialize hardware connections
17         Async_conn = Async_connection(obd_port)
18         # OBD-II interface
19         esp_conn = Esp8266_conn(esp8266_port,
20                                 esp8266_baud) # ESP8266 sensor module
21
22         print(f"Hardware initialized - OBD: {
23               obd_port} | ESP8266: {esp8266_port}")
24
25         # Main data collection loop
26         iteration = 1
27         while running:
28             print(f"\n--- Data Collection Cycle {
29                   iteration} ---")
30
31             # Parallel sensor data acquisition
32             results = {}
33
34             # Create concurrent threads for multi-
35             # -sensor data collection
36             obd_thread = threading.Thread(
37                 target=collect_obd_data,
38                 args=(Async_conn, 1, sensor_file,
39                       results)
40             )
41             esp_thread = threading.Thread(
42                 target=collect_serial_data,
43                 args=(esp_conn, results)
44             )
45
46             # Execute parallel data collection
47             obd_thread.start()
48             esp_thread.start()
49             obd_thread.join()
50             esp_thread.join()

```

```

44         # Local preprocessing and data fusion
45         if 'obd_df' in results and 'serial_df'
46             ' in results:
47             combined_df = merge_dataframes(
48                 results['obd_df'], results['
49                 serial_df'])
50
51         # Edge processing: Save locally
52         with timestamp
53         combined_df.to_csv(temp_csv_path,
54                             index=False)
55         append_to_data_csv(temp_csv_path,
56                             data_csv_path)
57
58         # Cloud transmission for
59         centralized analysis
60         upload_result = upload_to_server(
61             temp_csv_path, server_url)
62
63         print(f"Cycle {iteration}
64               complete - Data processed and
65               transmitted")
66
67         iteration += 1
68         time.sleep(1) # Regular interval
69         collection
70
71     except Exception as e:
72         print(f"Hardware implementation error: {e
73               }")
74     finally:
75         # Cleanup hardware connections
76         if Async_conn: Async_conn.close()
77         if esp_conn: esp_conn.close()
78
79     def merge_dataframes(obd_df, serial_df):
80         """
81         Local preprocessing: Merge multi-sensor data
82         with timestamp synchronization
83         """
84         obd_df = obd_df.reset_index(drop=True)

```

```

72         serial_df = serial_df.reset_index(drop=True)
73
74         # Add synchronized timestamp for data
           correlation
75         timestamp = datetime.now().strftime("%Y-%m-%d
           %H:%M:%S")
76         obd_df["MERGED_TIMESTAMP"] = timestamp
77
78         # Horizontal concatenation for unified sensor
           data
79         combined_df = pd.concat([obd_df, serial_df],
           axis=1)
80         return combined_df

```

The Raspberry Pi collected sensor data at regular intervals, pre-processed it locally, and transmitted the information to a cloud backend for storage and analysis. This edge setup ensured low-latency data capture and immediate response to critical driving events.

5.2 GOLANG

Once data is collected and processed locally by the Raspberry Pi 5 edge device, it is transmitted to a Golang-based server which acts as a middleware communication layer. This Go server ensures the reliable and secure transmission of structured telemetry data from edge to backend systems, enabling near real-time monitoring and decision-making. The Go server exposes a set of RESTful API endpoints for interacting with various components of the data pipeline. These include:

1. **/upload:** Handles incoming CSV files via POST requests. Data is parsed using Go's CSV reader libraries, and SQL queries are dynamically constructed for storage in the PostgreSQL database.
2. **/data:** Allows GET requests to fetch the most recent or specific historical records from the database. This enables dashboards, apps, or other services to retrieve and display relevant vehicle data.

3. **/health:** A lightweight endpoint that returns the server's health status, used for monitoring and diagnostics.

Through these endpoints, the Go server functions as the key intermediary for reliable, flexible, and secure data ingestion into the centralized storage system.

5.3 POSTGRES DB

The collected data is stored in a PostgreSQL (PGSQL) database for future processing and analysis. This database serves as the central repository for storing vehicle data, including various parameters like engine temperature, fuel consumption, speed, and more. The structured format of the database allows for efficient querying and data retrieval. All incoming telemetry and diagnostic data are stored in a PostgreSQL (PGSQL) relational database, which acts as the core data repository for the ADAM system. PostgreSQL is selected due to its enterprise-level capabilities, including full support for ACID transactions, advanced indexing techniques, query optimization, and secure storage features. The PostgreSQL database is designed with a normalized schema that efficiently captures and organizes various datasets such as: Engine diagnostic parameters and fault codes

- GPS and route tracking logs
- Vehicle movement and sensor activity
- Temperature metrics and thermal events
- User metadata and access logs

Structured storage facilitates rapid query response times and easy retrieval of records for downstream analytics and machine learning tasks. This centralized repository ensures long-term archival, auditability, and scalability as data volume grows.

5.4 FASTAPI

Once stored, the diagnostic data is accessed by a FastAPI-based application layer. This server plays a central role in processing data, serving APIs to external interfaces, and executing real-time and scheduled analysis tasks. One of its most critical roles is the application of Machine Learning (ML) models trained on historical vehicle data to derive predictive insights.

1. **Emissions Diagnostic:** The emissions router (`routers/emissions.py`) processes real-time sensor data to determine emission compliance status using the `EnhancedCarEmissionsMLModel`. When a request is received, the router accepts CSV uploads or JSON payloads containing sensor readings such as CO levels, NOx concentrations, and particulate matter measurements. The data is validated using Pydantic models before being passed to the emissions model, which preprocesses the sensor values, applies Indian emission standard thresholds, and generates compliance classifications using a trained Random Forest classifier. The router returns structured JSON responses containing compliance status, confidence scores, and detailed sensor analysis, along with optional confusion matrix visualizations for model performance assessment.
2. **Engine Health Diagnostic:** The engine health router (`routers/engine_health.py`) analyzes OBD diagnostic data through the `EngineHealthPredictor` model to assess overall engine condition. The router processes incoming requests containing engine parameters like RPM, coolant temperature, fuel trim values, intake pressure, and engine load. After data validation, the information is passed to the engine health model, which applies rule-based thresholds to detect anomalies across multiple engine systems. The model uses a Gradient Boosting Classifier to categorize engine status as "Good" or "Needs Attention" based on sensor patterns. The router formats the diagnostic results into comprehensive health reports that include specific maintenance recommendations, anomaly details, and performance metrics suitable for both technical users and vehicle owners.

3. **Predictive Maintenance:** The predictive maintenance router (routers/predictive_maintenance.py) generates maintenance schedules and component replacement predictions using the VehicleMaintenance class. This router accepts comprehensive vehicle data including mileage, operating hours, sensor readings, and usage patterns. The maintenance model applies rule-based algorithms to estimate wear patterns for various components such as tire wear, spark plug condition, brake pad status, and fluid change intervals. Unlike the machine learning approaches used in emissions and engine health modules, this system uses deterministic calculations based on manufacturer specifications and operational stress factors. The router returns detailed maintenance reports with specific recommendations, estimated replacement dates, and priority levels for each vehicle component, enabling proactive fleet management and service scheduling.

5.5 MOBILE APPLICATION

The ADAM system's mobile application serves as the primary user interface for data visualization and user interaction. Built using cross-platform frameworks like React Native or Flutter, the app is designed for both Android and iOS devices, ensuring wide accessibility.

- **Real-Time Monitoring:** The app provides real-time updates on vehicle diagnostics, including engine health, fuel efficiency, and emission compliance. Users can view live data streams from the OBD-II interface, allowing them to monitor their vehicle's performance on-the-go.
- **Maintenance Alerts:** Users receive notifications for upcoming maintenance tasks based on predictive analytics. The app alerts users about required services such as oil changes, tire rotations, and brake inspections, helping them stay proactive in vehicle care.
- **Driver Behavior Analytics:** The app tracks driver behavior metrics such as acceleration patterns, braking habits, and speed compliance. This data

is visualized through intuitive graphs and charts, enabling users to improve their driving habits for better fuel efficiency and safety.

- **Emission Compliance Status:** Users can check their vehicle's emission status against regulatory standards. The app provides insights into emission levels and compliance with local environmental regulations.
- **User-Friendly Interface:** The mobile app features a clean and intuitive design that allows users to easily navigate through various sections, access detailed reports, and interact with the system without technical expertise.
- **Chatbot Integration:** The app includes a chatbot that allows users to ask questions about their vehicle's performance, maintenance schedules, and diagnostic results. The chatbot provides instant responses, making it easy for users to get information without navigating through complex menus.

The mobile application serves as the primary interface for users to interact with the ADAM system, providing a seamless experience for monitoring vehicle performance, receiving maintenance alerts, and accessing diagnostic information

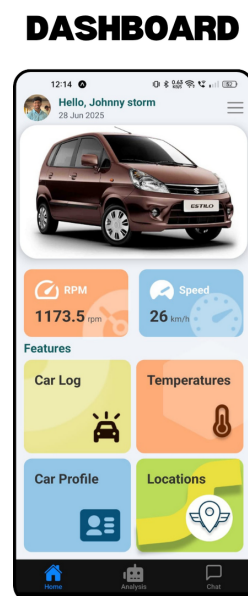


Figure 5.3: Dashboard of the ADAM mobile application

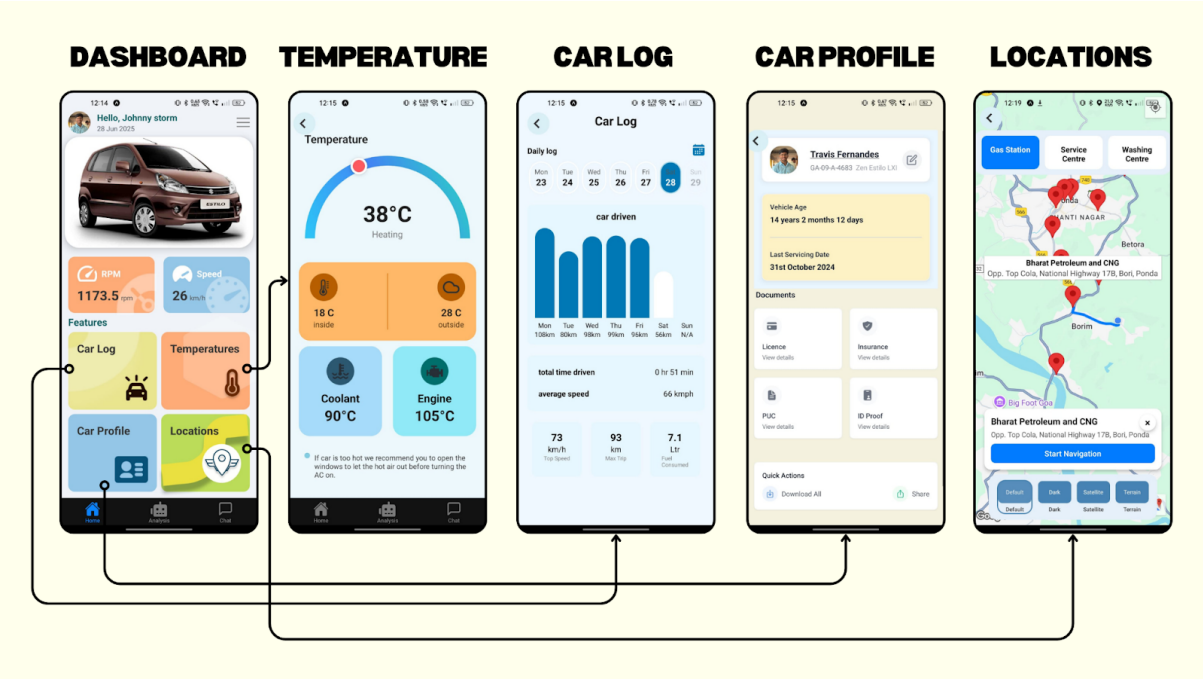


Figure 5.4: The dashboard includes direct navigation to four essential modules

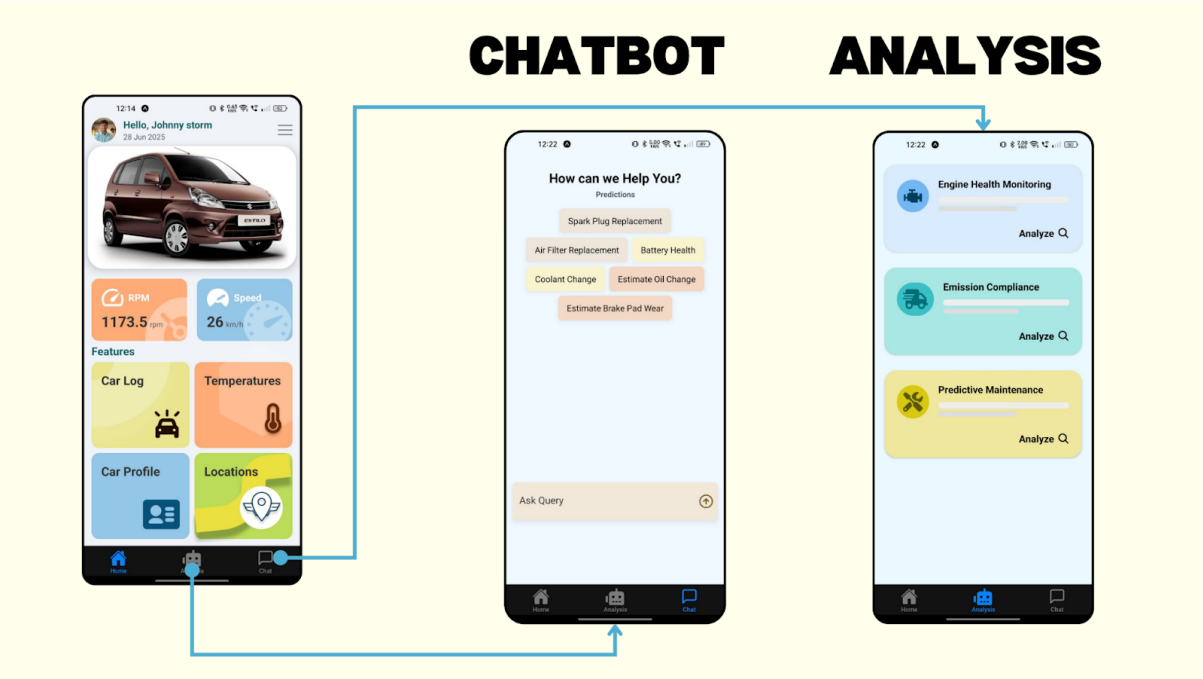


Figure 5.5: The bottom tab of the ADAM mobile application provides quick access to key features

CONCLUSION

The Automotive Diagnostic and Activity Monitoring (ADAM) System represents an innovative solution for improving vehicle safety, operational efficiency, and user convenience. The system combines real-time vehicle diagnostics, advanced data analysis, and seamless mobile application integration to provide actionable insights to various stakeholders, including vehicle owners, insurance agents, and regulatory authorities. By employing cutting-edge technologies such as machine learning algorithms, Raspberry Pi hardware, and the On-Board Diagnostics II (OBD-II) protocol, the ADAM System enables robust vehicle monitoring, fault detection, and forensic analysis capabilities.

The real-time diagnostic functionality of the ADAM System monitors vehicle performance and identifies potential mechanical issues before they escalate into significant problems, thereby reducing maintenance costs and enhancing road safety. The incorporation of machine learning facilitates predictive analytics, enabling the system to offer recommendations for preventive maintenance and optimize vehicle performance. Using Raspberry Pi as a cost-effective and scalable hardware platform allows for efficient data processing and ensures the adaptability of the system to a wide range of vehicles.

Integration with the OBD-II protocol ensures compatibility with modern vehicles and enables the collection of detailed diagnostic data, including engine performance, fuel efficiency, and emissions levels. The ADAM System also leverages a user-friendly mobile application to provide real-time notifications, comprehensive diagnostic reports, and driving insights, making it accessible and practical for everyday users.

Future advancements could expand the system's capabilities by incorporating features such as obstacle detection, which would enhance situational awareness for drivers. Predictive maintenance could be further refined to include

more sophisticated failure predictions based on historical and real-time data. Additionally, integrating the system with advanced driver-assistance systems (ADAS) could contribute to autonomous driving technologies by providing critical diagnostic and environmental data. These developments would position the ADAM System as a pivotal technology in the evolution of intelligent and connected vehicles.

BIBLIOGRAPHY

1. Duy Le Nguyen, Myung-Eui Lee and A. Lensky, **"The design and implementation of new Vehicle Black Box using the OBD information,"** *2012 7th International Conference on Computing and Convergence Technology (ICCCT)*, Seoul, Korea (South), 2012, pp. 1281-1284.
2. P. R. Sawant and Y. B. Mane, **"Design and Development of On-Board Diagnostic (OBD) Device for Cars,"** *2018 Fourth International Conference on Computing Communication Control and Automation (ICCUBEA)*, Pune, India, 2018, pp. 1-4, <https://doi.org/10.1109/ICCUBEA.2018.8697833>.
3. R. Malekian, N. R. Moloisane, L. Nair, B. T. Maharaj and U. A. K. Chude-Okonkwo, **"Design and Implementation of a Wireless OBD II Fleet Management System,"** *IEEE Sensors Journal*, vol. 17, no. 4, pp. 1154-1164, Feb. 15, 2017, <https://doi.org/10.1109/JSEN.2016.2631542>.
4. Landry Frank Ineza Havugimana, Bolan Liu, Fanshuo Liu, Junwei Zhang, Ben Li and Peng Wan, **"Review of Artificial Intelligent Algorithms for Engine Performance, Control, and Diagnosis,"** *Energies*, vol. 16, 2023, pp. 1206, <https://doi.org/10.3390/en16031206>.
5. R. Ahmed, M. El Sayed, S. A. Gadsden, J. Tjong and S. Habibi, **"Automotive Internal-Combustion-Engine Fault Detection and Classification Using Artificial Neural Network Techniques,"** *IEEE Transactions on Vehicular Technology*, vol. 64, no. 1, pp. 21-33, Jan. 2015, <https://doi.org/10.1109/TVT.2014.2317736>.
6. J. B. Porch, C. Heng Foh, H. Farooq and A. Imran, **"Machine Learning Approach for Automatic Fault Detection and Diagnosis in Cellular Networks,"** *2020 IEEE International Black Sea Conference on Communi-*

- cations and Networking (BlackSeaCom)*, Odessa, Ukraine, 2020, pp. 1-5, <https://doi.org/10.1109/BlackSeaCom48709.2020.9234962>.
7. S. N. Narayanan, S. Mittal and A. Joshi, **"OBD_SecureAlert: An Anomaly Detection System for Vehicles,"** *2016 IEEE International Conference on Smart Computing (SMARTCOMP)*, St. Louis, MO, USA, 2016, pp. 1-6, <https://doi.org/10.1109/SMARTCOMP.2016.7501710>.
8. J. E. Meseguer, C. T. Calafate, J. C. Cano and P. Manzoni, **"Assessing the impact of driving behavior on instantaneous fuel consumption,"** *2015 12th Annual IEEE Consumer Communications and Networking Conference (CCNC)*, Las Vegas, NV, USA, 2015, pp. 443-448, <https://doi.org/10.1109/CCNC.2015.7158016>.
9. R. Massoud, F. Bellotti, R. Berta, A. De Gloria and S. Poslad, **"Exploring Fuzzy Logic and Random Forest for Car Drivers' Fuel Consumption Estimation in IoT-Enabled Serious Games,"** *2019 IEEE 14th International Symposium on Autonomous Decentralized System (ISADS)*, Utrecht, Netherlands, 2019, pp. 1-7, <https://doi.org/10.1109/ISADS45777.2019.9155706>.
10. T. Liu, G. Yang and D. Shi, **"Construction of Driving Behavior Scoring Model based on OBD Terminal Data Analysis,"** *2020 5th International Conference on Information Science, Computer Technology and Transportation (ISCTT)*, Shenyang, China, 2020, pp. 24-27, <https://doi.org/10.1109/ISCTT51595.2020.00012>.