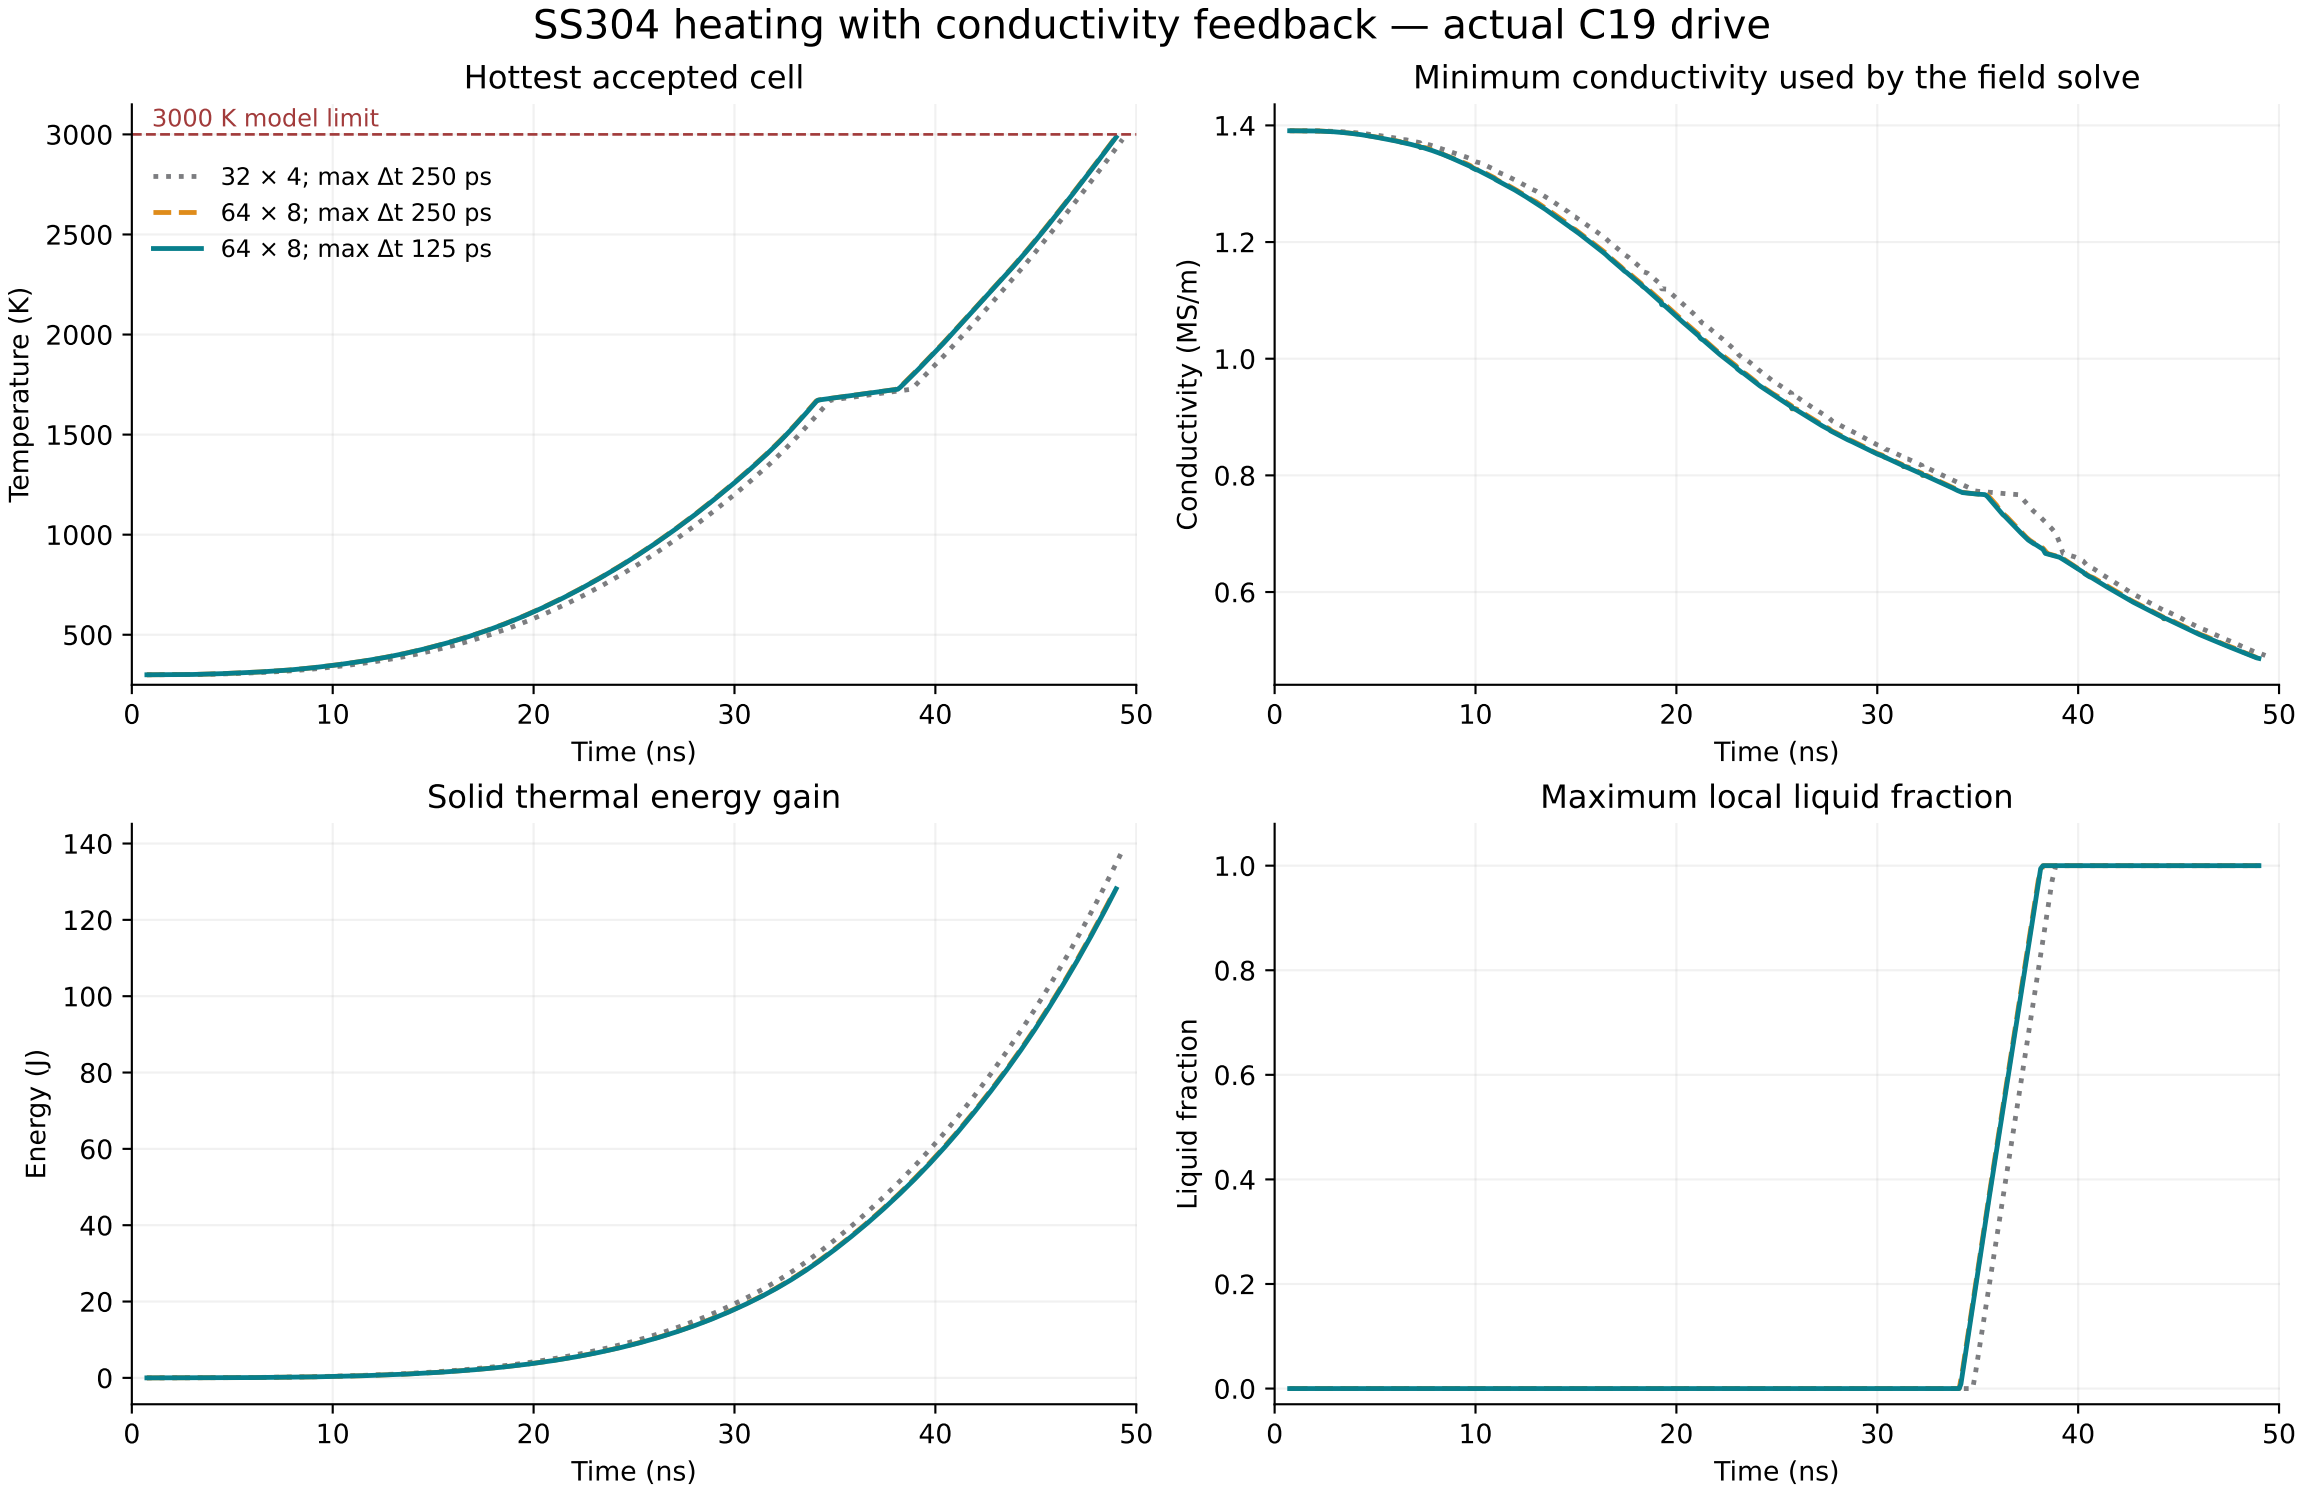
SS304 heating with conductivity feedback — actual C19 drive
Hottest accepted cell
3000 K model limit
32 × 4; max Δt 250 ps
64 × 8; max Δt 250 ps
64 × 8; max Δt 125 ps
Temperature (K)
Time (ns)
Minimum conductivity used by the field solve
Conductivity (MS/m)
Time (ns)
Solid thermal energy gain
Energy (J)
Time (ns)
Maximum local liquid fraction
Liquid fraction
Time (ns)
Solid-only reduced MQS; fixed shape and mass; conditional liquid properties.
Traces stop at their last accepted state. No plasma, vapor, mechanics, or spatial convergence claim.