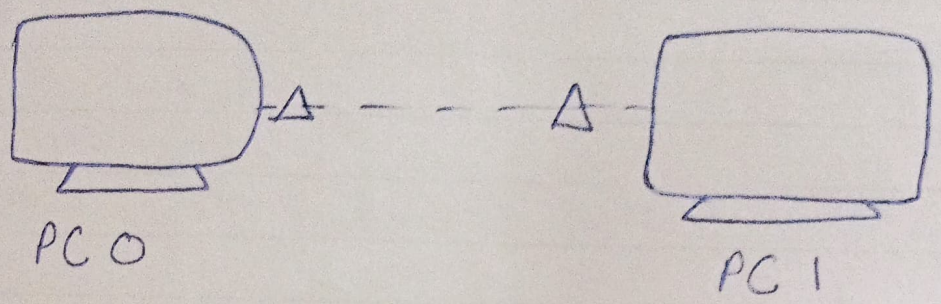

PC> ipconfig
IP address 10.20.30.1
Subnet mask 255.0.0.1
Default Gateway ... 0.0.0.0

PC> ping 10.20.30.2

Reply From 10.20.30.2 : bytes=32 time<1ms
Reply From 10.20.30.2 : bytes=32 time<1ms
Reply From 10.20.30.2 : bytes=32 time<1ms
Reply From 10.20.30.2 : bytes=32 time<1ms
Ping statistics sent=4, Received=4, lost=0 (0% loss)

PC> tracert 10.20.30.2
tracing route to 10.20.30.2 over a max. of 30 hops
1 0 ms 0 ms 0 ms 10.20.30.2
Trace complete

Date 29/1/26

Expt. No. 1 Page No. 1

AIM: To study basic commands and perform basic network configuration using cisco packet tracer.

Networking commands help in checking connection configuration and troubleshooting. Commands like ipconfig, ping and tracenet are used to verify ip configuration

Steps

→ Open Cisco Packet Tracer.
→ Drag 2 Pcs (PC0 and PC1) into workspace.
→ Connect them using copper cross-over cable.
→ Click on PC0 → Desktop → IP configuration.
→ Assign IP address : 10 : 20 : 30 : 1
→ Click on PC1 → Desktop → IP configuration.
→ Assign IP address 10 : 20 : 30 : 2
→ Open command prompt in PC0
→ Type commands
ipconfig
ping
tracert

Teacher's Signature :