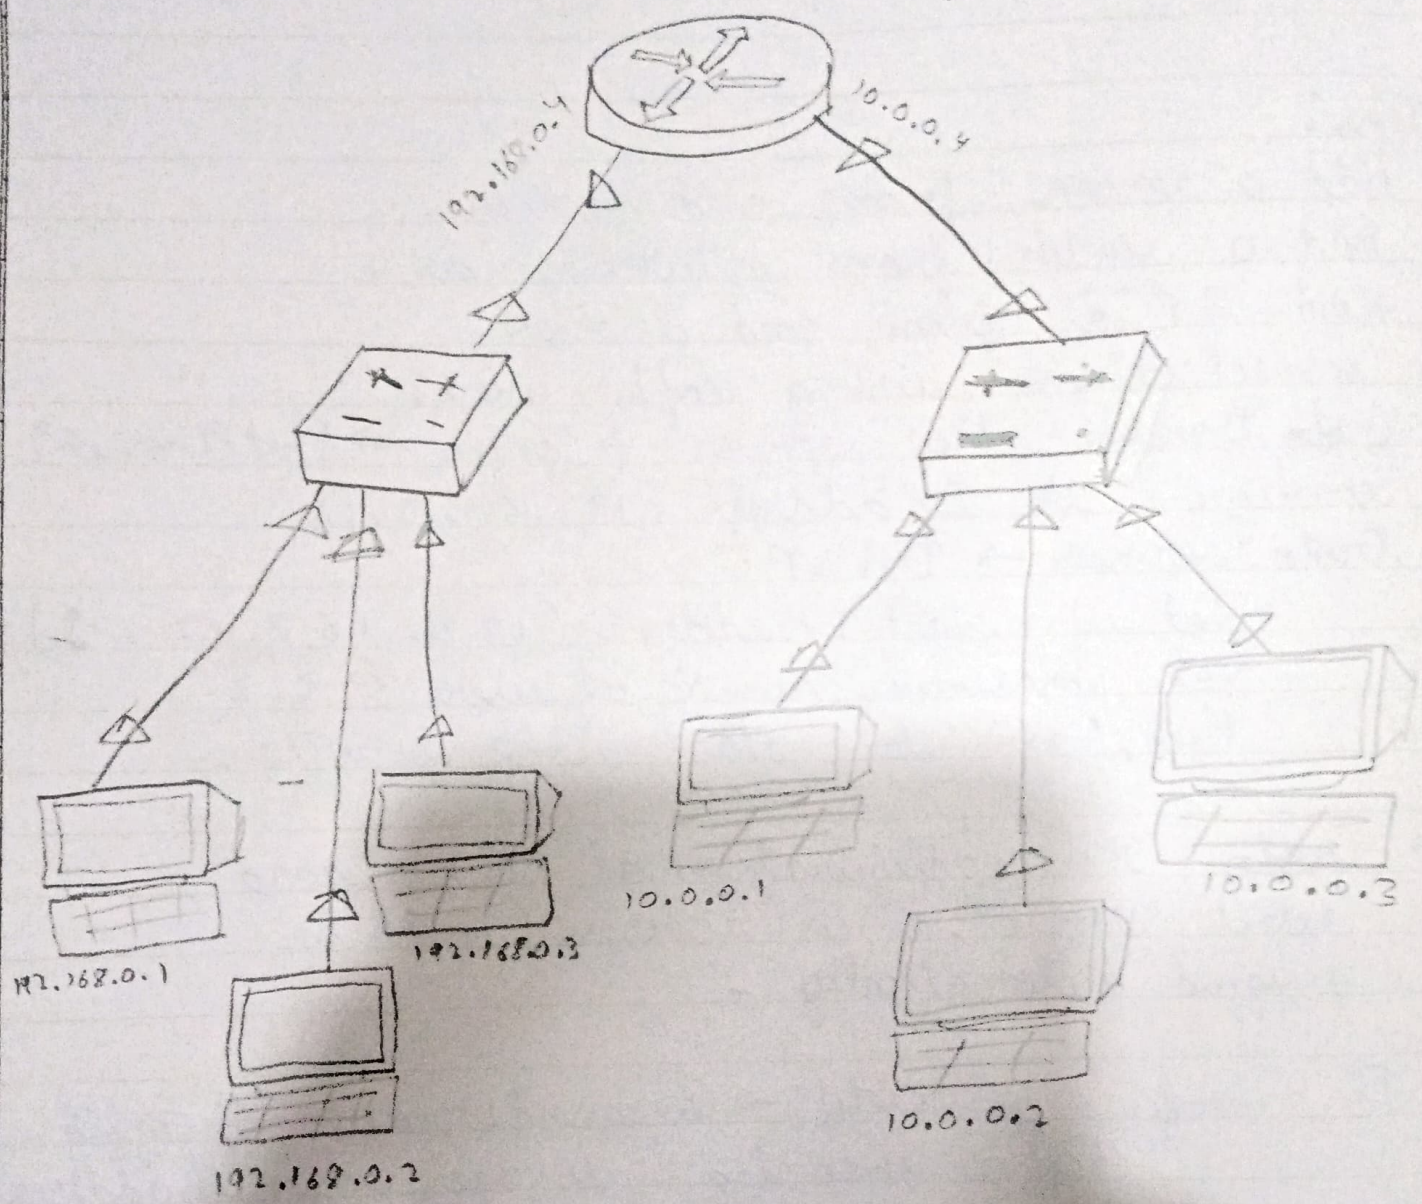
192.168.0.4
10.0.0.4
192.168.0.1
192.168.0.2
192.168.0.3
10.0.0.1
10.0.0.2
10.0.0.3

Date

Expt. No. 8 Page No.

Aim: To implement connection between devices using a router.

Steps:

→ Add a switch and connect three PCs to it.

→ Add another switch and connect three PCs to it.

→ Assign the IP address to PCs of first LAN (192.168.0.1, 192.168.0.2, 192.168.0.3)

→ Assign IP address to PCs of second LAN (10.0.0.1, 10.0.0.2, 10.0.0.3).

→ Add a router and connect the ~~LANs~~ switches to it using ~~Gigabit~~ Gigabit Ethernet.

→ Configure Router:

Config → Gigabit Ethernet 0/0/0 :
add IPv4 Address 192.168.0.4
Set port status to on.

For second switch
Config → Gigabit Ethernet 0/0/1
add IPv4 address 10.0.0.4
Set port status to on.

→ Set the default gateway of PCs in first LAN to 192.168.0.4. For PCs in second LAN set the default gateway to 10.0.0.4

Teacher's Signature :

C:\> ping 10.0.0.2

Pinging 10.0.0.2 with 32 bytes of data:

Reply from 10.0.0.2: bytes=32 time=1ms TTL=127

" " " " time=11ms " "

" " " " " " " "

" " " " " " " "

Ping statistics for 10.0.0.2:

Packets: Sent=4, Received=4, Lost=0 (0% Loss)

Date

Expt. No.

Page No.

Observation :

Message can be successfully sent to the PCs of another LAN.

Conclusion :

Two LANs were successfully connected using a router.

Teacher's Signature :