Switch CLI

```
Switch> enable
Switch# conf t
Switch(conf)# hostname anand
anand (config)# interface vlan 1
anand (config-if)# ip address 192.168.0.5 255.255.255.0
anand (config-if)# no shutdown
anand(config-if)# exit
anand (config)# username cisco password 123
anand (config)# login local
anand (config-line)# transport input telnet
```

Command Prompt

```
C:\> telnet 192.168.0.5
Trying 192.168.0.5 ... Open

User Access Verification
Username : cisco
password :
anand>
```

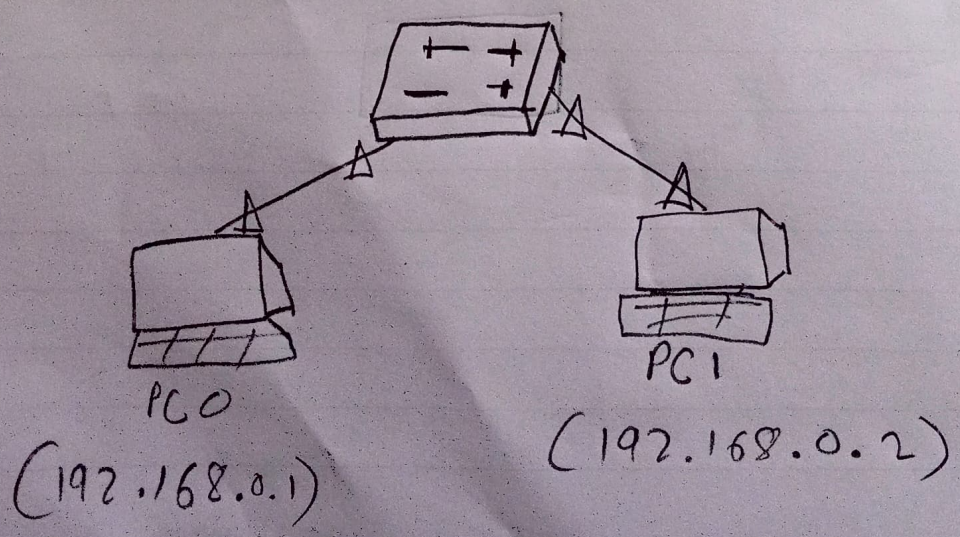

Expt. No. 9 Date 11

Page No. 16/3/26

Aim: To perform remote desktop within LAN connection.

Steps:

→ Open Cisco Packet Tracer and drag and drop two PCs and one switch.

→ ~~Com~~ Connect two PCs with the switch using copper straight-through wire.

→ ~~Con~~ Configure IP address of PC0 (192.168.0.1) and PC1 (192.168.0.2).

→ Open 'CLI' in the switch.

→ Run the following commands:

```
enable
conf t
hostname anand
interface vlan1
ip address 192.168.0.5 255.255.255.0
no shutdown
exit
username cisco password 123
line vty 0 4
login local
transport input telnet
```

→ Now check the connections using ping.

→ Open PC0 → command prompt.

→ telnet 192.168.0.5

Teacher's Signature :

Date

Expt. No.

Page No.

→ Now the ~~switch~~ enter username and password set in ~~so~~ the switch configuration.

→ Now we can remotely access the switch.

Conclusion: We can remotely access the switch using the PC.

16/3/26

Teacher's Signature :