


TOP VIEW SCALE 1/8" = 1"

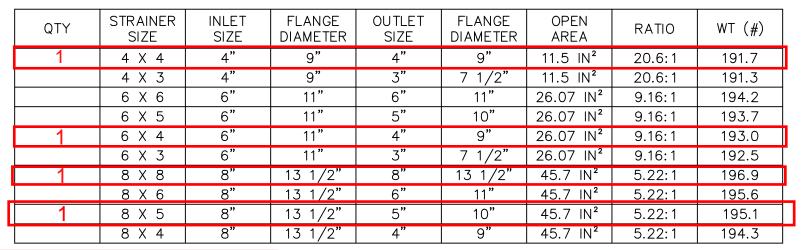

WITH EXTRA STRAINER BASKET

Per Strainer Size

FLOW DIRECTIONAL ARROW DECAL ON 1/4" IPS HALF COUPLINGS W/ PLUGS TOR GAUGES EXTERIOR TO BE GIVEN (1) COAT OF BLUE PAD-COTE EPOXY FINISH 1 1/2" IPS HALF COUPLING W/PLUG 33<u>3</u>"  $23\frac{7}{16}$ "  $23\frac{7}{16}$ " 18¾" 3/4" ST. ST. DRAIN COUPLING WITH THREADED PLUG 11중" 11၌"  $\bigcirc$ ·15<del>7</del>" FRONT ELEVATION SECTION A-A SCALE 1/8" = 1"SCALE 1/8" = 1"

PADDOCK HAIR AND LINT STRAINERS ARE FABRICATED FROM TYPE 304 1/8" THICK STAINLESS STEEL.

4", 6", AND 8" STRAINERS FEATURE A 1/2" STAINLESS STEEL COVER RING WITH 1/2" THICK POLYCARBONATE VIEWPORT.

LIDS ARE MACHINED TO ELMINATE SHARP EDGES AND ARE SEALED WITH A 1/4" DIAMETER RUBBER 'O'-RING GASKET.

LOCKING ASSEMBLIES PERMIT EASY ACCESS AND CLOSING WITHOUT USE OF TOOLS.

STAINLESS STEEL DRAIN AND VACUUM COUPLINGS WITH THREADED PLUGS ARE PROVIDED ALONG WITH DRILLED AND TAPPED GAUGE CONNECTIONS.

SYSTEM IS DESIGNED FOR 60 PSI WORKING PRESSURE.

PERFORATED BASKET IS CONSTRUCTED OF 18 GAUGE TYPE 304 STAINLESS STEEL W/A 52% OPEN AREA AND 1/8" PERFORATED HOLES.

STRAINER IS SHIPPED WITH (1) EXTRA BASKET.

