



PADDOCK

POOL EQUIPMENT COMPANY

100% EMPLOYEE OWNED


PUMP STRAINER

Maintenance & Care Stainless-Steel Equipment

Pump Strainer

Features and Benefits with Options – Refer to Drawing(s)

The Pump Strainer is a high-quality stainless-steel vessel incorporating a perforated stainless-steel basket designed to strain hair, lint, and other large particles from the fluid stream that might clog or damage the pump's impeller. A typical design is shown in the cross-sectional view below with basket and includes one additional basket for easy cleaning.

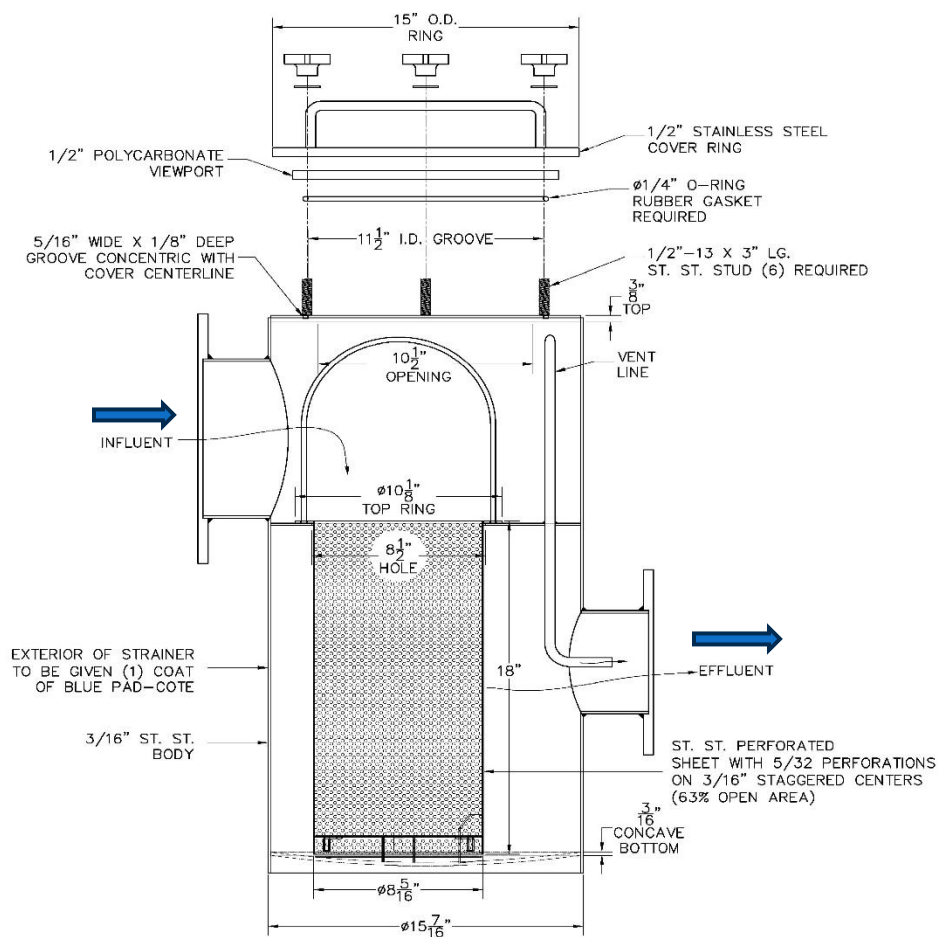

Installation

Support the strainer, pump, and piping independently using standard concrete pedestals to mount the pump and standard pipe supports for the plumbing. Typically, the strainer sits on the floor, but a pedestal can be constructed for it, if necessary. Attach the strainer flange to the pump flange using standard flange gaskets and hardware. Likewise, attach the influent plumbing to the strainer. Install an isolation valve in the influent line upstream of the strainer, and another in the effluent line downstream of the pump.

© Paddock Pool Equipment Co. | 555 Paddock Parkway, Rock Hill, SC 29730

Phone (803)324-1111 | www.paddockpoolequipment.com | 800-849-2729 | Email: info@paddockindustries.com

Start-Up

Close both isolation valves, remove the strainer lid, and fill the strainer and pump volute with water through the lid opening if pump is installed above water level. In a flooded-suction system, slightly open the influent isolation valve to allow the strainer and volute to fill with water, then close influent isolation valve. Re-install the strainer lid, making sure it is secured and sealed tightly. Open the influent isolation valve and start the pump. After five seconds, slowly open the effluent isolation valve, taking 5-10 seconds to open the valve.

This slow opening of the effluent isolation valve eliminates the possibility of creating a water hammer (also known as hydraulic shock).

Shut Down and Cleaning

Gradually close the effluent isolation valve, taking 5-10 seconds, before turning pump off. This slow closing of the effluent isolation valve prevents water hammer. This deadheading of the pump for a few seconds will in no way damage it. If the strainer is to be opened at this time for cleaning, close the influent isolation valve before removing the lid. Upon replacement of a clean basket, re-install the lid and secure it tightly, and open the influent isolation valve. **Do not open the effluent isolation valve until after the pump is started to prevent water hammer.**

A Word About Water Hammer

Water hammer is a destructive pressure spike caused by the sudden deceleration of water flow. The pressure spike potential can be easily calculated by multiplying the water velocity at normal flow in feet per second by 65. This gives the pressure spiking potential in pounds per square inch. For example, water flowing at 6 ft/s will cause a 390 psi water hammer if the water flow is suddenly stopped. **This can occur upon starting a pump with air in the plumbing every time the water flow encounters an elbow or tee, or upon closing a valve suddenly, or even upon simply turning off a pump without first slowing the water flow down. Failure to prevent water hammer constitutes abuse and will render any warranties void.**

Safety & Hazards

A pump strainer protects equipment by catching debris like dirt, rust, and other particles that easily flow into your system. These contaminants are known to exert considerable wear on pumps, valves, and other sensitive equipment.

DO NOT open/loosen strainer lid while pump is running. Opening a strainer without proper isolation can cause sudden pressure blasts and possibly flooding. Clear out debris from the basket and rinse with clean water. Inspect the rubber O-ring for cracks/damaged, knobs, basket, and any other parts that may need to be replaced.

For questions concerning the usage of our equipment, please contact Paddock Pool Equipment Co., customer service.

Powder Coated Metal Care & Maintenance

Refer to Drawing(s) – if applicable.

Powder coating is a type of coating that is applied as a free-flowing, dry powder. Unlike conventional liquid paint, which is delivered via an evaporating solvent, powder coating is typically applied electrostatically and then cured under heat or with ultraviolet light. It's very durable and can last for many years if treated well.

Clean as follows:

1. **Clean with mild soap and fresh water (not pool water)**, after washed, rinse off completely.
2. **Dry the surface completely after cleaning**; when water is left on the surface it can cause staining. **Avoid using any type of abrasive cleaner, pads or brushes as this can damage the finish.**
3. If you need to remove a **tough stain**, try using a soft cloth dampened with white vinegar. Gently rub the stained area until the stain is removed. Be sure to rinse the area off with fresh water (not pool water) afterwards then dry it completely. If tough stain(s) are still there, use a soft cloth or non-abrasive sponge with a water-based gentle cleaner for cleaning powder-coating surfaces.
4. **Power Wash on Low Settings** is one of the best ways to clean your powder-coated items. However, power washers are **super powerful**, so be prudent and use the low setting to avoid damage. **Dry the surface completely after cleaning/rinsing**; when water is left on the surface it can cause staining.
5. **Protecting the surface of the powder-coated metal by Waxing the Exposed Areas:**
 1. Waxing the exposed areas of your powder-coated metal will help to protect it from the elements and keep it looking shiny and new. You can use commercial car wax or beeswax furniture polish by applying the wax with a soft cloth and rub it in using circular motions. Allow the wax to dry for at least 20 minutes before buffing it off with a clean, dry cloth.
 2. **DO NOT** put wax on **non-skid surfaces**, this will cause safety hazards on the surface.

SAFETY & HAZARDS - AVOID

Harsh Chemical Cleaners, Abrasives and Harsh Weather Conditions - these things can damage the finish on your product(s).

For questions concerning the usage of our equipment, please contact Paddock Pool Equipment Co., customer service.