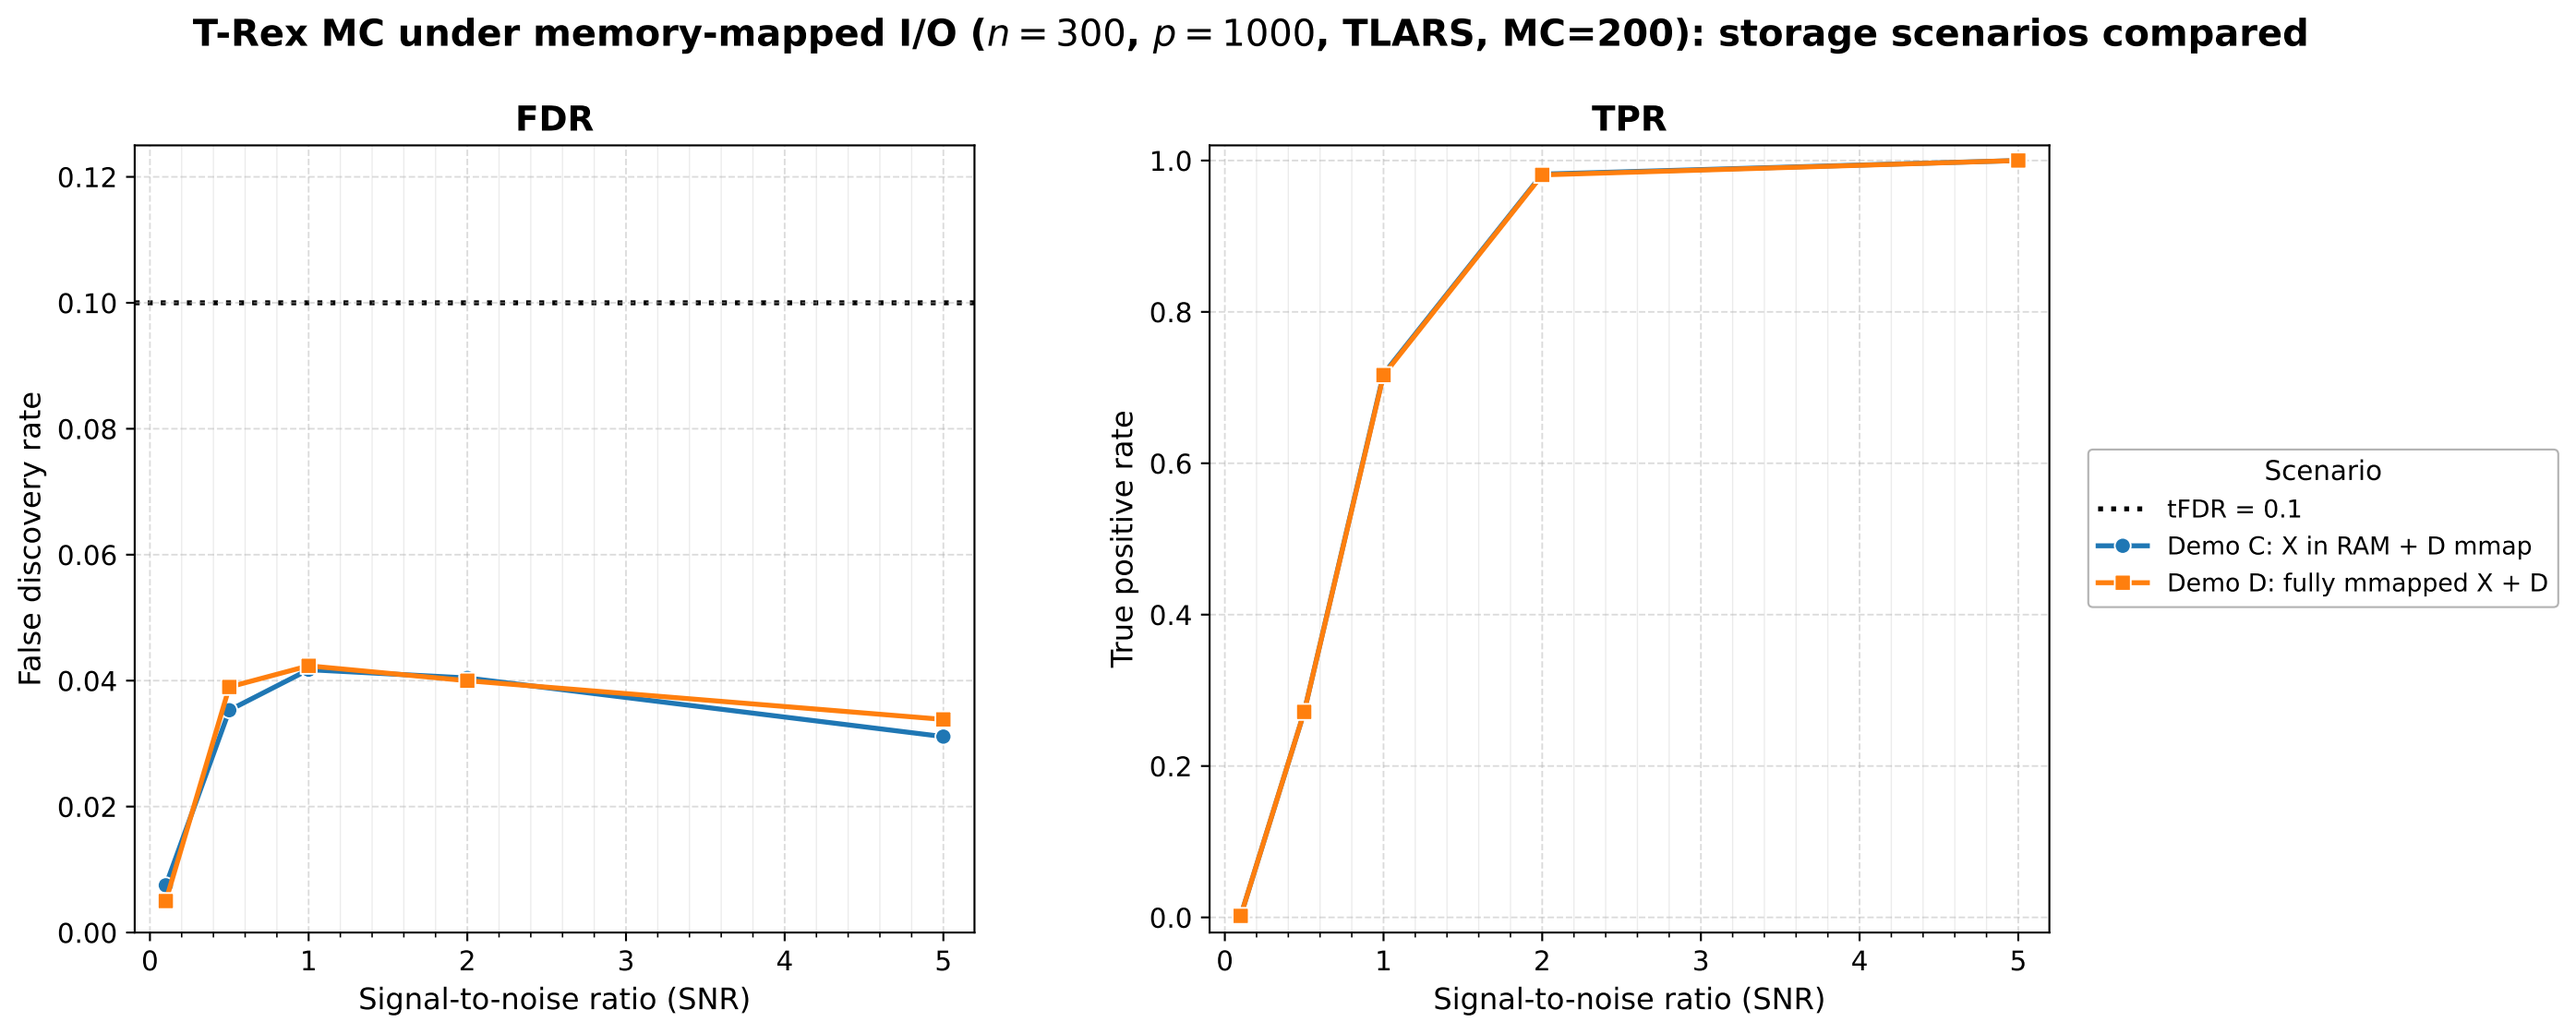
T-Rex MC under memory-mapped I/O ($n = 300$, $p = 1000$, TLARS, MC=200): storage scenarios compared
FDR
False discovery rate
Signal-to-noise ratio (SNR)
0.00
0.02
0.04
0.06
0.08
0.10
0.12
0
1
2
3
4
5
TPR
True positive rate
Signal-to-noise ratio (SNR)
0.0
0.2
0.4
0.6
0.8
1.0
Scenario
tFDR = 0.1
Demo C: X in RAM + D mmap
Demo D: fully mmapped X + D