


# TEST DOCUMENT

Trey Dufrene, Zack Johnson, David Orcutt, Alan Wallingford, Ryan Warner

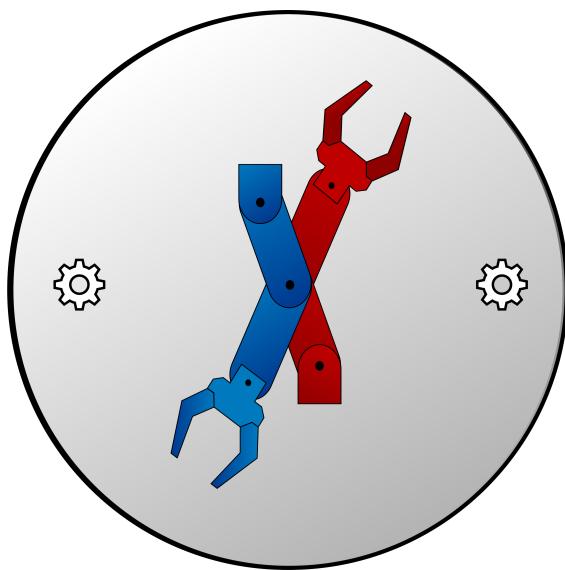

ME 407

Preliminary Design of Robotic Systems

Embry-Riddle Aeronautical University



Meiosis

# Contents

1	Introduction . . . . .	1
2	Specifications and Tests . . . . .	1
3	Further Testing . . . . .	13
4	Conclusion . . . . .	14

# List of Figures

1	Labeled Image of Manipulator Render . . . . .	2
2	Measurement Test for Link Offset . . . . .	3
3	Manipulator in its Zeroed Configuration . . . . .	3
4	Solidworks Measurement of Reachable Workspace . . . . .	5
5	Test of Link Length for Specification 1.5.a. . . . .	5
6	Matlab Plot of Invalid Dexterity Check . . . . .	6
7	Matlab Plot of Successful Dexterity Check . . . . .	7
8	Dynamixel Parallel Gripper with Servo Modified from [2] . . . . .	8
9	Dynamixel Gripper with and without Foam Padding at Minimum and Maximum Opening [2] . . . . .	9
10	Dynamixel Gripper Rotational to Linear Motion Mechanism [3] . . . . .	10
11	Dynamixel Parallel Gripper with Servo Modified from [2] . . . . .	11
12	GUI Template . . . . .	12

# 1 Introduction

With the intention of making robotics education more accessible, The Manipulator for Educational Institutions with Open Source Integrated Systems (MEIOSIS) intended to provide robotics classes with an accurate and precise manipulator for a lower cost. The system is designed to be 3D printed by the end-user to reduce overall cost and will be modifiable to create a sustainably increased understanding of robotics. This document details the tests performed by the MEIOSIS team and the specific results obtained by each test. This is done in order to ensure that the design requirements are properly met by the finished product.

## 2 Specifications and Tests

Specification **1.1.a** states: **The cost for the MEIOSIS team to develop the manipulator shall cost no more than \$800.** This is met if the cost for the MEIOSIS team to develop the manipulator does not exceed \$800. This can be tested by adding together the total cost of all parts ordered. This process can be seen in Table 1.

Table 1: MEIOSIS Bill of Materials with Costs

Part	Quantity	Individual price	Transaction Cost
M3x30mm Screws	2	\$5.99	\$11.98
M3 Locking nuts	1	\$7.99	\$7.99
TRiREAK AC Bearing	7	\$9.00	\$63.00
Dynamixel MX-12W	3	\$65.90	\$197.70
Thrust Bearing	1	\$7.99	\$7.99
Skateboard Bearings	1	\$5.29	\$5.29
Pi 3 B	1	\$34.95	\$34.95
Power Supply	1	\$9.95	\$9.95
SD Card	1	\$12.95	\$12.95
Shipping/Tax	1	N/A	\$7.95
Discounts	1	N/A	-\$8.17
		<b>Total Cost</b>	<b>\$351.58</b>

In Table 1, the “Shipping/Tax” row shows the listed shipping fees for the Pi 3 B and associated parts, and the “Discounts” row shows the sum total of all the small discounts that were applied to the bulk purchases of multiple items. Table 1 also demonstrates that the total cost to develop the manipulator was \$351.58, well under the \$800 allocated for this project, signifying that **Specification 1.1a was met by the product.**

Specification **1.2.a** states: **The system shall consist of six rotational joints connected by four links. The last three joints will create a spherical wrist.** For this specification to be met, the robot must have six rotational joints and 4 links. The last three joints must create a spherical wrist where the axis of revolution for the last three

joints are intersecting with one another. To perform a test to check for six rotational joints, SolidWorks is required. A render of the manipulator with labeled joints can be seen in Figure 1.

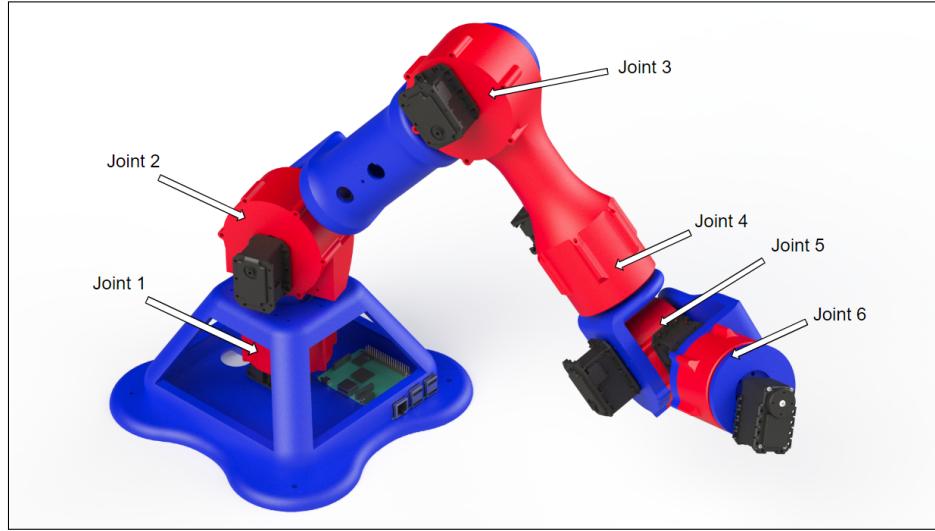


Figure 1: Labeled Image of Manipulator Render

As can be seen labeled in Figure 1, the robot consists of six rotational joints. Joint 1 controls the rotation about the base, joints 2-3 control the “shoulder” and “elbow” of the robot, and joints 4-6 control the spherical wrist. The rotational axis of joint 4 intersects with joint 5’s and joint 5’s also intersects with joint 6’s rotational axis. To perform this test, the assembly file containing the manipulator was opened and the joints were counted. Using the move tool, each joint can be observed to be purely rotational. The data obtained is purely simulated due to the fact that the robot has not been fully fabricated. **This manipulator meets specification 1.2.a.**

Specification **1.2.b** states: **The system shall have no link offsets.** For this specification to be satisfied, there must be no link offsets present in the design of the robotic manipulator. This means that the link should connect two joints by translating in only one direction and the axes of the joints attached to the link should be collinear with one another. Testing this specification requires SolidWorks’ measurement tool. Using the measurement tool, measure each joint to ensure that there is only displacement along one axis. Figure 2 shows an example of a measurement done on the elbow link of the manipulator.

Figure 2 shows a screen capture of a measurement taken and as can be seen by the blue line, the link only extends across one axis. If there were a link offset present, there would be multiple multi-colored lines to show displacement in multiple directions. These tests were done in simulation on each link of the manipulator and none contained any offset direction. Through this test, it is observed that **the manipulator meets specification 1.2.b.**

Specification **1.3.a** states: **The system shall accommodate a process in which the**

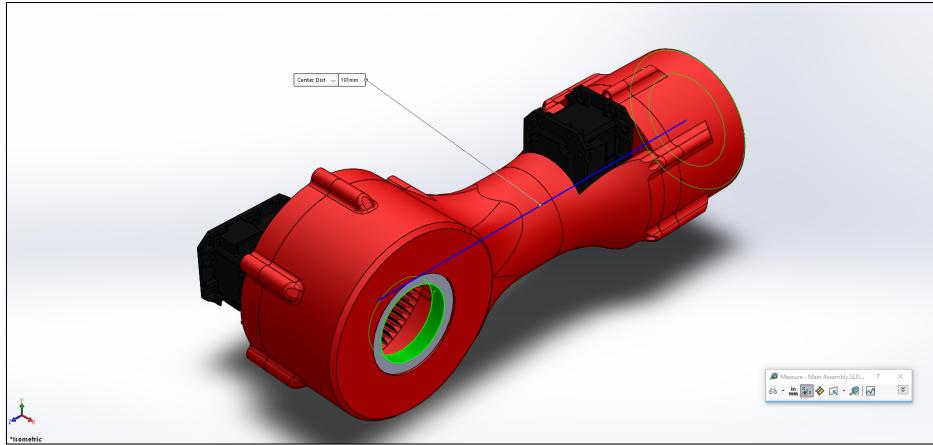


Figure 2: Measurement Test for Link Offset

**end user can calibrate the end effector position and orientation to within 0.5 mm and 1 degree of the manipulator's precision.** In order to fulfill specification 1.3a, an algorithm was developed for calibration. This algorithm must allow the user to manually move the links into a desired zeroed configuration, then accurately retain that zeroed configuration as a reference position during use. Figure 3 depicts the manipulator in a zeroed configuration.

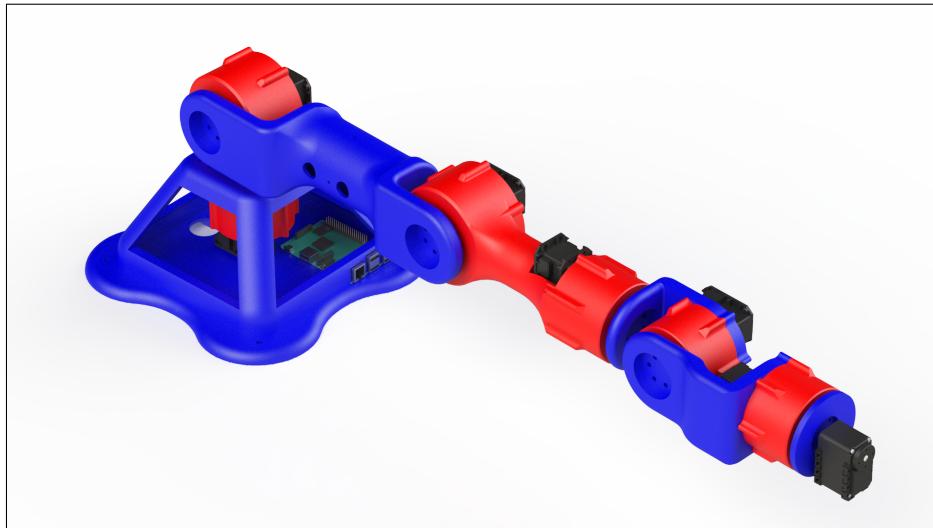


Figure 3: Manipulator in its Zeroed Configuration

The configuration shown in Figure 3 is what we have defined to be the zeroed configuration. The purpose of the calibration algorithm is to force the software to consider every joint angle to be zero when the manipulator is in this configuration, even if the servos return non-zero angular values. The algorithm developed allows the users to move the joints one by one until the robot is in the desired “zeroed” position. The program then reads the servos positions and stores those values as offset variables. These offsets are subtracted off of the desired joint angle values when commanding the servo positions.

In order to measure the calibration accuracy, the PhaseSpace Motion Capture system will be required. The calibration algorithm itself is accurate to the same value as the manipulator, however inaccuracies can arise due to the user not being able to manually put the manipulator into the correct configuration. The testing procedure will be performed as follows. The motion capture system will be fully set up, including placing the tracking markers on the manipulator's base and end-effector. Once the motion capture system is fully set up, the manipulator will be placed in an arbitrary configuration, at least 30° away from zero in each joint. The manipulator will then be restarted, which will erase the system's memory of it's configuration. At this point, the motion capture system will start recording data. Using the calibration software, the manipulator will then be manually zeroed to the best of the operator's abilities. Once this is completed, error terms can be determined by comparing the tracking data to the known values of the end-effector's position and orientation in the zeroed state. Due to circumstances beyond our control, we are not able to perform this test. Because of this, adherence to specification 1.3a, and by extension **adherence to specification 1.3.a cannot be determined**.

Specification **1.4.a** states: **Joint one and two of the system shall possess an angle error of no more than 0.025 degrees.** Specification **1.4.b** states: **Joint three of the system shall possess an angle error of no more than .03 degrees.** Specification **1.4.c** states: **Joints four, five, and six shall possess an angle error of no more than .29 degrees.** In order to verify specifications 1.4.a-1.4.c, the angle accuracy of the system must be measured. To determine the accuracy, the PhaseSpace Motion Capture System is required. Three LED indicators will be placed at the end of each gearbox that is farthest from the previous gearbox in the line to indicate the farthest point directly controlled by the previous gearbox. The three LEDs will be placed at 120° increments around each link/gearbox so that one or more of the LEDs are visible to the motion capture system at a time. To attain accurate results, small divots will be placed on the manipulator where the LEDs will be located in order to allow precise application of the LEDs to the system. Accurate LED placement will allow for more accurate kinematic/angle calculations.

To test the system, the manipulator will be placed in the zeroed configuration and each joint will be tested individually. First, joint 1 will be tested by running from zero to 90°, and then back to zero, and repeat for a total of 10 times. Each time joint 1 has reached the desired angle, the motion capture system will collect the location data of the LEDs and store it for error calculation. When the test has completed, the data can be used to calculate the angle the link actually achieved, and can be compared to the desired angle. Any error in zeroing can also be seen from the collected data. After the joint 1 has been tested, joint 2 will be tested following the same procedure, after which joints 3 through 6 will be tested in order. The worst angle error achieved by each joint will be compared to the value defined in the specifications. This test is unable to be performed and thus **the manipulator's adherence to specifications 1.4a-1.4c cannot be determined**.

Specification **1.5.a** states: **The manipulator shall have a maximum reach between 300 and 700 mm.** In order to satisfy this specification, the robot's links must have a sum length of between 300 mm and 700 mm. Using Solidworks, the total reachable workspace

can be measured using the “Measure” tool. This measurement can be seen in Figure 4.

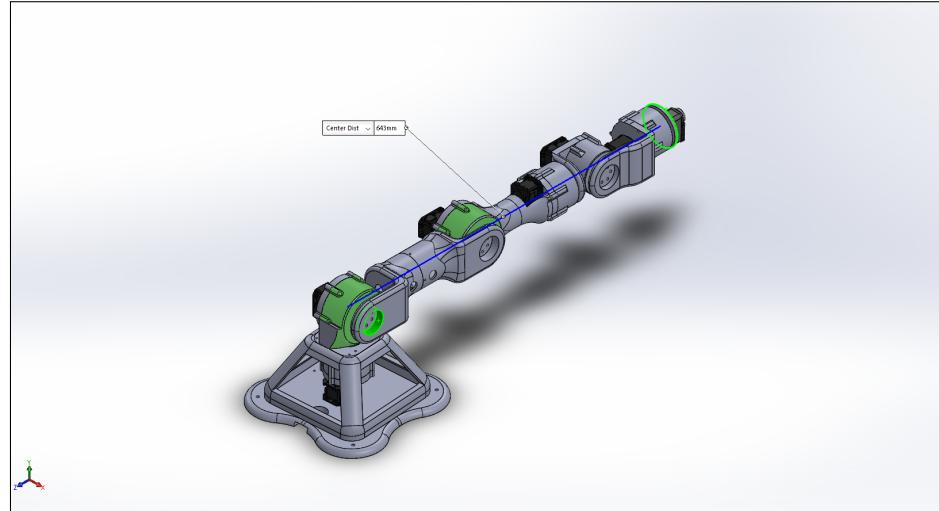


Figure 4: Solidworks Measurement of Reachable Workspace

As can be seen in Figure 4, the total reachable workspace is 643 mm. This measurement is between 300 and 700 millimeters and therefore **the manipulator meets specification 1.5a.**

Specification 1.5.b states: **The length of link one, two, three, and the wrist shall be 161.5 mm, 250 mm, 250 mm, and 143 mm respectively.** For the manipulator to meet specification 1.5.a, each link and the wrist simply need to match the lengths provided in the specification. Testing this specification requires the SolidWorks measurement tool. An example of the measurement tool being used to test this specification can be seen in Figure 5.

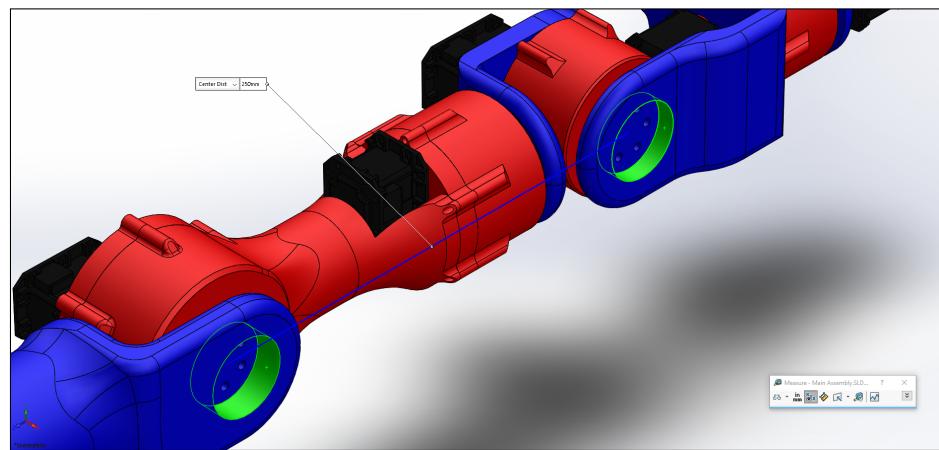


Figure 5: Test of Link Length for Specification 1.5.a.

Once the measurement tool in SolidWorks is selected, a measurement from the first joint in a link to the last joint in a link should be taken. Figure 5 shows a measurement between

joints 3 and 5, these joints make up Link 3 or the “elbow” link of the manipulator. The center distance measurement came out to be 250 mm. Once a measurement is done for each link, the center distance values are to be recorded. The variable factors in these measurements are the dimensions of the parts used to make up the link lengths. The lengths of the individual links can be seen in Table 2. These dimensions are simulated in SolidWorks.

Table 2: Measurements of Manipulator Link Lengths

Portion of manipulator measured	Measurement Value
Link 1 (Base to Joint 2)	161.5 mm
Link 2 (Joint 2 to Joint 3)	250 mm
Link 3 (Joint 3 to Joint 5)	250 mm
Wrist (Joint 5 to End Effector)	143 mm

As can be seen by Table 2, the link measurements obtained in SolidWorks match the measurements provided by specification 1.5.a and the **manipulator meets the specification.**

Specification **1.6.a** states: **The system’s workspace must contain a hemispherical shell which has a thickness of 280 mm where the robot is theoretically fully dexterous.** In order to test the dexterity of the manipulator and ensure that it fulfills specification 1.6.a, a program was created which tests a series of points for dexterity. These points are 1 millimeter apart to match the manipulator’s precision and can be rotated around the z-axis to create a hemispherical shell. It does this by calculating the inverse kinematics for the manipulator, given its dimensions, and if any point is outside of the manipulator’s workspace it is marked on a MATLAB plot, as can be seen in Figure 6.

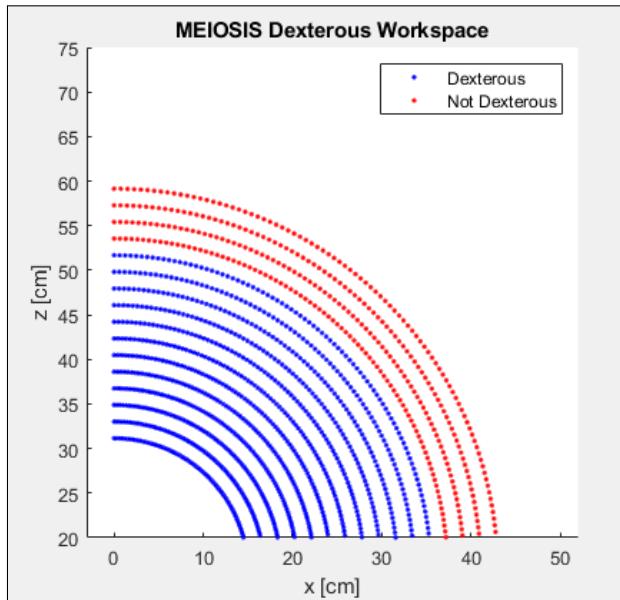


Figure 6: Matlab Plot of Invalid Dexterity Check

Figure 6 shows a failed configuration for our dexterity check. After around 35 cm away from the robot it is no longer fully dexterous in this configuration. In order to fix this, changes to the design need to be made, specifically the length of the links. Another fix would be moving the dexterous workspace closer to the base of the robot, however it cannot be moved too close since the base of the robot would be in the way. Figure 7 shows a successful dexterity check.

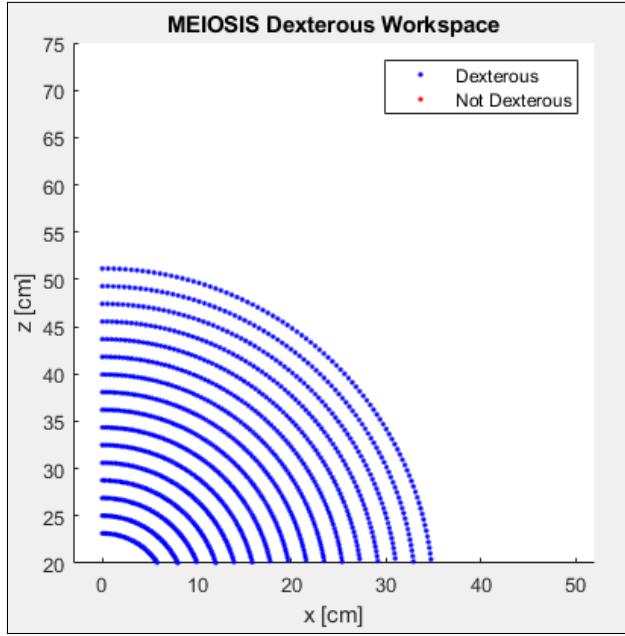


Figure 7: Matlab Plot of Successful Dexterity Check

As can be seen in Figure 7, a successful dexterity check was achieved and the requirement is met. The dexterous workspace spans from 70 mm away from the base to 350 mm away from the base and thus creates a hemispherical workspace with a thickness of 280 mm, thus **the manipulator fulfills specification 1.6.a**.

Specification **1.6.b** states: **The rotational limit of joint one, two, three, four, five, and six shall be -165° to 180°, 13.7° to 179.8°, -179.6° to -19.2°, ±180°, -180° to 0°, and ±180° respectively.** This specification is met if the links can rotate to the maximum and minimum angles provided by the specification. These angles were tested in SolidWorks using the measurement tool. The links to be measured are moved until they collide with one another and then the measurement tool is selected. Once the measurement tool is selected, the two links that form the angled are selected and the “create sensor” button is pressed. SolidWorks then provides the angle in degrees on the left sidebar. The angles for each joint are then recorded and the results of the measurements can be seen in Table 3.

Table 3 shows that the measurements for joints 3 and 5 do not meet the specification’s individual requirements for them, therefore **the manipulator does not meet specification 1.6.b**. This specification could be met following a major redesign of the

Table 3: Results of Angle Measurement Test for Specification 2.1.6.a

Joint Number	Minimum Angle	Maximum Angle	Specification Met?
1	-180°	180°	✓
2	-21°	201°	✓
3	-126°	126°	✗
4	-180°	180°	✓
5	-75°	115°	✗
6	-180°	180°	✓

system's link and joint system.

Specification **1.7a** states: **The system shall use a parallel gripper that can close to 18 mm.** To meet specification 1.7.a, a parallel gripper must be designed or purchased that can close to a minimum distance of at most 18 mm. Dynamixel offers a parallel gripper actuated by an AX-12A servo as shown in Figure 8. This can be utilized since the manipulator's end effector is designed to attach an AX-12A smart servo.

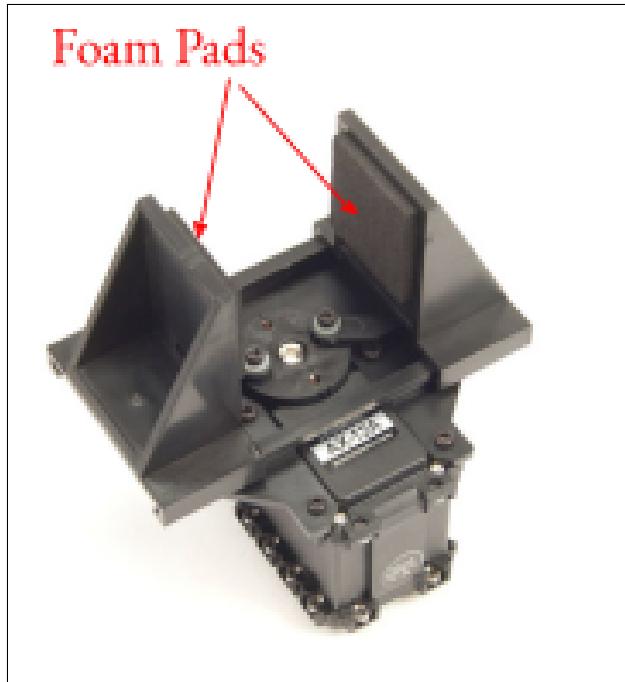


Figure 8: Dynamixel Parallel Gripper with Servo Modified from [2]

As depicted in Figure 8, the gripper is open to its widest extent. However, the gripper's fingers have removable foam pads. The foam pads allow adjustments in the gripping plasticity and the maximum opening/closure. Figure 9 shows the gripper in various configurations.

The top three gripper configurations, shown in Figure 9, are maximally closed and the bottom three are maximally open. From left to right, the fingers have no, one, and two

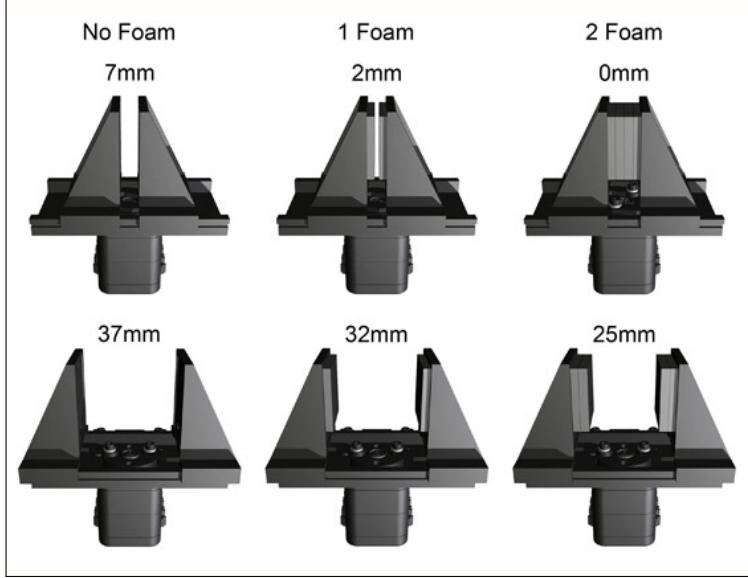


Figure 9: Dynamixel Gripper with and without Foam Padding at Minimum and Maximum Opening [2]

pieces of foam. The maximum opening is 32 mm and the minimum amount of closure is 0mm. However, these extremes require different numbers of foam pads. So, the gripper could not open to 32 mm, then, close to 0 mm solely by the servo's actuation. While none of these configurations has 18 mm between the fingers and, consequently, cannot close to 18 mm, the distance between the fingers can be adjusted as shown in Figure 10.

By sending the servo a position, the two highlighted red half-circular bars seen in Figure 8 pivot about the servo face's edges, translating the fingers either inward or outward. Clockwise rotation would decrease the distance between the fingers, while counterclockwise rotation would increase the distance. The closure's precision would be dictated by the AX-12A's resolution. Since the precision of the 18mm closing distance is not specified, it can be assumed the precision need only be sufficient to prevent the marker from being dislodged during writing, which is addressed in 1.8a. Therefore, with any number of foam pads, the gripper could close to 18 mm. With this gripper being used as an end effector attachment, **the manipulator meets specification 1.7.a**.

Specification **1.7.b** states: **The end effector shall attach to the manipulator using screws configured in a pattern that can accommodate a Dynamixel AX-12A servo.** In order to meet this specification, a dynamixel AX-12A smart servo must be compatible with the end effector's screw configuration. This can simply be tested using screws and a screwdriver. If the smart servo can successfully be screwed onto the end effector, then this specification is met. The design matches measurements acquired in the lab and parts to accommodate an AX-12A were fabricated and assembled in the lab. This is enough to say that **the manipulator meets specification 1.7.b**.



Figure 10: Dynamixel Gripper Rotational to Linear Motion Mechanism [3]

Specification **1.8.a** states: **The gripper shall be able to support 0.004 Newton meter moments about the axes normal to its gripping surfaces.** To meet specification 1.8.a, the gripper selected to be attached to the manipulator's end effector should be capable of holding an object that provides 0.004 Newton meter moments about the axes normal to its gripping surfaces. Using the same Dynamixel gripper seen in Figure 11, a test can be performed

While Dynamixel states the gripper's gripping strength is 500g, they do not specify [1]. For testing, we can consider the convenient coordinate frame shown in Figure 9. Specifically, when writing, moments caused by the Expo marker's contact force with paper can be decomposed along these axes. In the best case scenario, the marker provides force parallel to and perpendicular to the gripping plane denoted by PL and PD respectively. To test this specification, a set of masses and an expo marker are required. First, the servo would be commanded to close the gripper on the expo marker and the masses would be gradually hung from the end of the expo marker. The moment could be calculated as more mass is added and if the marker is observed to slip or rotate, the moment is too large for the gripper. The gripper would be tested at different angles, grip force, and number of pieces of foam attached, as can be seen in Figure 7. Due to unforeseen circumstances, **adherence to specification 1.8.a cannot be determined.**

Specification **2.1.a** states: **The software shall be hosted publicly on an online repository and maintain an MIT license for distribution.** To satisfy this requirement, the software used to control the robot must be open source and publicly accessible; the use of the code repository GitHub allows for the former easily; by using the MIT licensing, the latter is accomplished, and possible legal implications due to misuse can be avoided. The license allows the end-user to modify, redistribute, or do with the code basically however they please: "...without limitation the rights to use, copy, modify, merge,

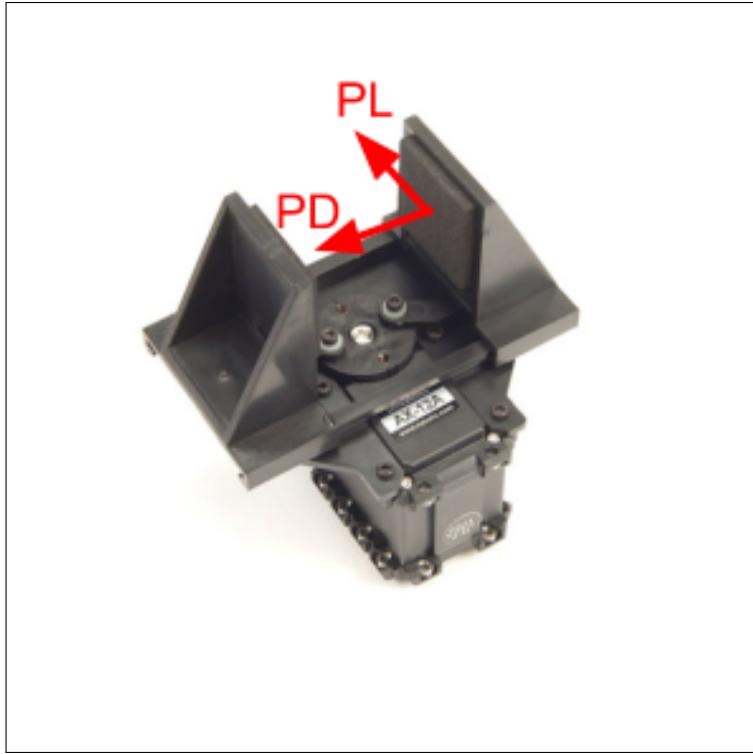


Figure 11: Dynamixel Parallel Gripper with Servo Modified from [2]

publish, distribute, sublicense, and/or sell copies of the Software...”[4] This makes it such that any end-user that makes a system with the manipulator, i.e. repurposes the given system for a task, has no limitations with how they wish to redistribute, share, or even sell the system. To implement the use of the license, all that must be done is the source code must contain the proper header including, shown by MIT [4], which was completed, as well as the code is hosted in a public GitHub repository. Therefore **the system fulfills specification 2.1.a.**

Specification **2.2.a** states: **The system shall have a user interface capable of accepting the end-effector’s desired cartesian position and Euler angle orientation as a six element row vector.** In order to satisfy specification 2.2.a, python scripts have been methodically developed to allow for user input of desired end effector position. These scripts could potentially be used as a backend for a graphical user interface (GUI) to further simplify the process of controlling the manipulator.

In lieu of a python based GUI directly controlling the manipulator, a GUI could be created to instead control an animated simulation of the manipulator. The simulation is currently generated by a MATLAB script which draws the robot STL files into a figure window—the possibilities of controlling the simulation consist of several options, the most efficient would likely be to develop a user interface entirely with MATLAB. This avoids possible incompatibilities on systems without Python installed and avoids any communication issues that could incur with attempting to create the GUI in another language.

The best option is to have a MATLAB GUI control the MATLAB simulation, therefore a basic interface shall be created in which the user can select which control scheme is desired as well as goal positions for the end effector. A sample GUI can be seen in Figure 12.

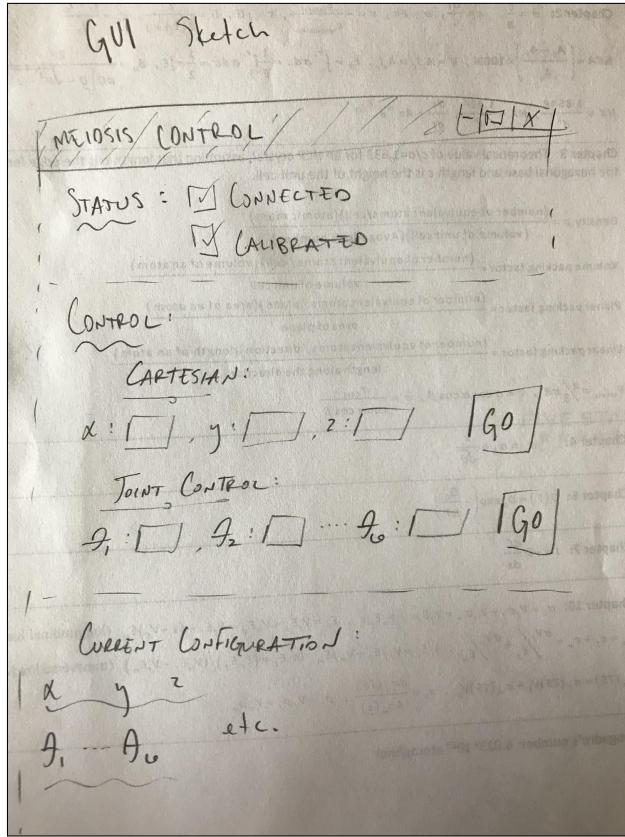


Figure 12: GUI Template

As shown in Figure 12, the GUI will have desired cartesian end effector positions, such as an X, Y, and Z for the end effector position, as well as an end effector orientation input, i.e., phi, theta, and psi. The input will closely resemble the input of a 6 element row vector. The interface will also have user selectable direct joint controls, rather than the system performing the inverse kinematic calculations for the user. The interface will also display status indicators showing whether the robot is calibrated as well as the current manipulator configuration.

In order to test this specification, several points within the workspace will be selected as well as at least 3 points outside of the workspace for the purpose of error checking. The points (in cartesian XYZ and Euler angles) are chosen randomly. These points are then given to the user interface, which will return joint angle values. The same randomly generated coordinates will be given to the verified kinematics functions, and the outputs will be compared to the output of the UI to check for validity.

Due to uncertainties in the design caused by recent events, development for this user

interface has been stopped and verification of its accuracy can not be determined. Therefore, **adherence to specification 2.2.a cannot be determined.**

Specification **2.2.b** states: **The system shall be capable of performing floating point arithmetic.** In order to fulfill specification 2.2.b, a computational system must be selected that can perform floating point arithmetic. The Raspberry Pi 3b+ includes an ARM Cortex A-53 [5], which is capable of performing high-speed floating point arithmetic [1]. Based on this fact, **the manipulator meets specification 2.2b.**

### 3 Further Testing

In order to determine how useful the harmonic gearboxes are, each gearbox must be fatigue tested. The procedures for both the 1/39 ratio gearbox and the 1/20 gearbox are essentially the same, with the only difference being the load applied to each one. To run the test, each gearbox will be fitted with a load that represents the maximum resting force that the individual gearbox will have to support. For the 1/39 gearbox, the weight applied will be equivalent to the weight the manipulator must support in the shoulder joint. For the 1/20 gearbox, the gearbox will be loaded with the weight the manipulator must support in the elbow joint.

Once the load has been applied, the gearboxes will be set to run repeatedly at full speed from  $0^\circ$  to  $180^\circ$ , then back to  $0^\circ$  to maximize the torque being applied to each gearbox. The test will run for eight hours or until the gearbox breaks, after which data will be collected and analyzed.

In order to collect useful data from the fatigue tests, certain measurements must be taken. Before the fatigue test both the height and width of 4 teeth at  $90^\circ$  angles from each other will be measured and marked, then measured again after the tests to determine the wear the gearbox may go through. A visual inspection of the gearbox will also be conducted to determine if there is any shavings of material in the gearbox.

To test how gearbox fatigue will affect error, the PhaseSpace motion capture system will be utilized to determine any drift from the exact angle. Since the length of each load is known, a PhaseSpace marker can be placed at the end of each load so the motion capture system can see the location of the end of the link. The marker will be placed in a slightly recessed divot on the end of the link in order to make the forward kinematics calculations more exact. Another marker will be placed at the center of the motor cap, again placed within a small divot. This will allow us to determine the angle of the load by comparing the positions of the end of the load to the center of rotation. While the fatigue test is running, the motion capture system will capture data at each  $0$  and  $180^\circ$  position, and the actual angle will be plotted vs time to show any drift or error that occurs.

## 4 Conclusion

Table 4 summarizes the results of the tests performed throughout the course of this semester.

Table 4: Summary of Test Results

Specification Tested	Specification Met?
1.1.a	✓
1.2.a	✓
1.2.b	✓
1.3.a	Cannot be Determined
1.4.a	Cannot be Determined
1.4.b	Cannot be Determined
1.4.c	Cannot be Determined
1.5.a	✓
1.5.b	✓
1.6.a	✓
1.6.b	✗
1.7.a	✓
1.7.b	✓
1.8.a	Cannot be Determined
2.1.a	✓
2.2.a	Cannot be Determined
2.2.b	✓

# Appendix

Listing 1: MATLAB Script For Dexterity Check

---

```
1 % Checks inverse kinematics to verify MEIOSIS robot has the correct
2 %   dextrous workspace.
3
4 clear all
5 close all
6 clc
7
8 %define resolutions and constants
9 xres = 5;           %Cartesion resolution in x direction
10 tres = 15;          %Rotational resolution
11 eOff = [0;0;5.25]; %End effector offset in cm
12 rInner = 19;        %Inner radius of dexterous workspace
13 rOuter = 47;        %Outer radius of dexterous workspace
14 theta = linspace(0,90,91); %Elevation angle
15 L = rInner:xres:rOuter; %Line of points to check
16 errorPos = zeros(3,length(L),length(theta));
17 desPos = zeros(3,length(L),length(theta));
18
19 for jj = 1:length(theta)
20     %Define desired cartesion end effector positions
21     desX = cosd(theta(jj)).*L;
22     desY = zeros(1,length(desX));
23     desZ = sind(theta(jj)).*L + 22.08;
24
25     %Iterate through all positions and orientations
26     count = 1;
27     for ii = 1:length(desX)
28         for tx = deg2rad(0:tres:180)
29             for tz = deg2rad(0:tres:360)
30                 desR = rotz(tz)*rotx(tx);
31                 desPos(:,ii,jj) = [desX(ii);desY(ii);desZ(ii)];
32                 [gamma{count},error] = MeiosisIK2(desPos(:,ii,jj),desR);
33                 if error == 1
34                     errorPos(:,ii,jj) = [desX(ii);desY(ii);desZ(ii)];
35                     break
36                 else
37                     count = count + 1;
38                 end
39             end
34             if error == 1
35                 break
36             end
37         end
38     end
39 
```

```

43     end
44     if error == 1
45         count = count + 1;
46     end
47 end
48 if error == 0
49     gammaM(:,:,jj) = cell2mat(gamma);
50     for ii = 1:6
51         jointMin(ii) = rad2deg(min(gammaM(ii,:,:jj)));
52         jointMax(ii) = rad2deg(max(gammaM(ii,:,:jj)));
53     end
54     limits(:,:,jj) = [jointMin;jointMax];
55 end
56 end
57
58 %Determine the maximum and minimum joint angle requirements
59 for ii = 1:6
60     totalJointLimits(1,ii) = min(limits(1,ii,:));
61     totalJointLimits(2,ii) = max(limits(2,ii,:));
62 end
63 totalJointLimits
64
65 %Error plot
66 figure(1)
67 axis equal
68 axis([-3 52 20 75])
69 hold on
70 title('MEIOSIS Dexterous Workspace')
71 xlabel('x [cm]')
72 ylabel('z [cm]')
73
74 for jj = 1:length(theta)
75     for ii = 1:length(L)
76         plot(desPos(1,ii,jj),desPos(3,ii,jj),'b.');
77         plot(errorPos(1,ii,jj),errorPos(3,ii,jj),'r.');
78
79     end
80 end
81
82 pd = plot(0,0,'b.');
83 pe = plot(0,1,'r.');
84 pd.DisplayName = 'Dexterous';
85 pe.DisplayName = 'Not Dexterous';
86 legend([pd;pe], 'Location', 'northeast')
87

```

```
88 print('DexterityWithOffset.pdf', '-dpdf')
89 %
90 % % Uncomment to animate
91 % for ii = 1:length(gamma)
92 %     meiosis_draw(gamma{ii})
93 %     hold on
94 %     plot3(desX,desY,desZ, 'r.')
95 %     pause(0.01)
96 % end
```

---

# References

- [1] URL <https://developer.arm.com/ip-products/processors/cortex-a/cortex-a53>.
- [2] . URL [https://www.trossenrobotics.com/p/phantomx-parallel-gripper.aspx?feed=Froogle&gclid=EAIaIQobChMl\\_6Wsu3B6AIVJoNaBR3l3A\\_2EAQYASABEgK1o\\_D\\_BwE](https://www.trossenrobotics.com/p/phantomx-parallel-ax12-gripper.aspx?feed=Froogle&gclid=EAIaIQobChMl_6Wsu3B6AIVJoNaBR3l3A_2EAQYASABEgK1o_D_BwE).
- [3] . URL <https://www.trossenrobotics.com/productdocs/assemblyguides/phantomx-parallel-gripper.html>.
- [4] URL <https://opensource.org/licenses/MIT>.
- [5] URL <https://static.raspberrypi.org/files/product-briefs/200206+Raspberry+Pi+3+Model+B+plus+Product+Brief+PRINT&DIGITAL.pdf>.