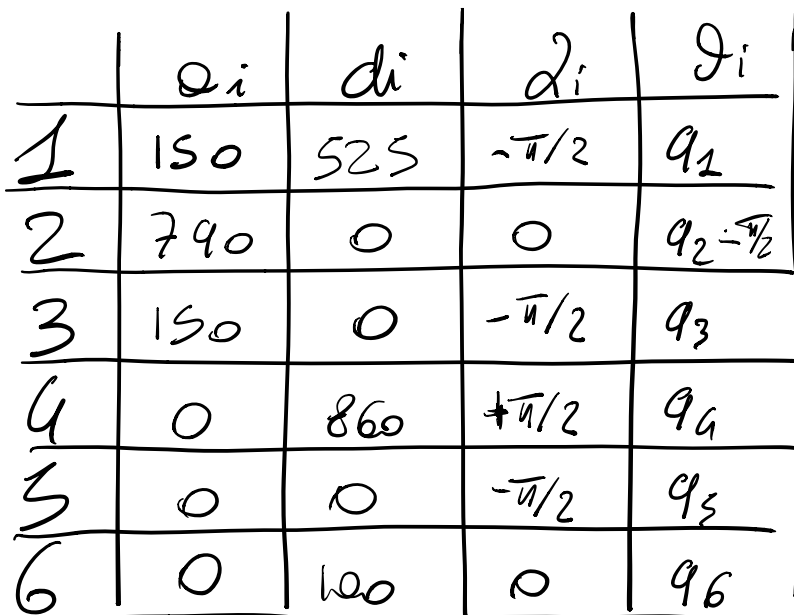


Note 1) In case of angle mounting, J1 and J2 axis motion range are restricted.
 Note 2) In case of short distance motion, the axis speed may not reach the maximum value stated.
 Note 3) Compliant with ISO 9283.
 Note 4) Without controller


$$\mathcal{G}_i: X_{i-1} \rightarrow X_i \text{ intorno a } z_{i-1}$$