


EcoX

EcoX eliminates the logistical headaches and high shipping cost associated with traditional rail based systems. Streamlined designs and preassembled components enable a faster installation at a lower price/watt.

4 main components




Clamp



Coupling



Flashing Kit

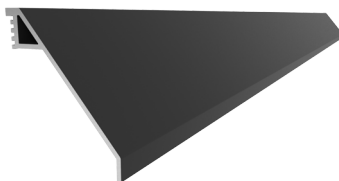

Skirt


Benefits of Design:

- Rail-less
- Certified to UL 2703 Subject
- Integrated Grounding
- Preassembled Components
- Low Shipping Cost
- Quick Installation




The low part count, one lag screw and only standard driver bits, brings unparalleled simplicity and speed to mounting systems. EcoX, accompanied by a 15 year warranty, will accelerate your installations resulting in more profits and fewer headaches.

EcoX

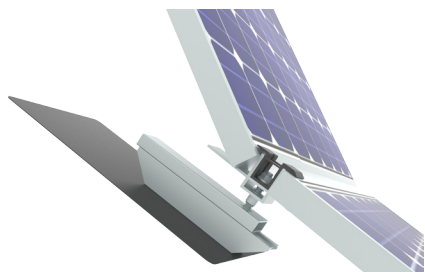


Lay-in Accessibility:

Different opening distances on each side of the clamp and an extended North ledge enable tightening on the Southern edge while leaving the Northern edge free to slide. This facilitates one man installations on a sloped roof.

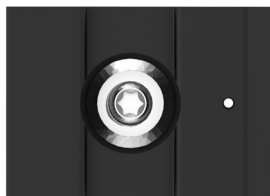


Leveling Adjustability:

The top of the clamp allows for 1" leveling post module installation.

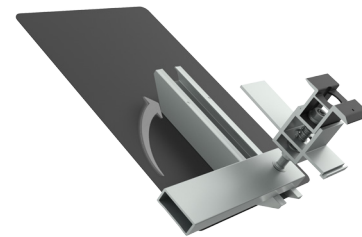

Lock and Bond:

With a quick twist, the clamp assembly is locked into the flashing kit and integrated grounding is achieved.

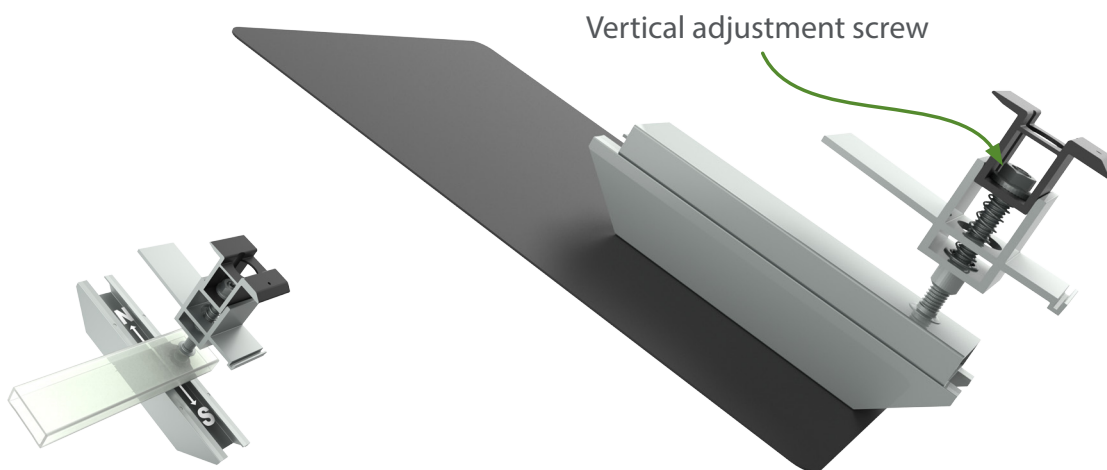


North South Adjustability:

EcoX lower support provides 4½" of NS adjustability.

Vertical adjustment screw

Optional Accessories

- Micro Inverter Brackets
- Wire Management
- Junction Box Mounts

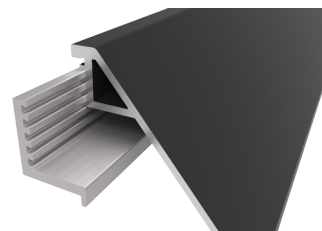

Skirt Adjustability:

The adjustable skirt accommodates different module thicknesses and delivers a clean finished look.

