

## **100A Meter Socket**


## U5929 Ring Type & U5934 Ringless

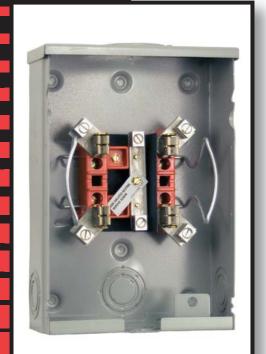

U5934-XL

- Designed for solar applications
- 100 amp continuous rating
- 4 terminal, 1Ø3W
- #12 AWG 1/0 AWG CU7AL wire range
- Isolated neutral option
- UL Listed
- Type 3R construction for durable outdoor use, lockable and sealable
- Wire terminations accept copper or aluminum conductors
- Accepts standard meter socket hubs









## 100A METER SOCKET - 103W - RING TYPE AND RINGLESS

CATALOG NUMBER	SERVICE	HUB	CONNECTORS CU/AL		BYPASS	DIMENSIONS			CONCENTRIC KO'S			
			LINE	LOAD	DITAGO	D''	W''	н''	1	2	3	4
U5929-XL	OH/UG	C.P.	#12 - 1/0 AWG	#12 - 1/0 AWG	NONE	3 5/16	8	11.5	1.5"	2"	1/4"	1 1/4"
U5934-XL	OH/UG	C.P.	#12 - 1/0 AWG	#12 - 1/0 AWG	NONE	3 1/16	8	11.5	1.5"	2"	1/4"	1 1/4"

Phone: 816.483.5314

Fax: 816.483.6357

www.milbankmfg.com

5929/5934 4/10 (1K)



