



USB C connector; applied
required 5K1 resistors
for CC pins;
using ESD protection



Crystal oscillator
FT232 datasheet recommends
12MHz using stability
30ppm, CL 10pF;
using calculated
12pF 25V NP0
capacitors

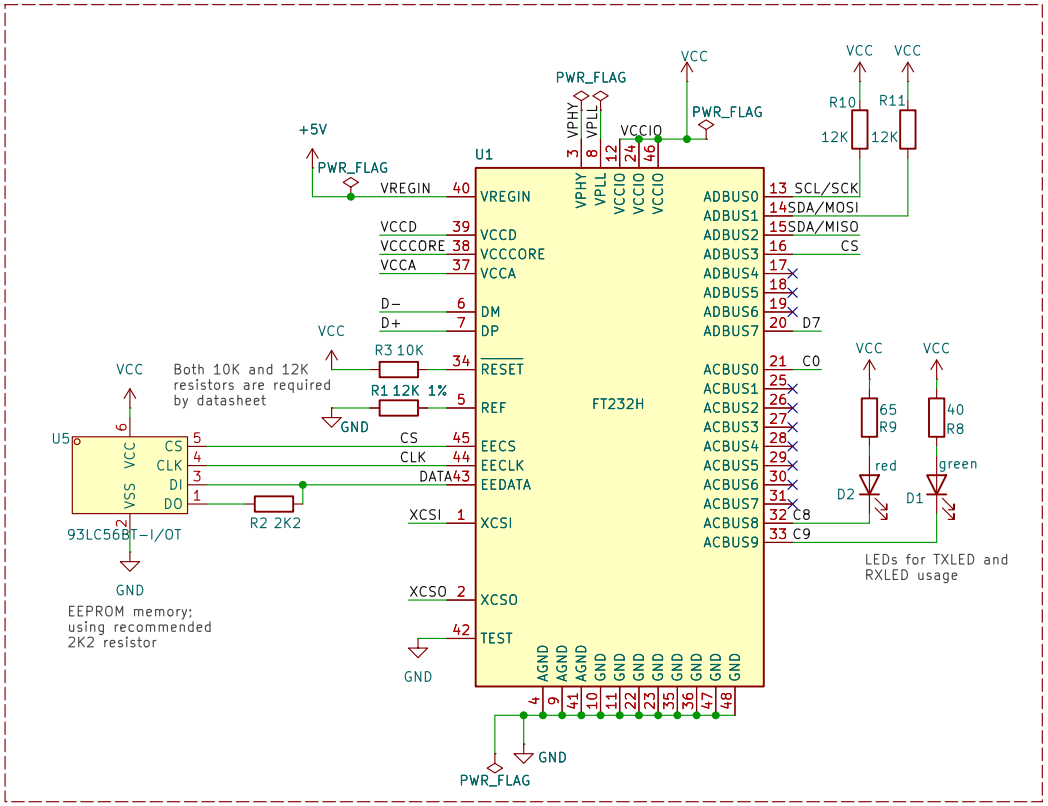


Both 10K and 12K
resistors are required
by datasheet


EEPROM memory;
using recommended
2K2 resistor

LEDs for TXLED and
RXLED usage

FT232H USB to Multipurpose
UART/FIFO IC

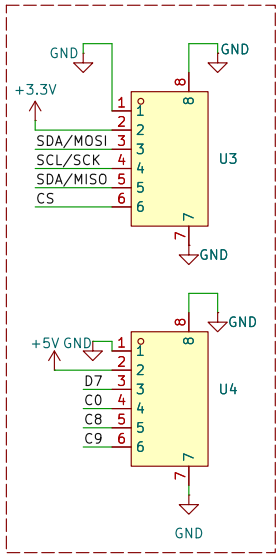


JST connectors

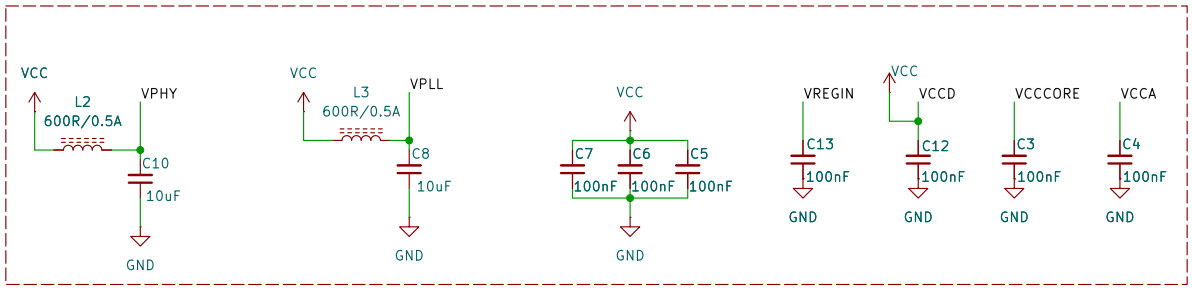

Power Supply / Decoupling
According to FT232H datasheet

Both 10uF and 100nF are ceramic capacitors

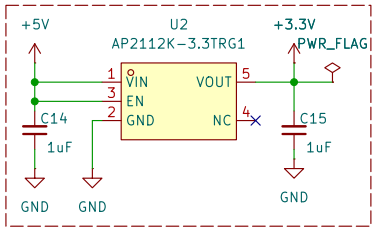

LDO used to get 3.3V
without relying on
FT232H internal LDO

Sheet: /
File: usb_to_multipurpose.kicad_sch

Title: USB to multipurpose

Size: A4	Date: 2026−11−04	**Rev:** v1.0
KiCad E.D.A. 10.0.7		Id: 1/1