




# $T_{\text{max}}$ of crossed pads

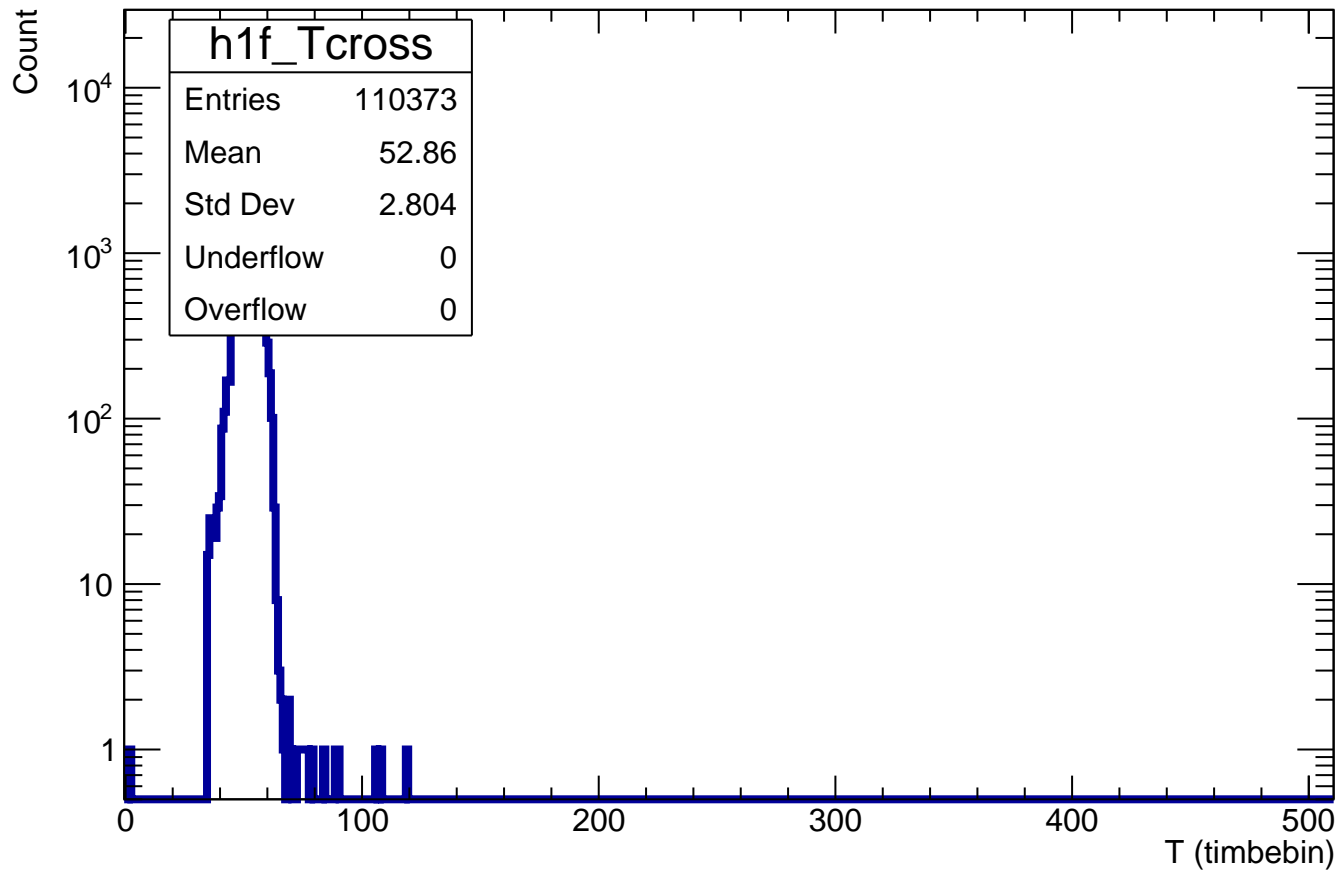

# Number of crossed pads

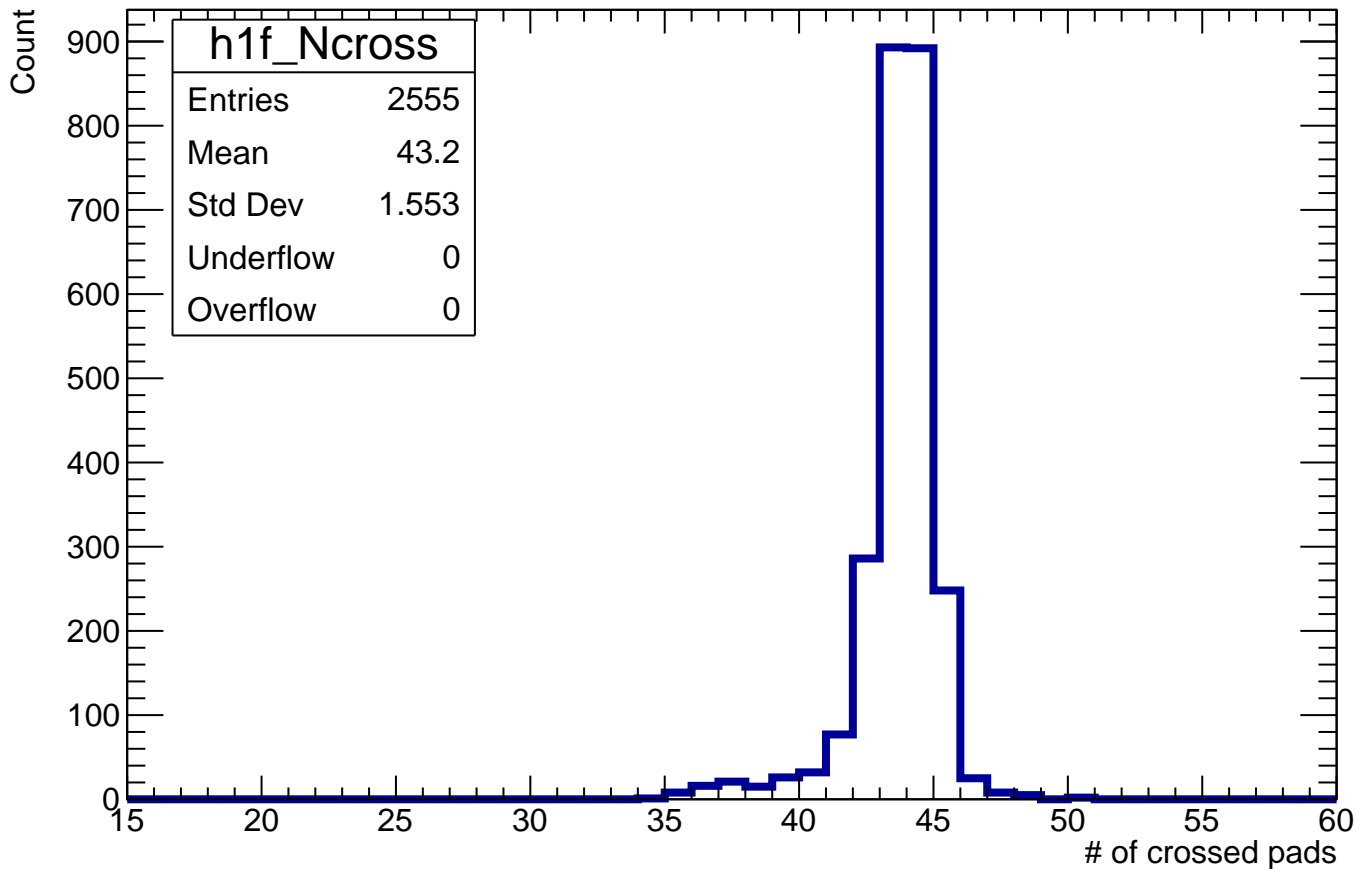


$$\Sigma(Q)/\Sigma(\text{length}) - \text{mean}\{Q/\text{length}\}$$

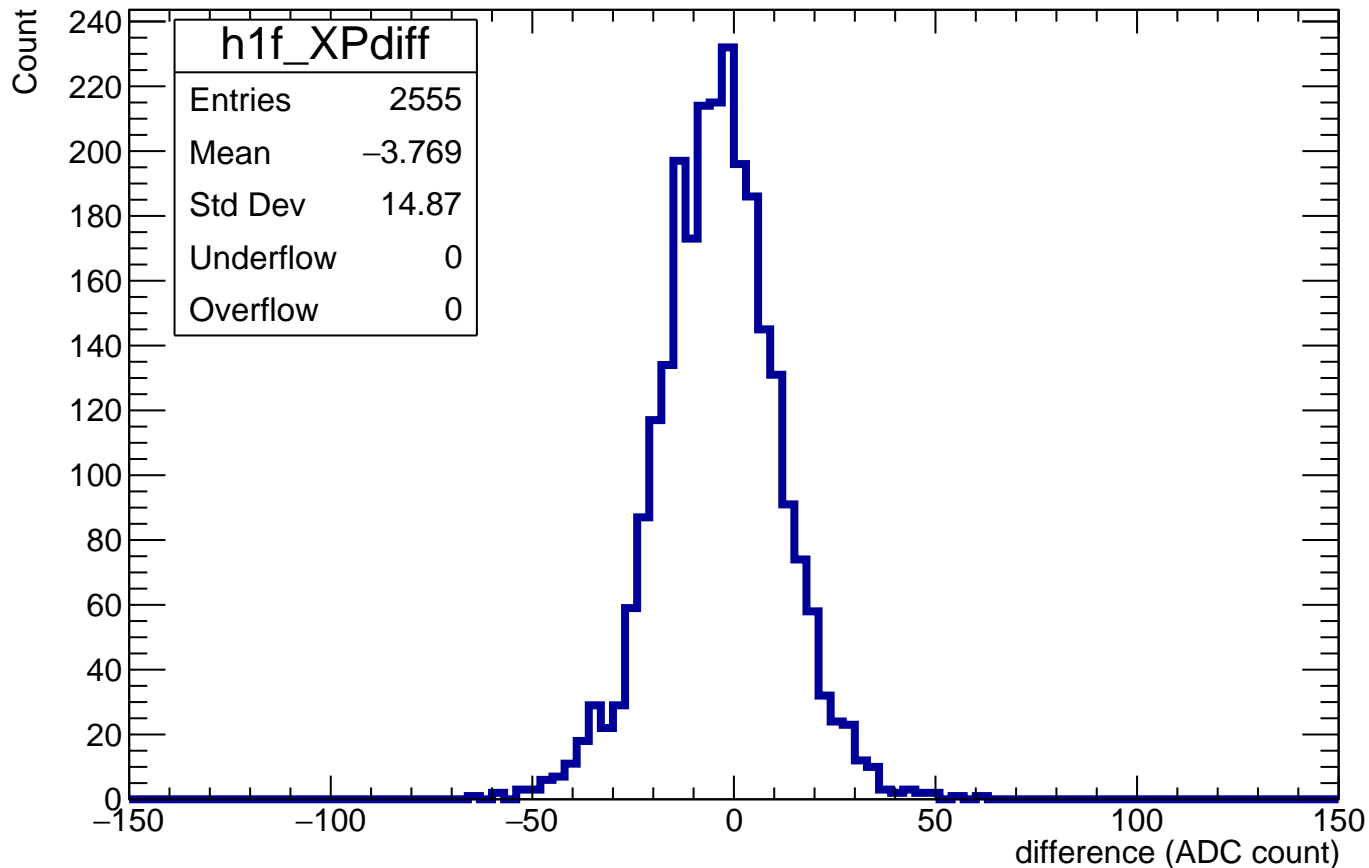


$$Z_{\text{file}} = 50\text{mm} - Z_{\text{computed}}$$


Count

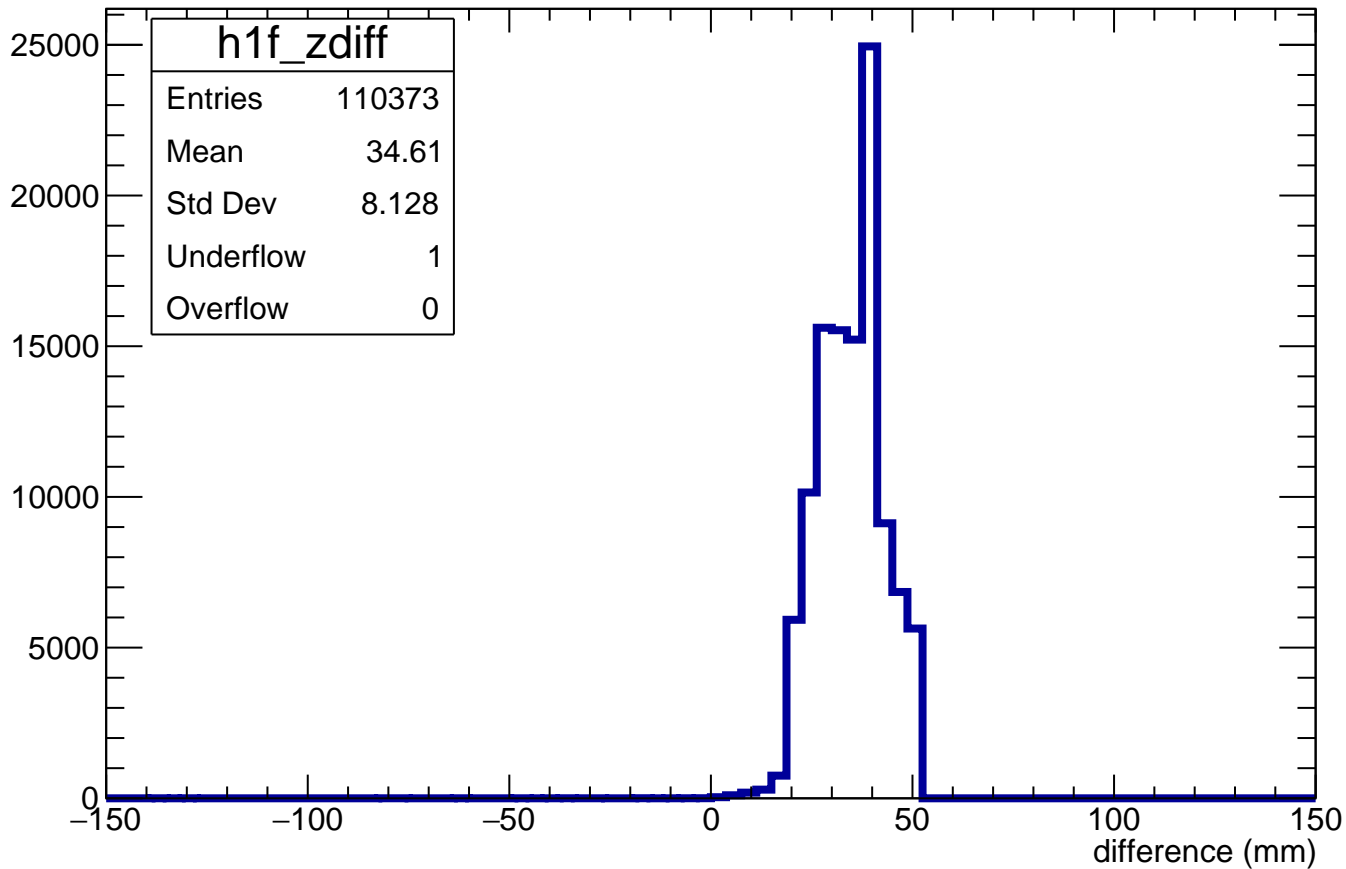


# Angle $\phi$ in each pad

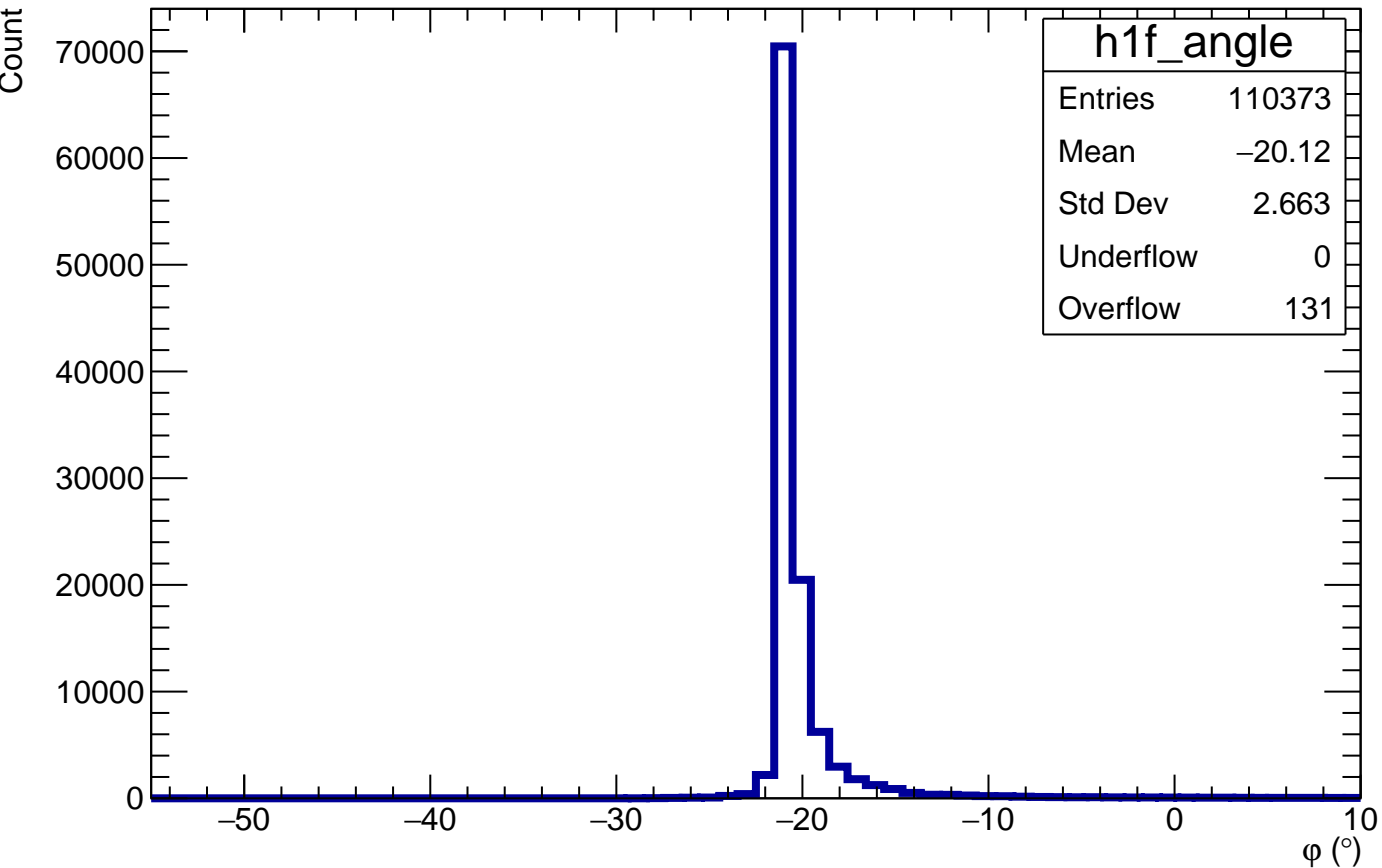


Length in pad normalized to maximum length in pad for a given  $\phi$

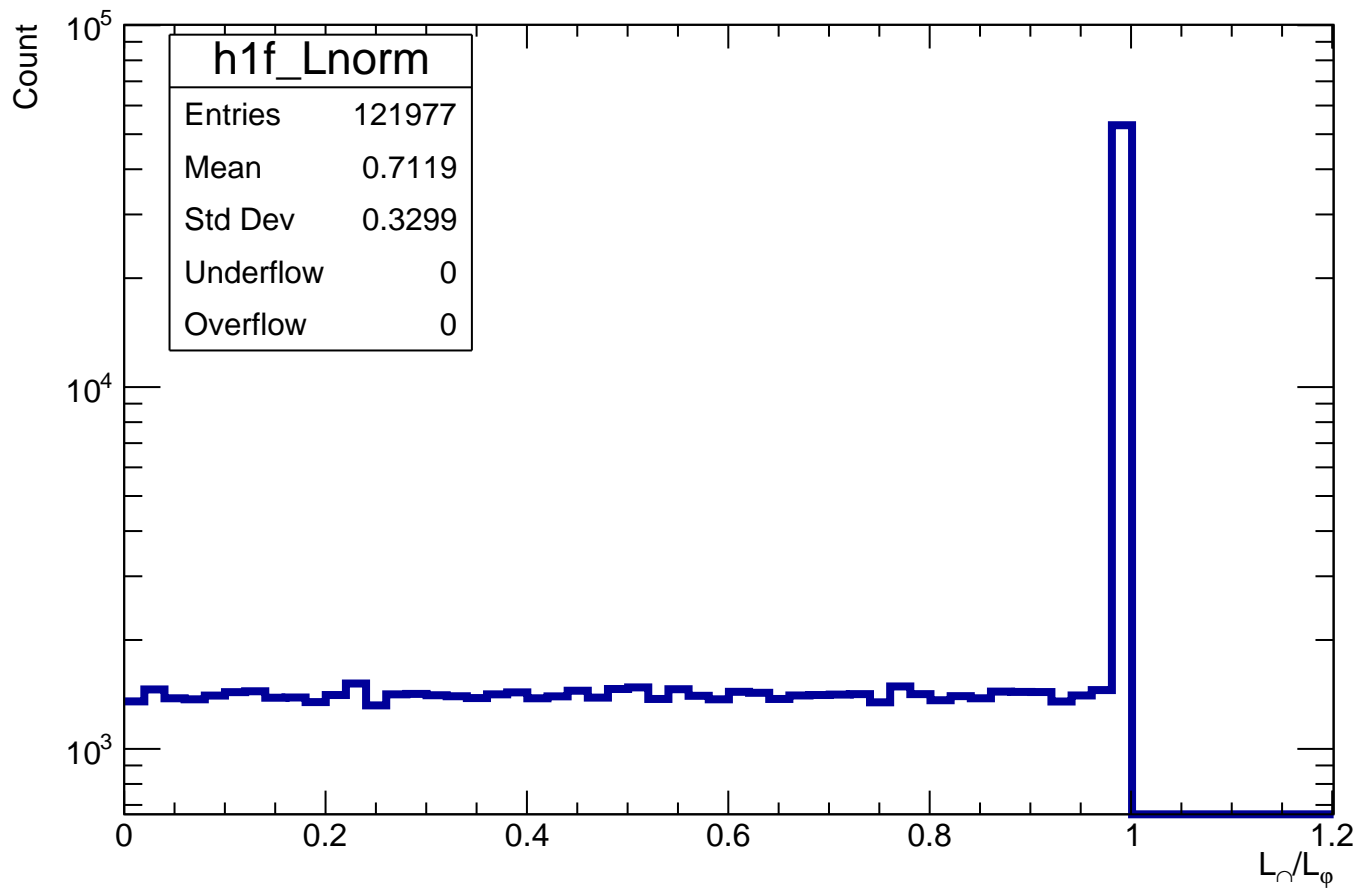

# Normalized impact parameter $d/d_{\text{max}}$

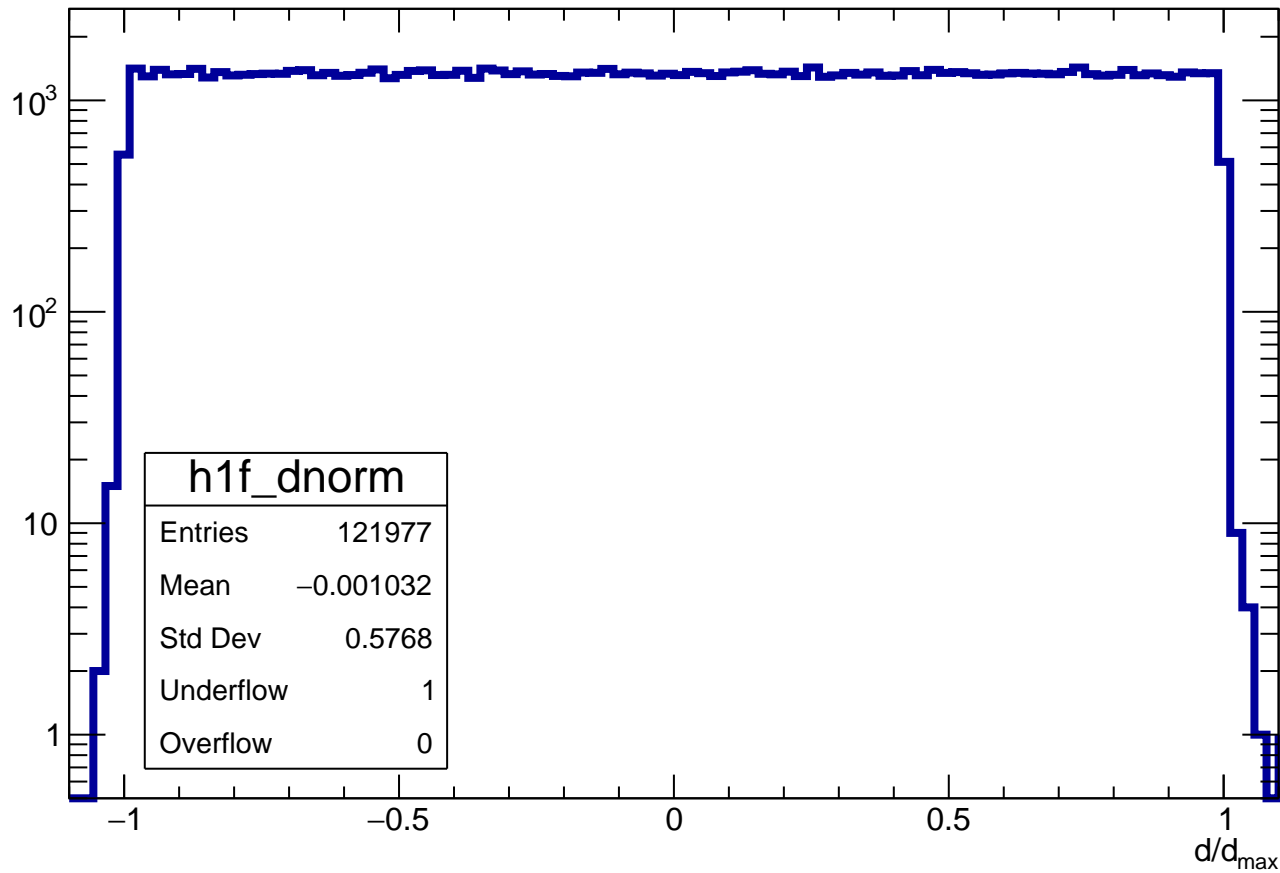


# distance of track in pad

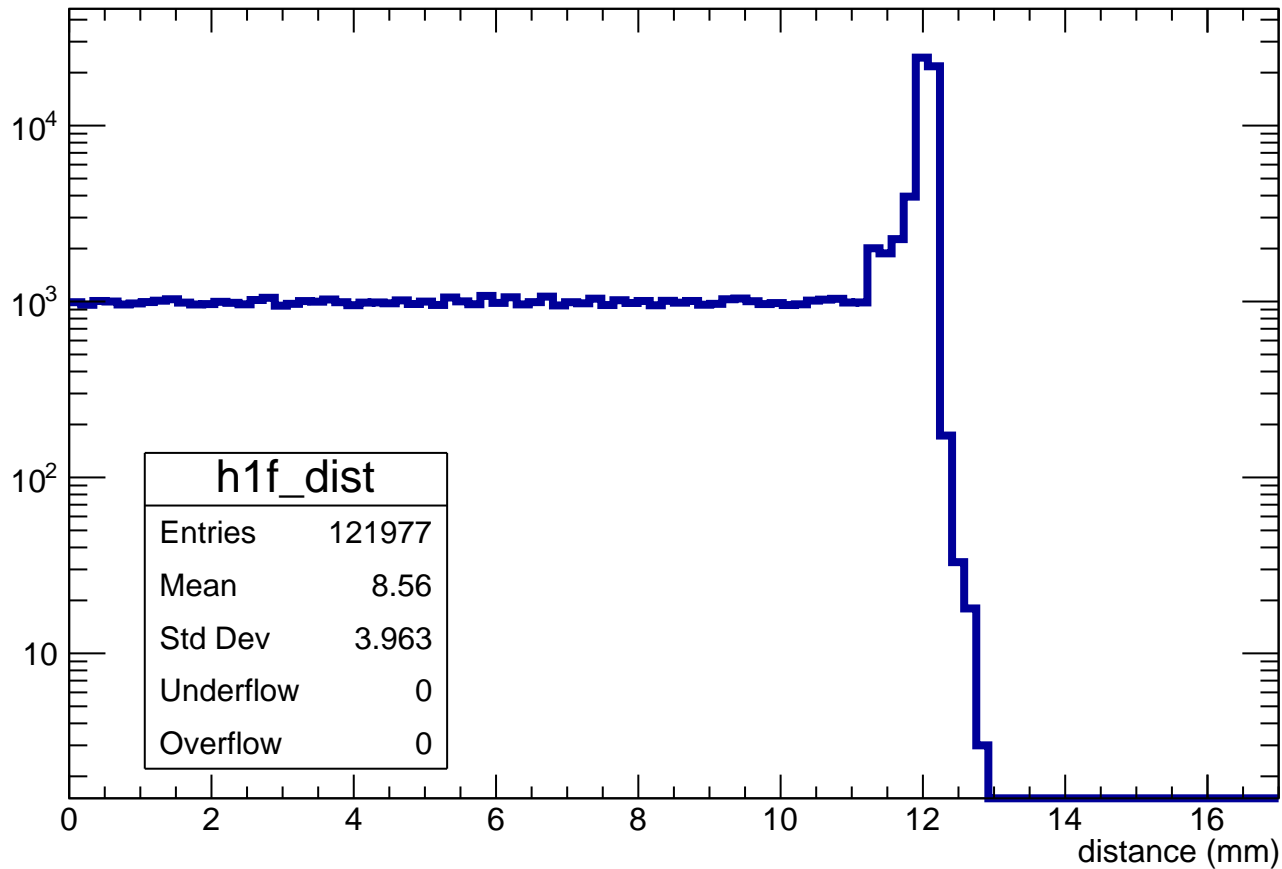




distance of track in cluster

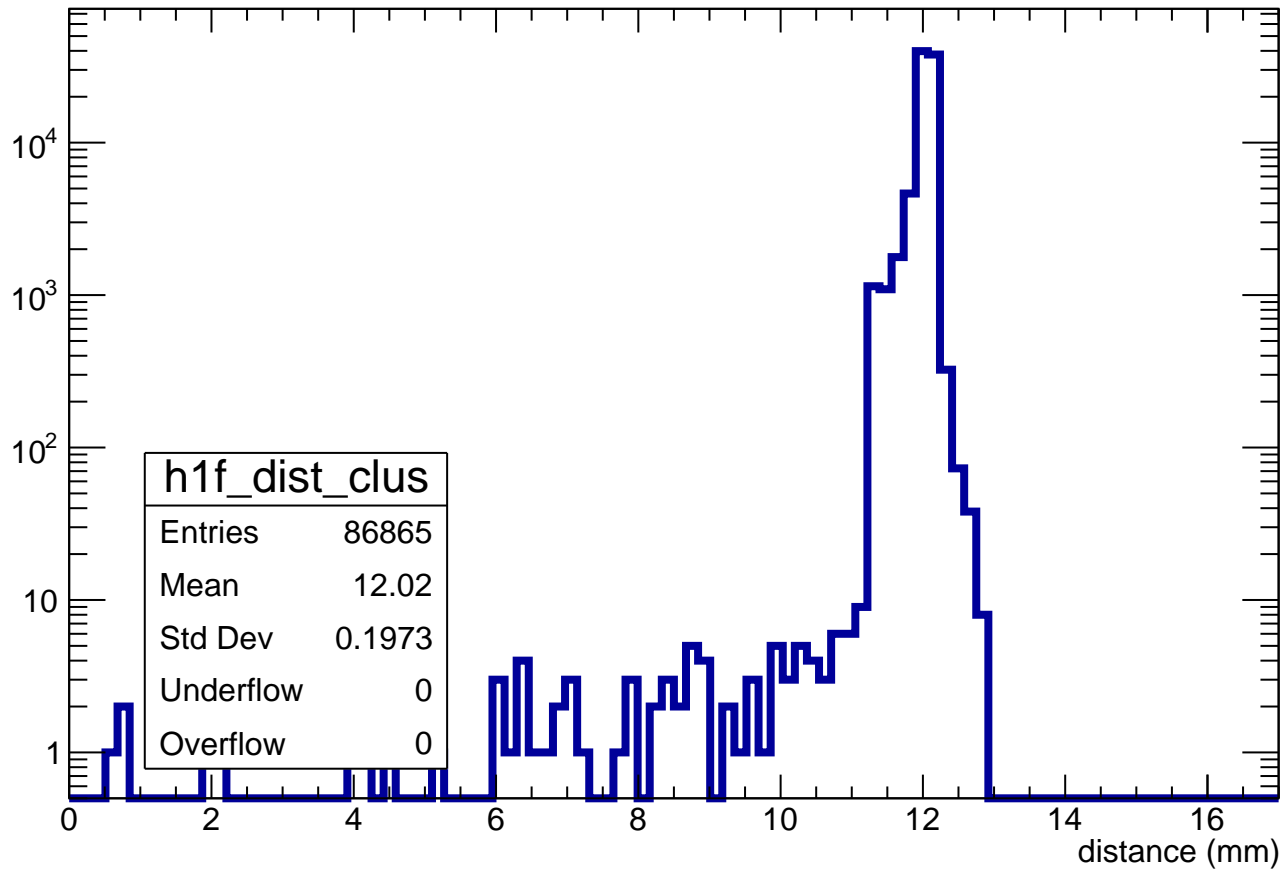


# Correction $A_{\text{max}}$ ratio

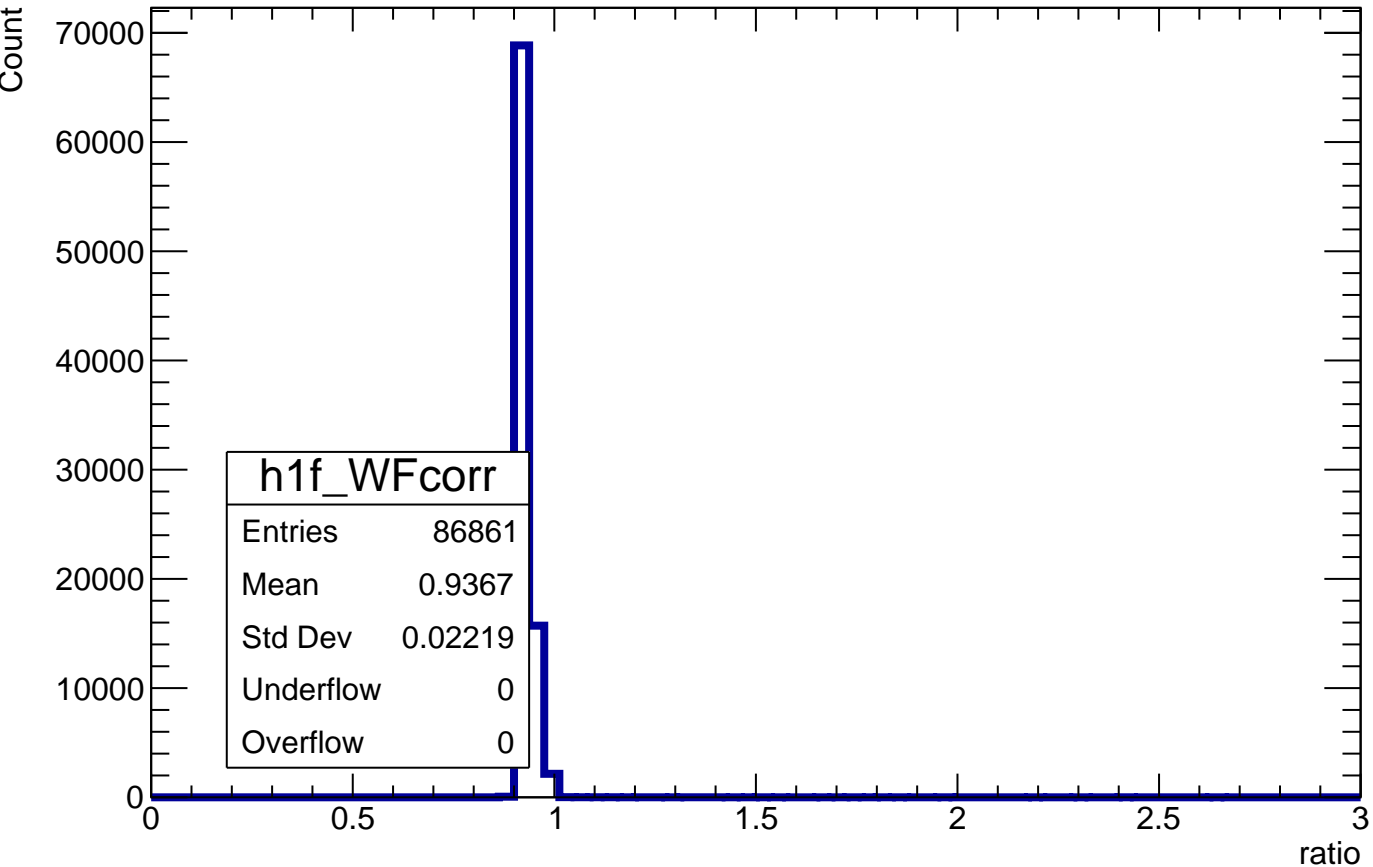


$$L_{\text{ERAM}} \cdot 0.7 - \sum L_{\text{clus} > 2\text{mm}}$$

Count

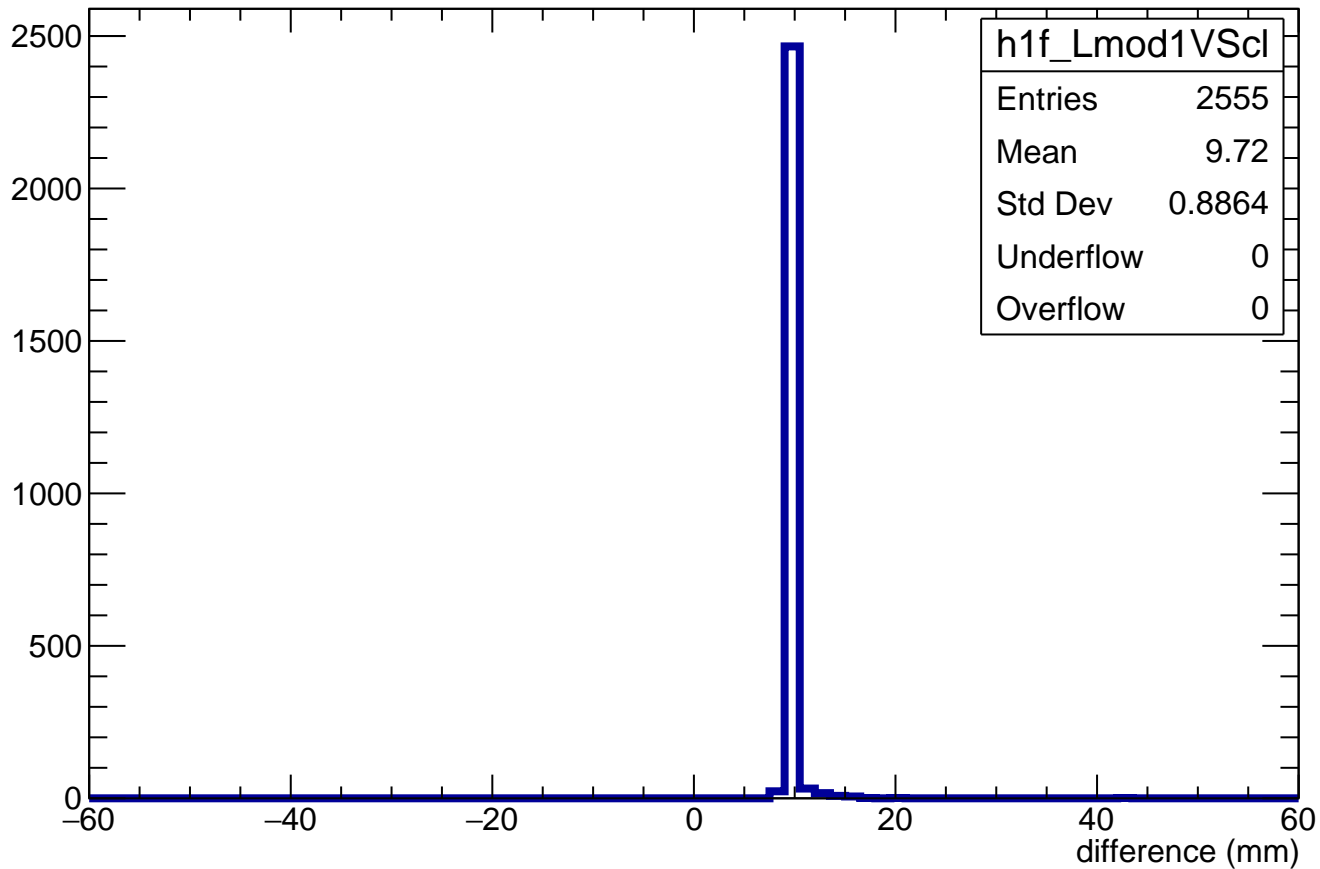

$$L_{\text{ERAM}} * (N_{\text{trunc cross}} / N_{\text{clus cross} > 2\text{mm}}) - \sum L_{\text{clus} > 2\text{mm}}$$

Count

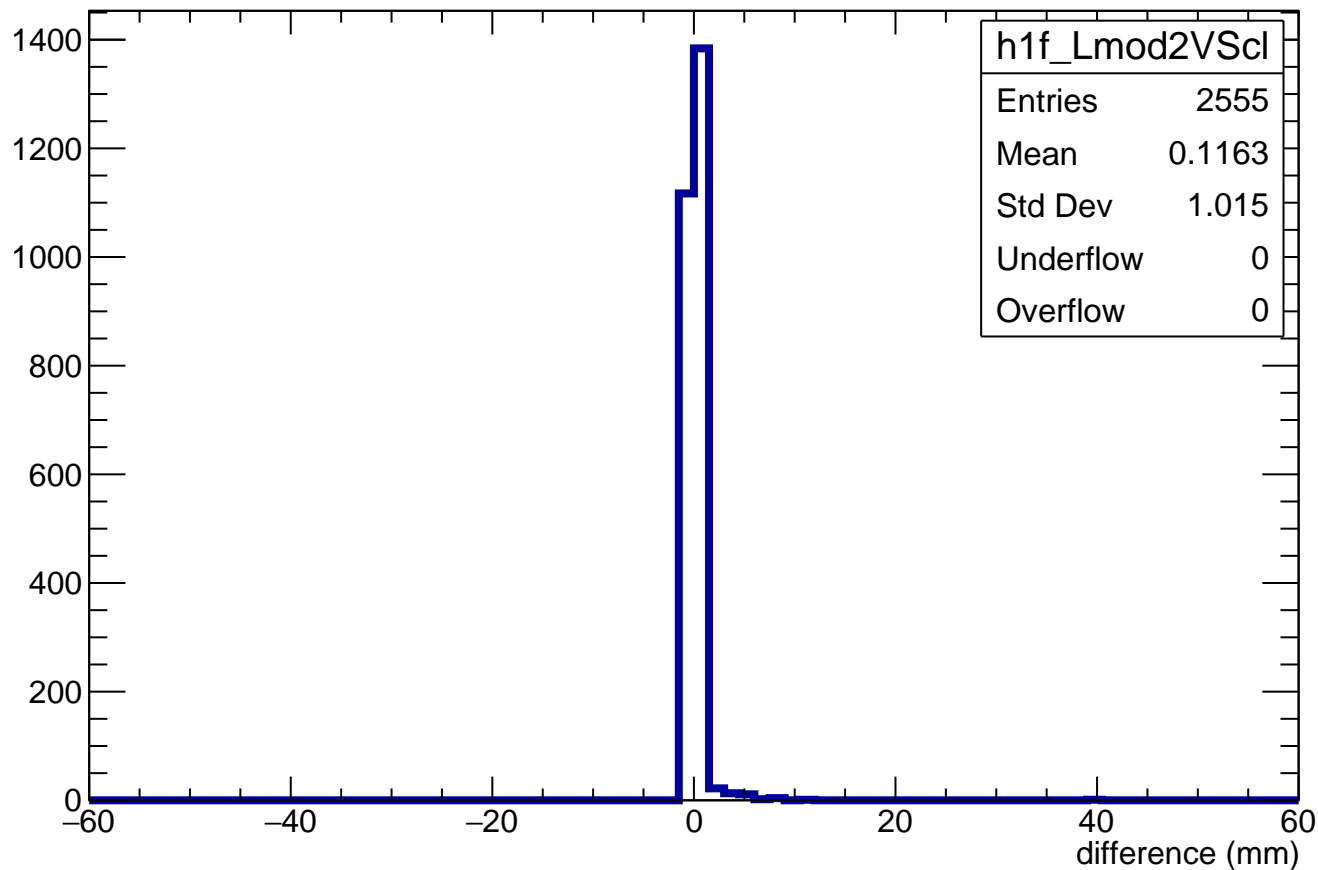

$L_{\text{clusters}} - L_{\text{clusters} > 2\text{mm}}$

Count

1200

1000

800

600

400

200

0

-60

-40

-20

0

20


40

60


difference (mm)

h1f_LallVScI	
Entries	2555
Mean	0.001611
Std Dev	0.0461
Underflow	0
Overflow	0


# LUT( $z_{\text{file}}$ ) vs LUT( $z_{\text{calc}}$ )

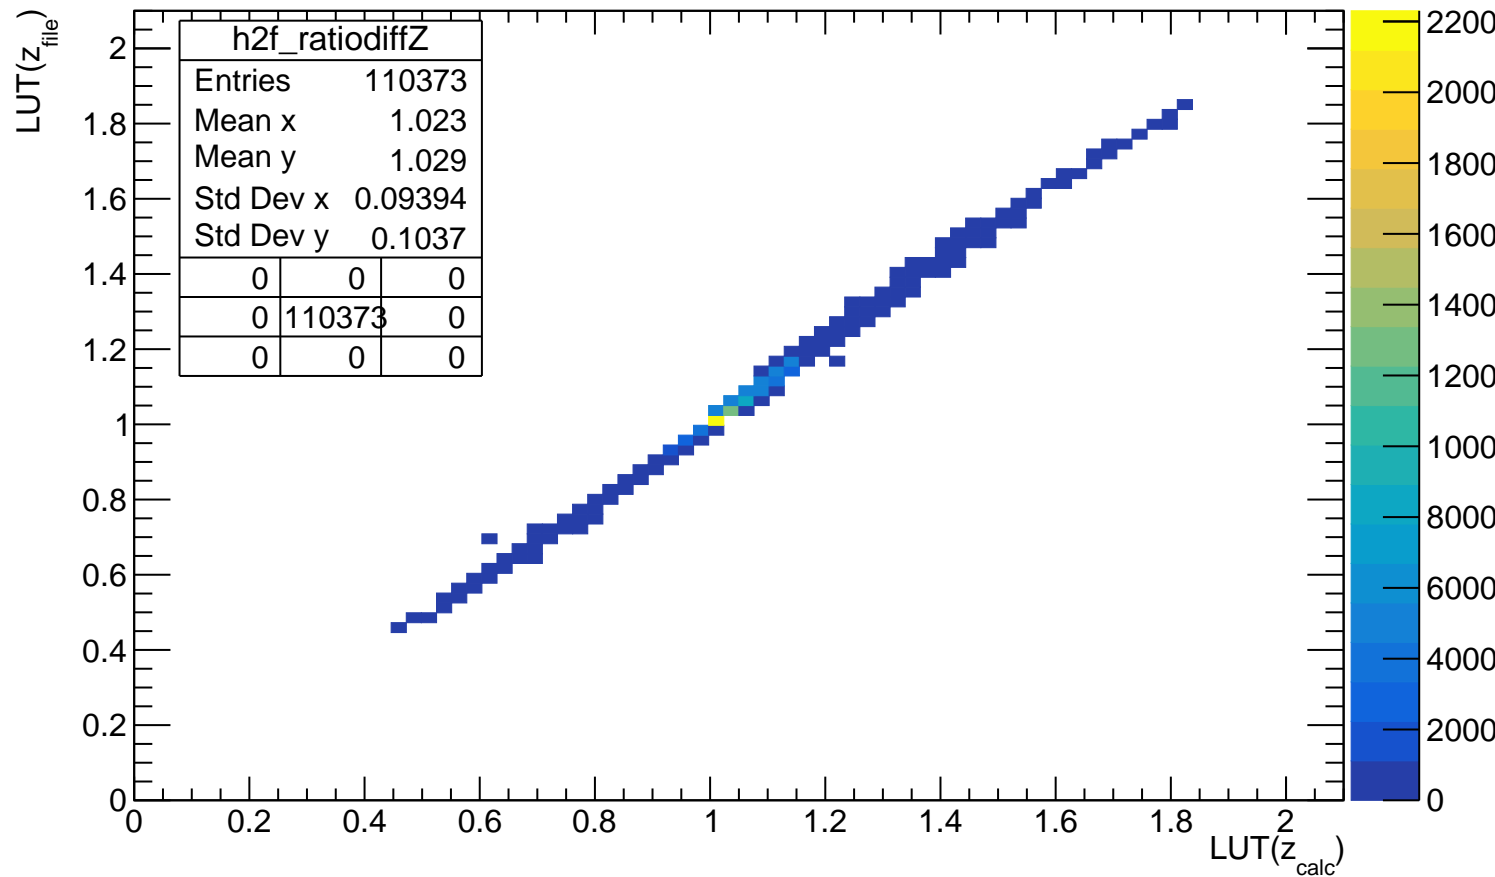

# ADC<sub>max</sub> VS length in pad (before length cut)

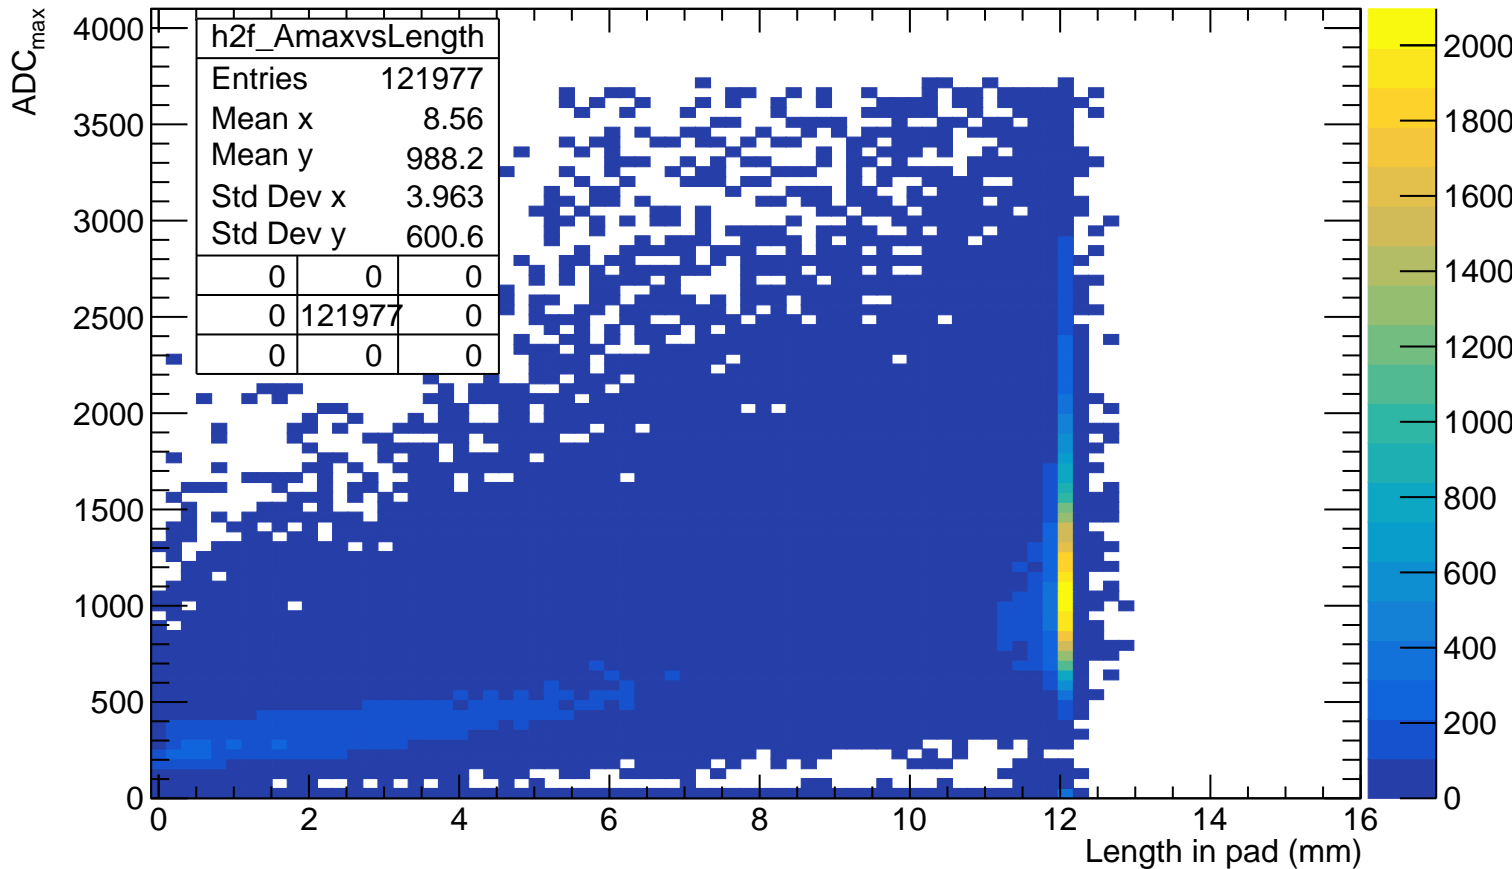


# $Q^{\text{anode}}$ VS length in pad (before length cut)

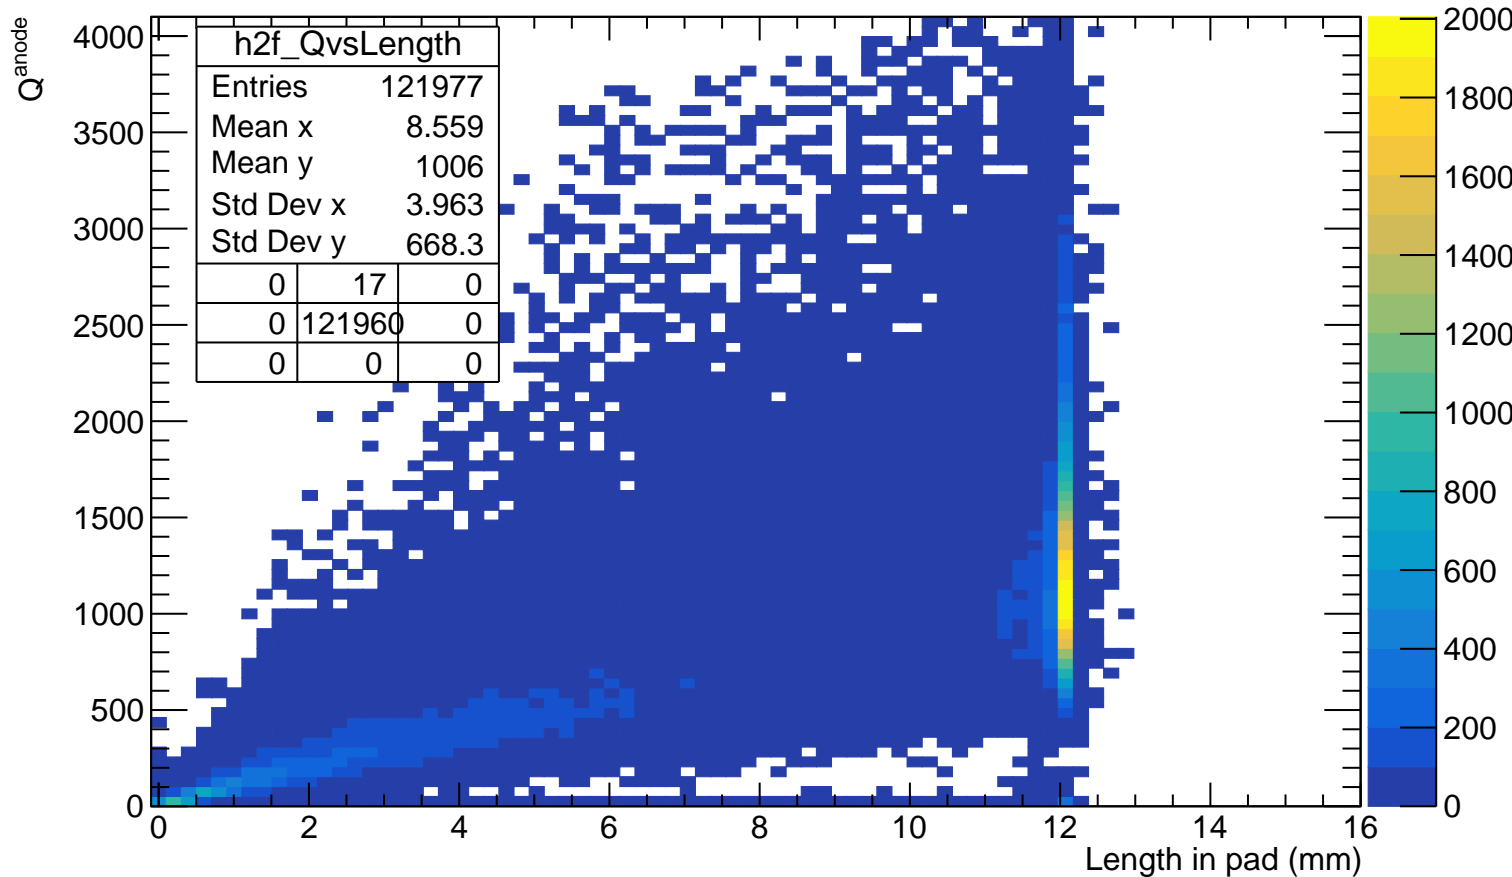





$Q^{\text{anode}}/\text{ADC}_{\text{max}}$  VS length in pad (before length cut)

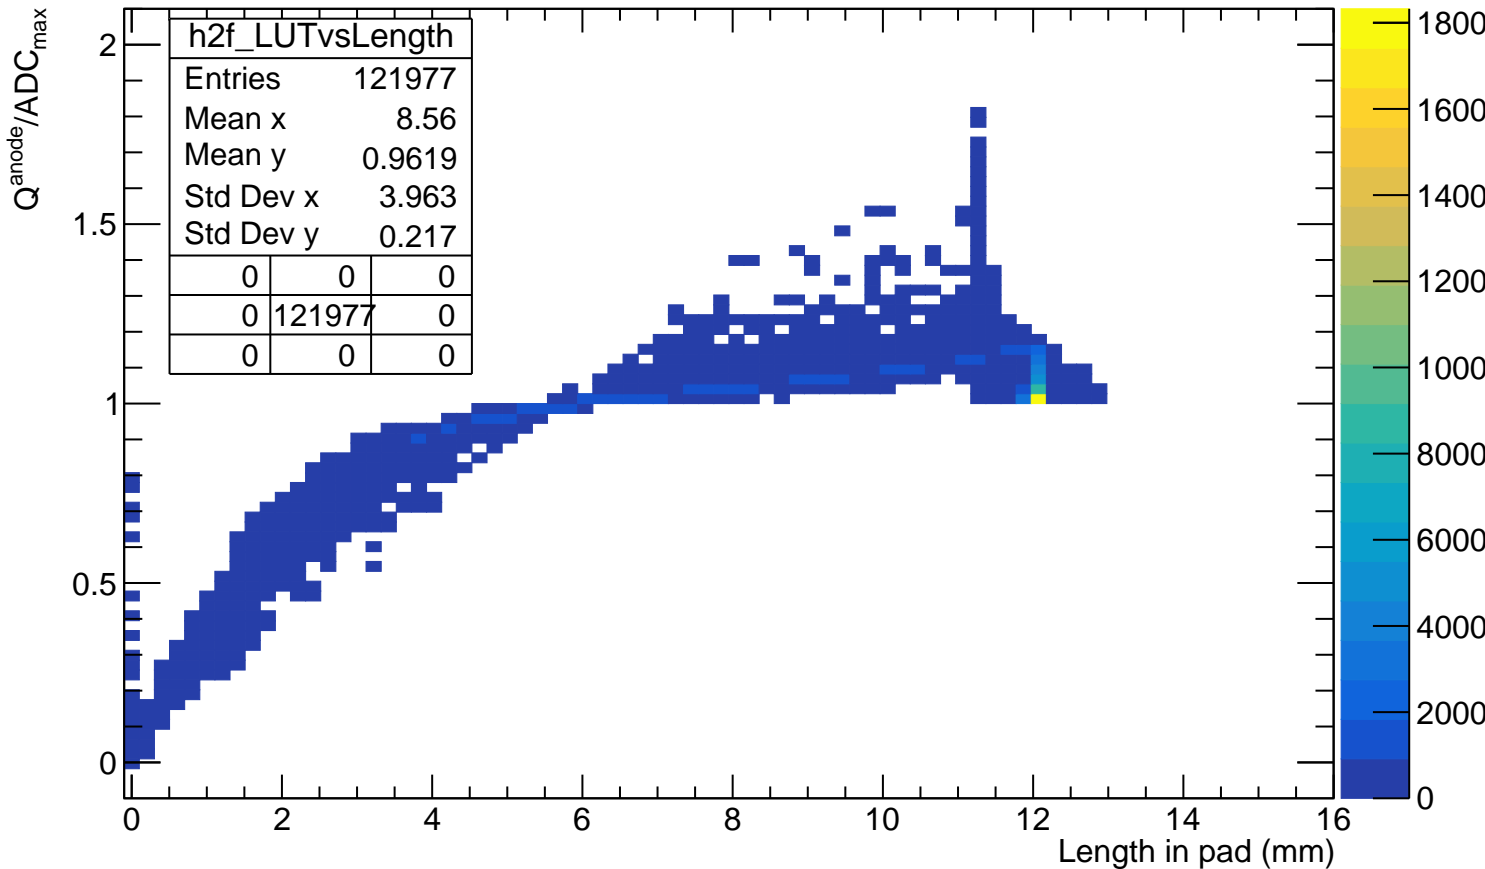


# $Q_{\text{cluster}}$ VS length in cluster

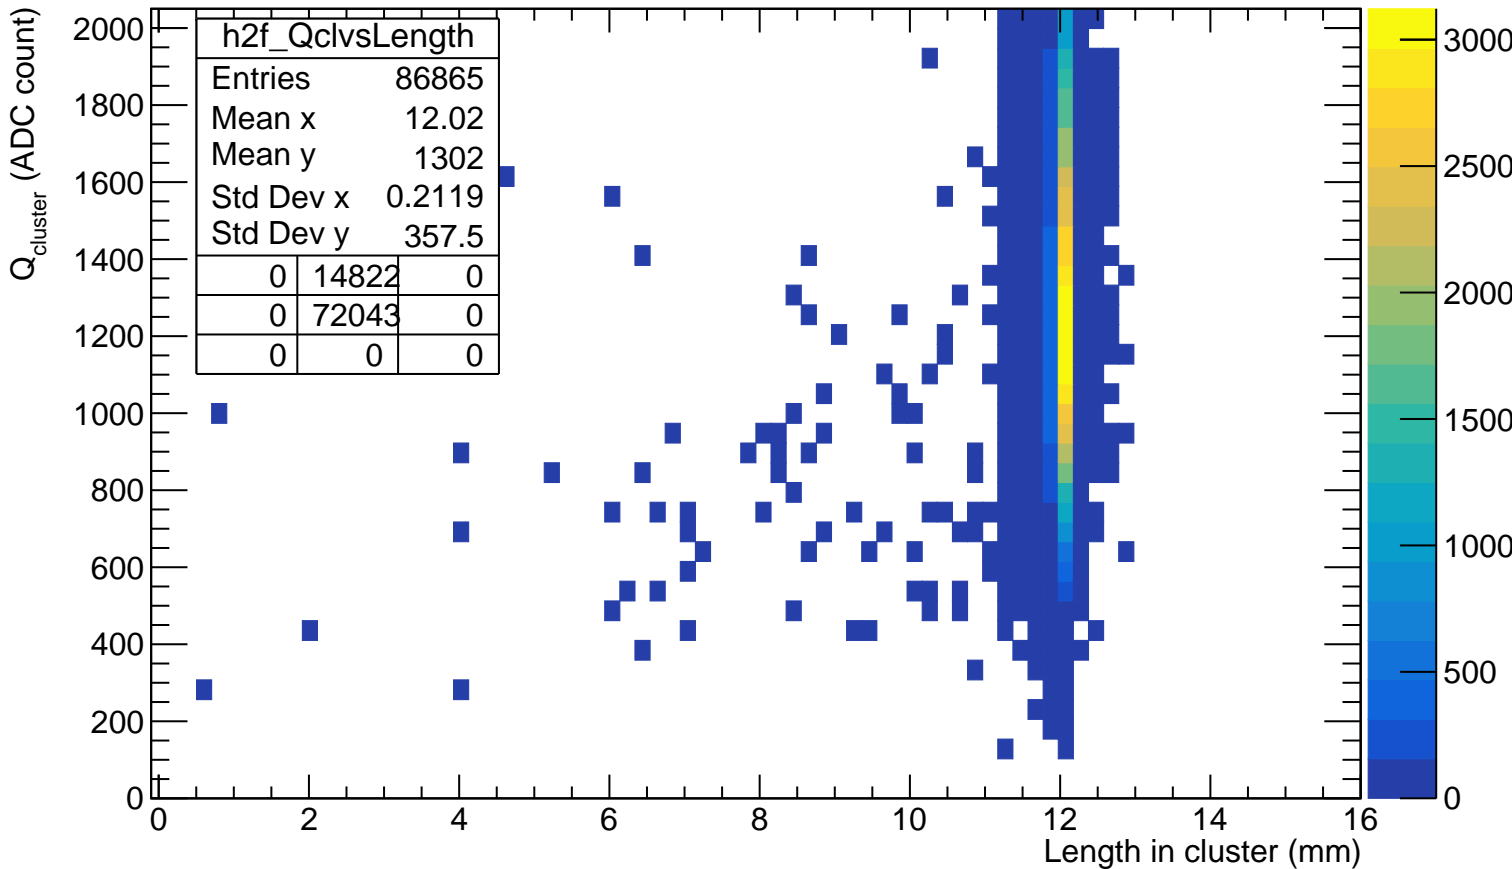


# WF<sub>sum</sub> VS length in cluster

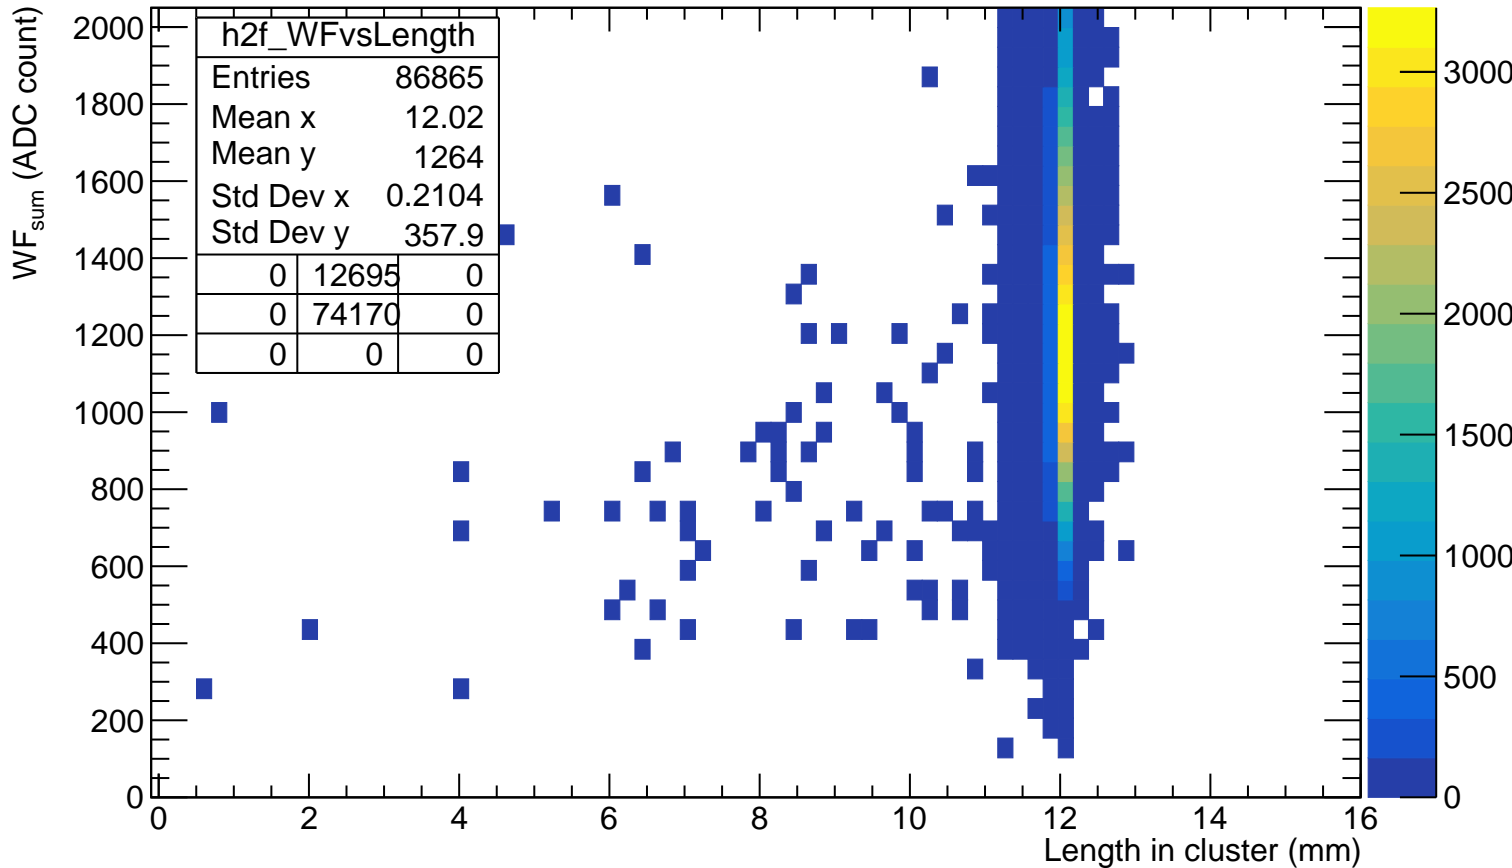


# WF<sub>sum truncated</sub> VS length in cluster

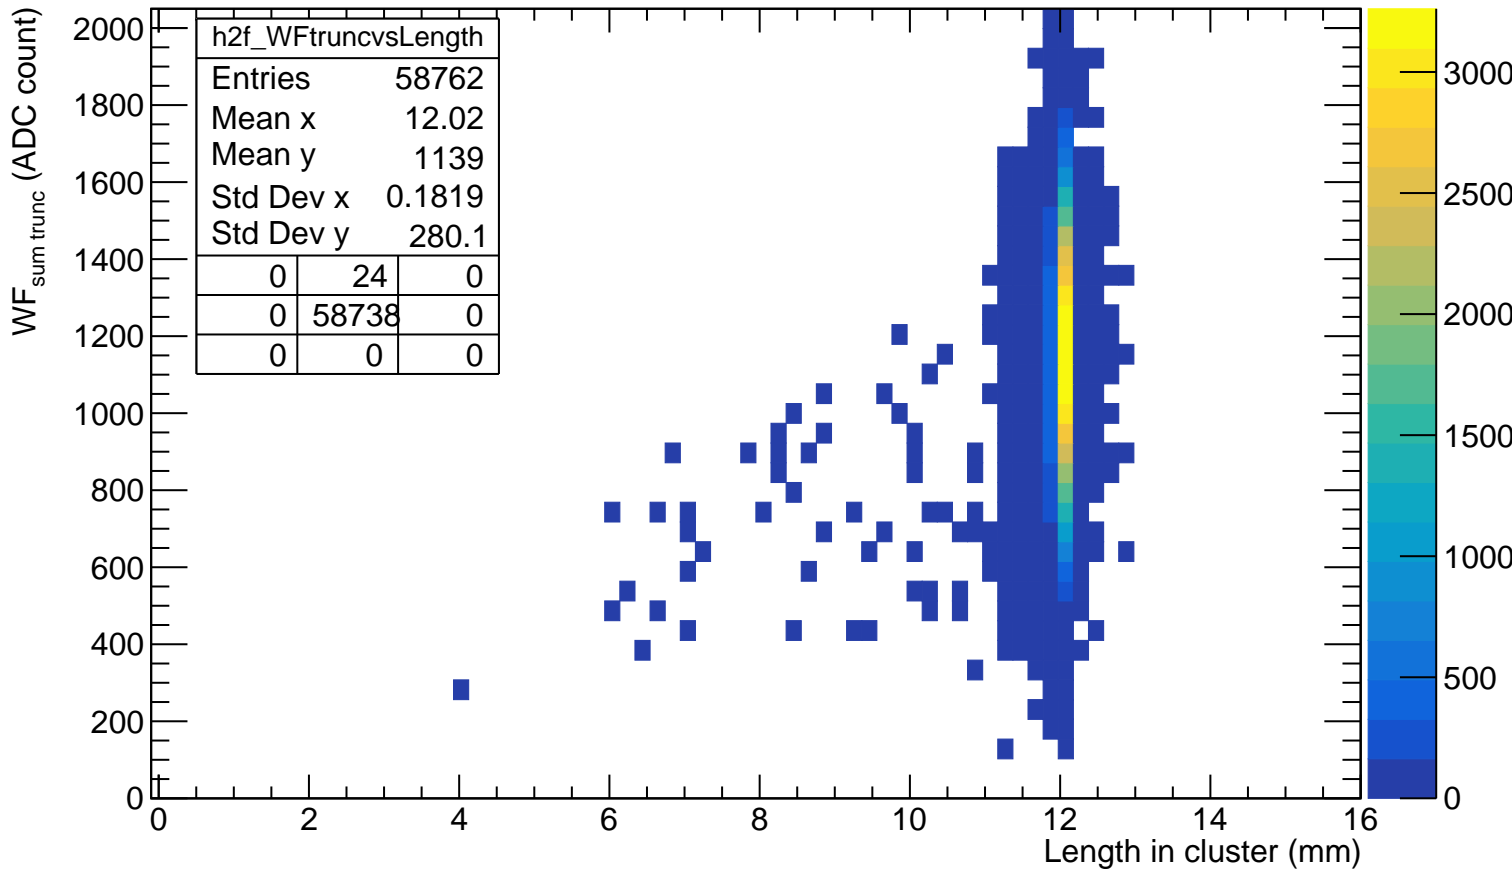


# WF\*<sub>sum</sub> VS length in cluster

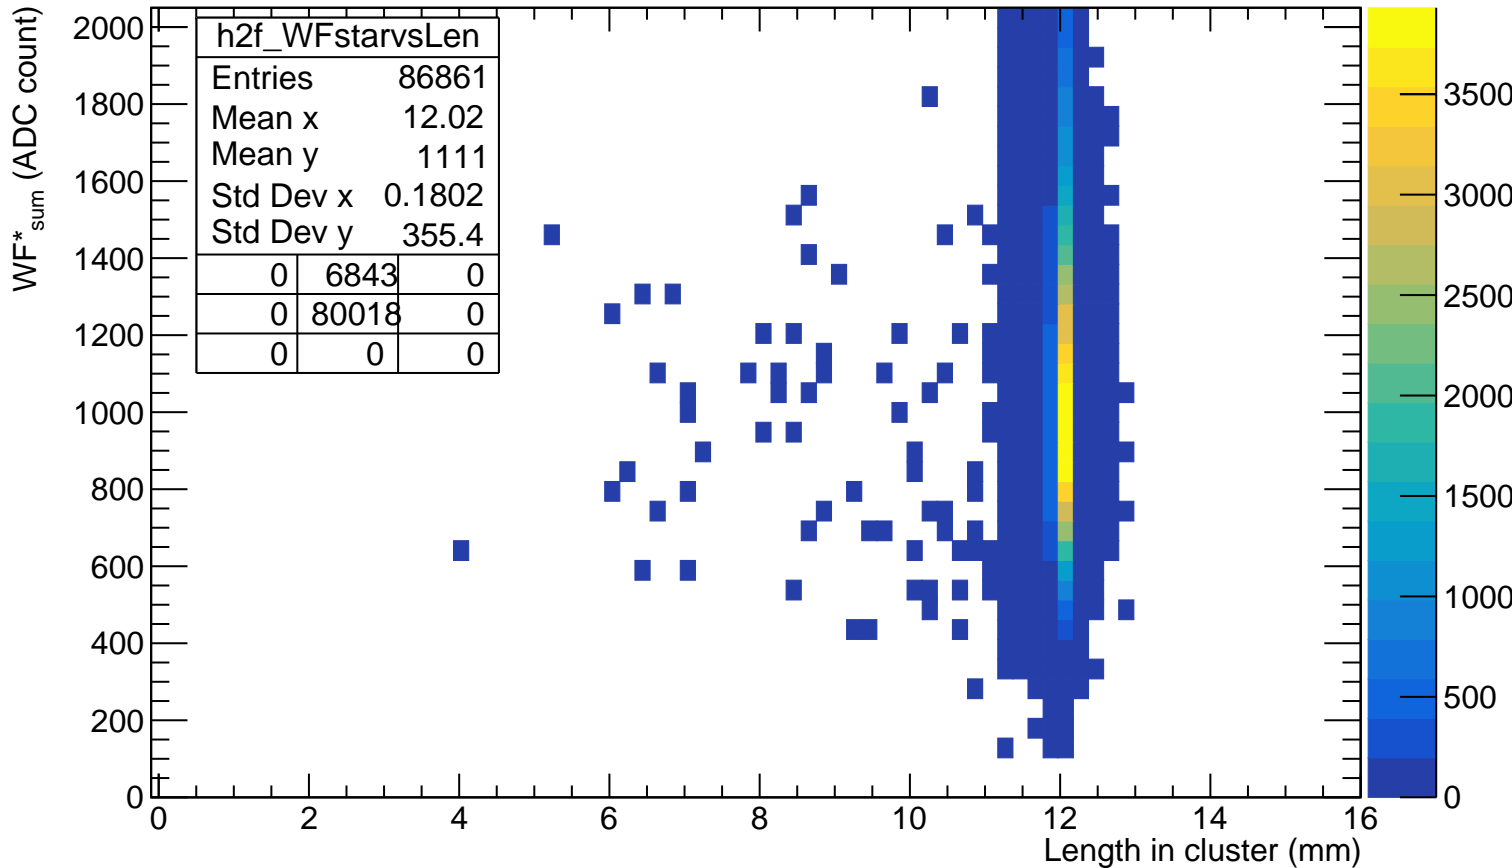

# WF\*<sub>sum truncated</sub> VS length in cluster

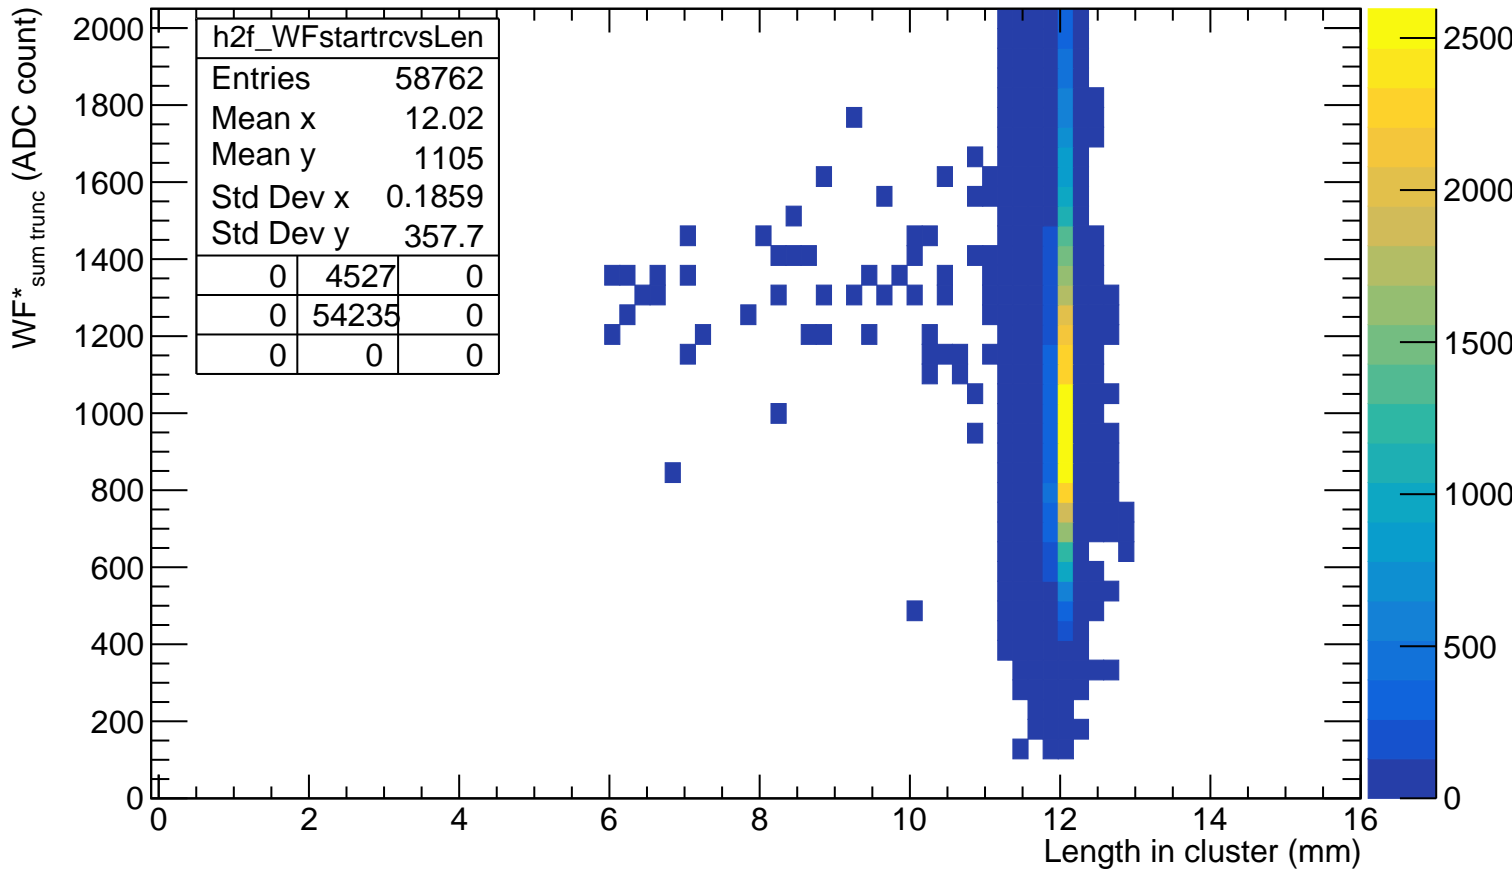

$$A_{\max}(\text{WF}_{\text{sum}}) / L_{\text{cluster}}$$

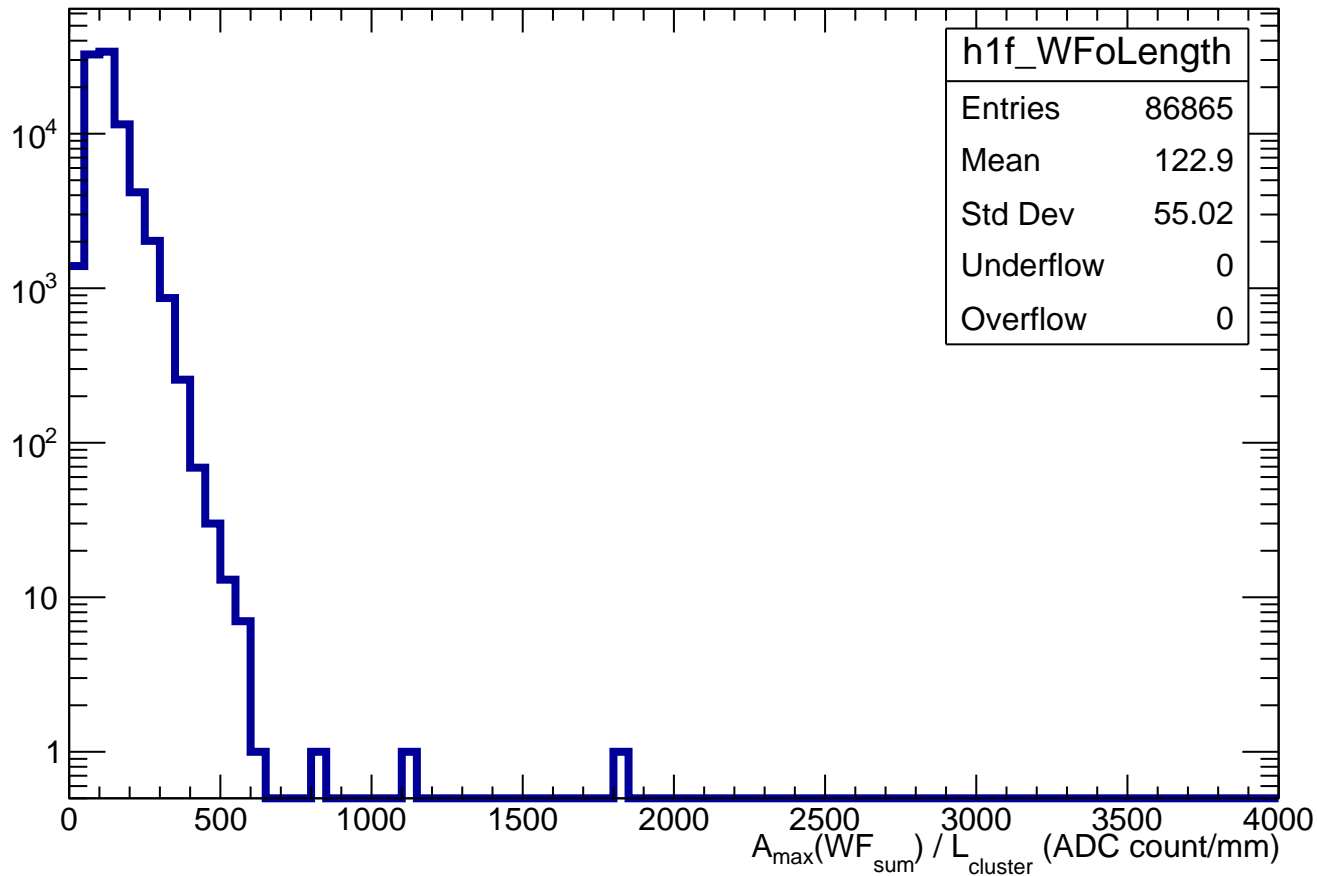

impact parameter d vs length in pad

