




T_{\max} of crossed pads

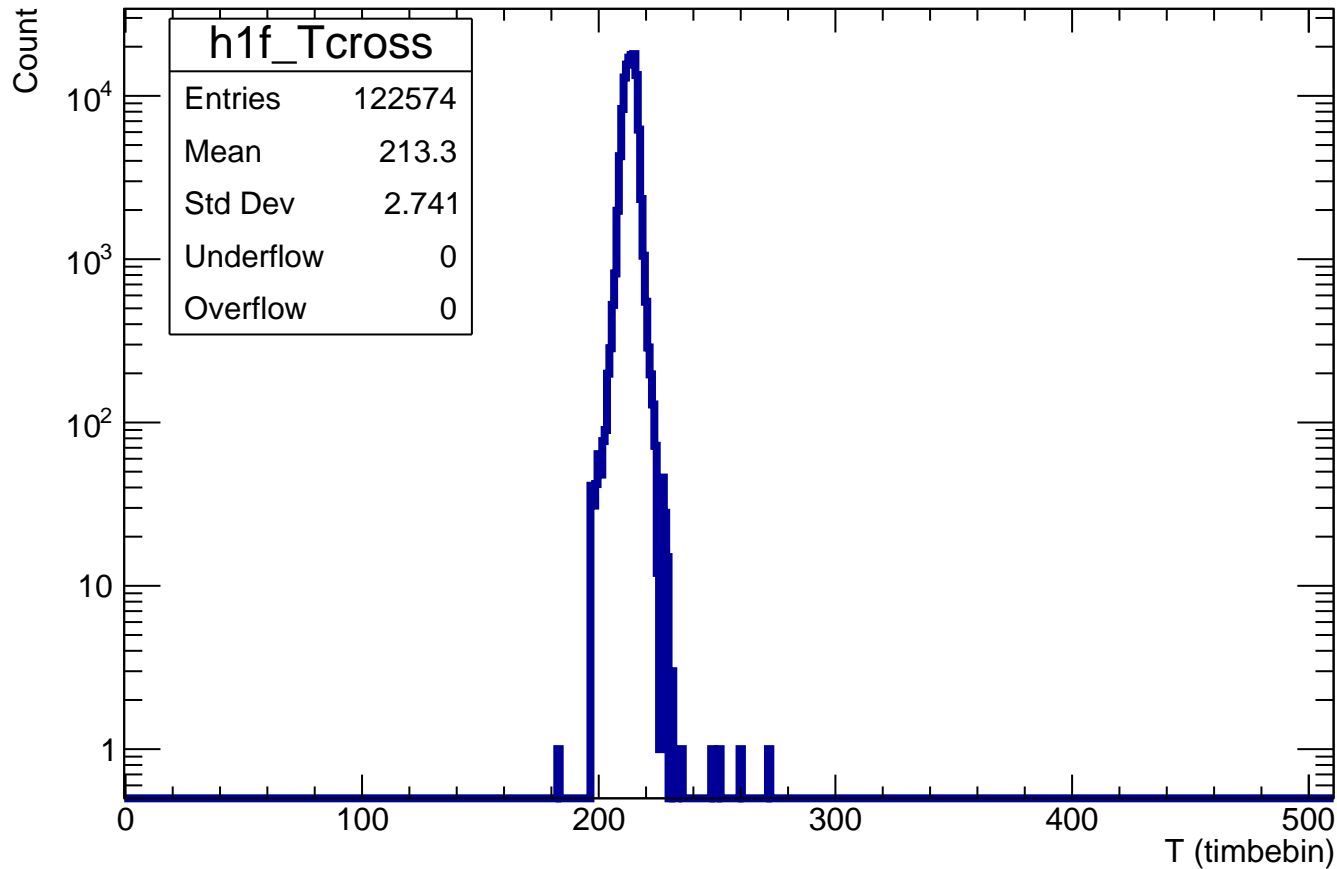


Number of crossed pads

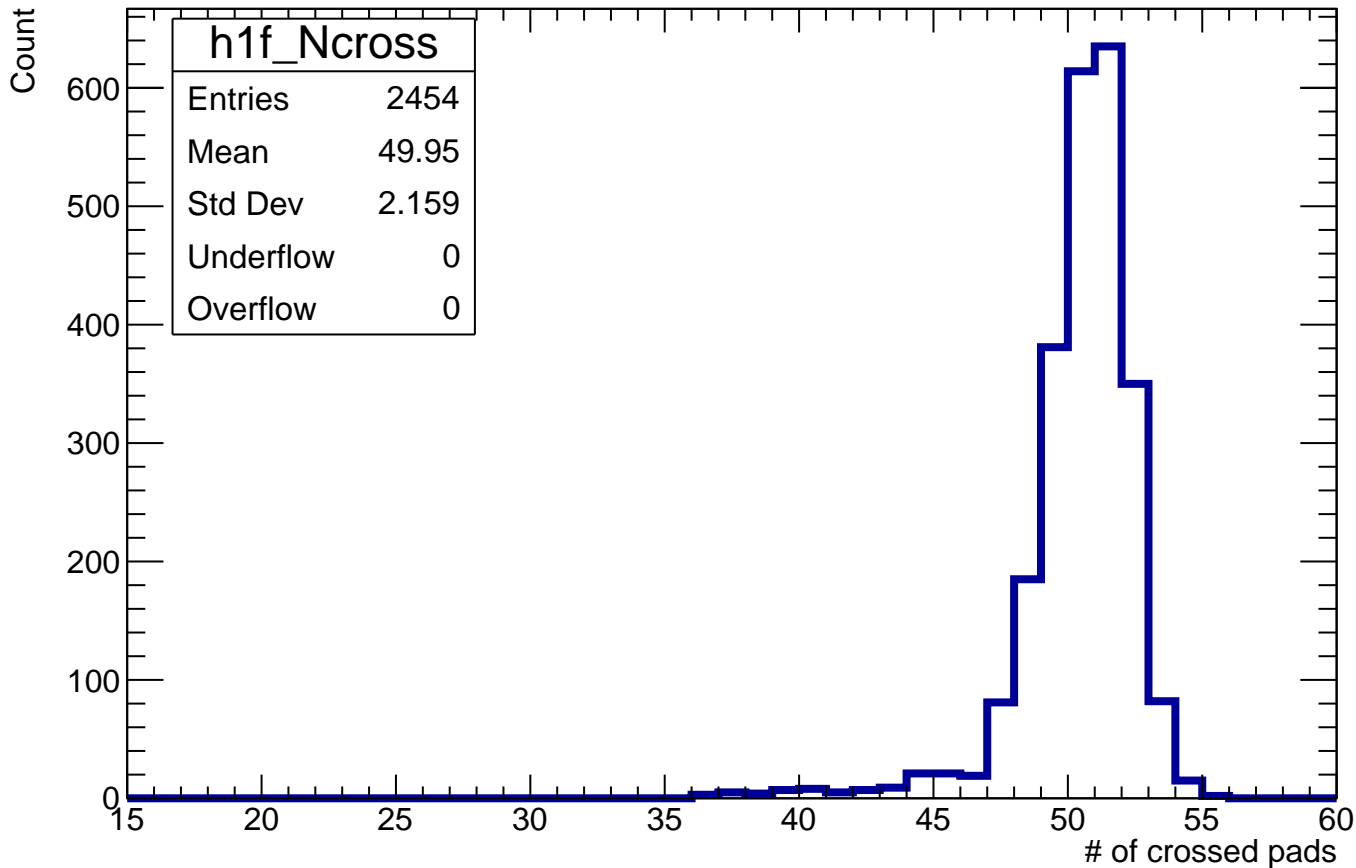


$$\Sigma(Q)/\Sigma(\text{length}) - \text{mean}\{Q/\text{length}_i\}$$

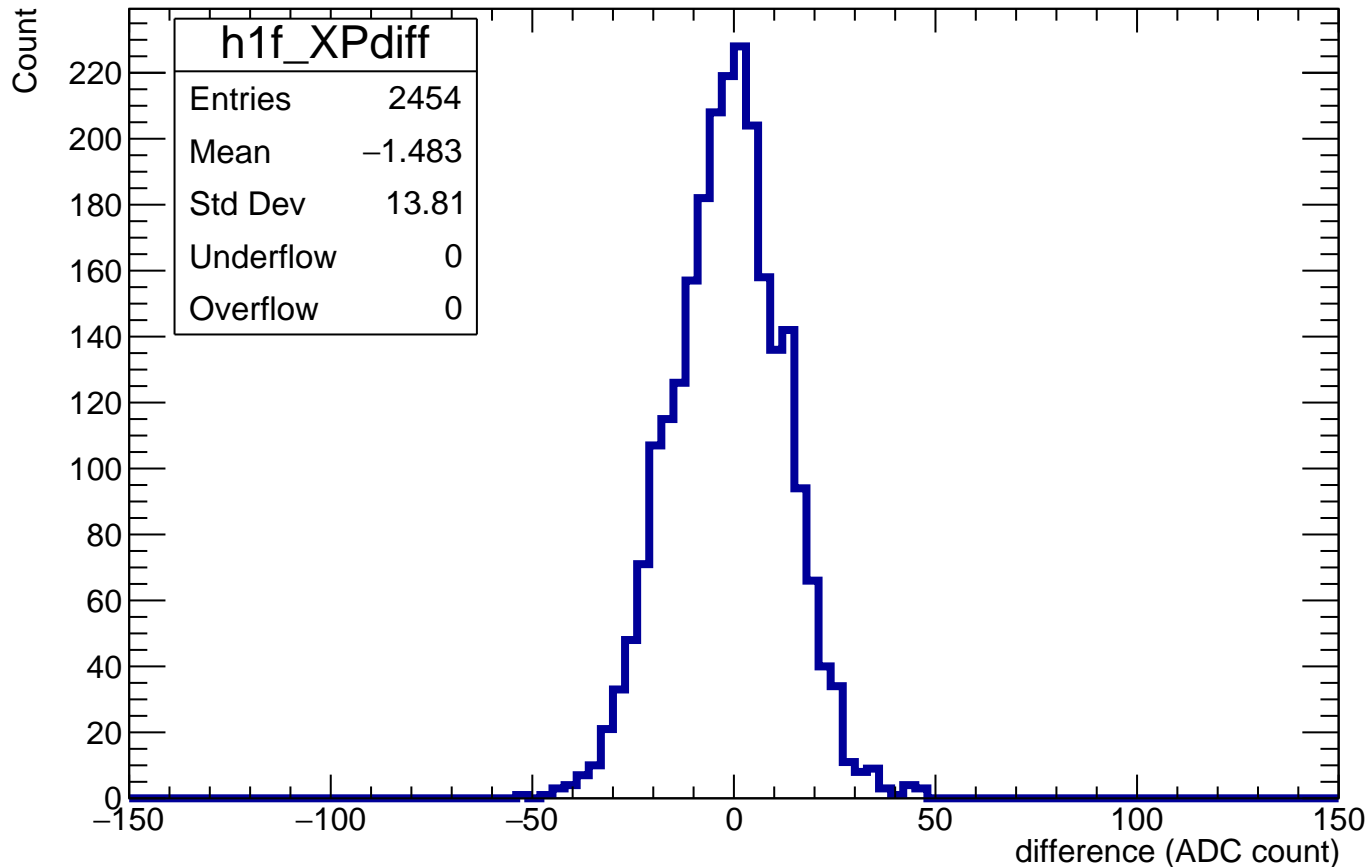


$$Z_{\text{file}} = 550\text{mm} - Z_{\text{computed}}$$

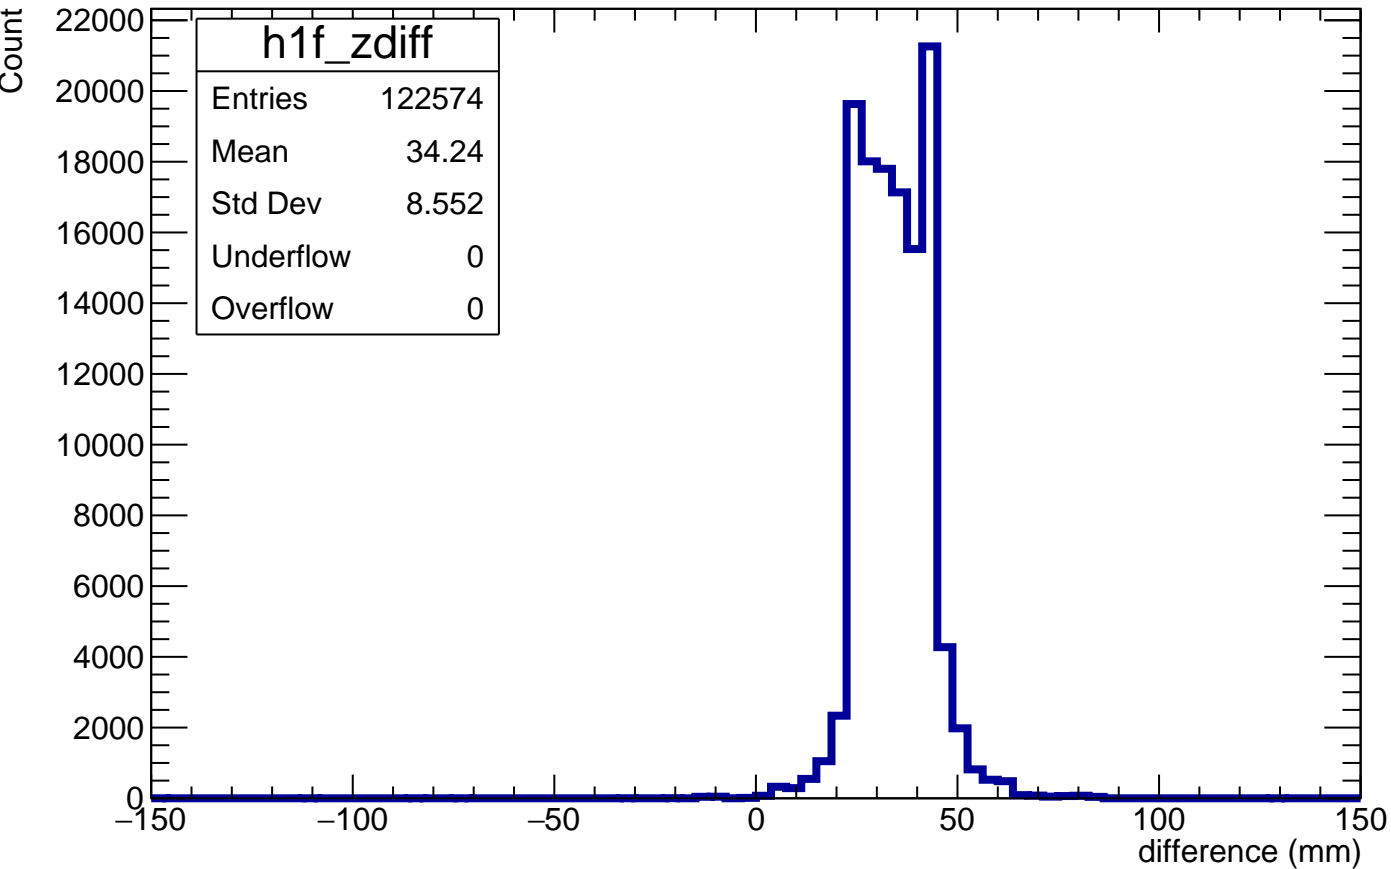


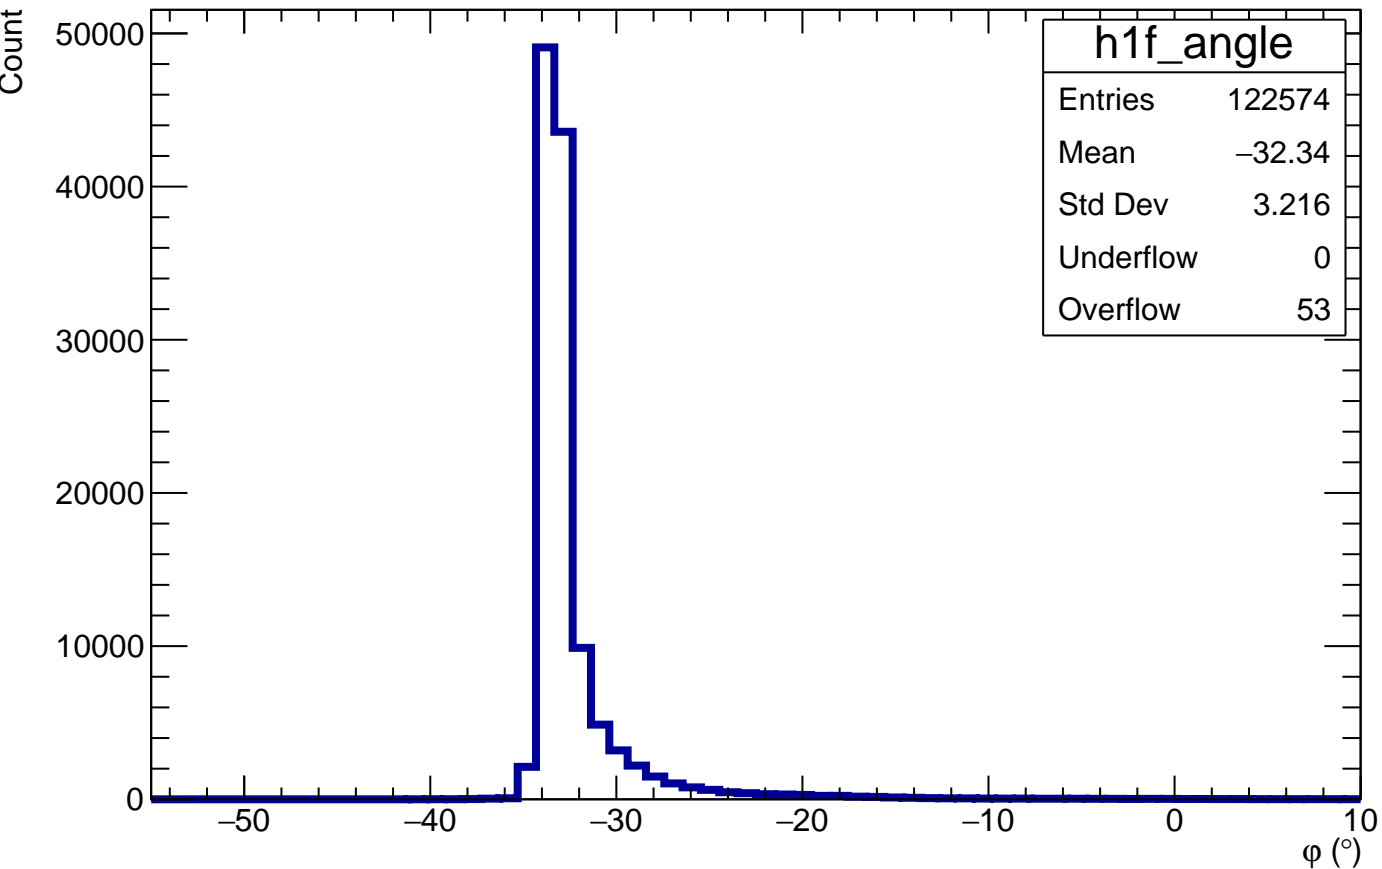Angle ϕ in each pad


Length in pad normalized to maximum length in pad for a given ϕ

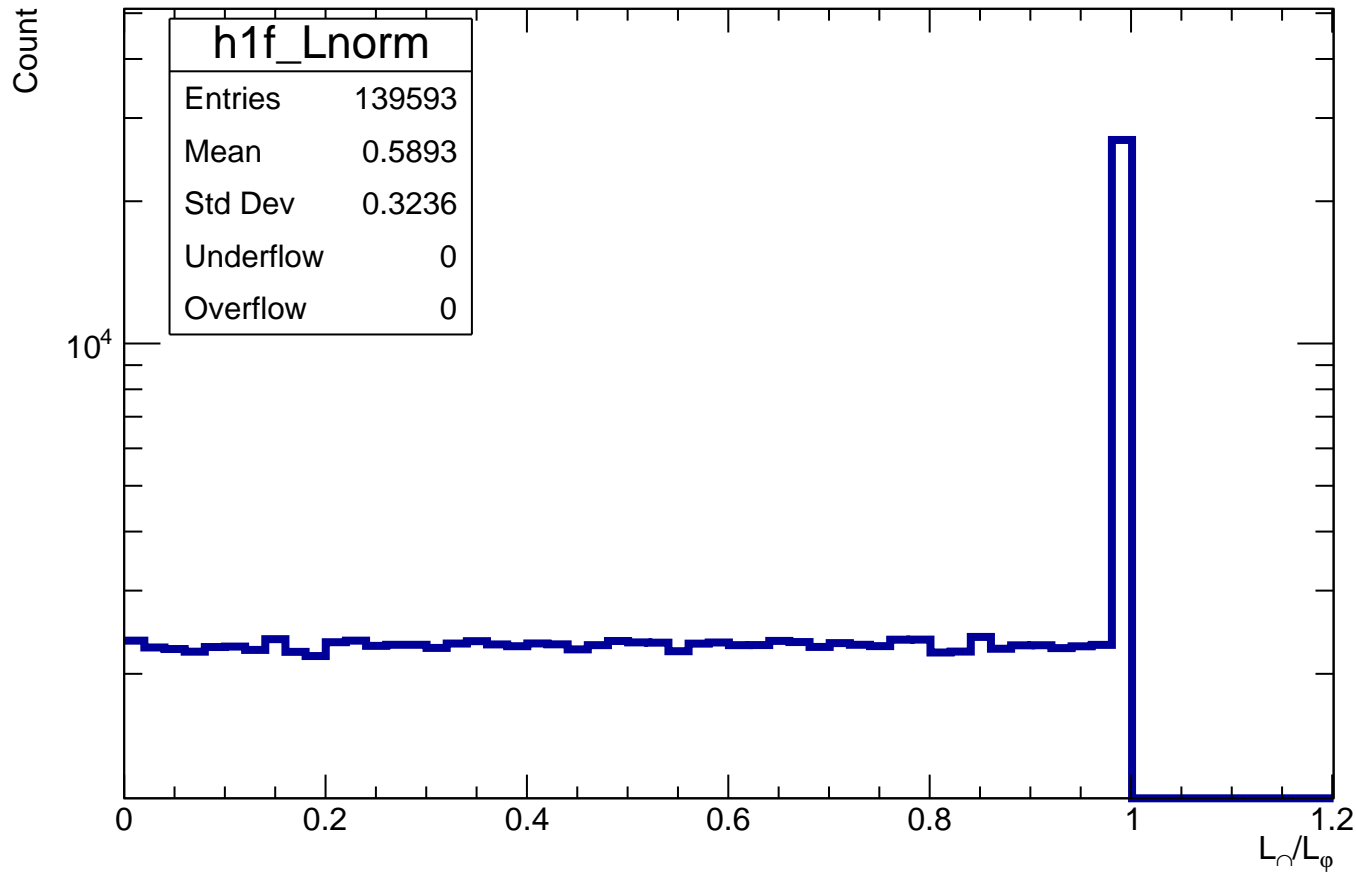


Normalized impact parameter d/d_{max}

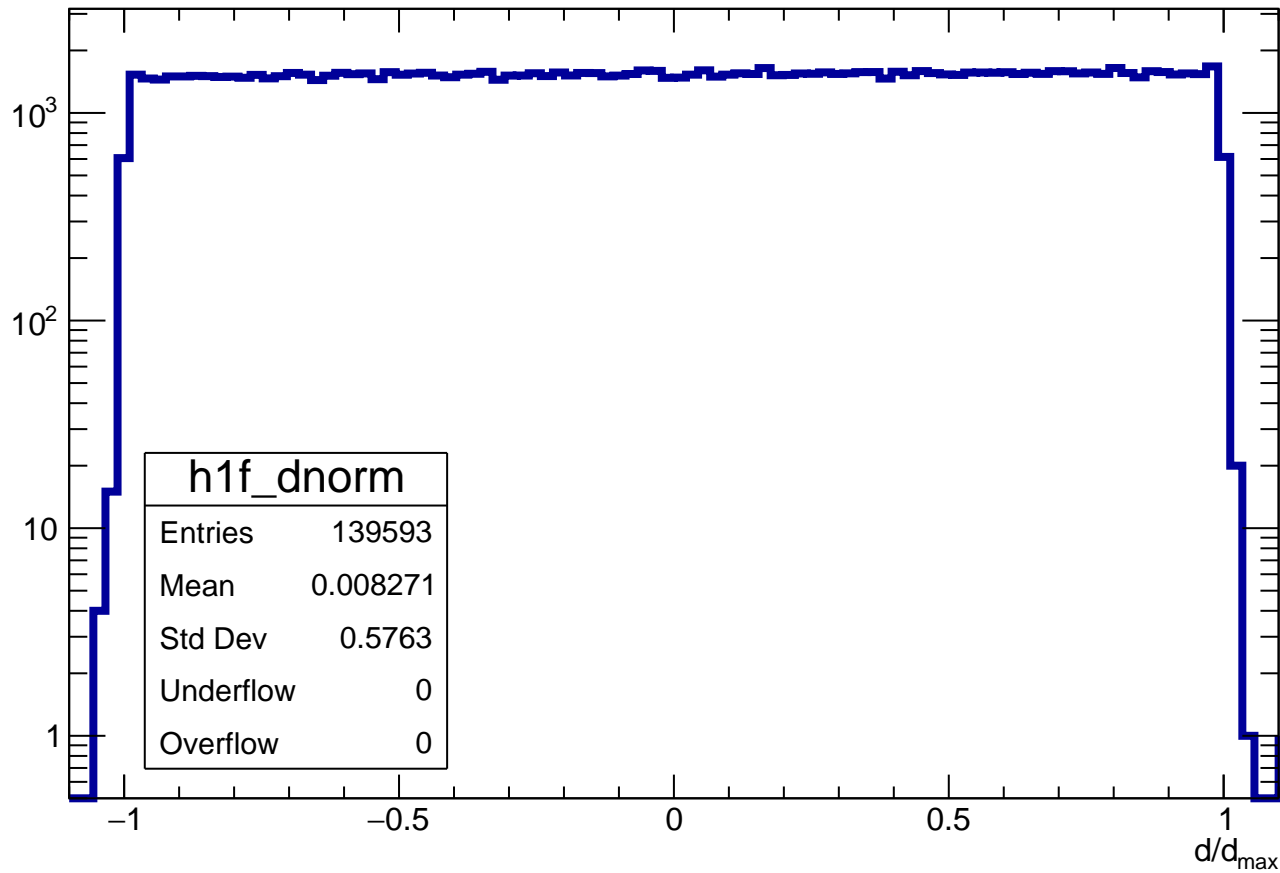


distance of track in pad

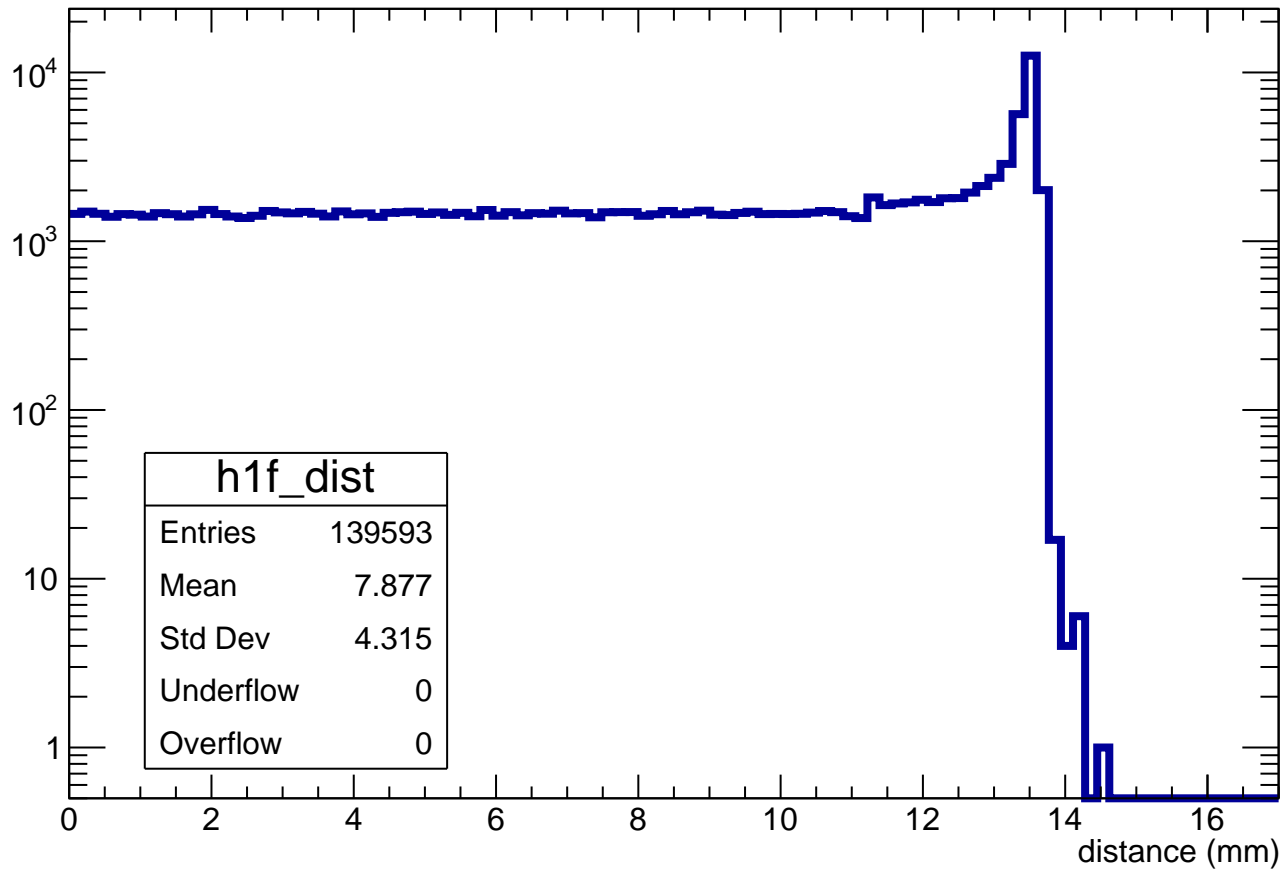

distance of track in cluster

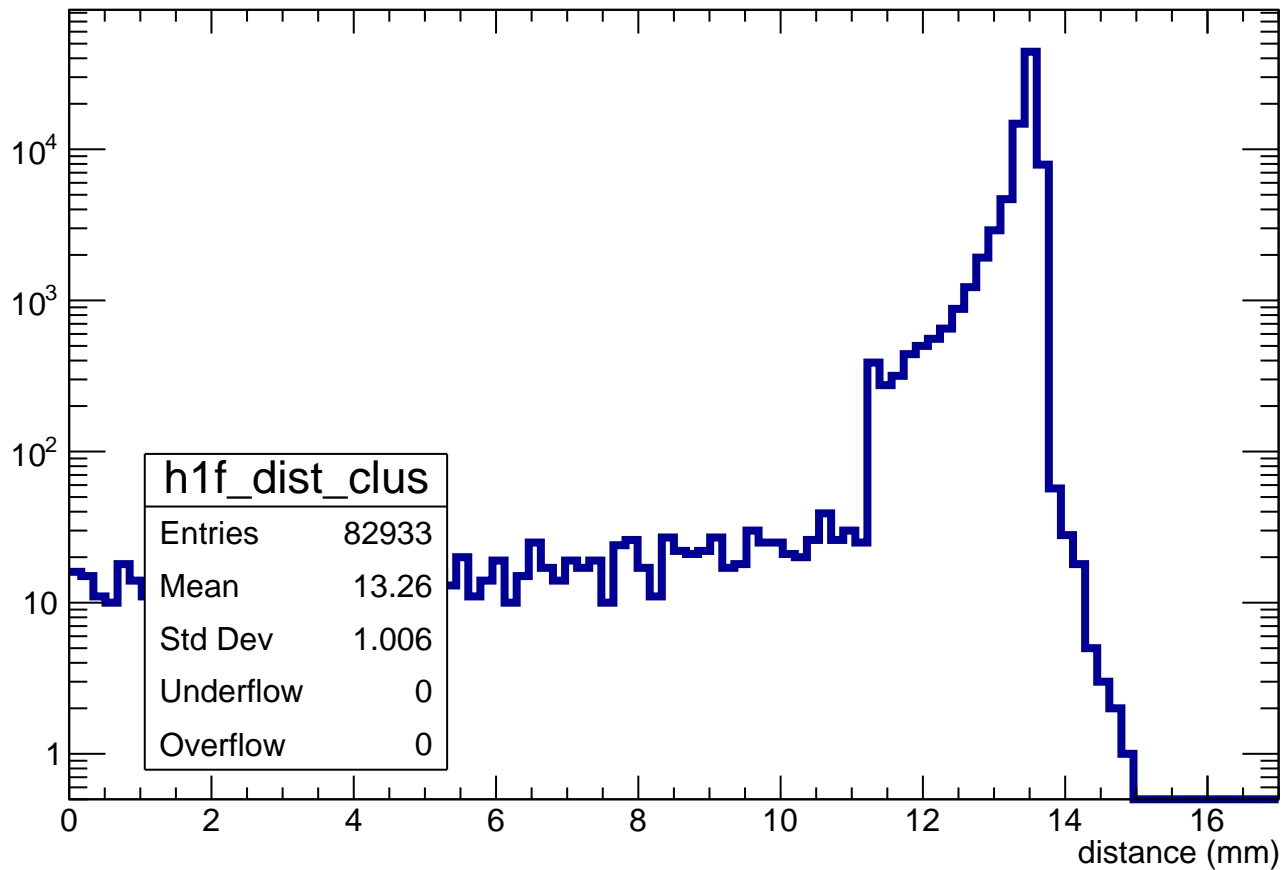


Correction A_{max} ratio

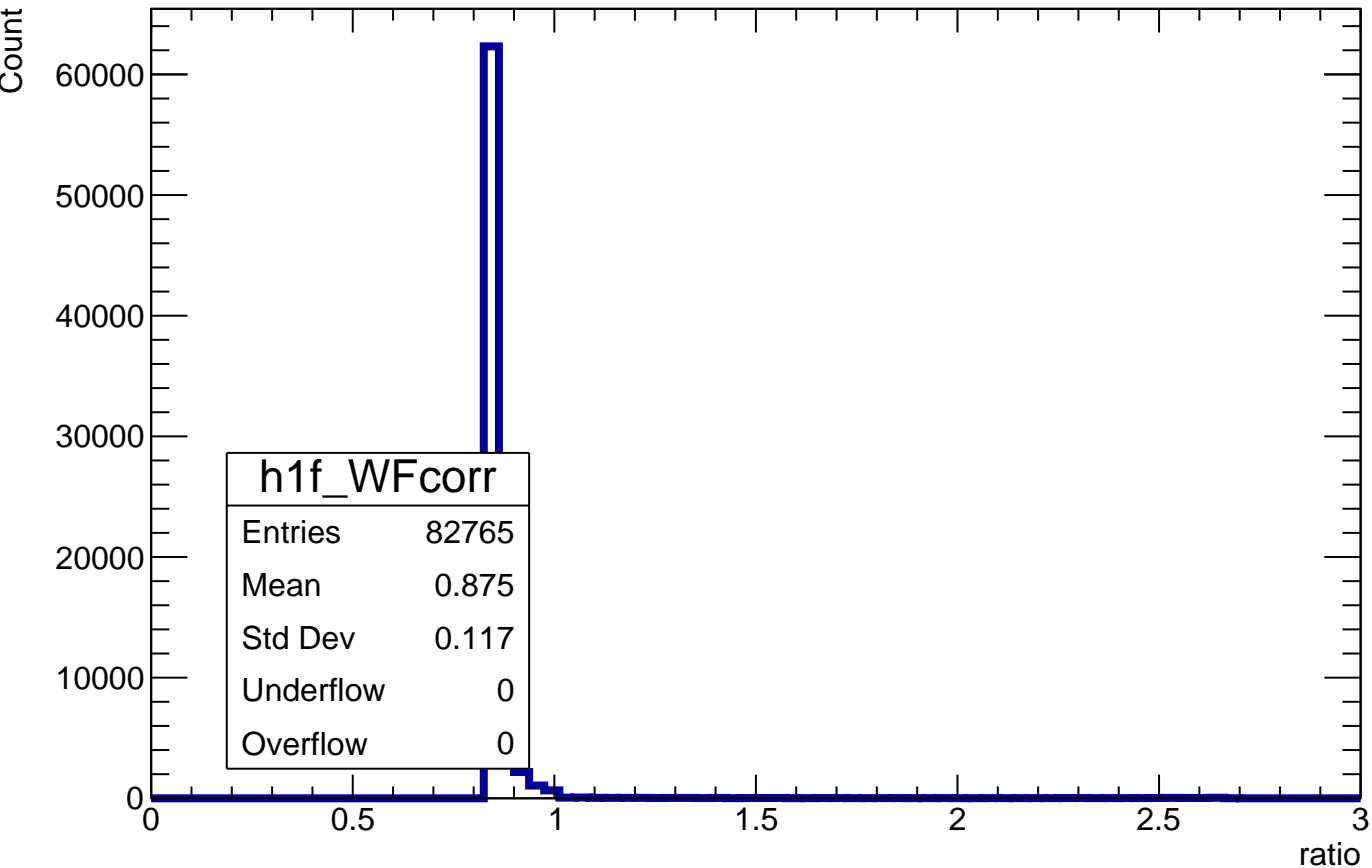

$$L_{\text{ERAM}}^{*0.7} - \Sigma L_{\text{clus}>2\text{mm}}$$

Count

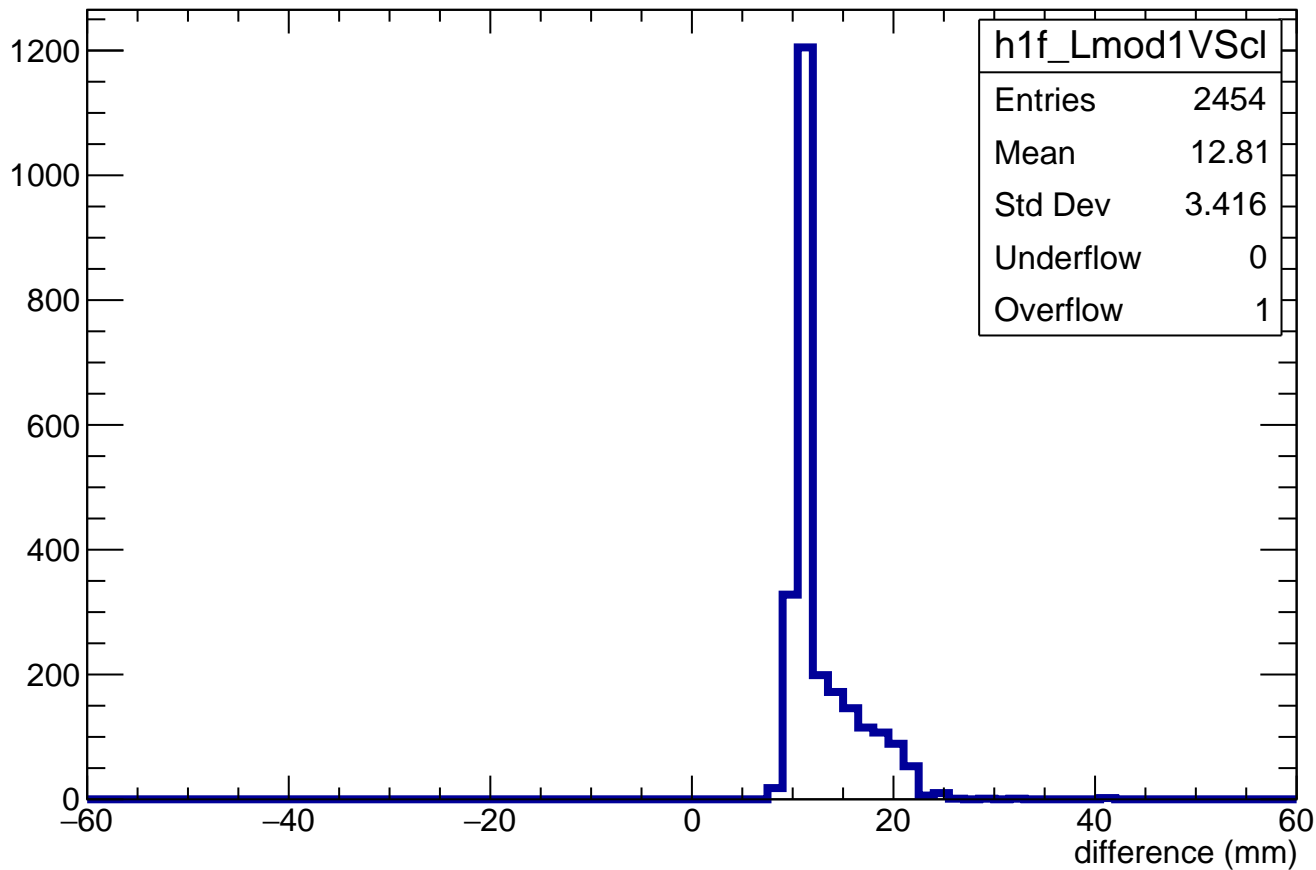

$$L_{\text{ERAM}} * (N_{\text{trunc cross}} / N_{\text{clus cross} > 2\text{mm}}) - \sum L_{\text{clus} > 2\text{mm}}$$

Count


700
600
500
400
300
200
100
0

-60 -40 -20 0 20 40 60
difference (mm)


h1f_Lmod2VScI	
Entries	2454
Mean	4.586
Std Dev	5.324
Underflow	0
Overflow	1

$L_{\text{clusters}} - L_{\text{clusters} > 2\text{mm}}$

Count

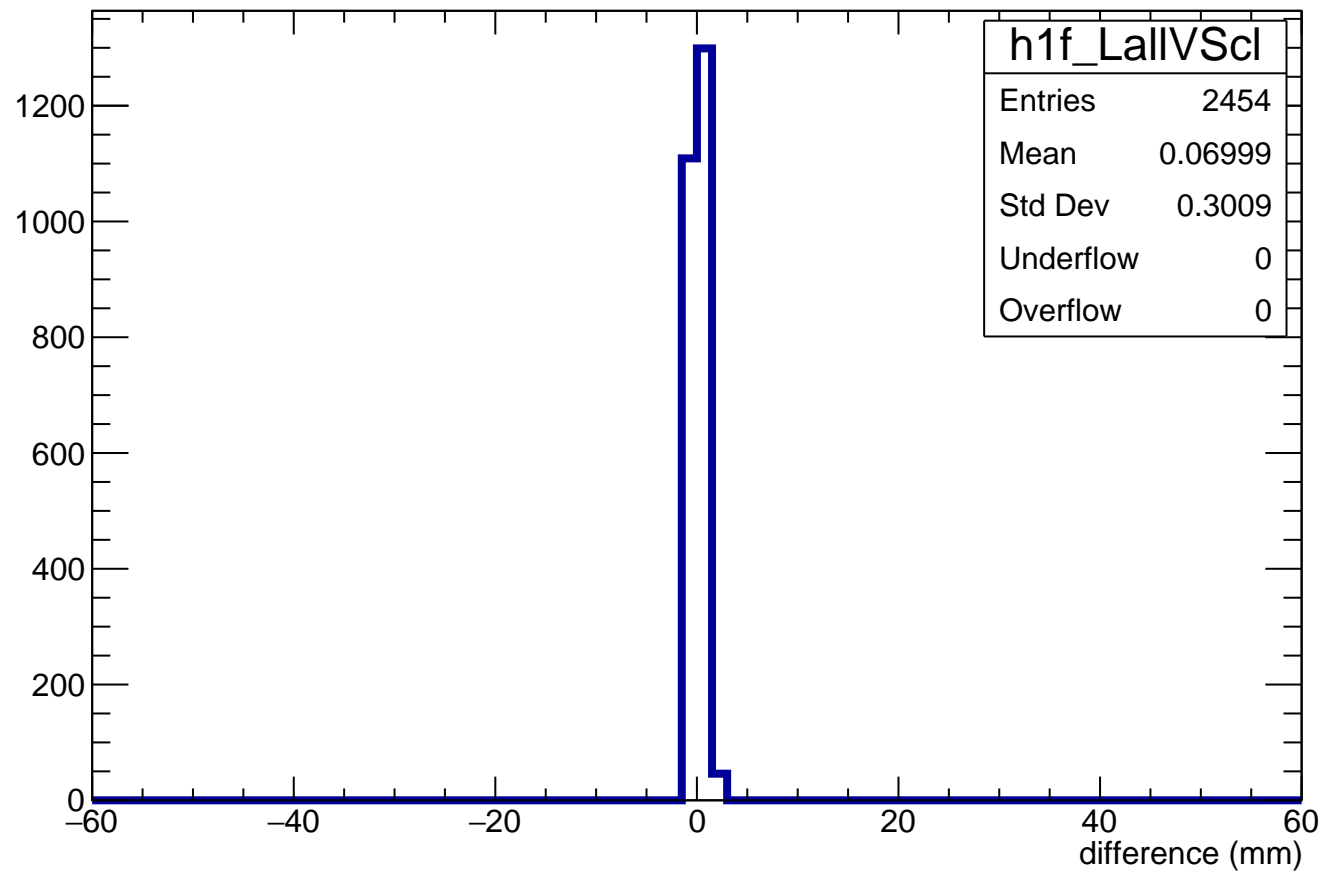


LUT(z_{file}) vs LUT(z_{calc})

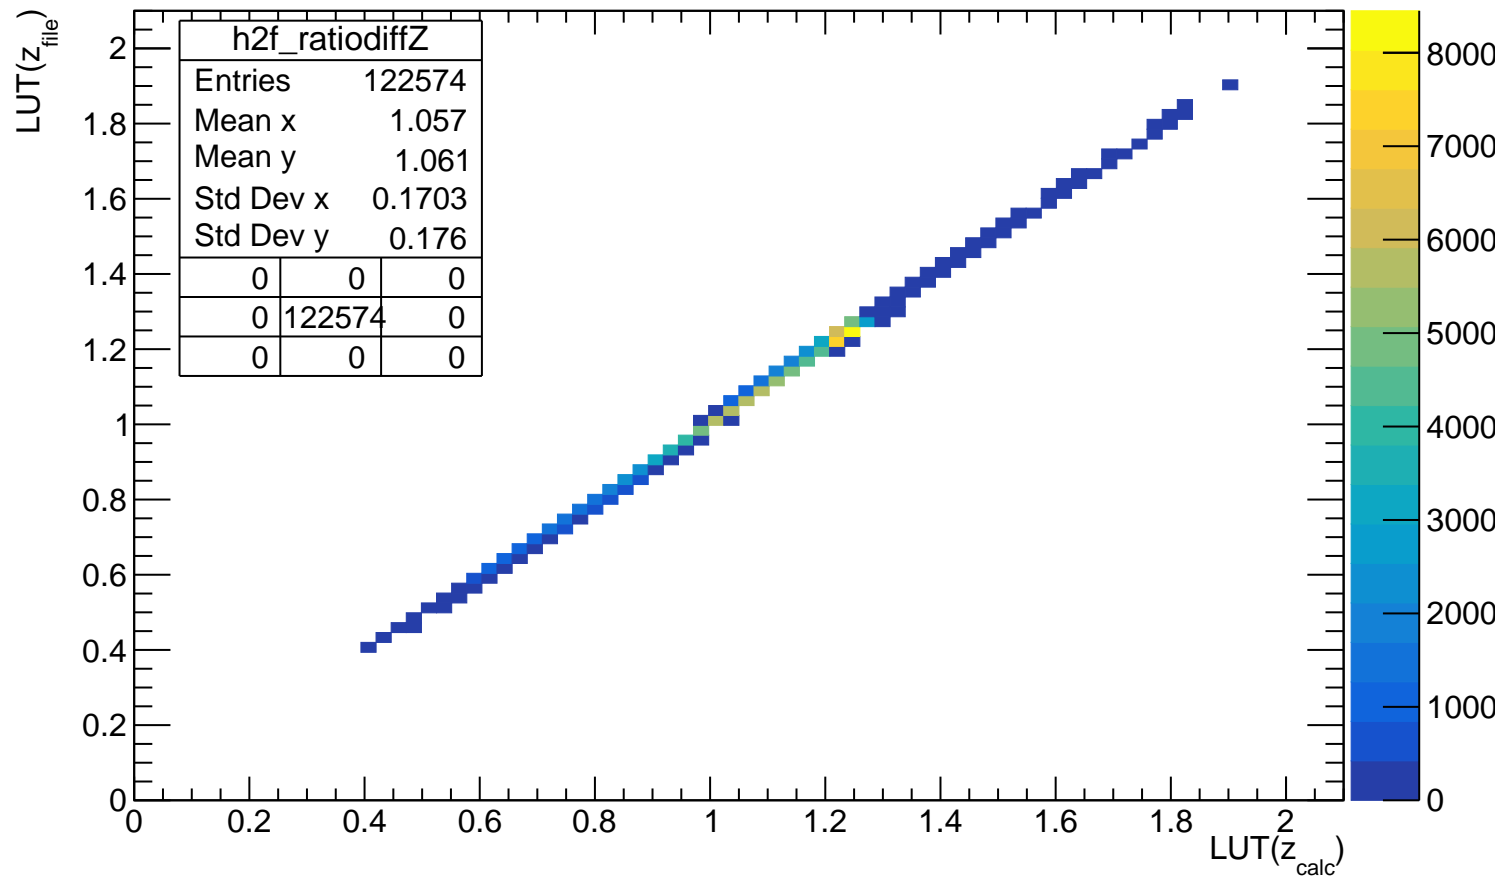


ADC_{max} VS length in pad (before length cut)


ADC_{max}

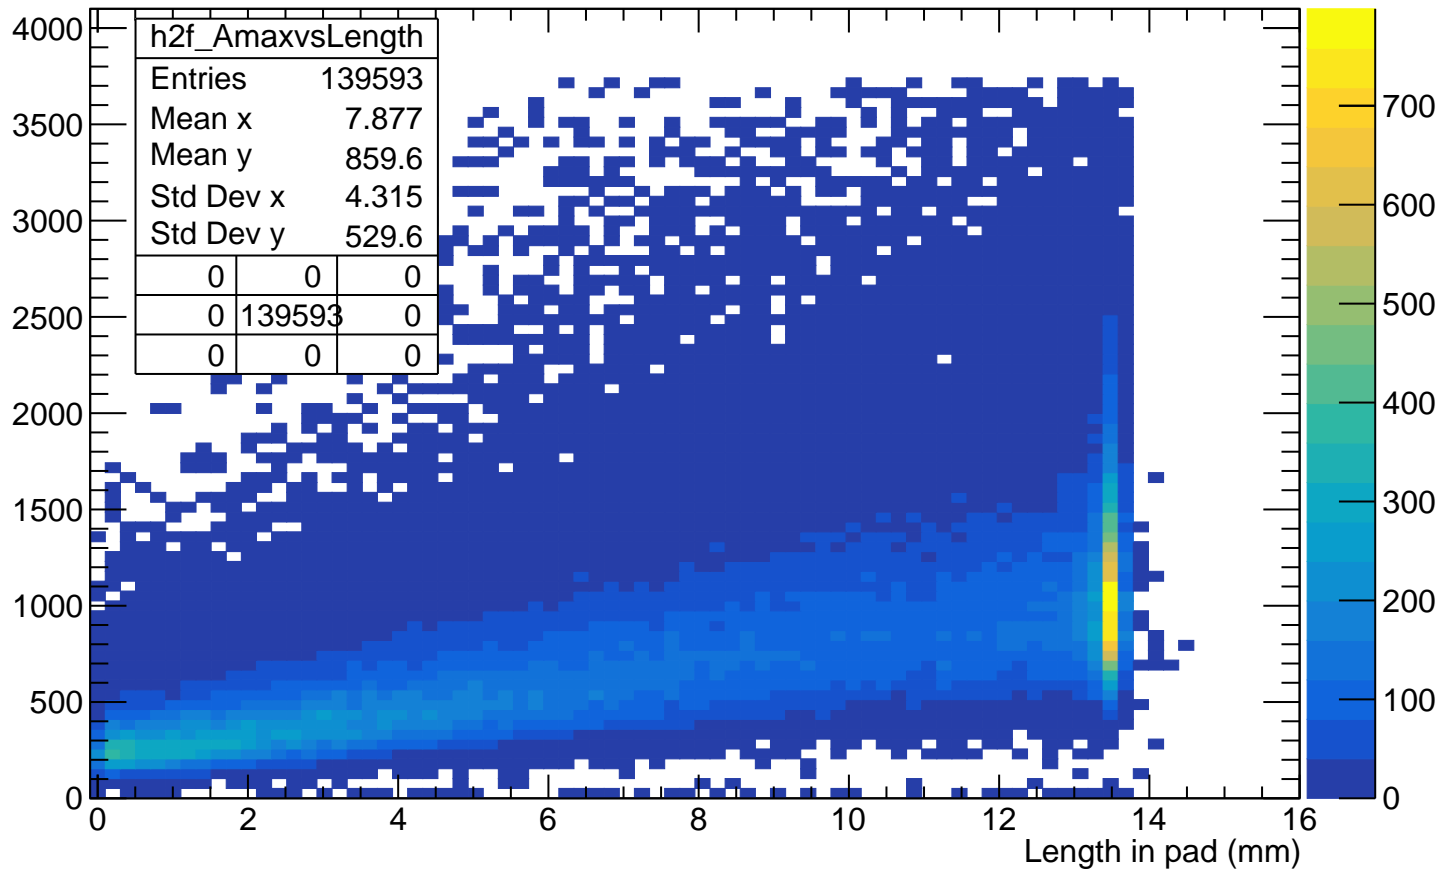


Q^{anode} VS length in pad (before length cut)

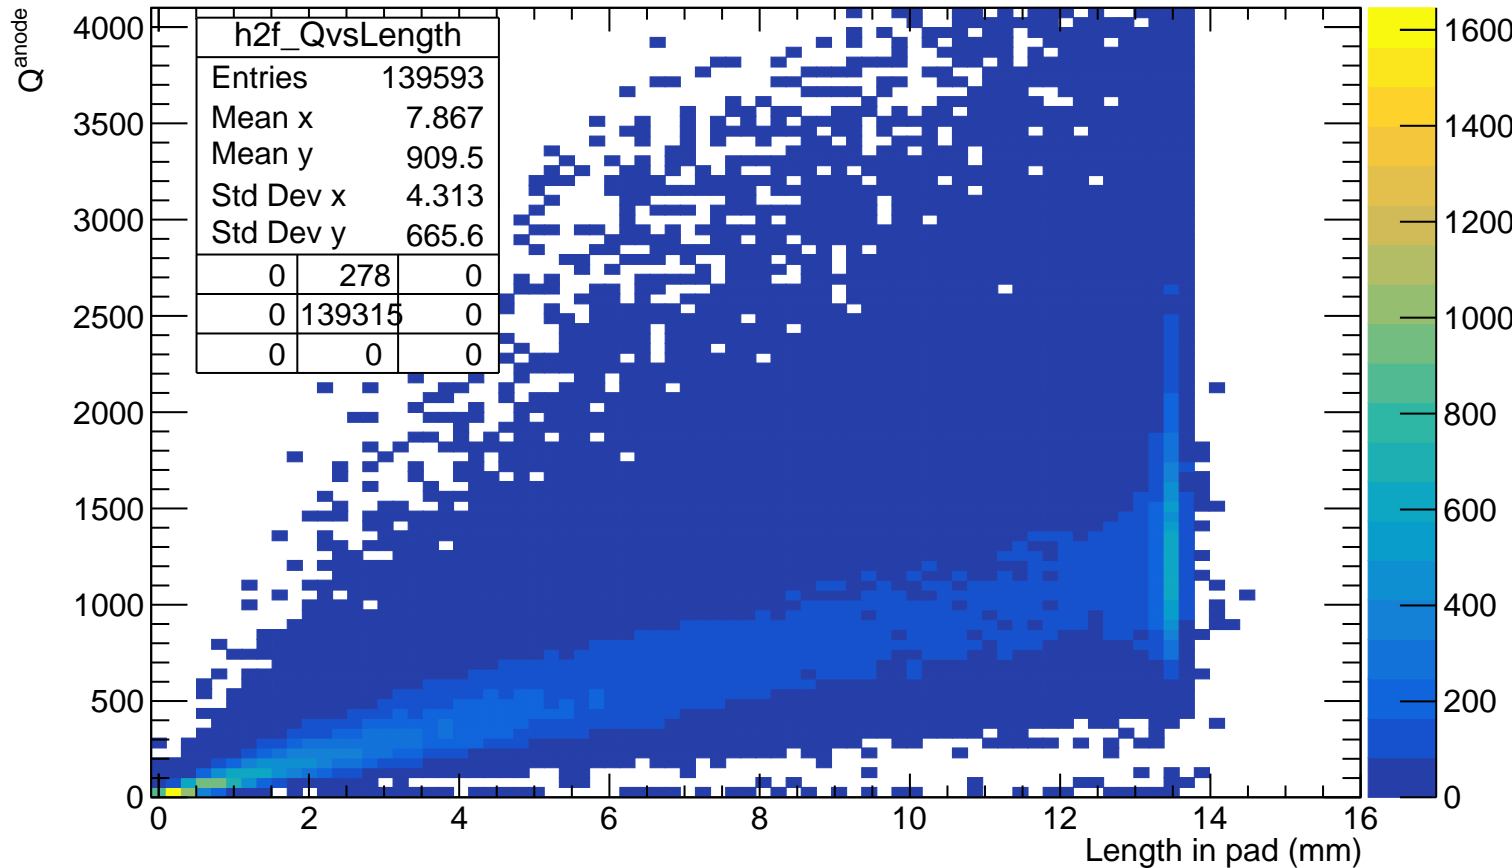


$Q^{\text{anode}}/\text{ADC}_{\text{max}}$ VS length in pad (before length cut)

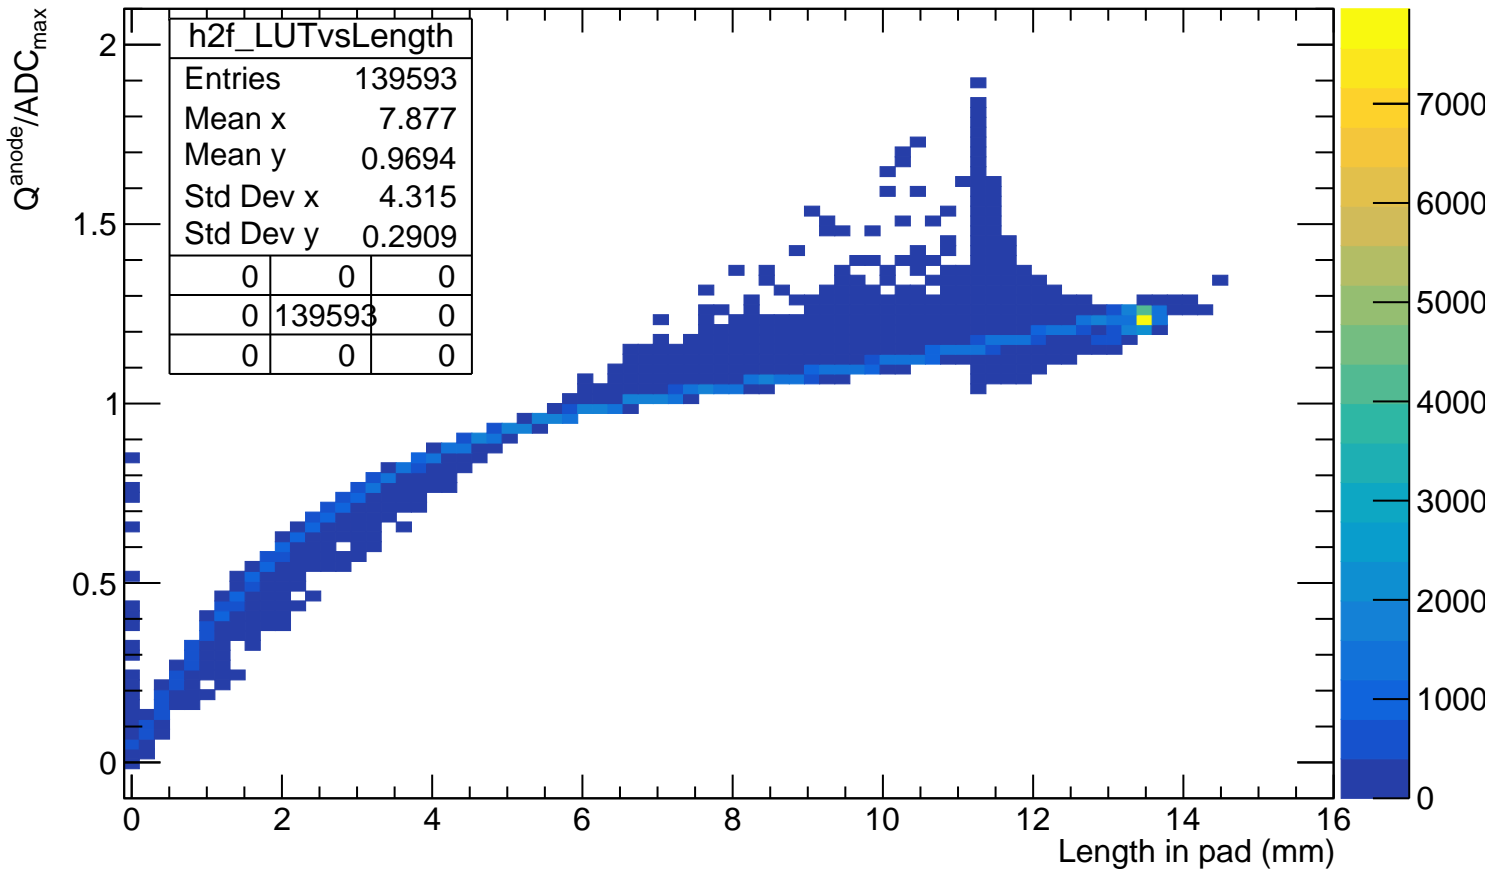


Q_{cluster} VS length in cluster

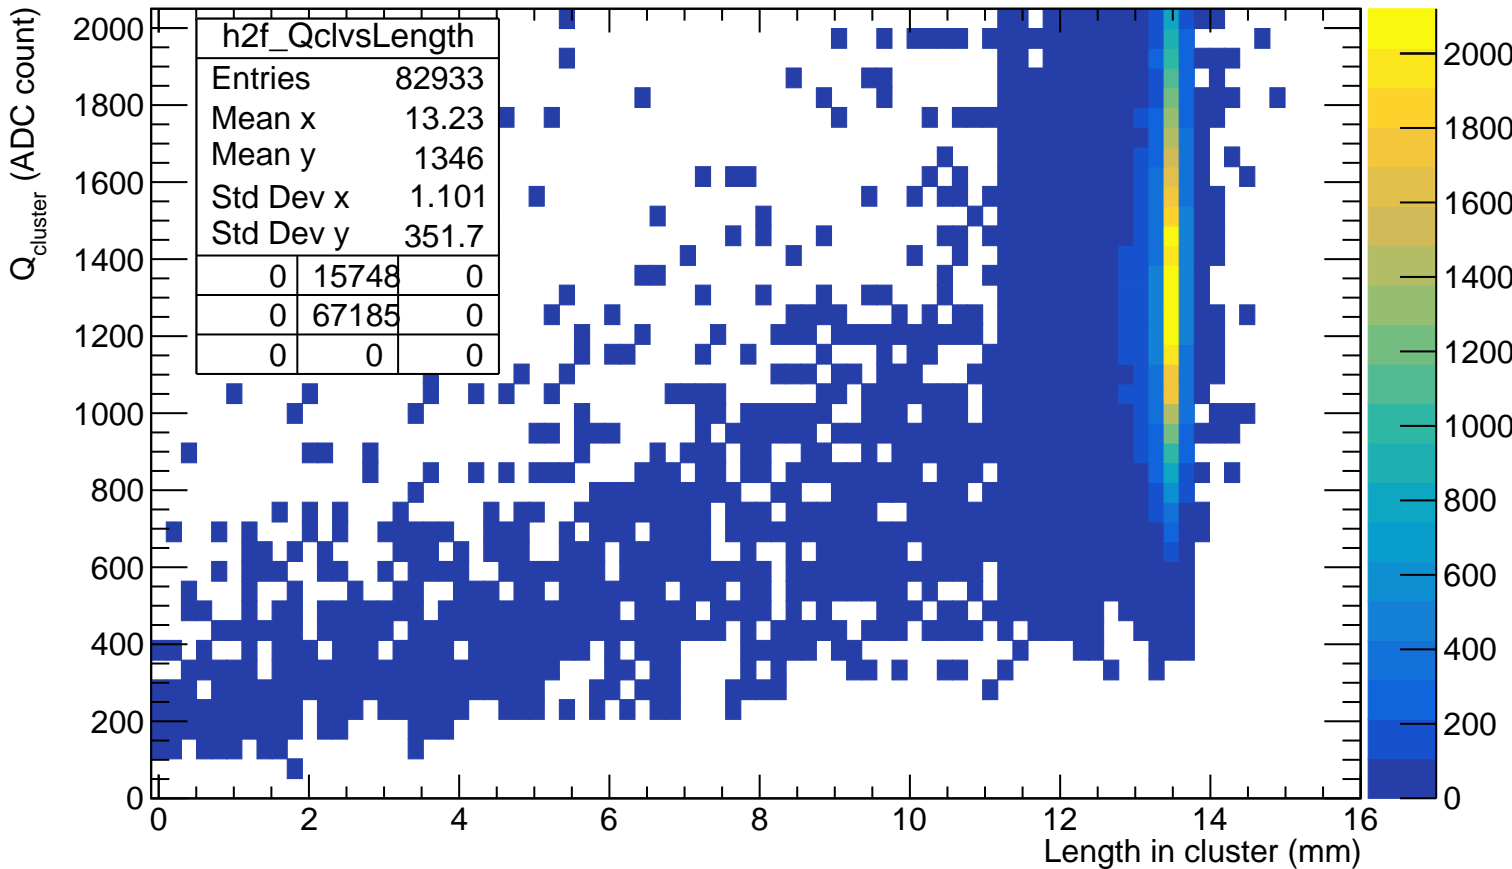


WF_{sum} VS length in cluster

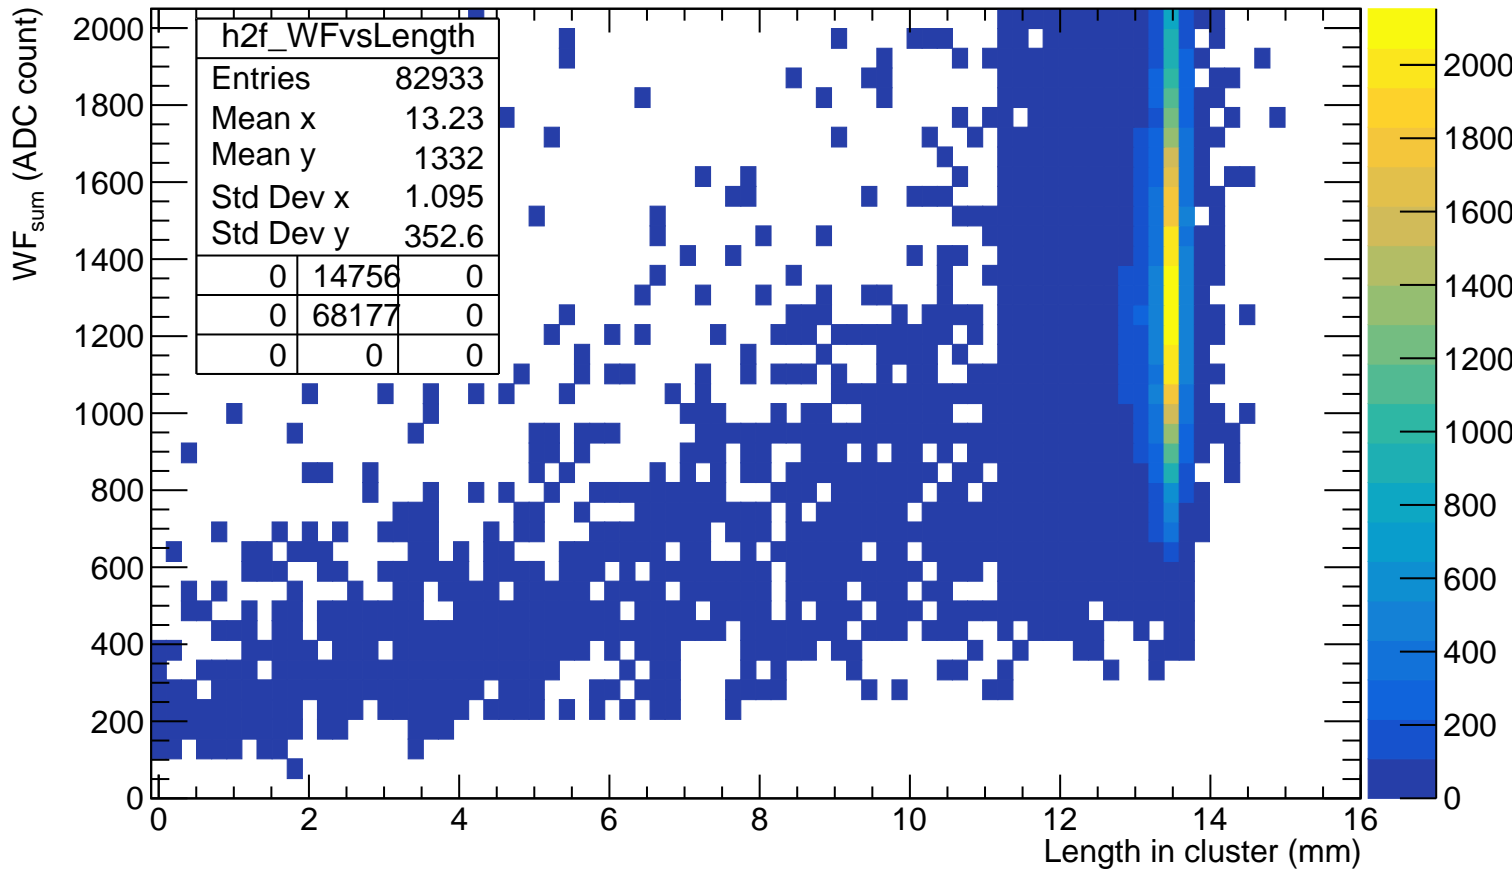


WF_{sum truncated} VS length in cluster

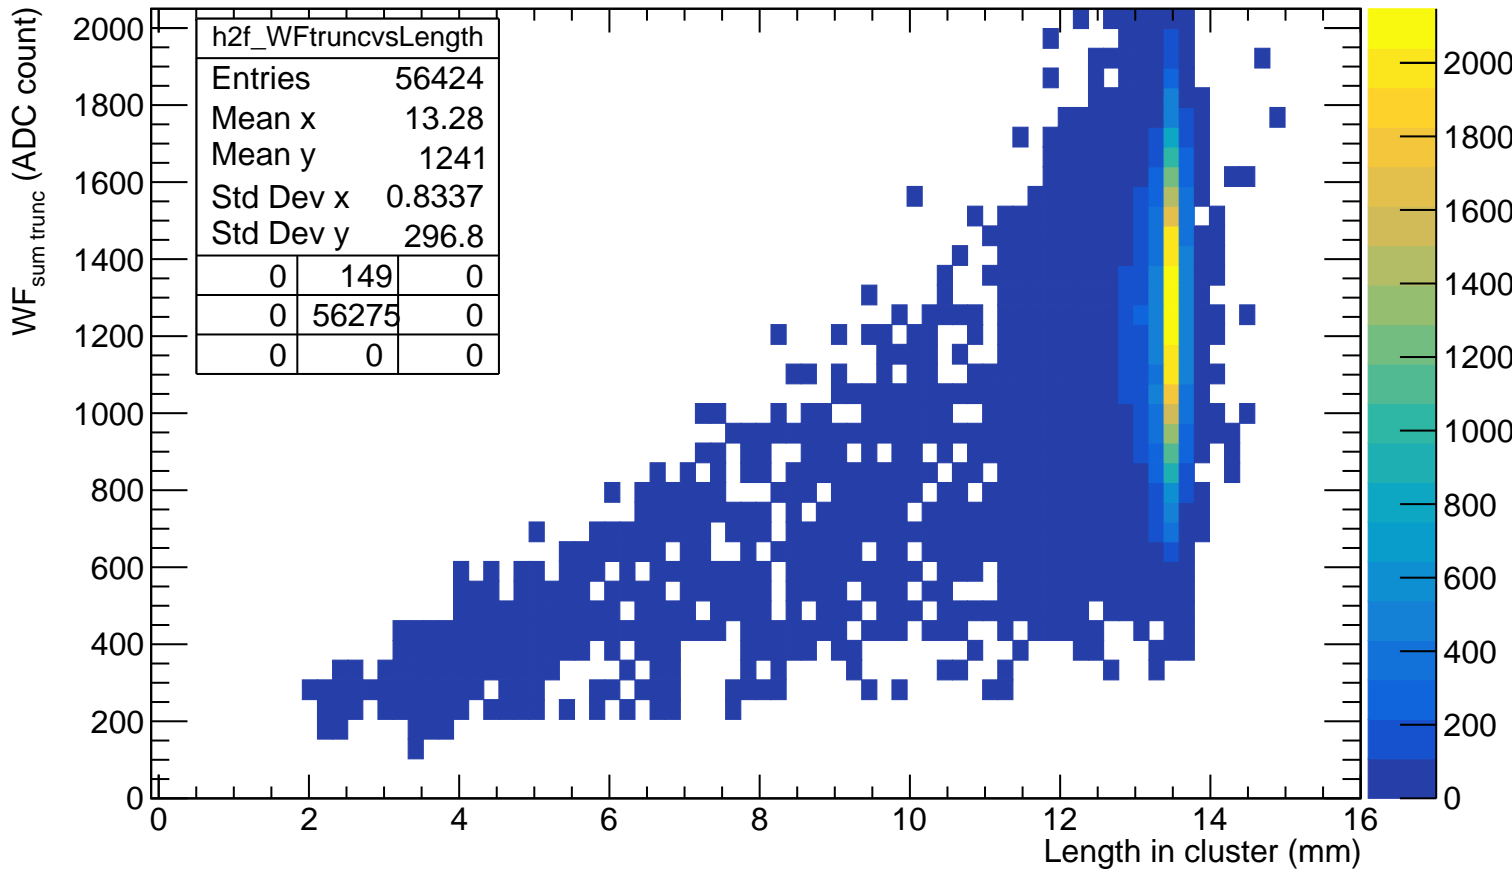


WF_{sum}^{*} VS length in cluster

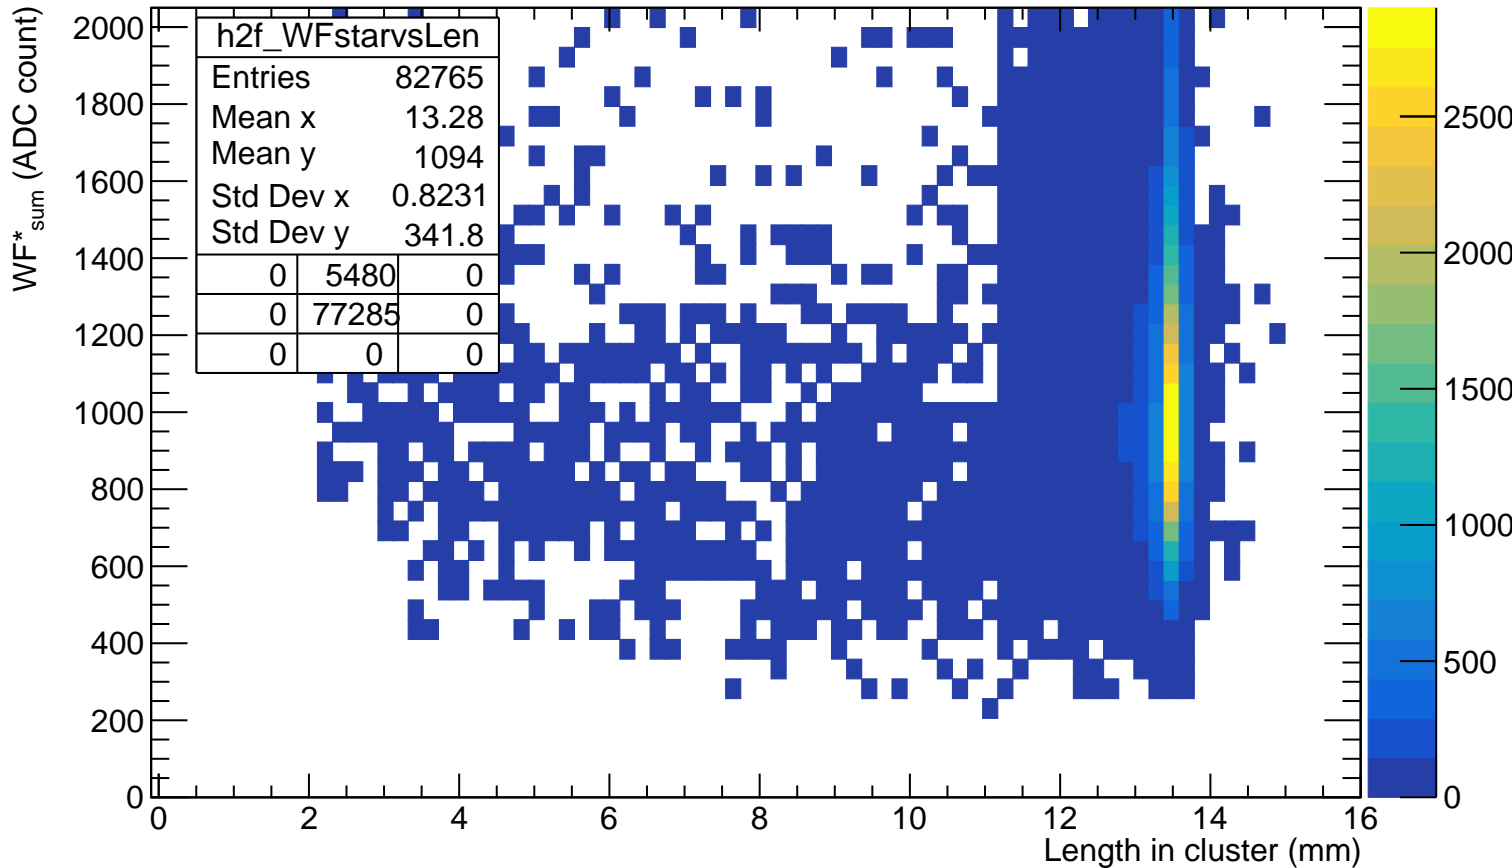

WF*_{sum truncated} VS length in cluster

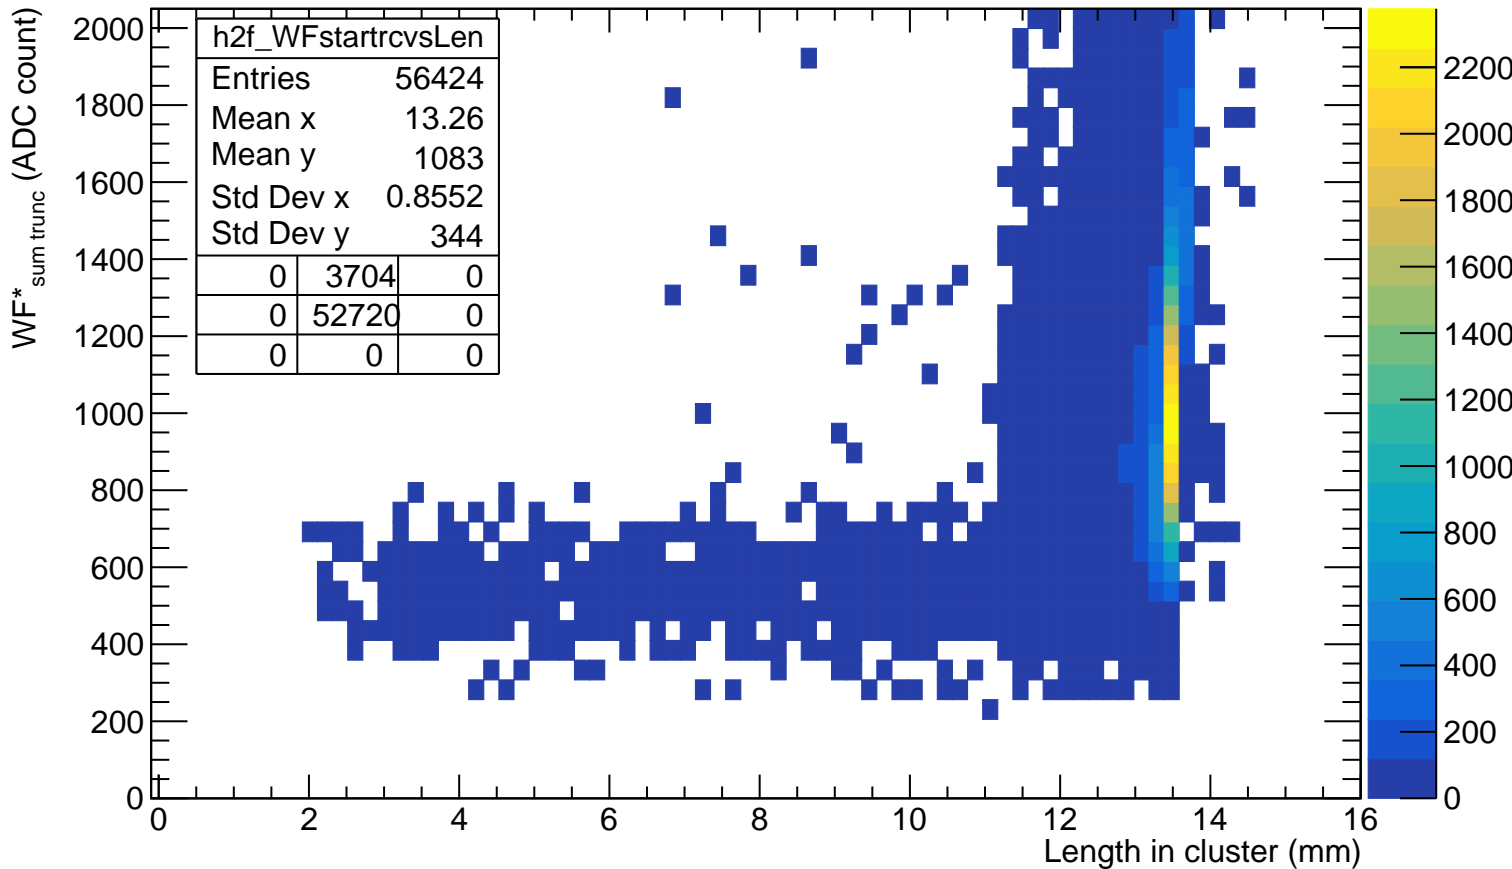

$$A_{\max}(\text{WF}_{\text{sum}}) / L_{\text{cluster}}$$

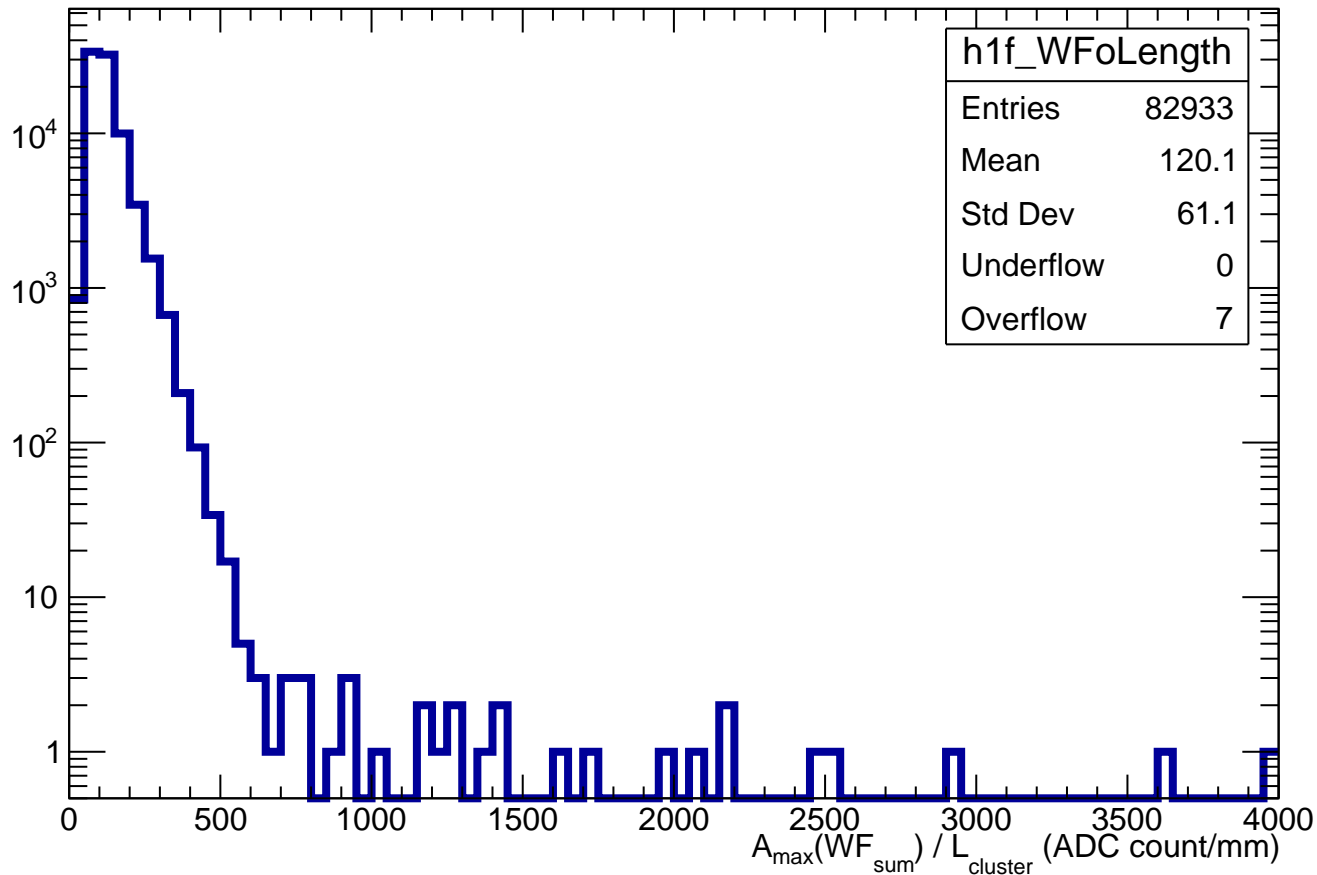

impact parameter d vs length in pad

