



T_{\max} of crossed pads

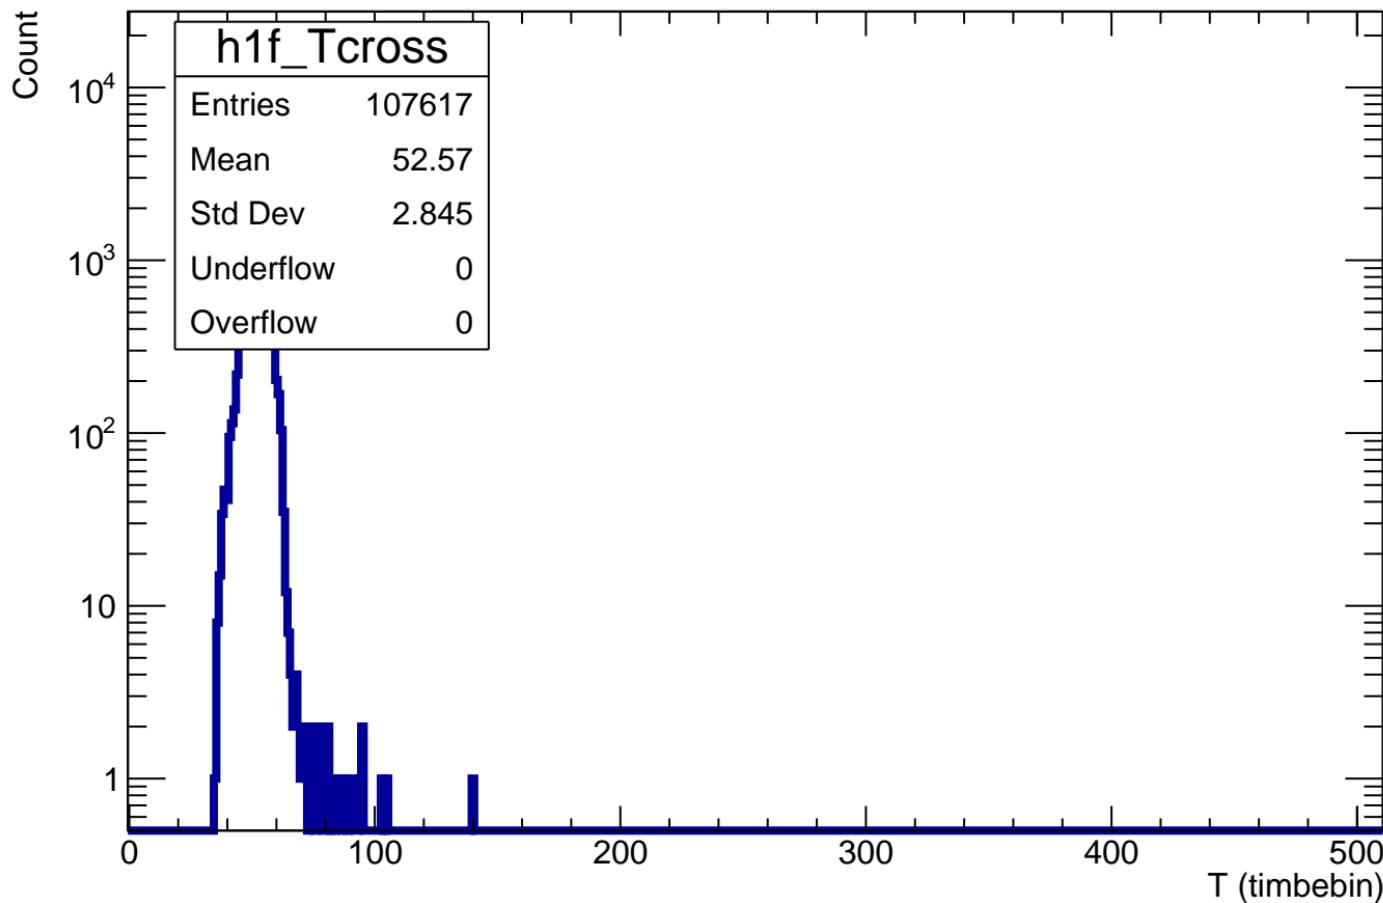


Number of crossed pads


Count

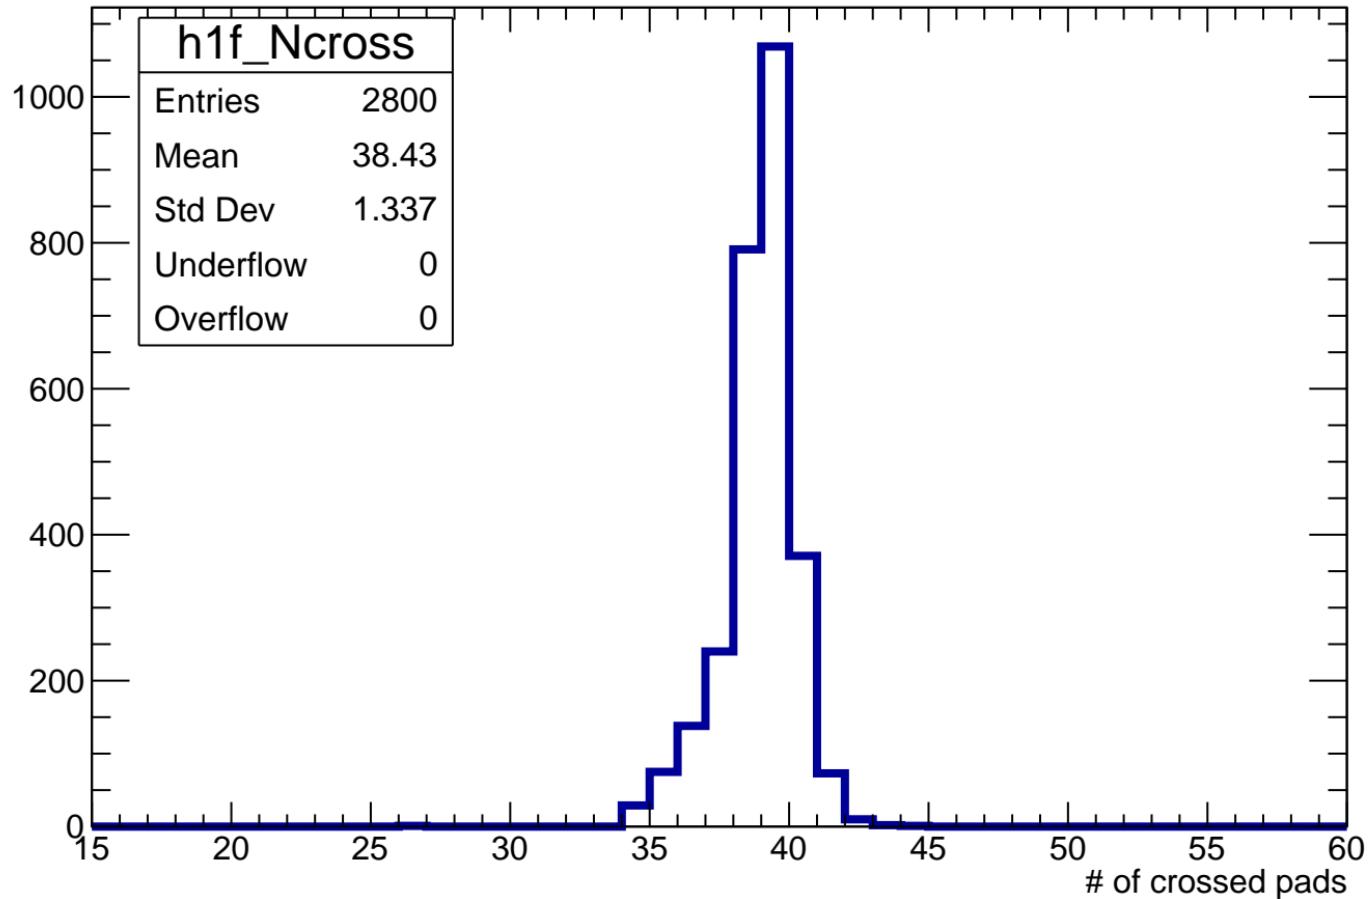


$$\Sigma(Q)/\Sigma(\text{length}) - \text{mean}\{Q/\text{length}\}$$

Count

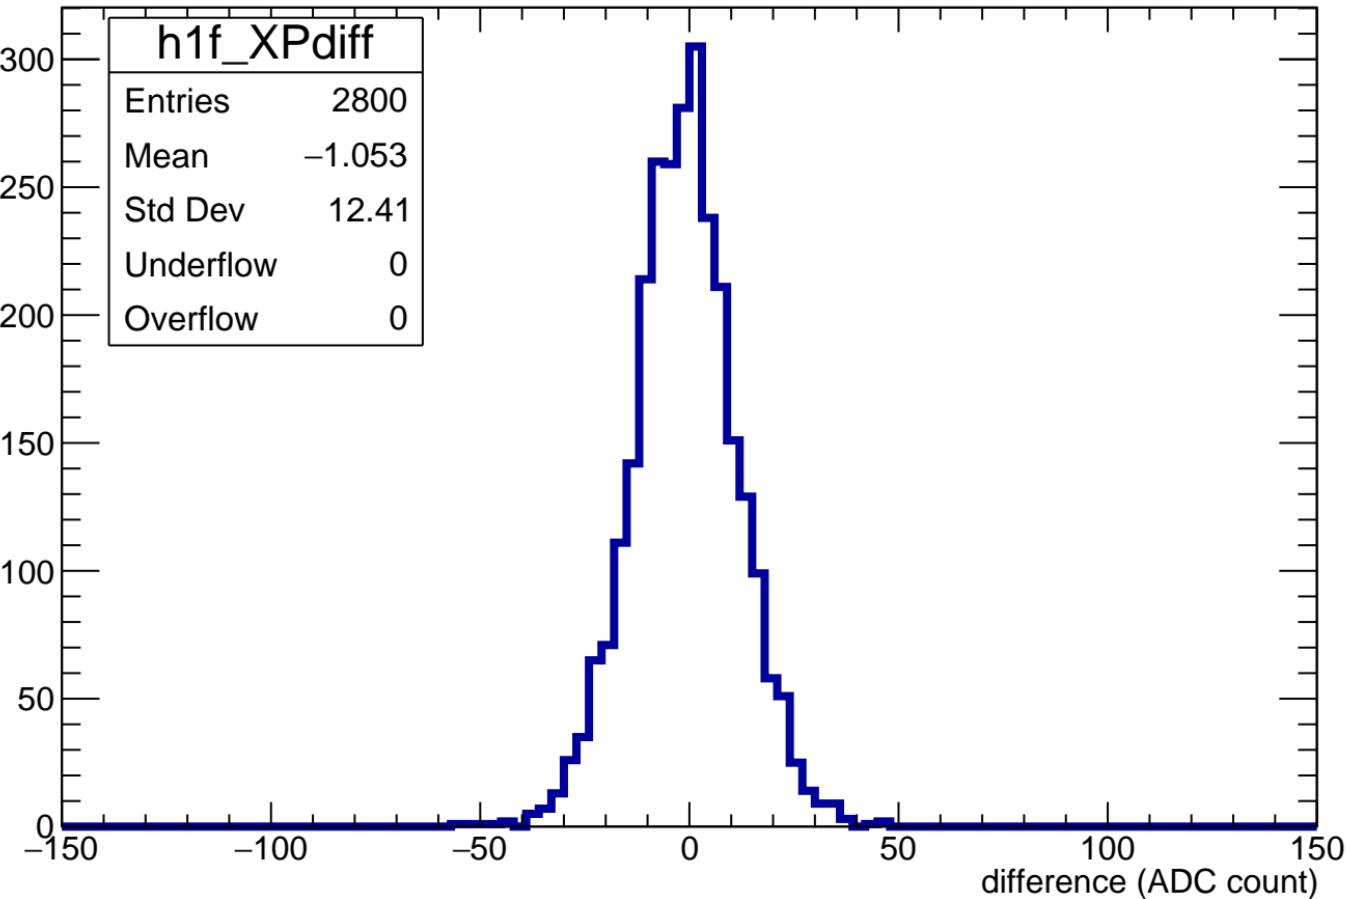


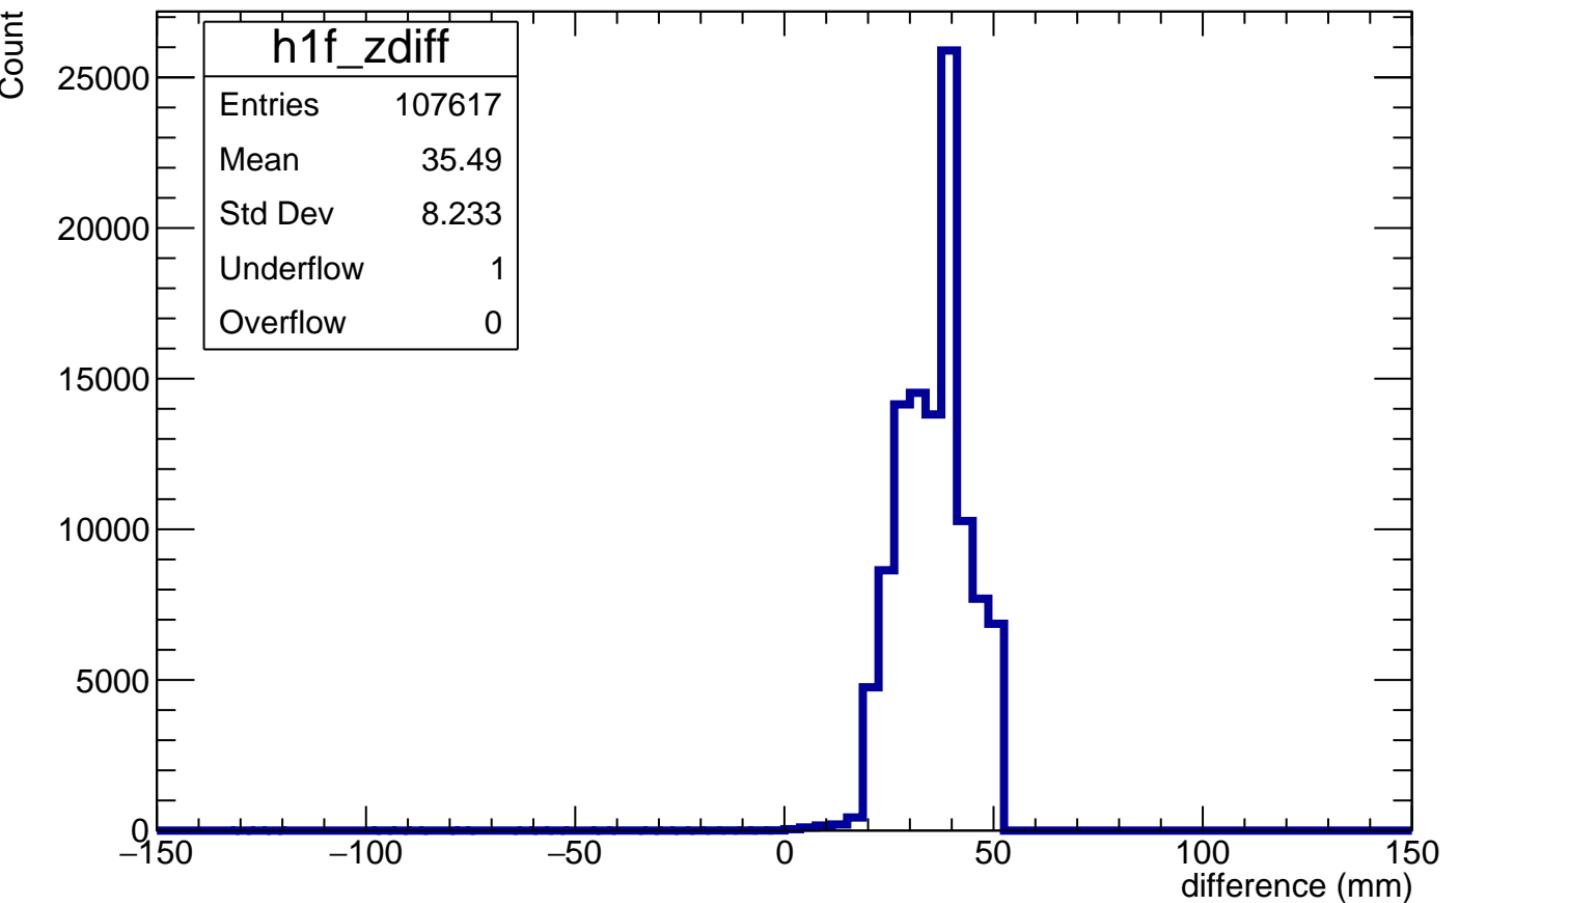$Z_{\text{file}} = 50\text{mm} - Z_{\text{computed}}$ 


Angle φ in each pad

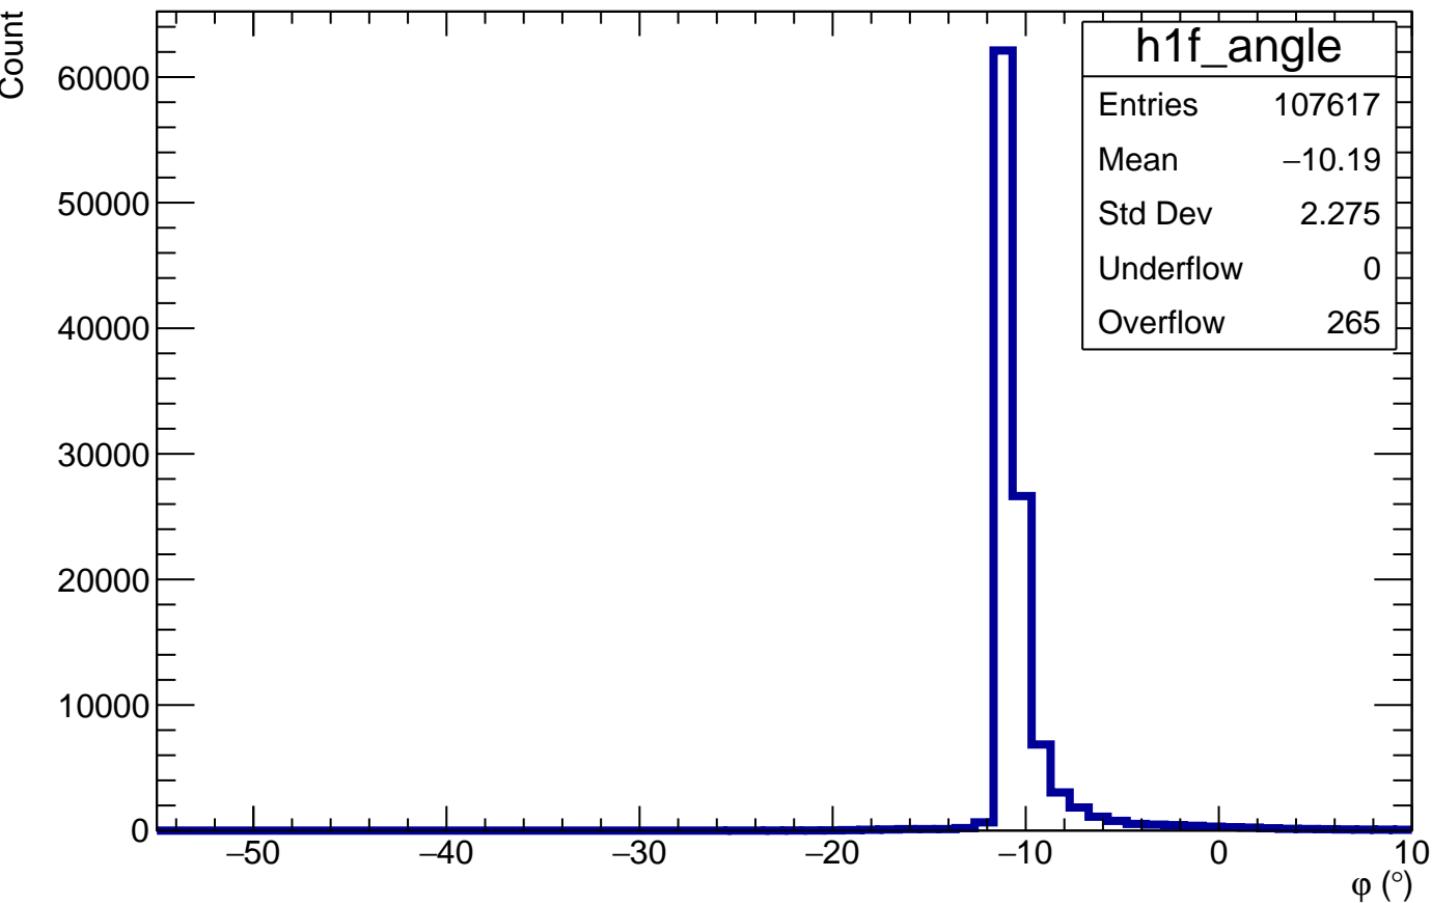


Length in pad normalized to maximum length in pad for a given ϕ

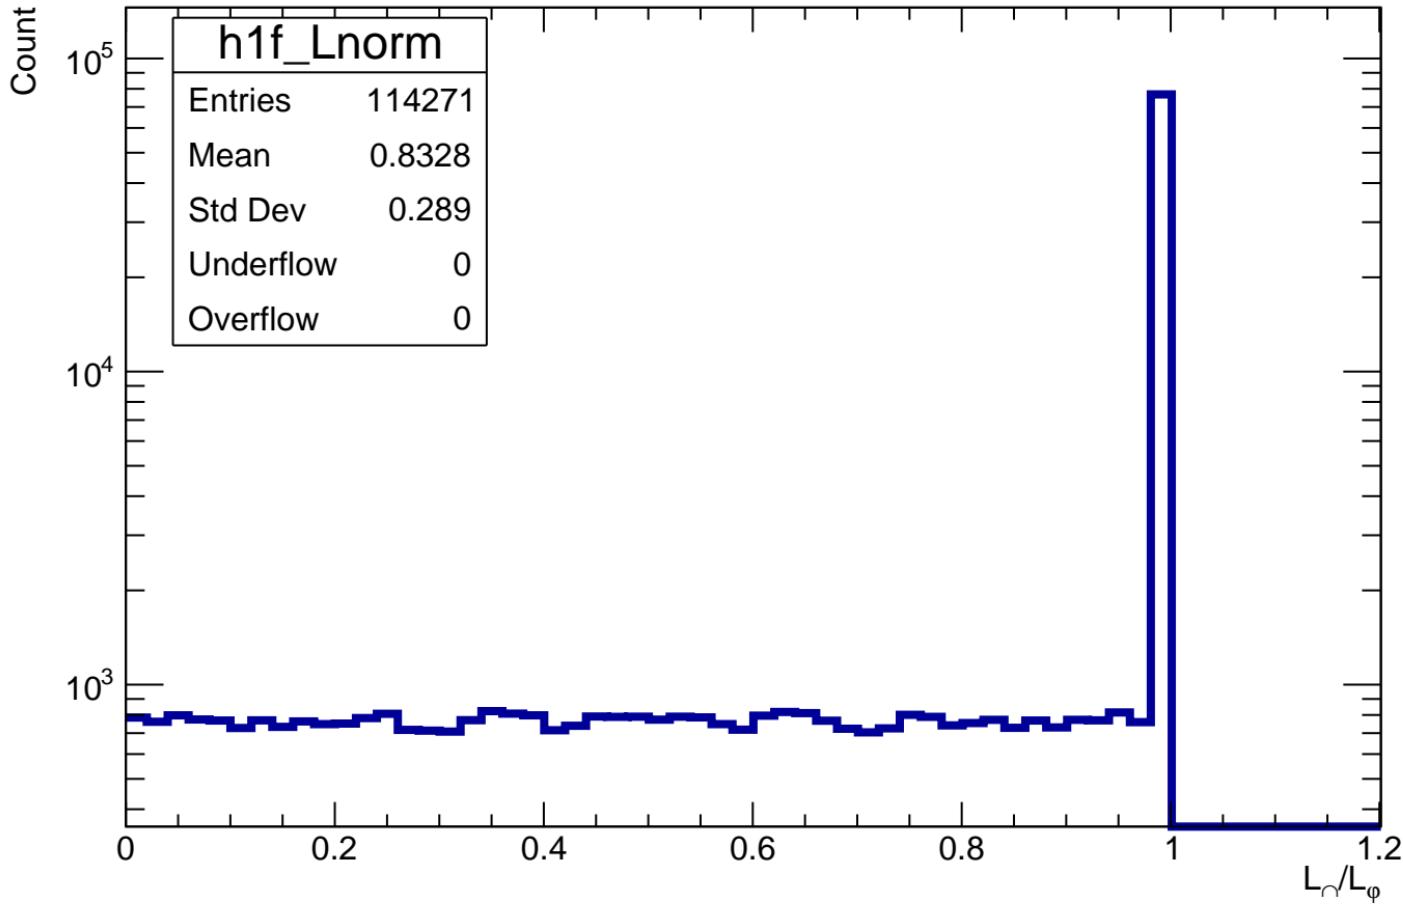


Normalized impact parameter d/d_{\max}

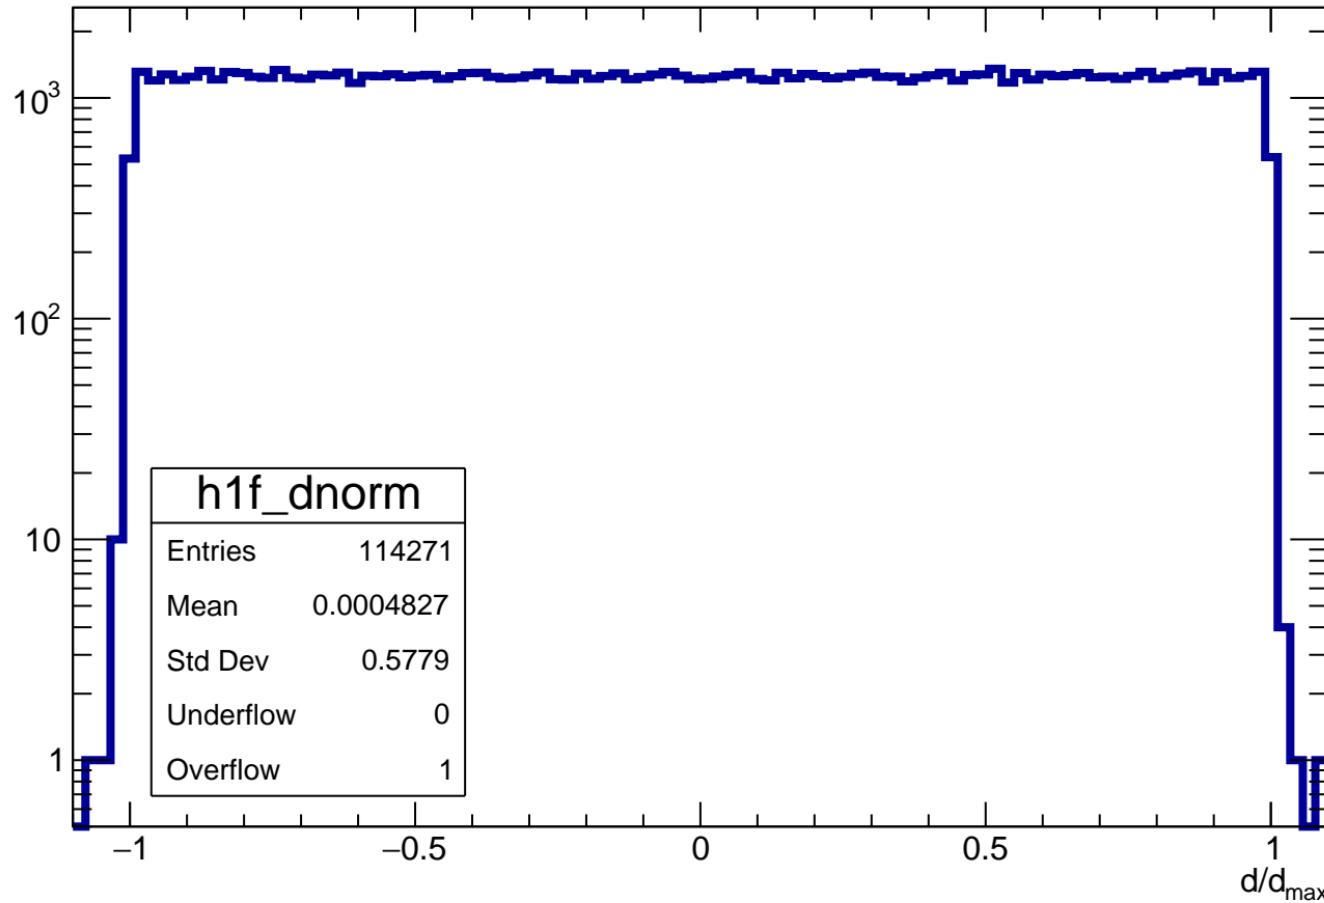

distance of track in pad

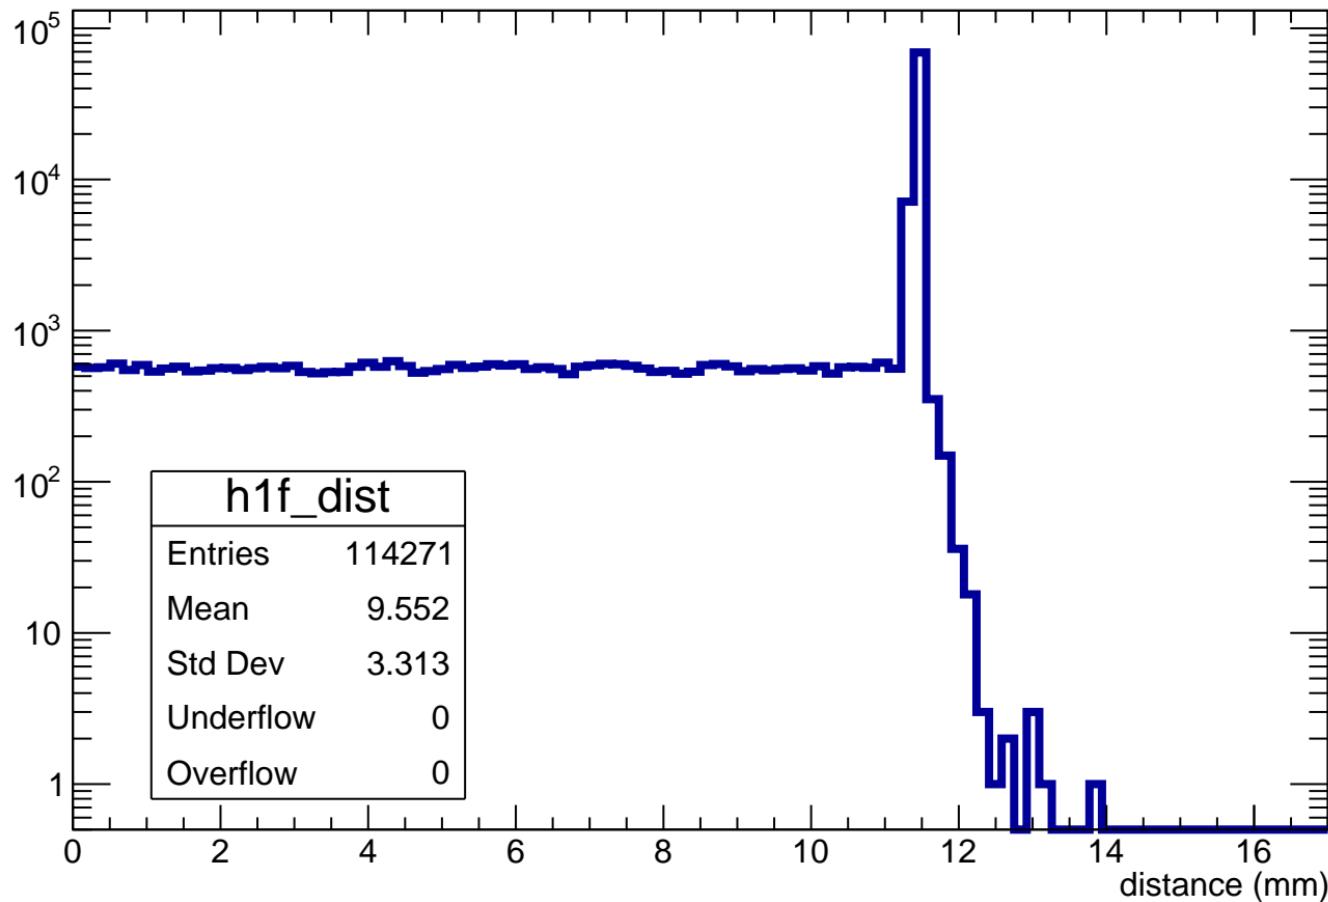


distance of track in cluster

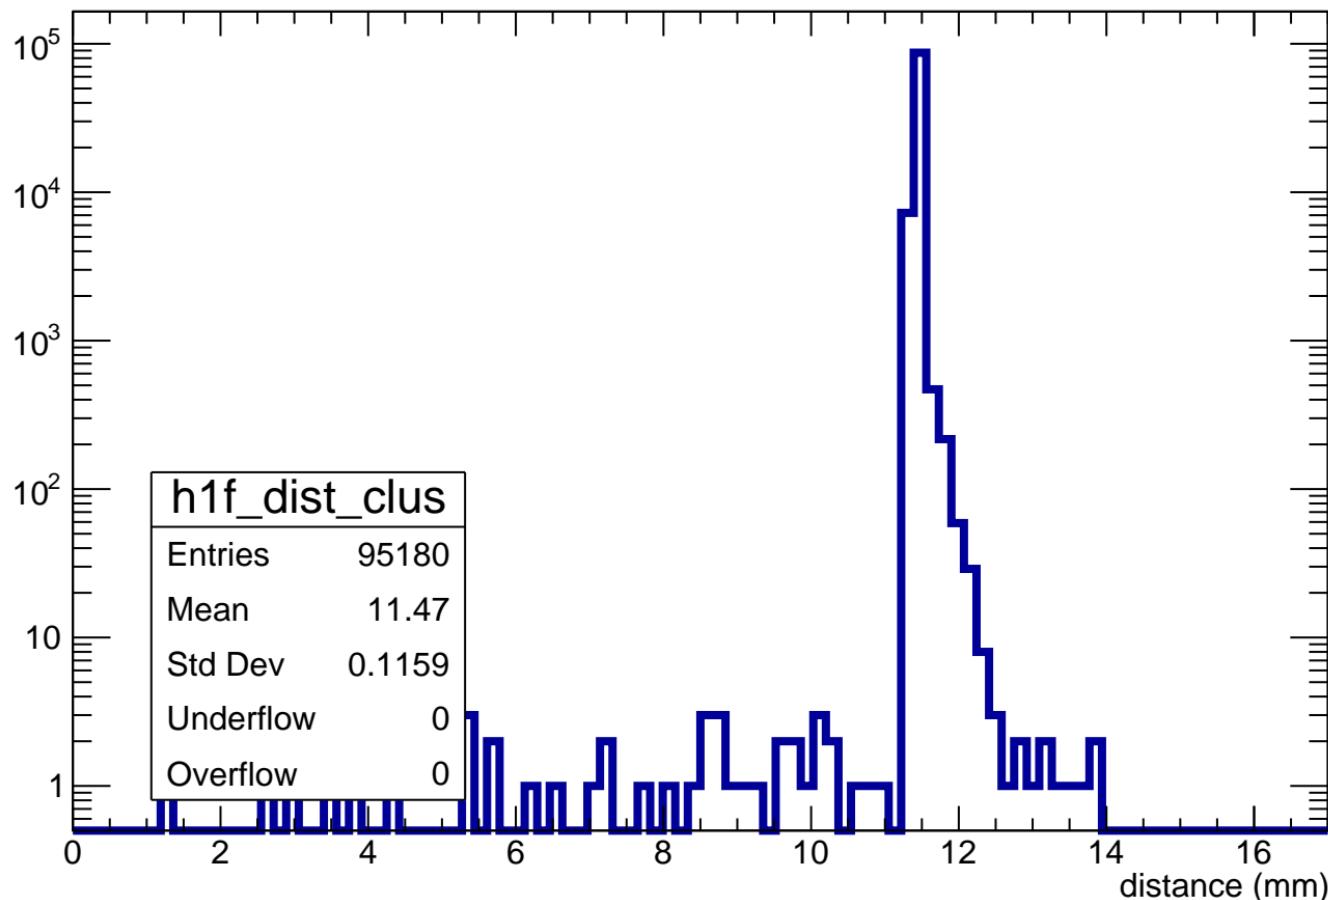


Correction A_{max} ratio

Count

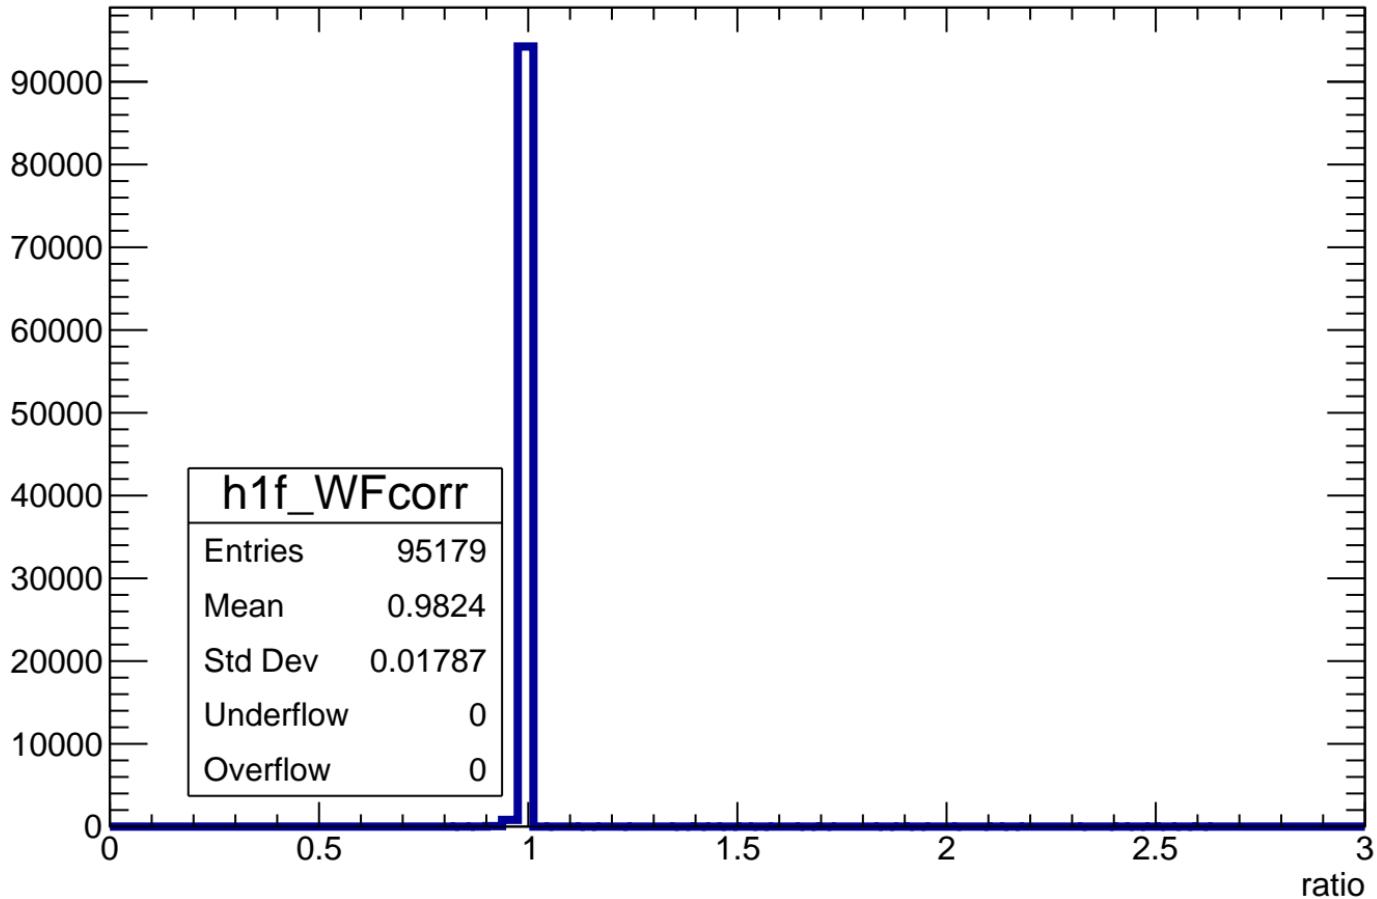


$L_{\text{ERAM}} * 0.7 - \sum L_{\text{clus} > 2\text{mm}}$

Count

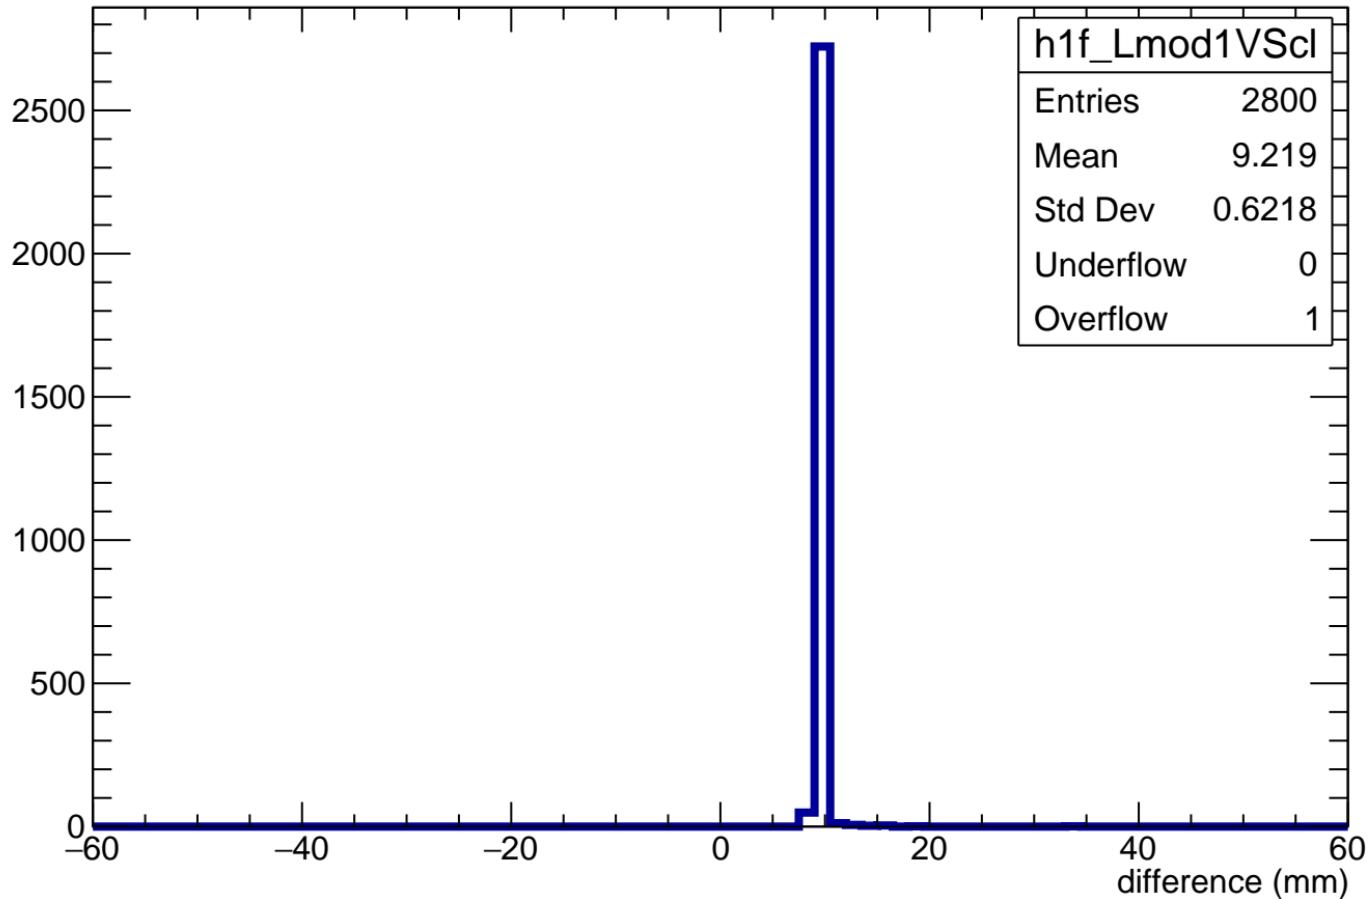

$$L_{\text{ERAM}} * (N_{\text{trunc cross}} / N_{\text{clus cross} > 2\text{mm}}) - \sum L_{\text{clus} > 2\text{mm}}$$

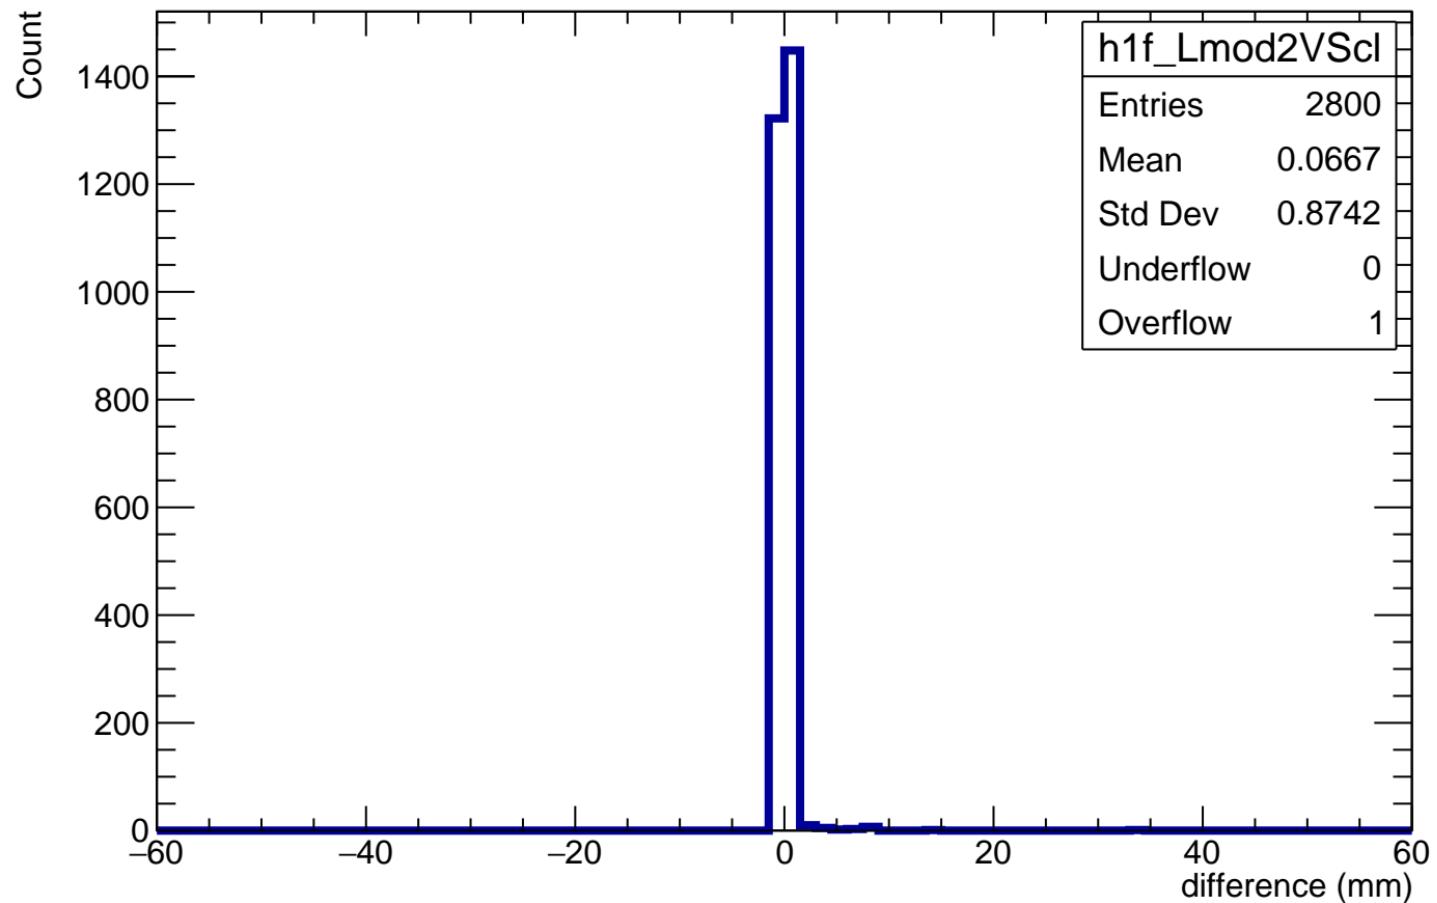

$L_{\text{clusters}} - L_{\text{clusters} > 2\text{mm}}$


Count

1400
1200
1000
800
600
400
200
0


-60 -40 -20 0 20 40 60
difference (mm)

h1f_LallVScl	
Entries	2800
Mean	0.0004587
Std Dev	0.02427
Underflow	0
Overflow	0


LUT(z_{file}) vs LUT(z_{calc})

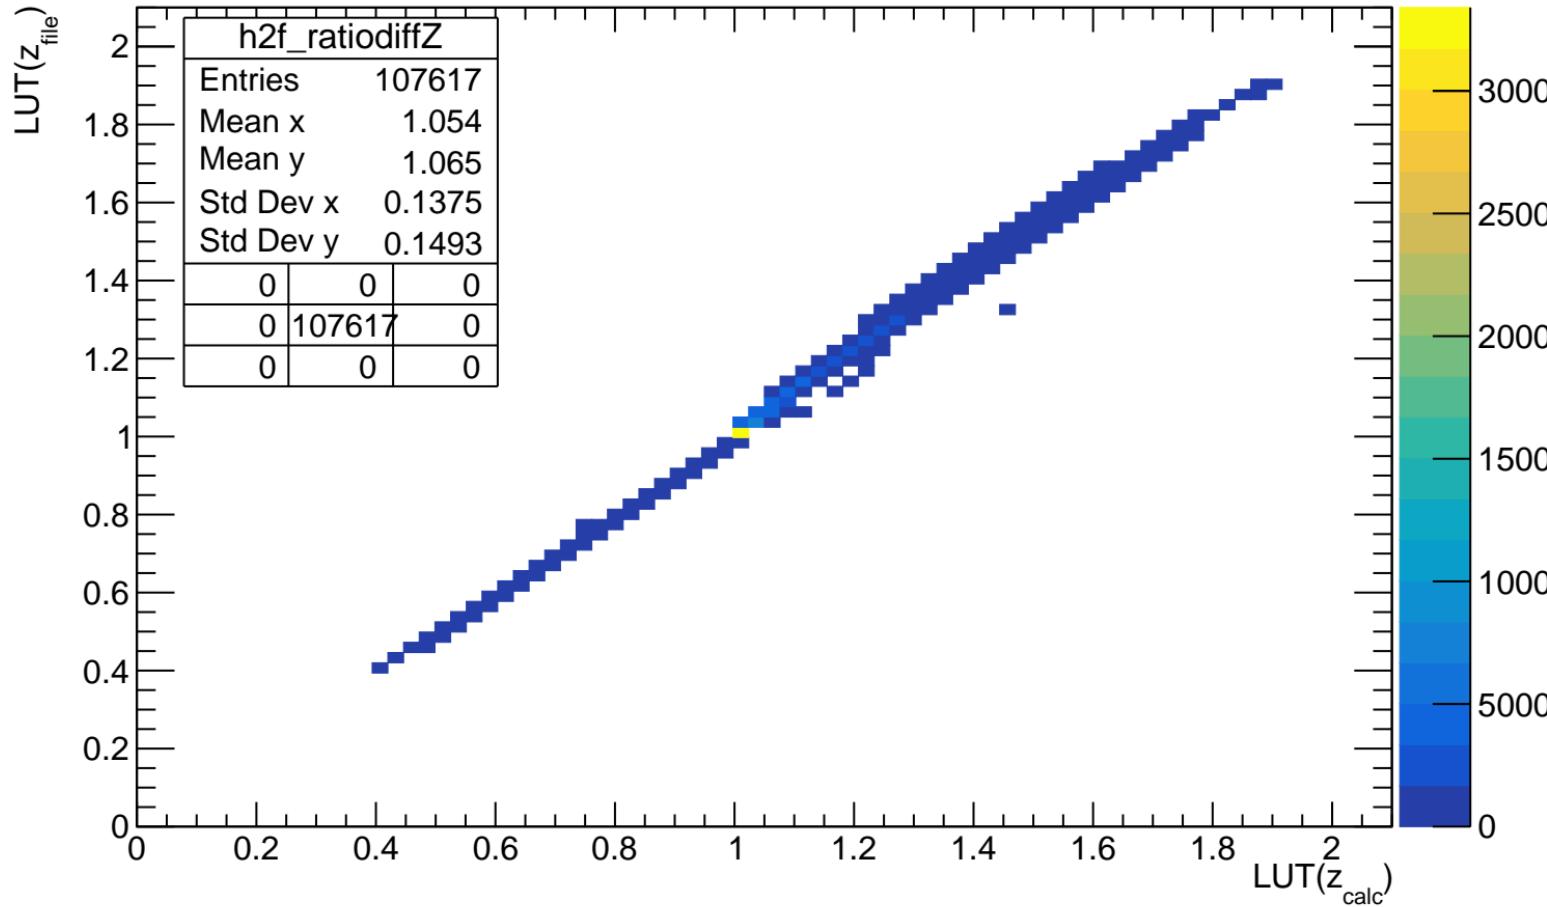

ADC_{max} VS length in pad (before length cut)

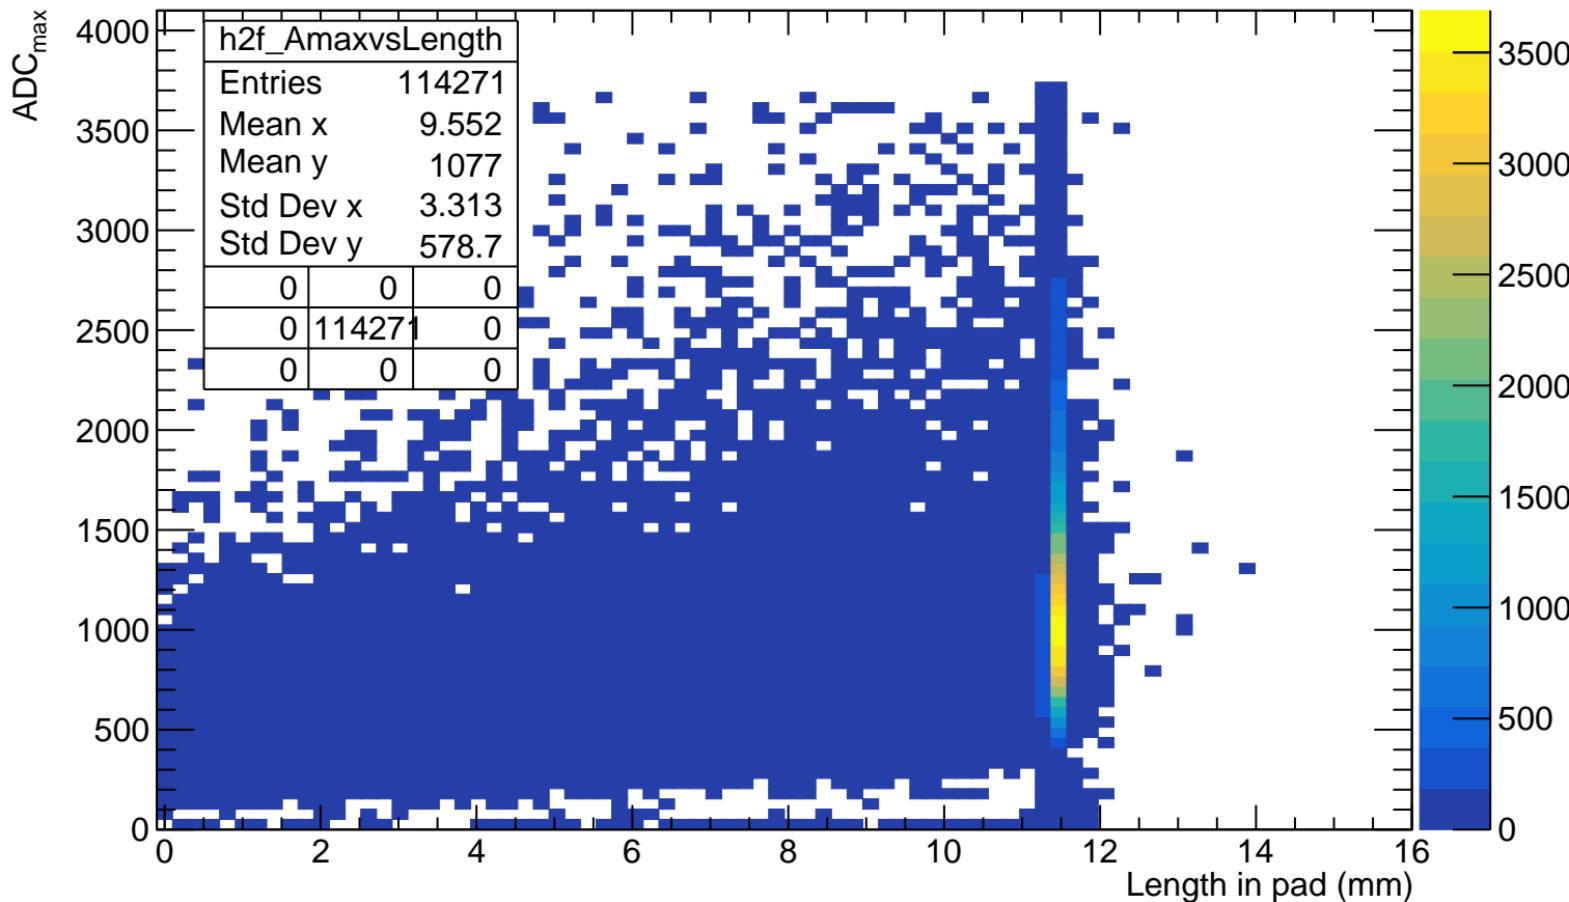


Q^{anode} VS length in pad (before length cut)

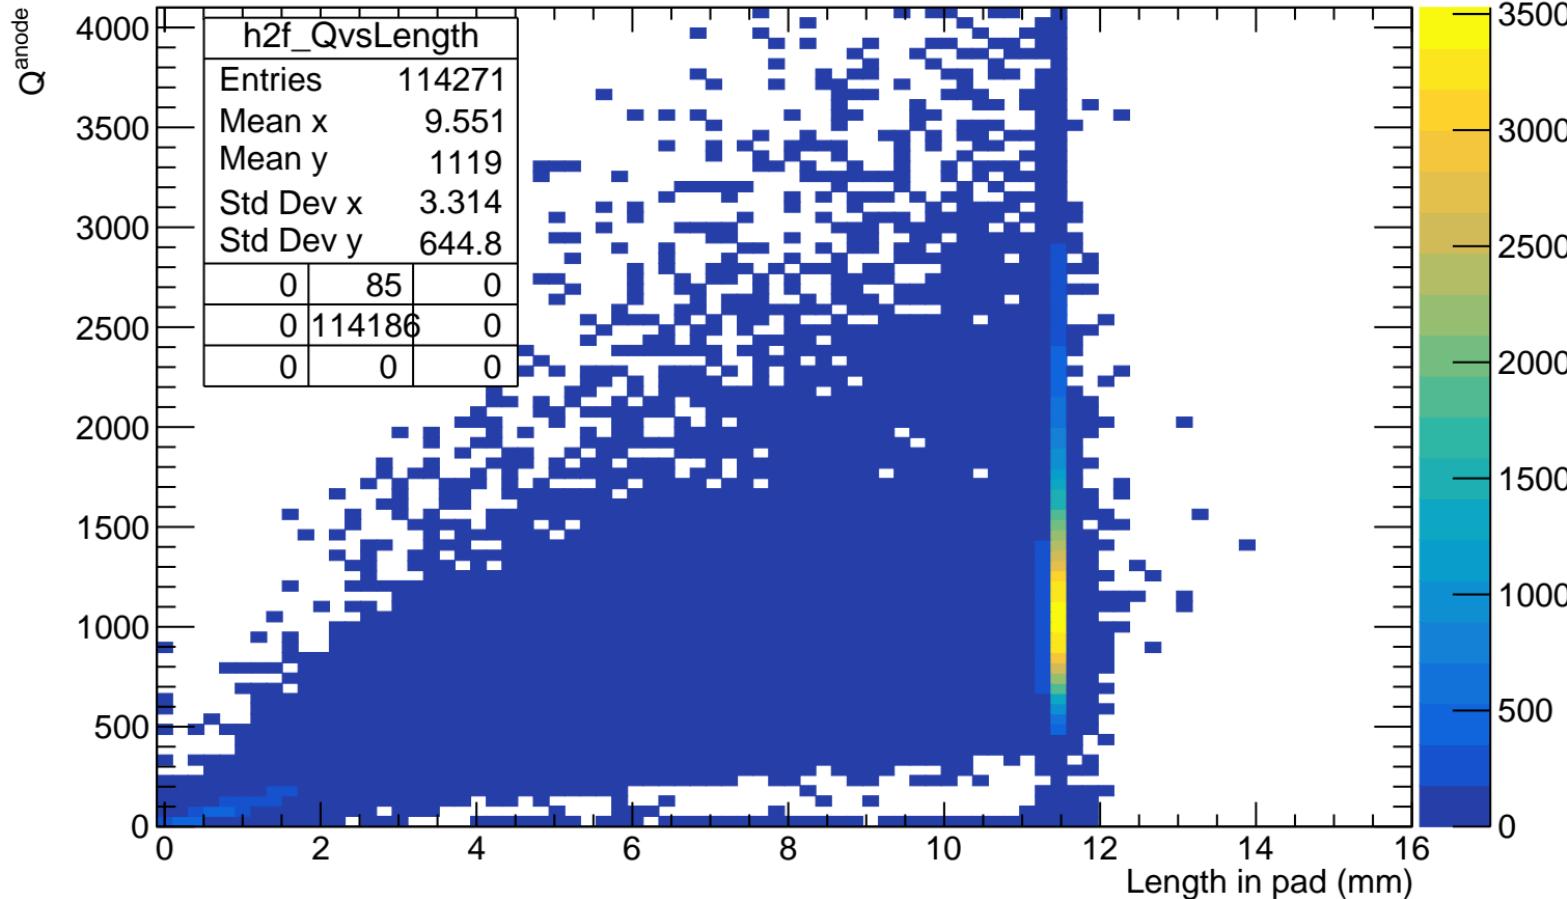


$Q^{\text{anode}}/\text{ADC}_{\max}$ VS length in pad (before length cut)


$Q^{\text{anode}}/\text{ADC}_{\max}$

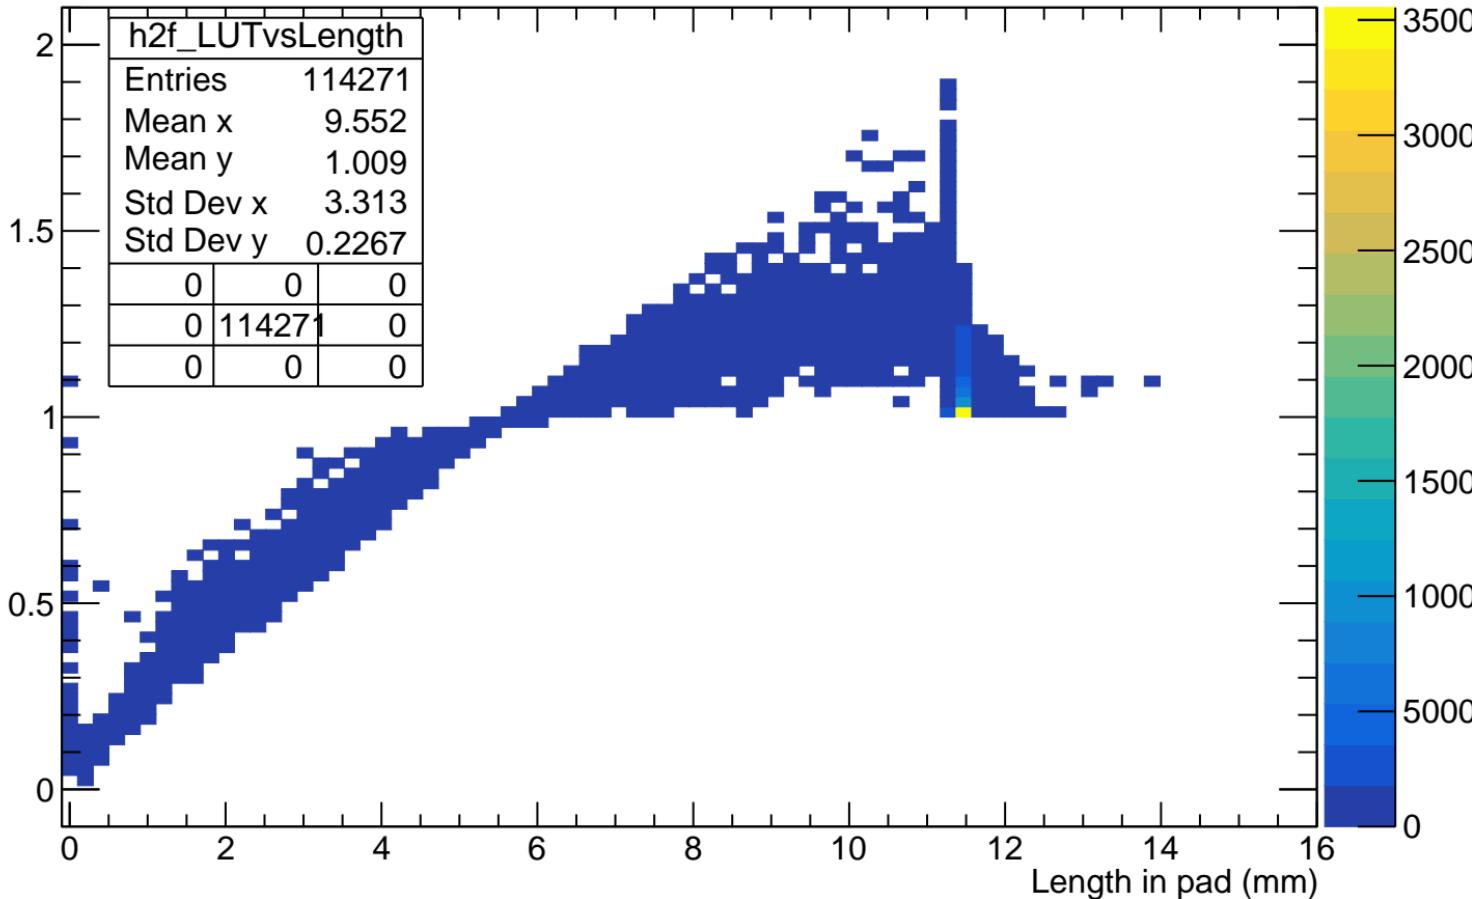


Q_{cluster} VS length in cluster

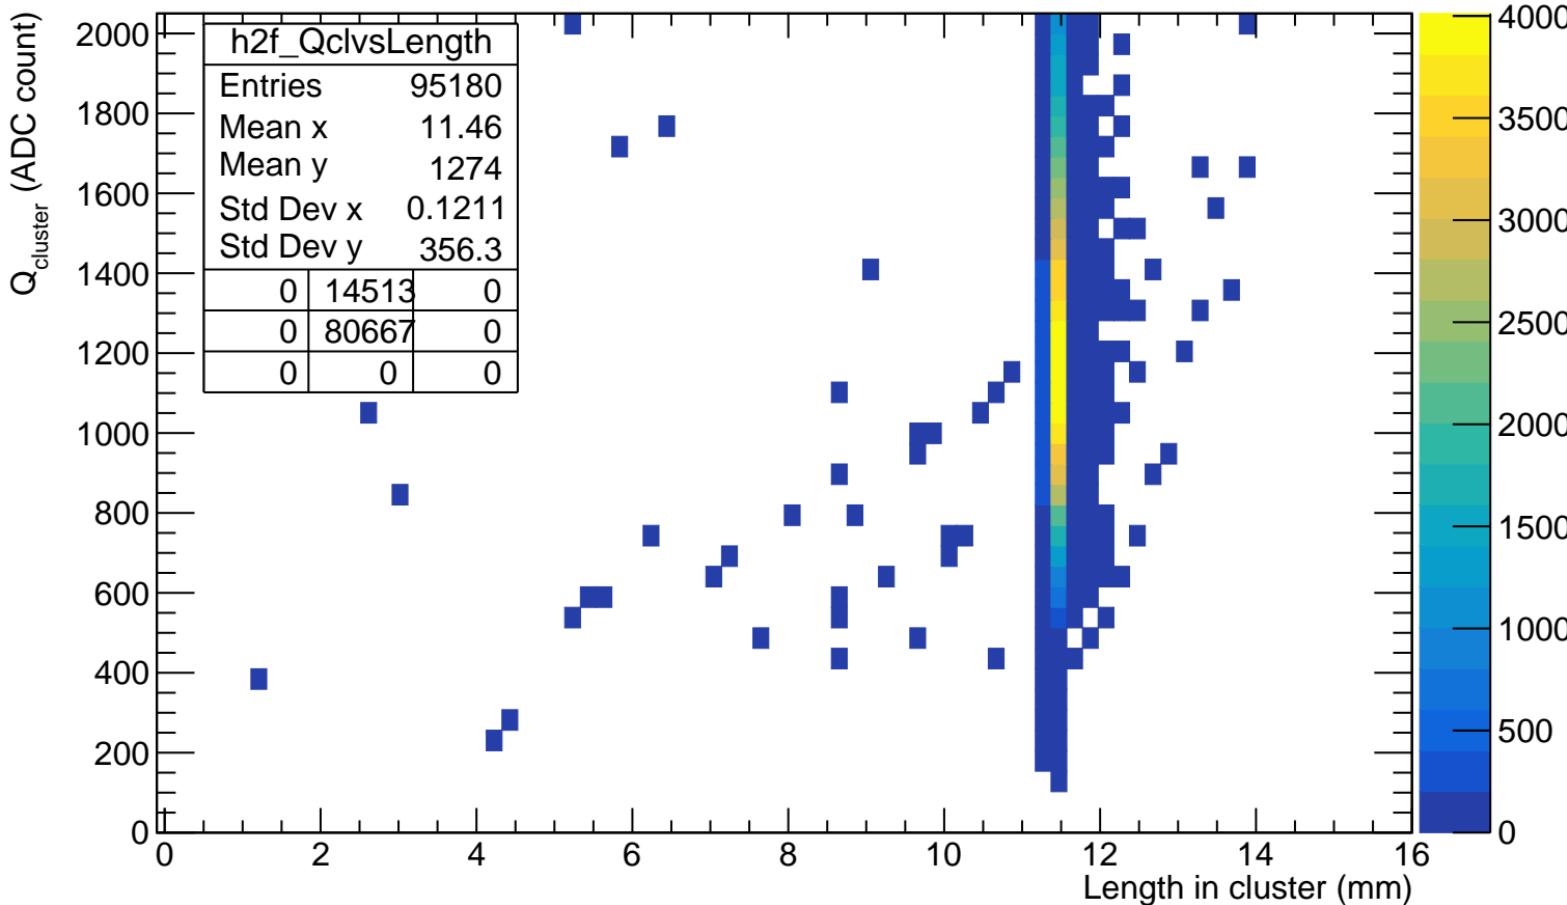


WF_{sum} VS length in cluster

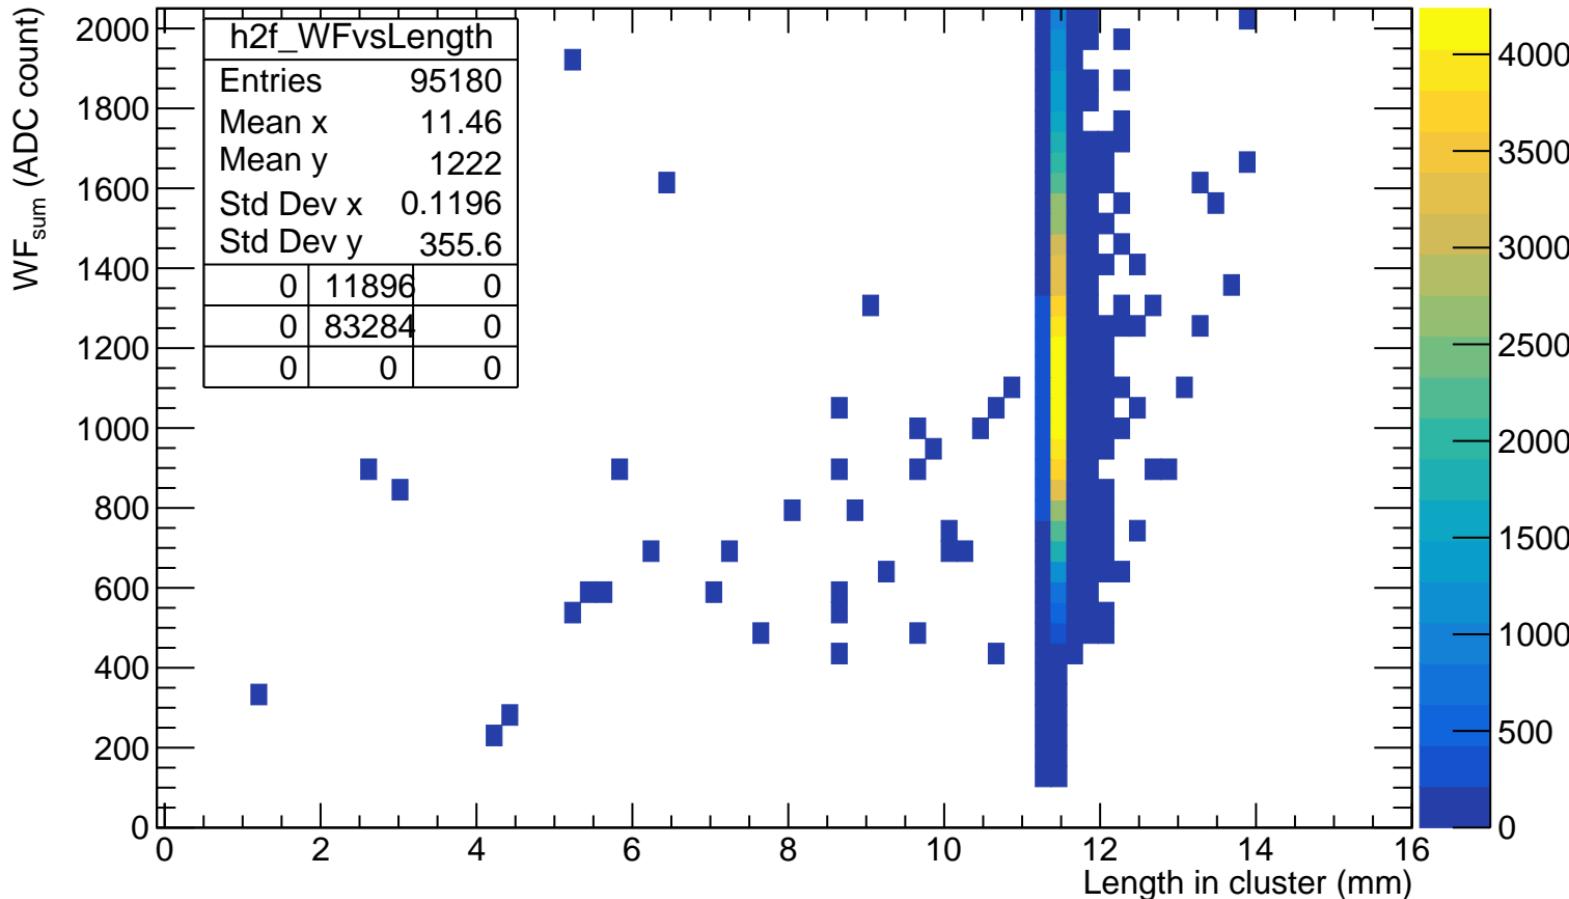


WF_{sum} truncated VS length in cluster

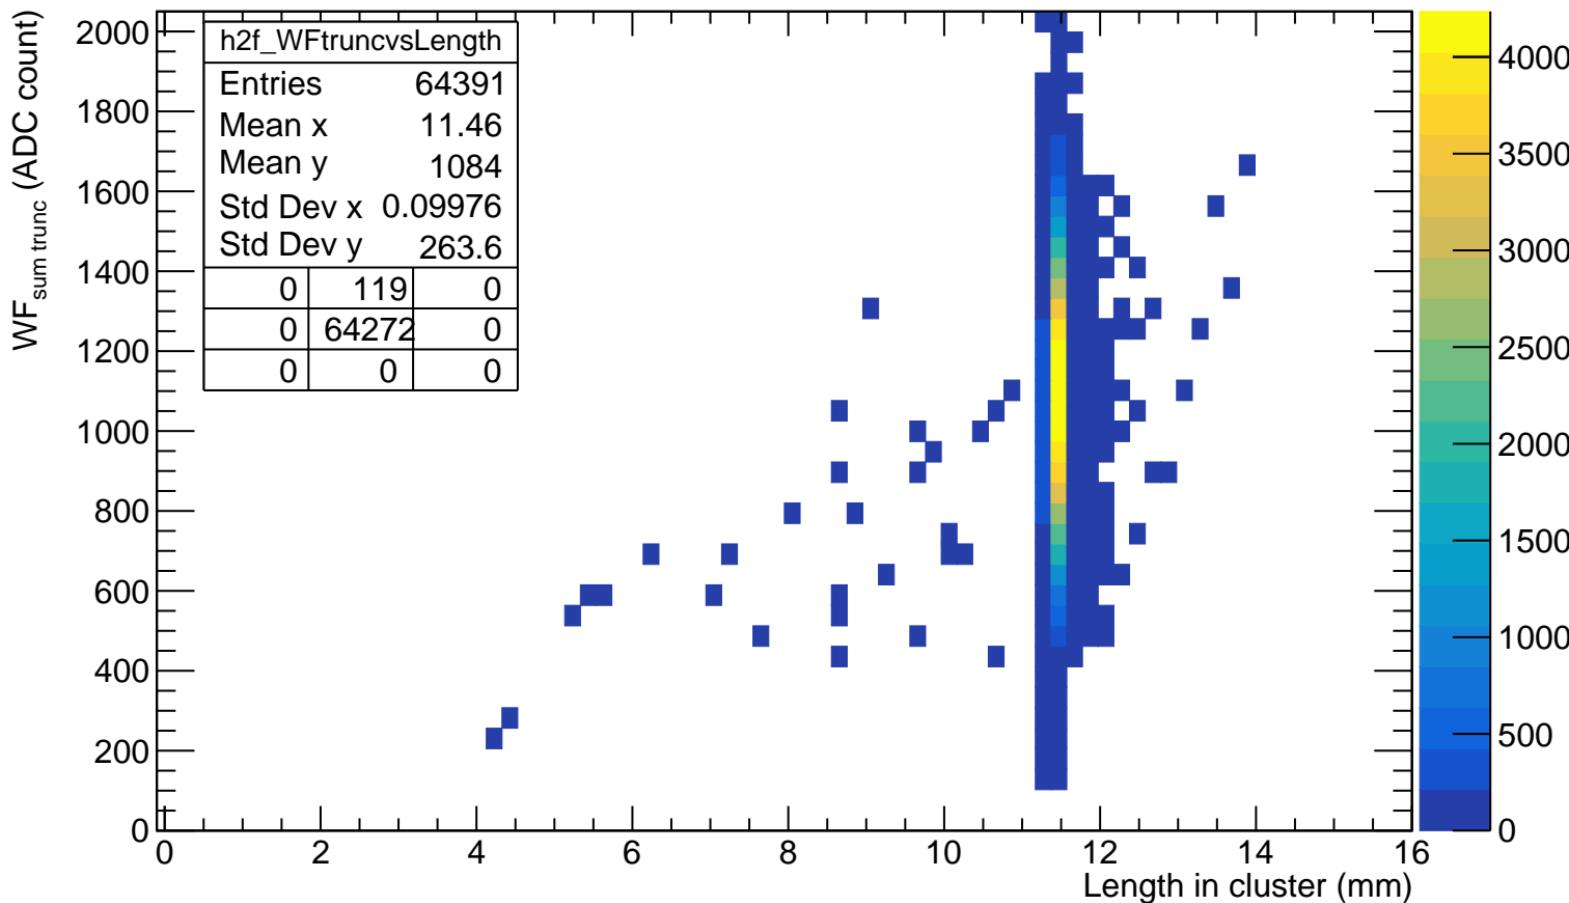


WF^{*}_{sum} VS length in cluster

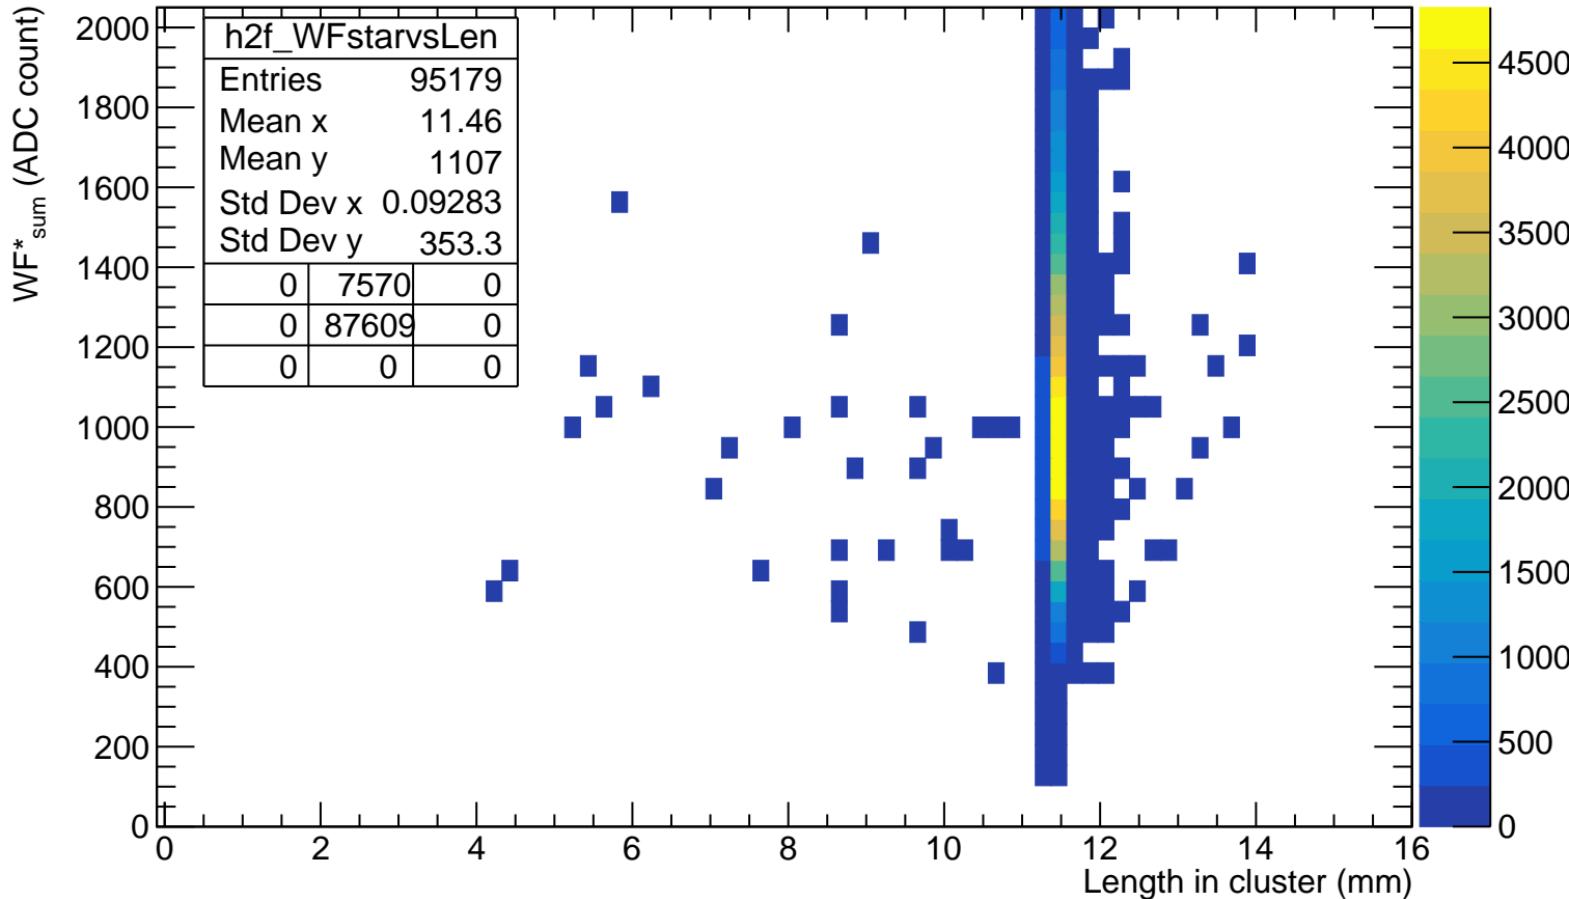

WF*_{sum truncated} VS length in cluster

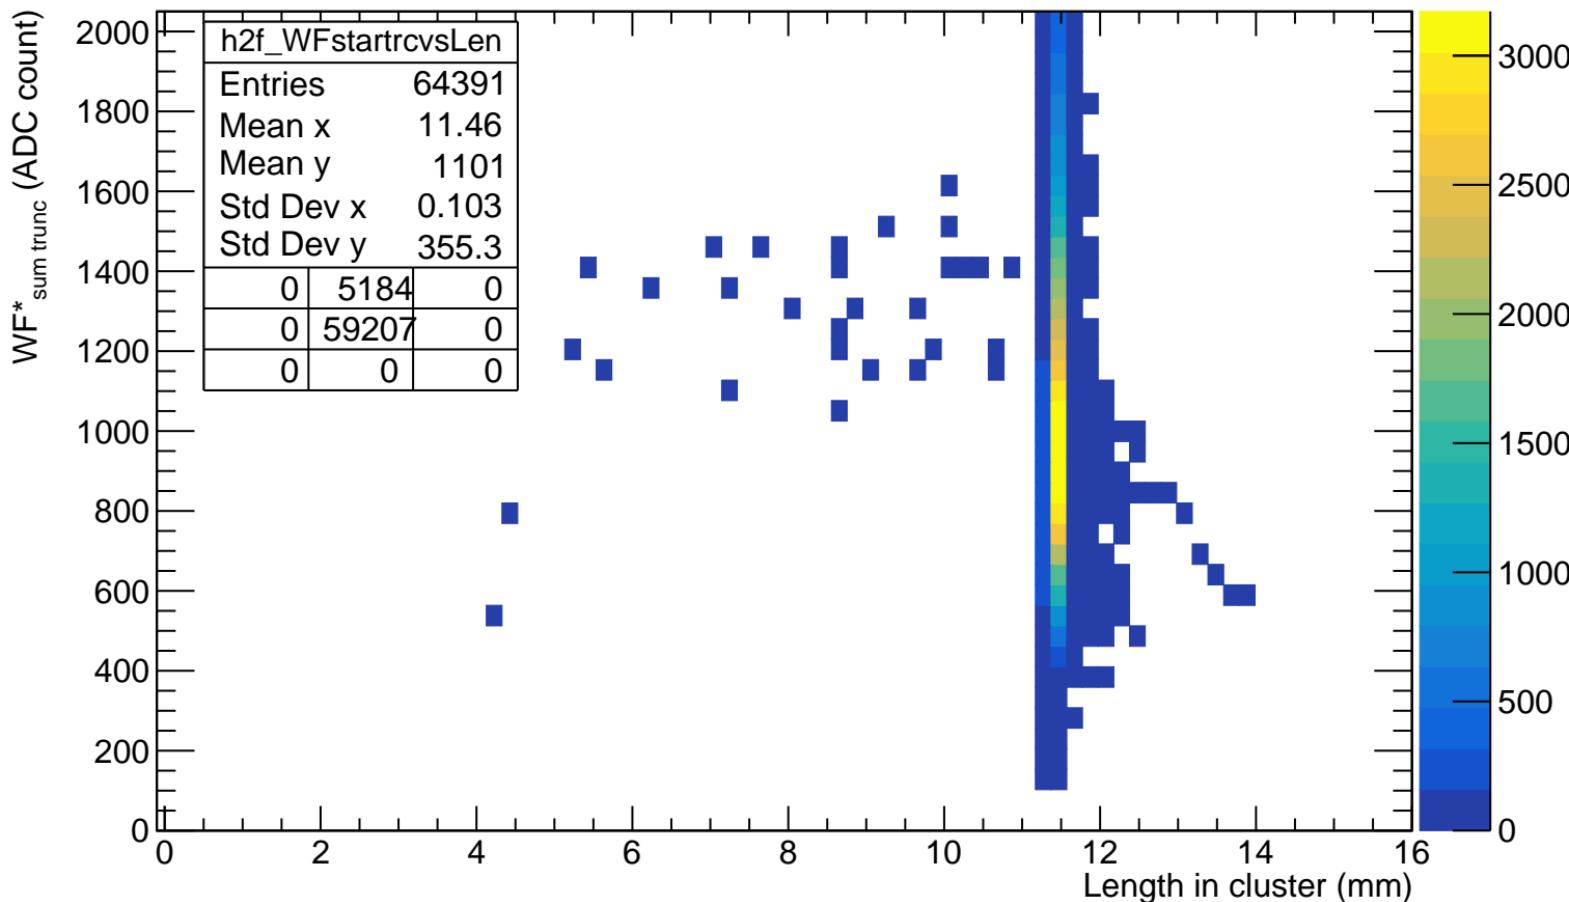

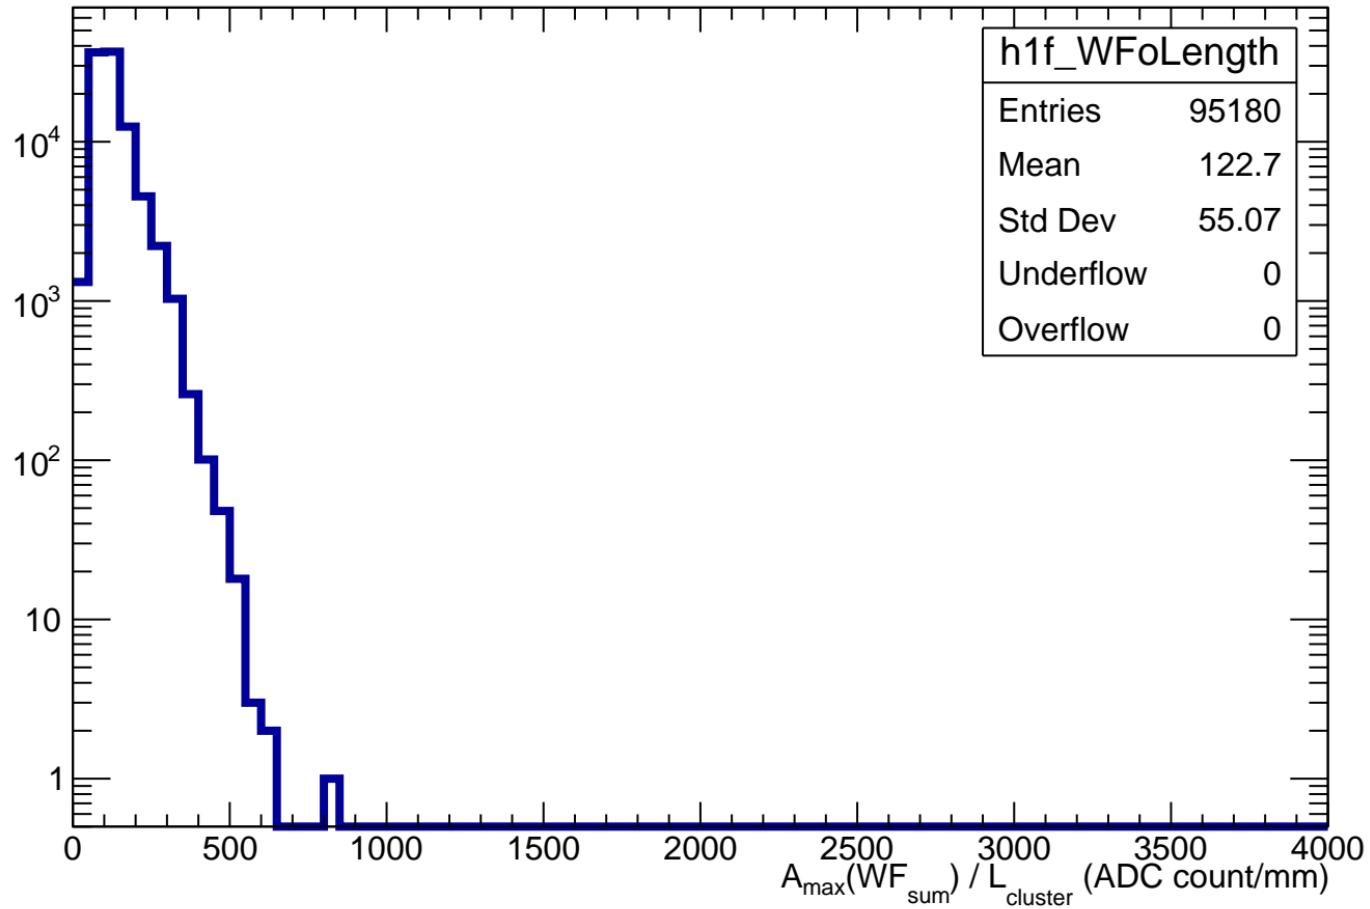$A_{\max}(WF_{\text{sum}}) / L_{\text{cluster}}$ 

impact parameter d vs length in pad

