



T_{\max} of crossed pads


Count

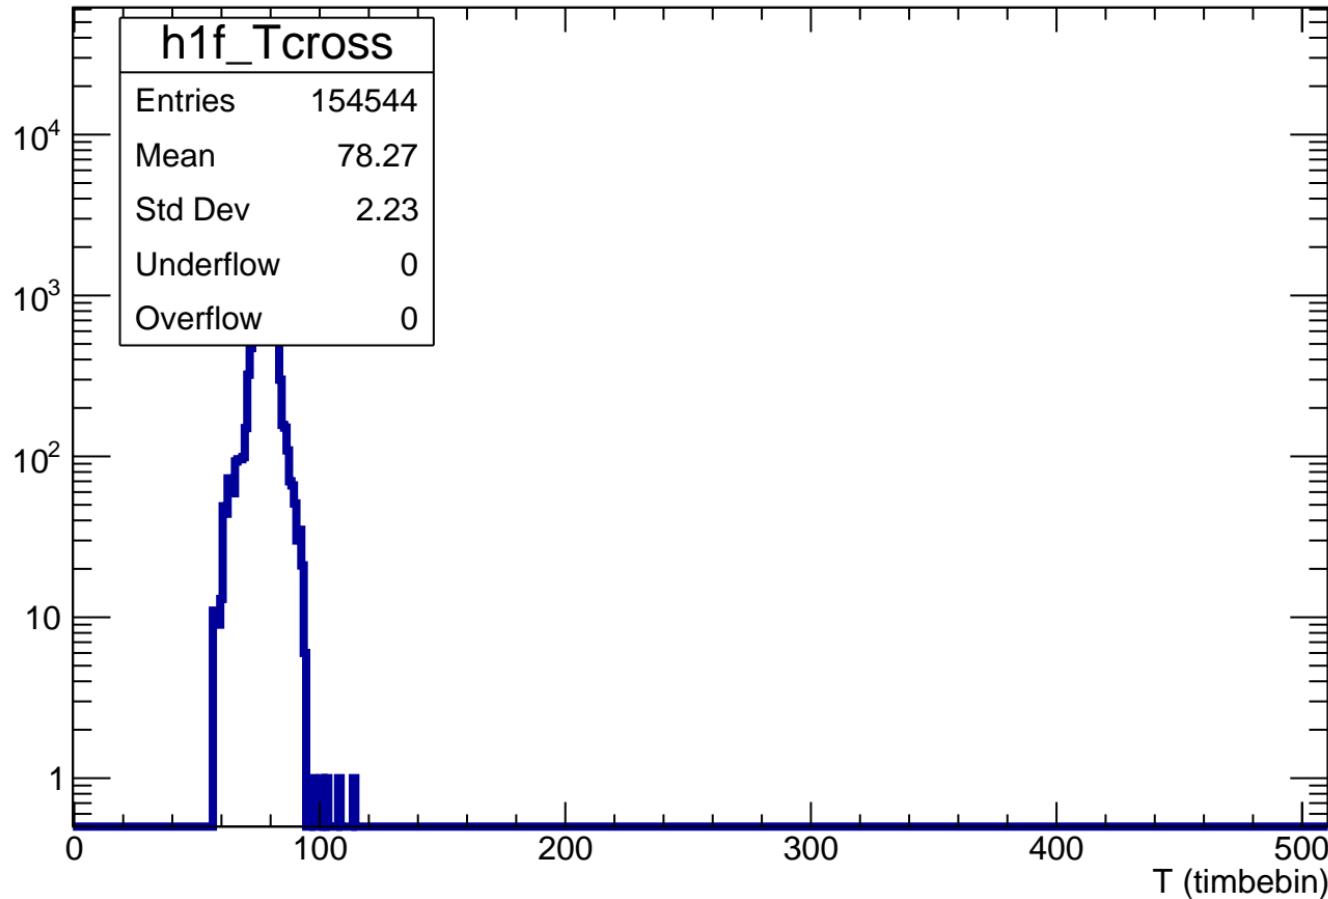

Number of crossed pads

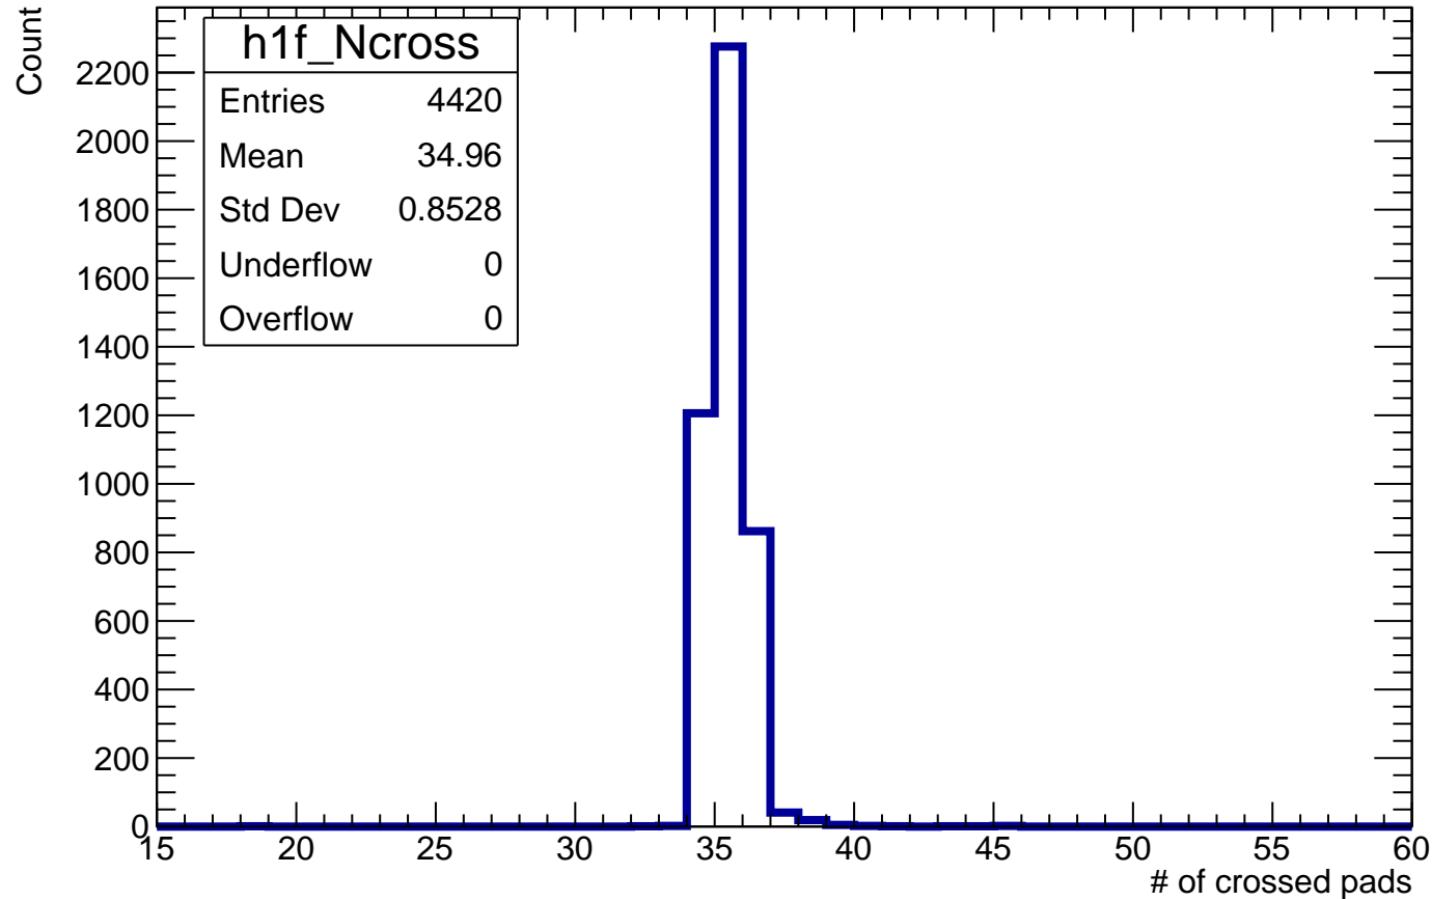


$$\Sigma(Q)/\Sigma(\text{length}) - \text{mean}\{Q/\text{length}\}$$

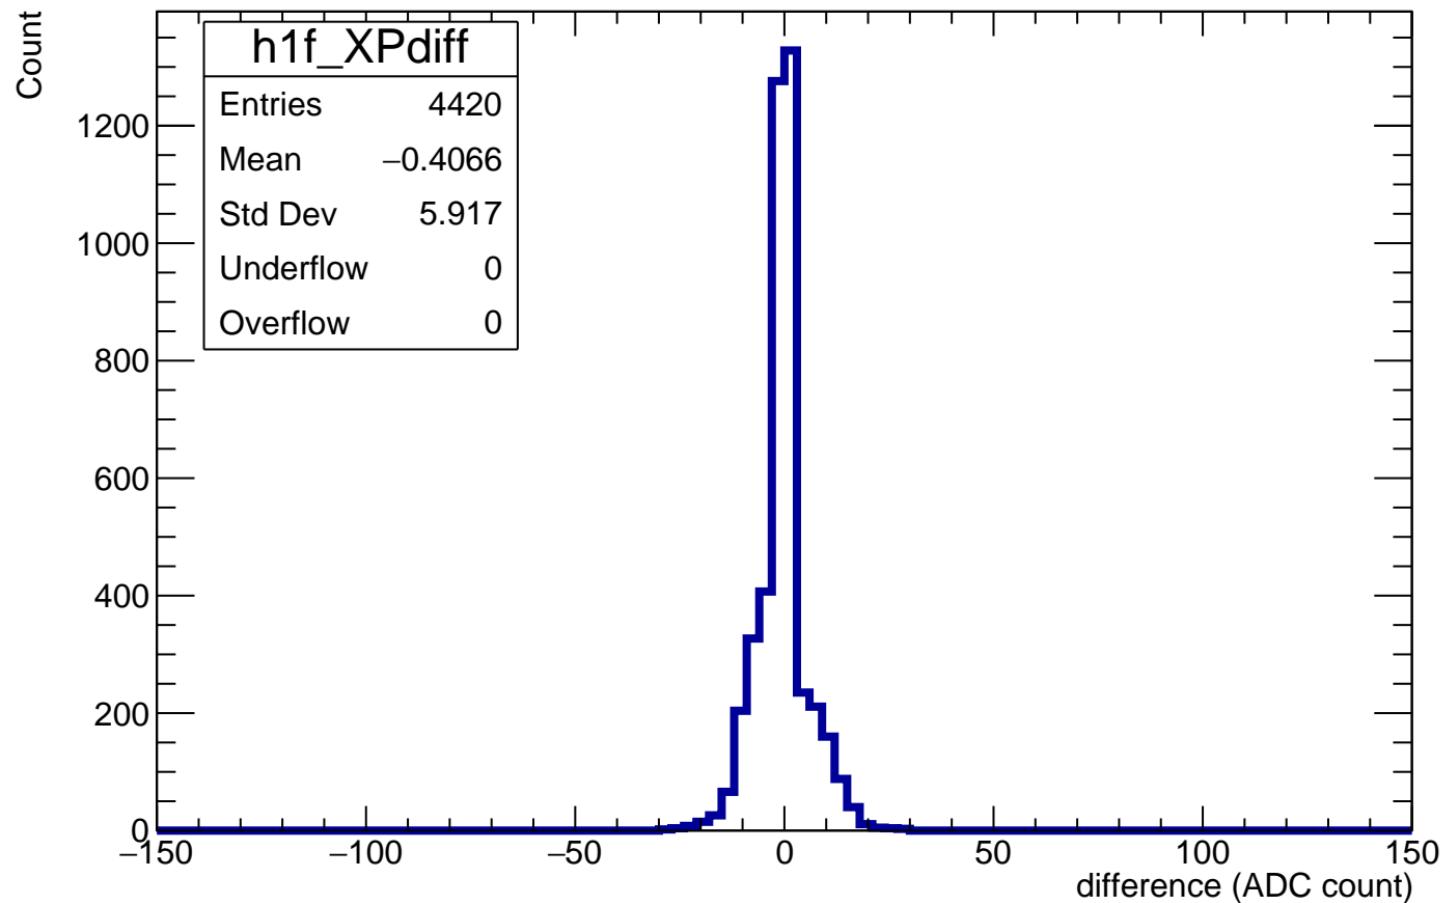

$Z_{\text{file}} = 150\text{mm} - Z_{\text{computed}}$

Count

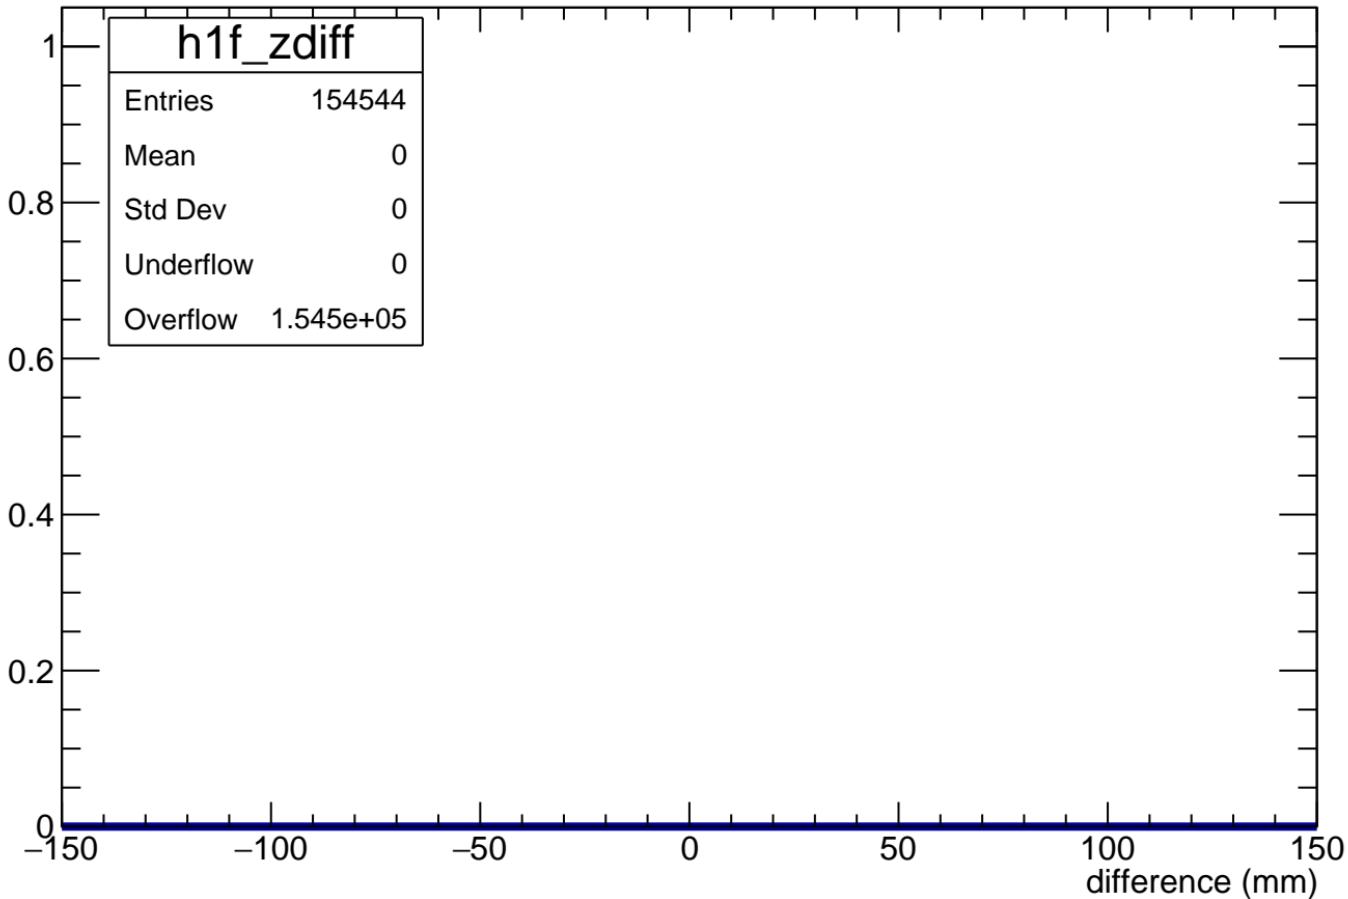

Angle φ in each pad

Count

$\times 10^3$

100

80

60

40

20

0

-50

-40

-30

-20


-10

0


φ ($^\circ$)

h1f_angle


| | |
|-----------|--------|
| Entries | 154544 |
| Mean | -1.88 |
| Std Dev | 1.733 |
| Underflow | 0 |
| Overflow | 308 |

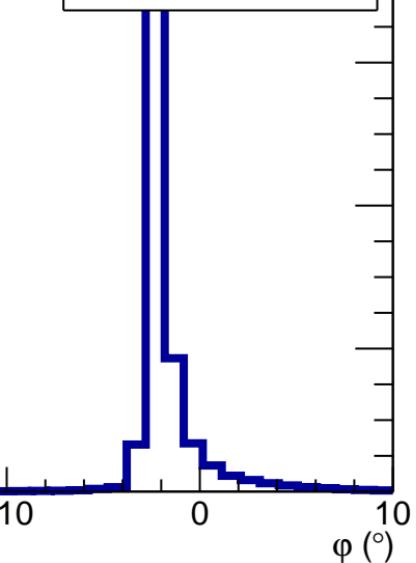


Length in pad normalized to maximum length in pad for a given ϕ

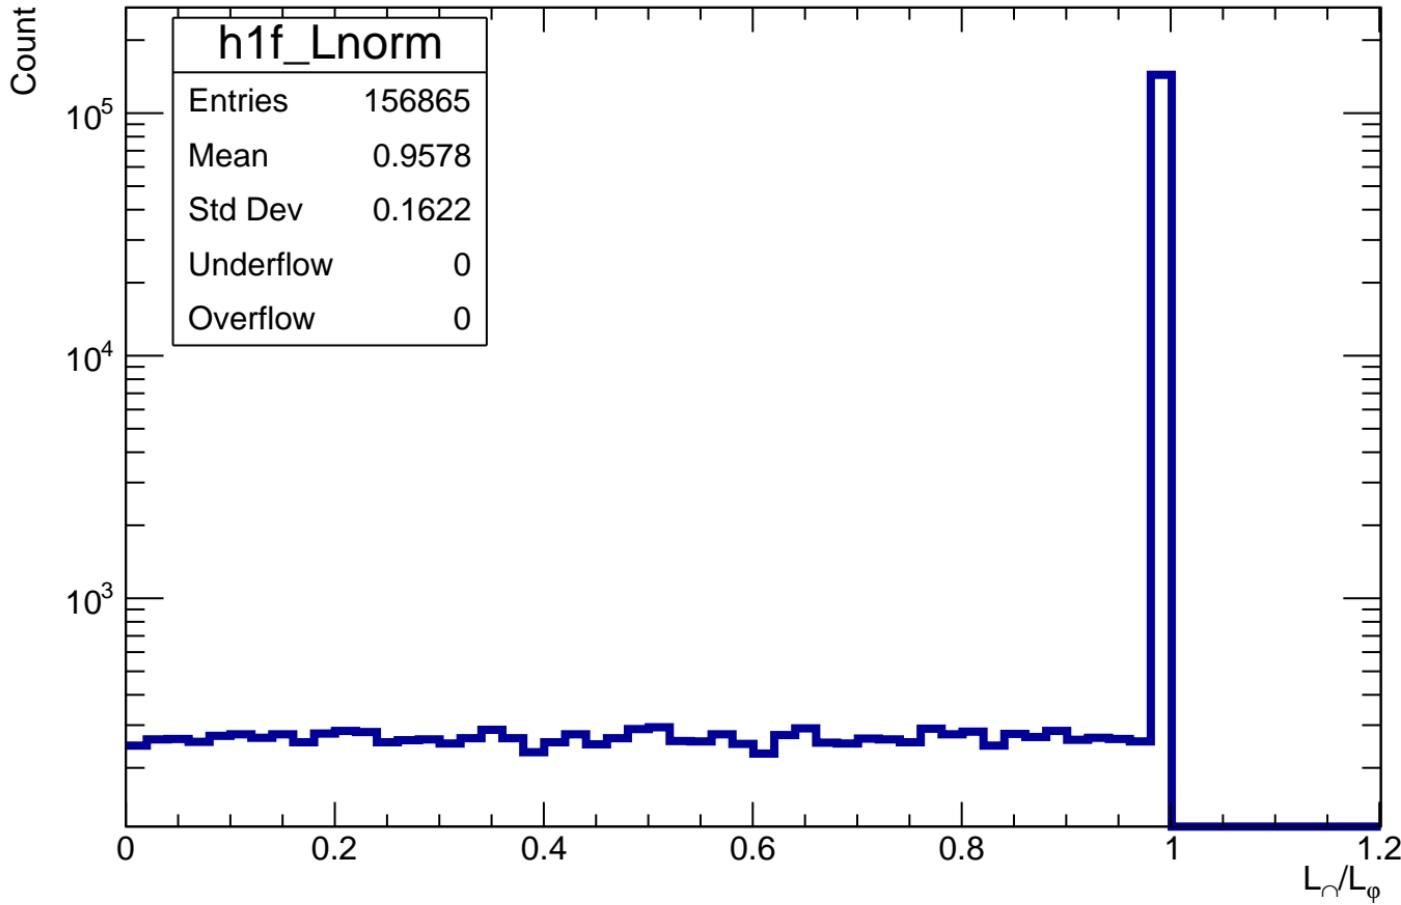


Normalized impact parameter d/d_{\max}

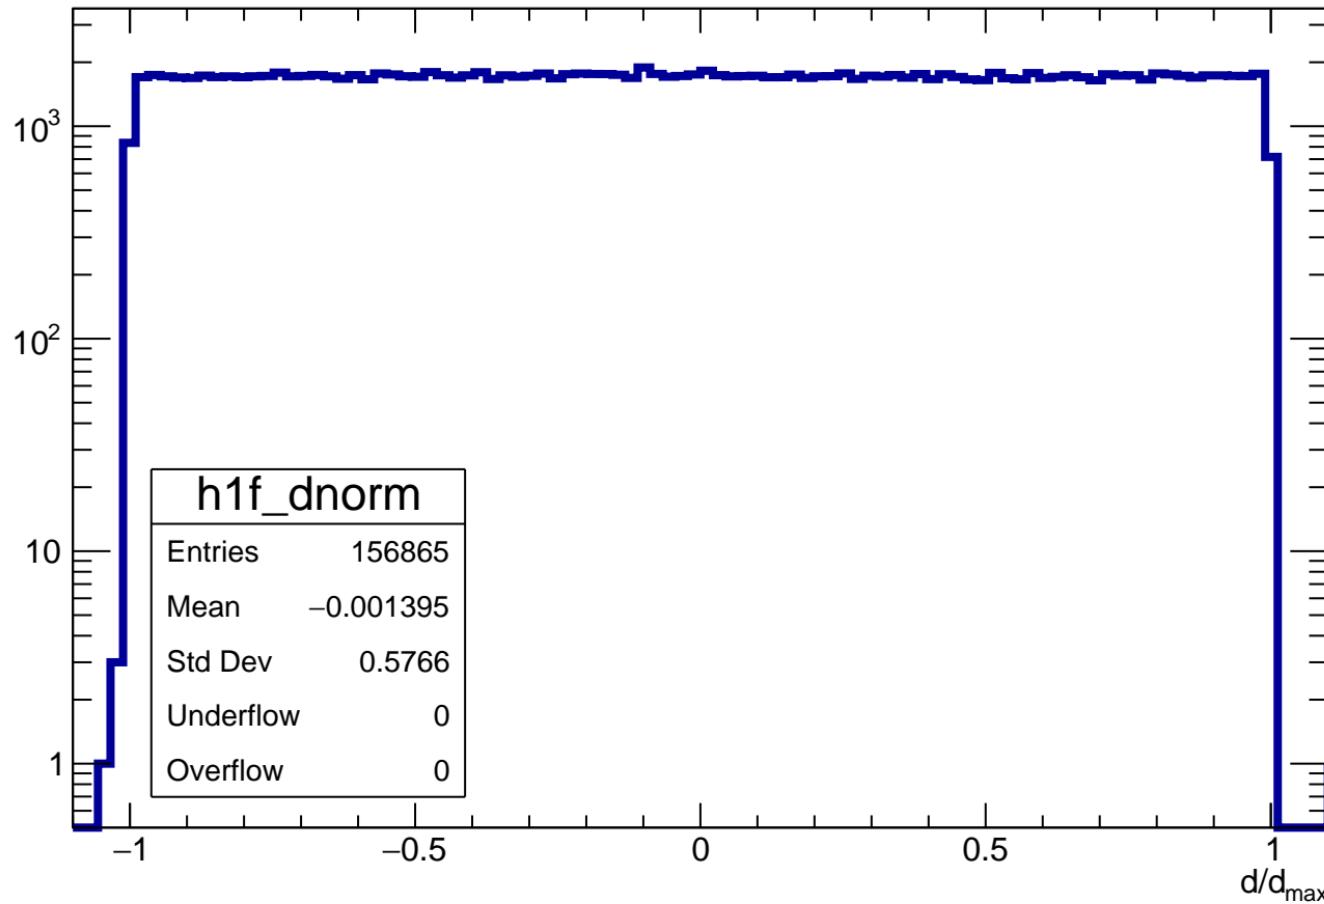


distance of track in pad

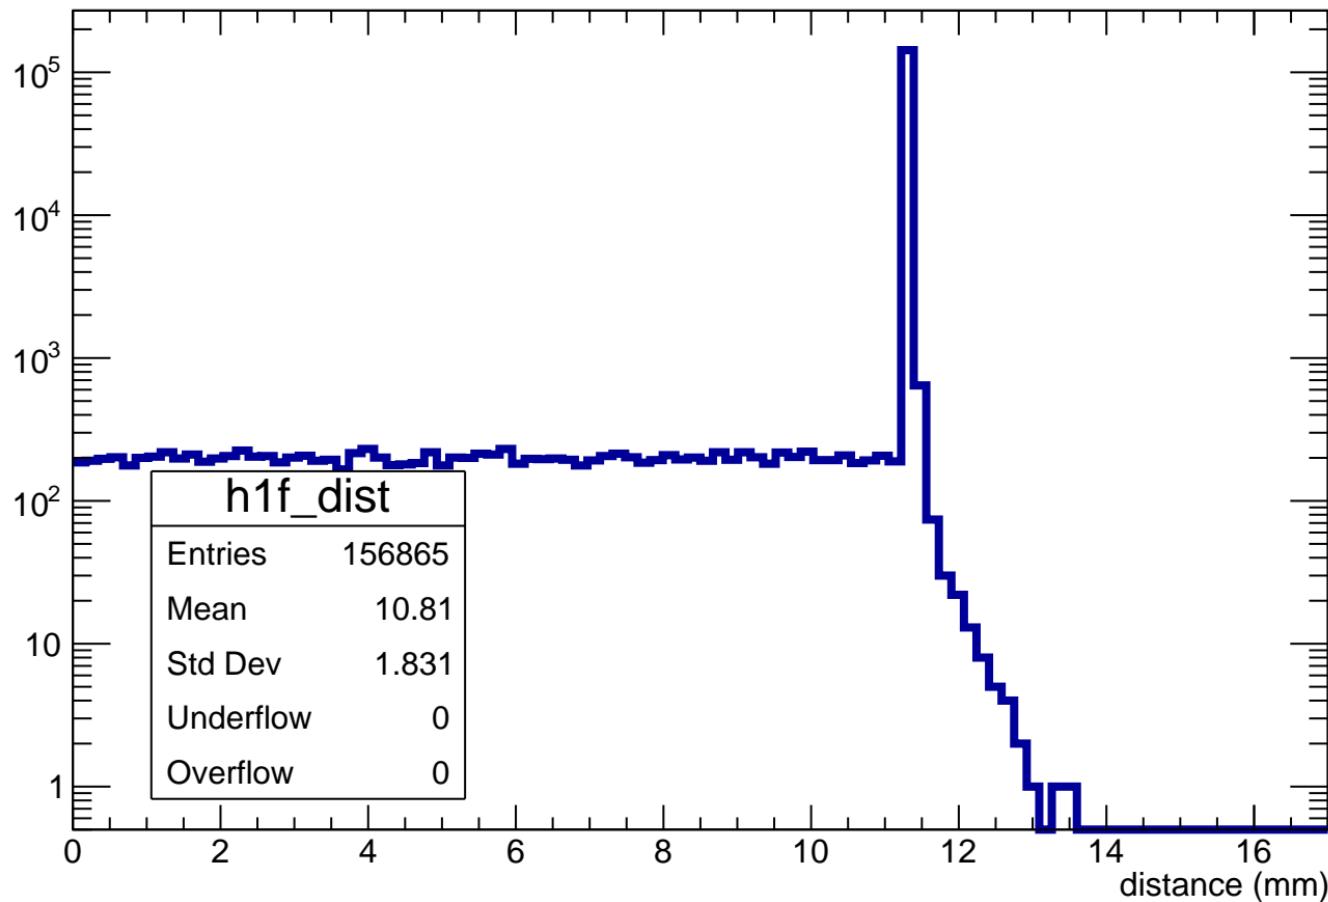


distance of track in cluster

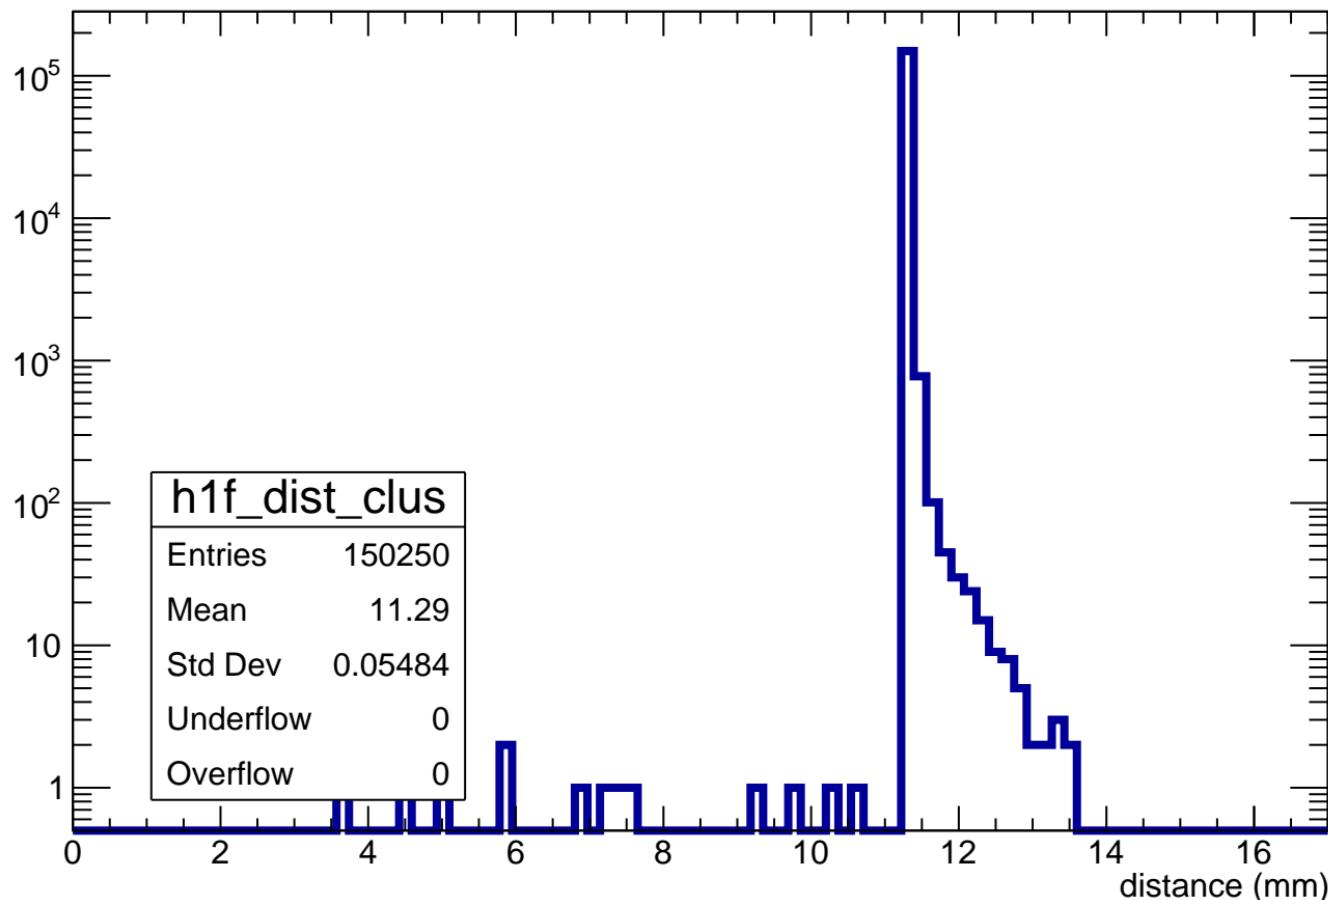


Correction A_{max} ratio

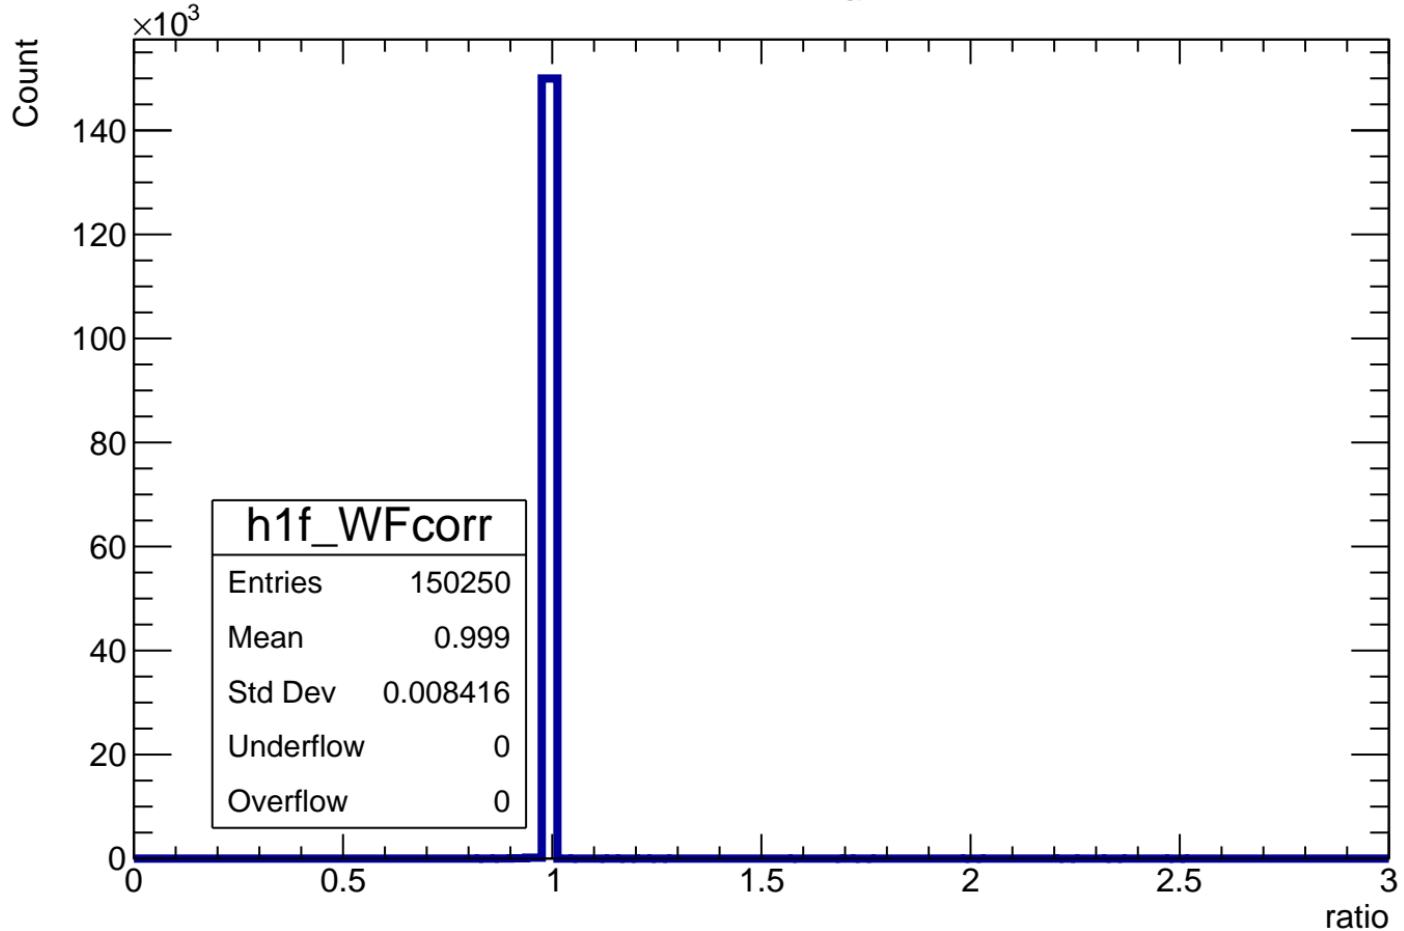

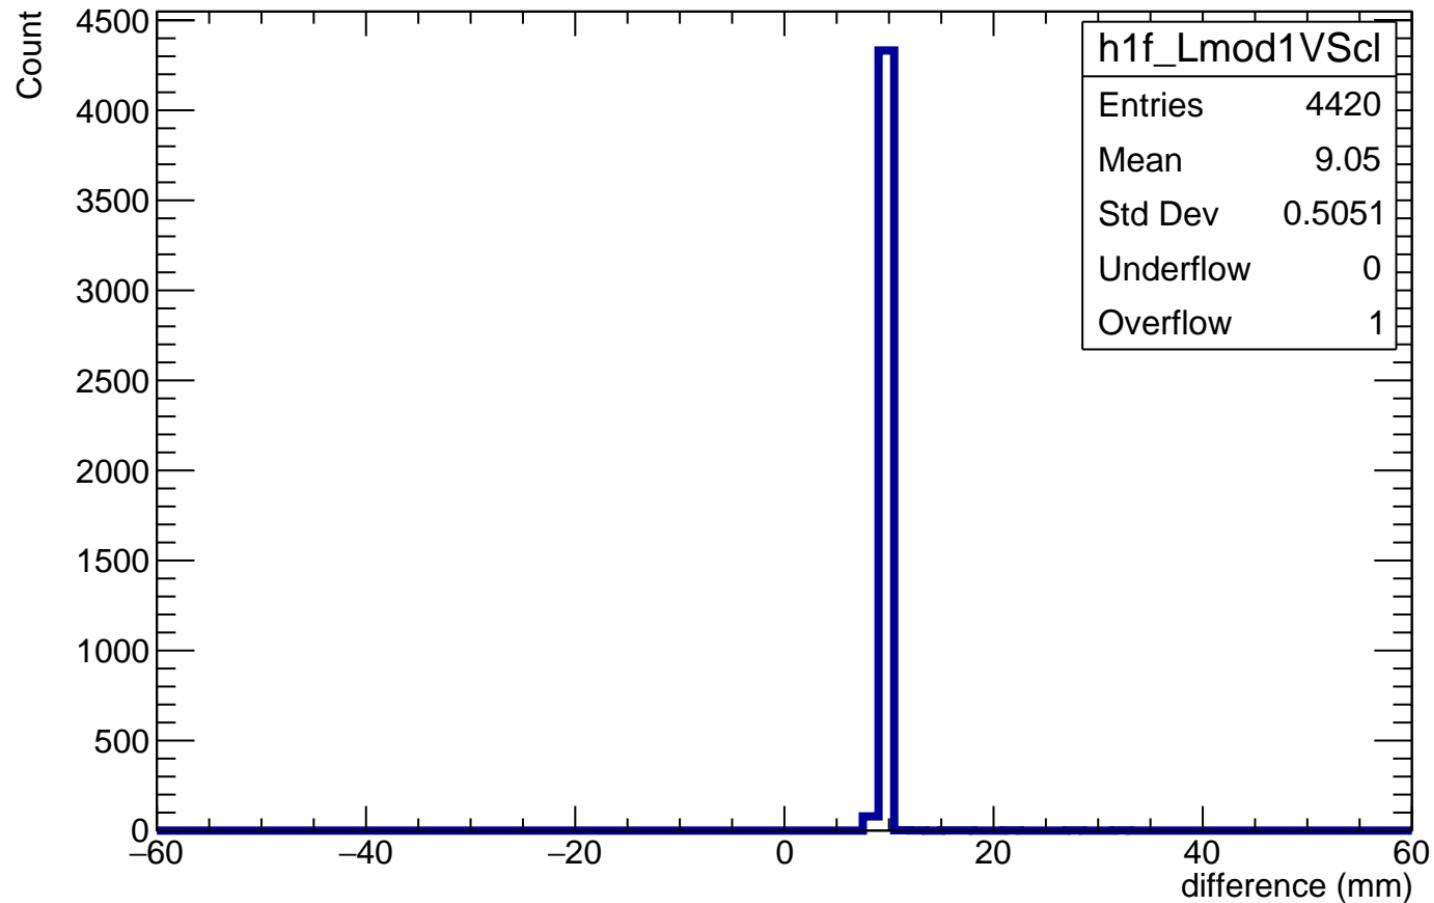$L_{\text{ERAM}} * 0.7 - \sum L_{\text{clus} > 2\text{mm}}$ 


$$L_{\text{ERAM}} * (N_{\text{trunc cross}} / N_{\text{clus cross} > 2\text{mm}}) - \sum L_{\text{clus} > 2\text{mm}}$$

Count

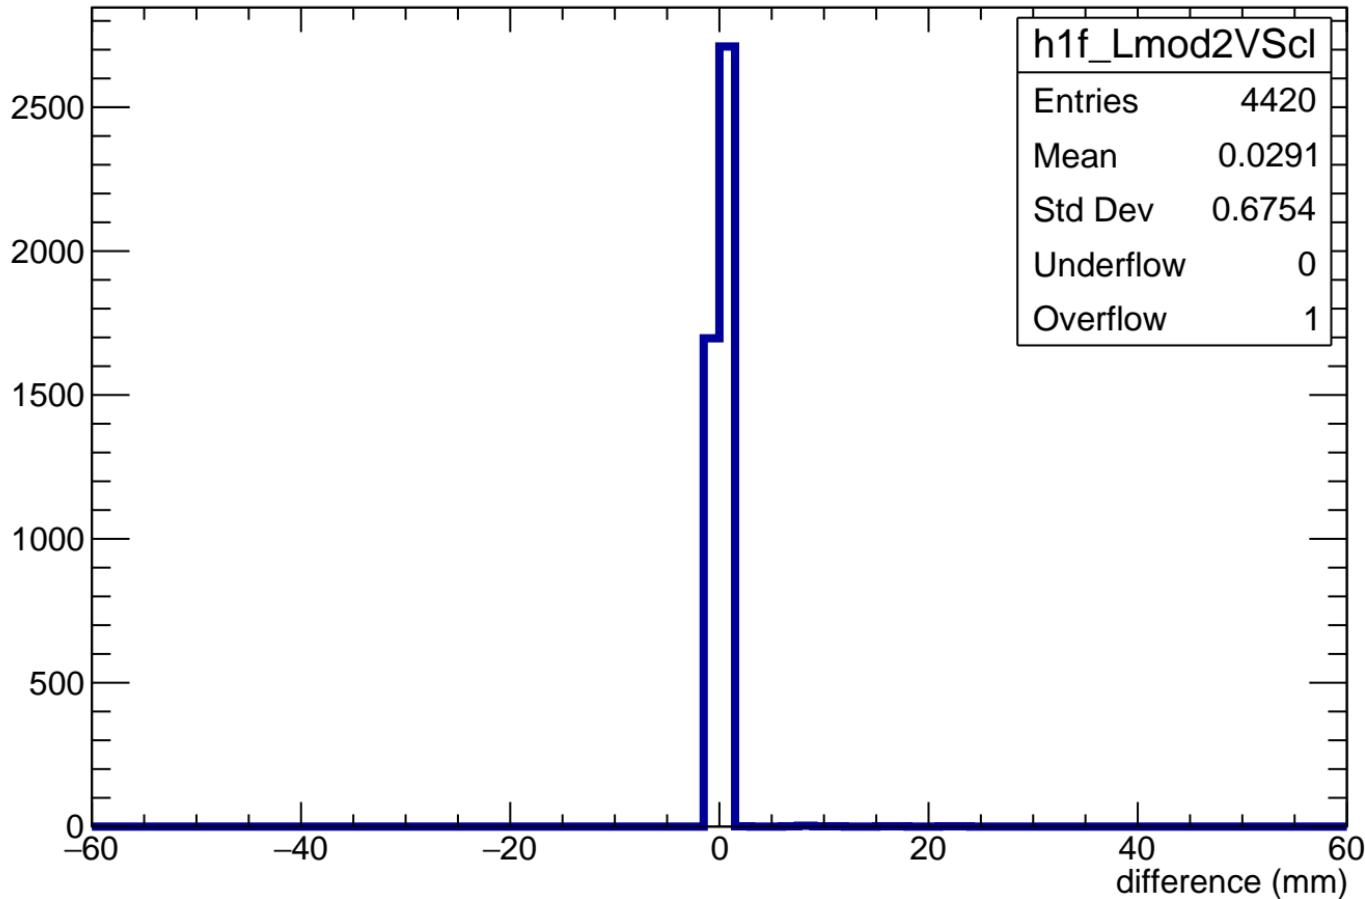


$L_{\text{clusters}} - L_{\text{clusters} > 2\text{mm}}$


Count

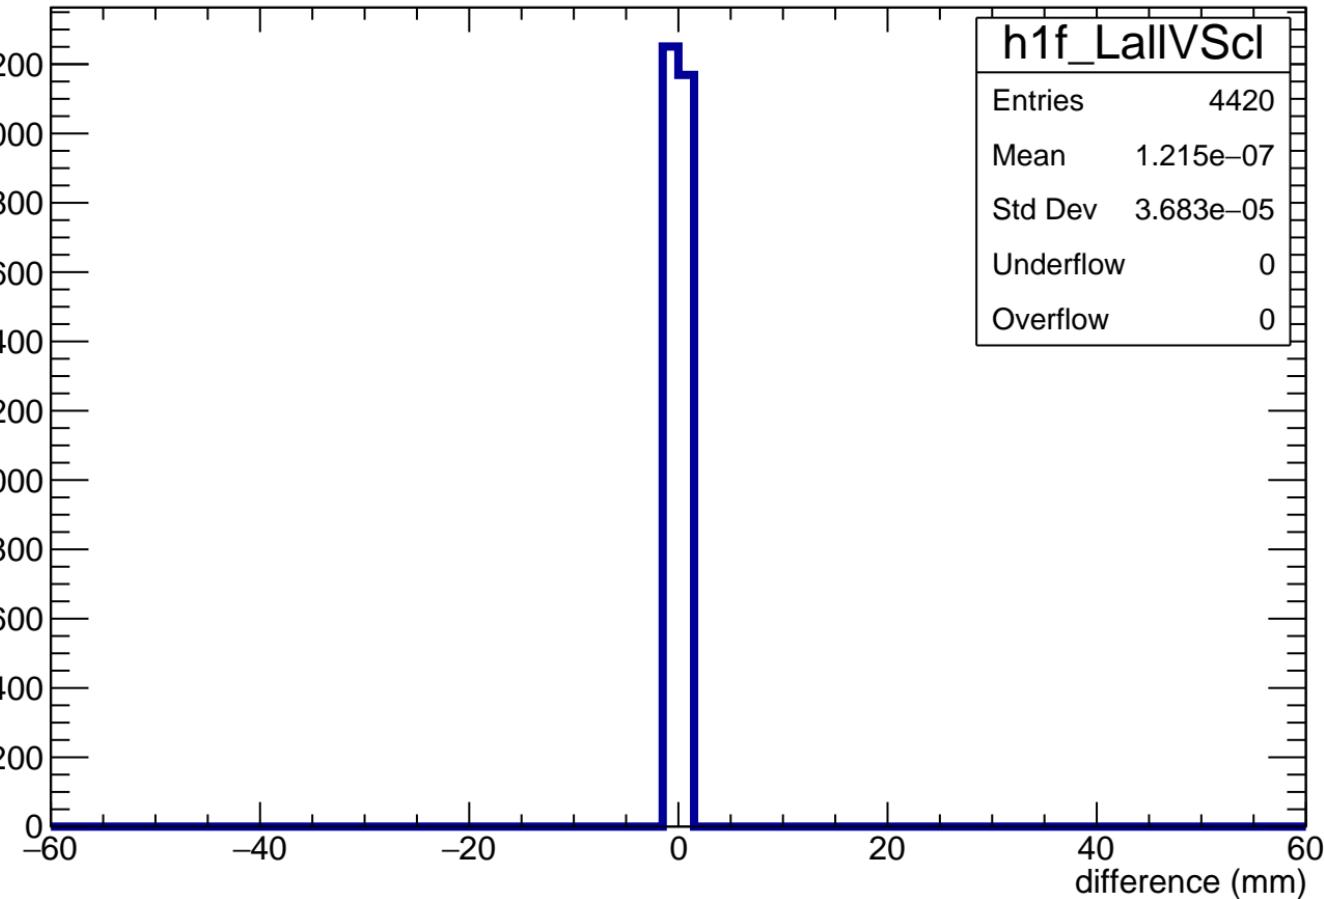


LUT(z_{file}) vs LUT(z_{calc})

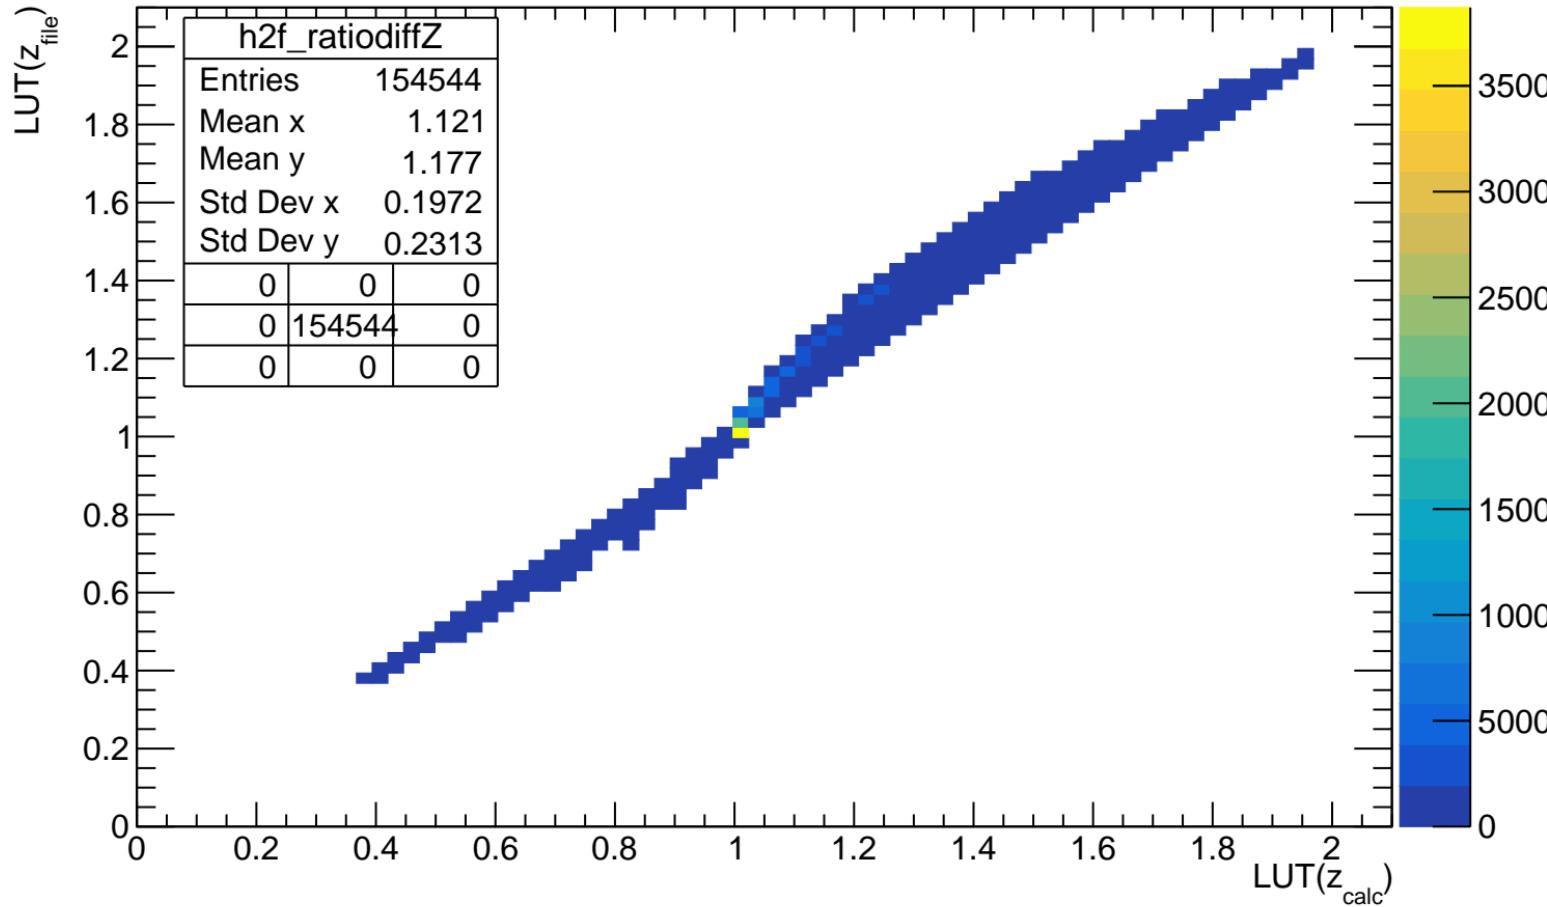


ADC_{max} VS length in pad (before length cut)

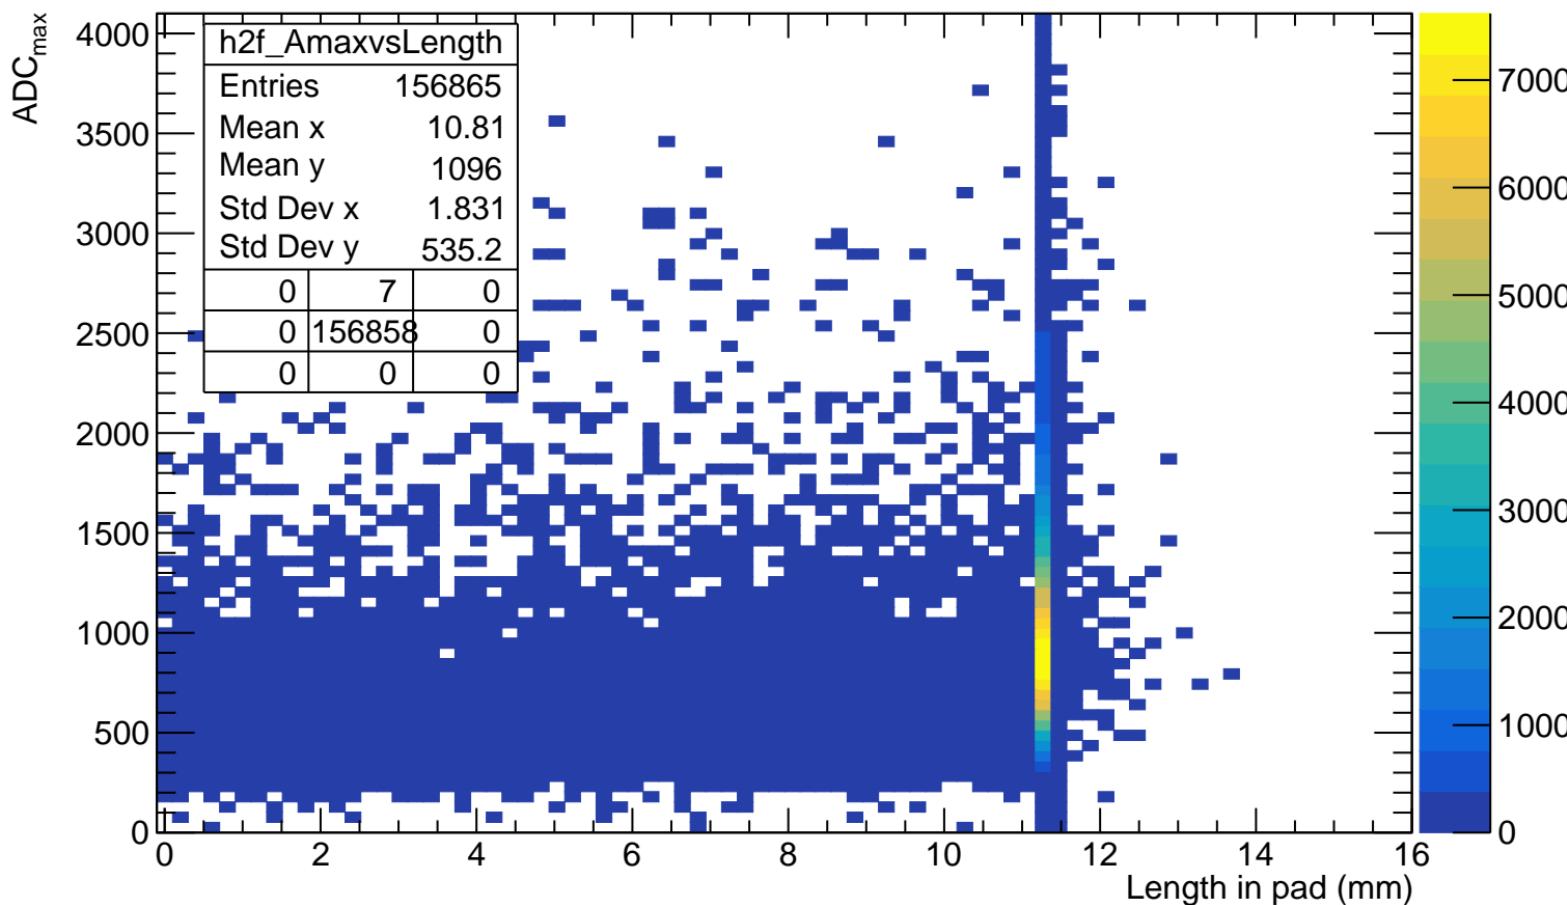


Q^{anode} VS length in pad (before length cut)

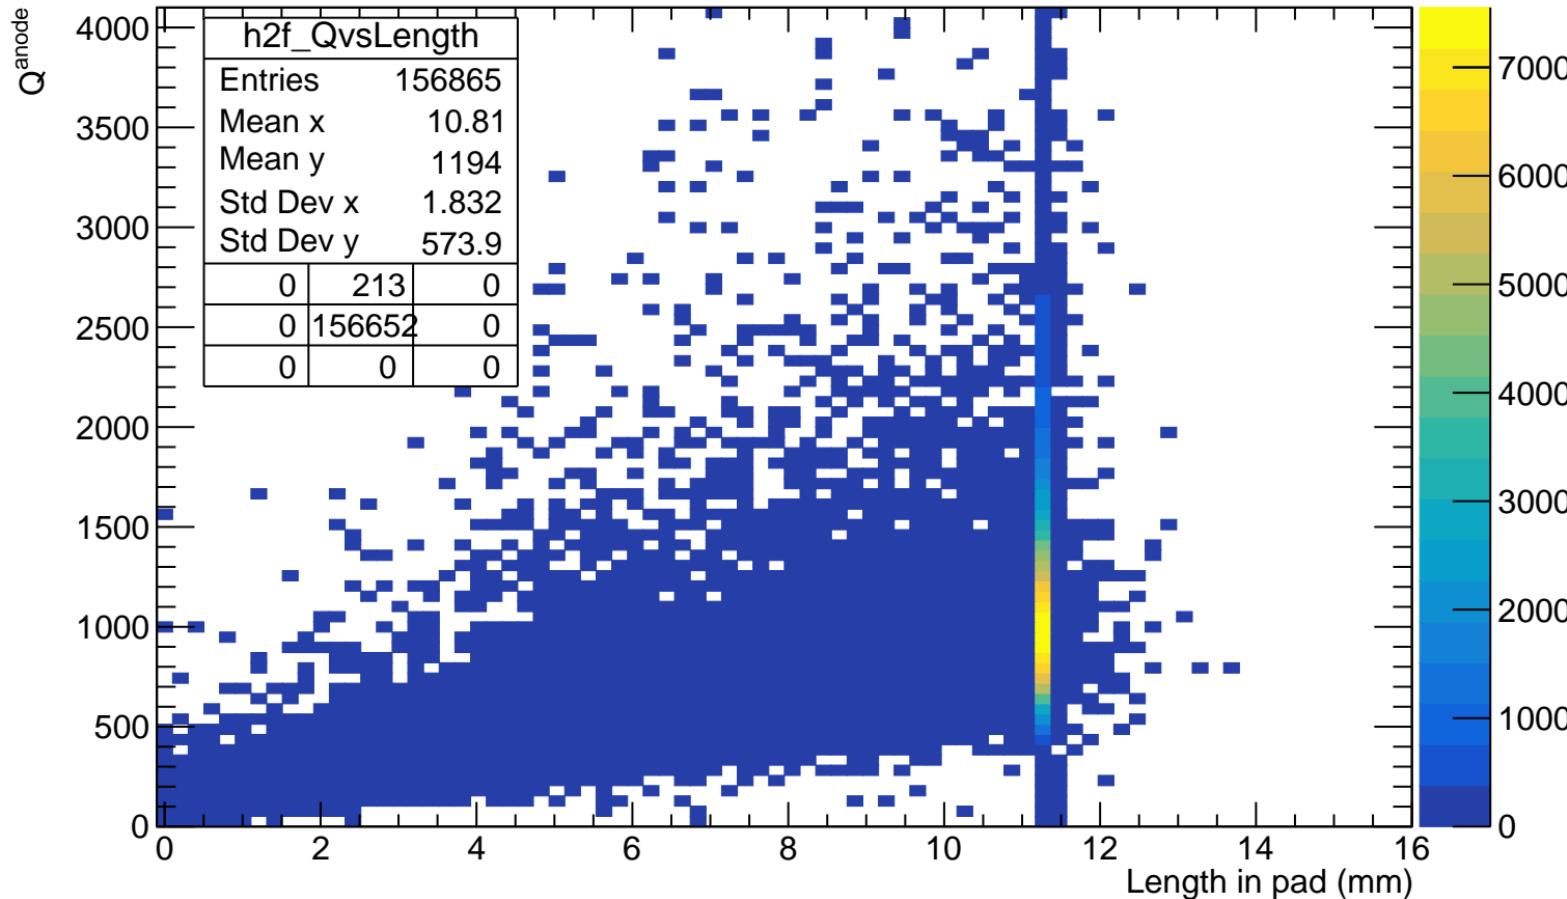


$Q^{\text{anode}}/\text{ADC}_{\max}$ VS length in pad (before length cut)

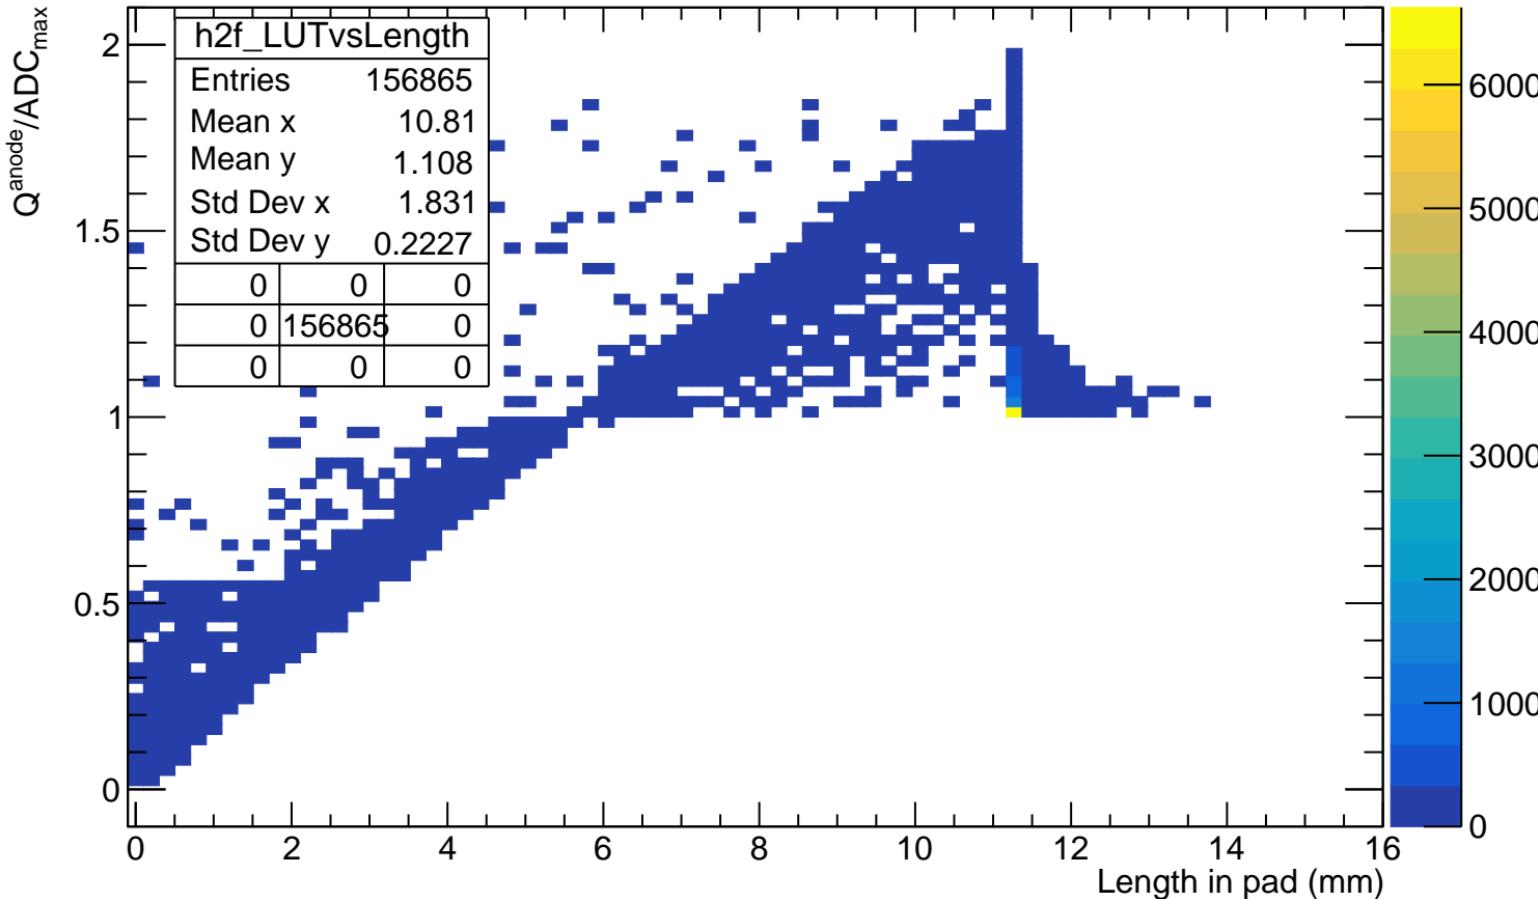


Q_{cluster} VS length in cluster

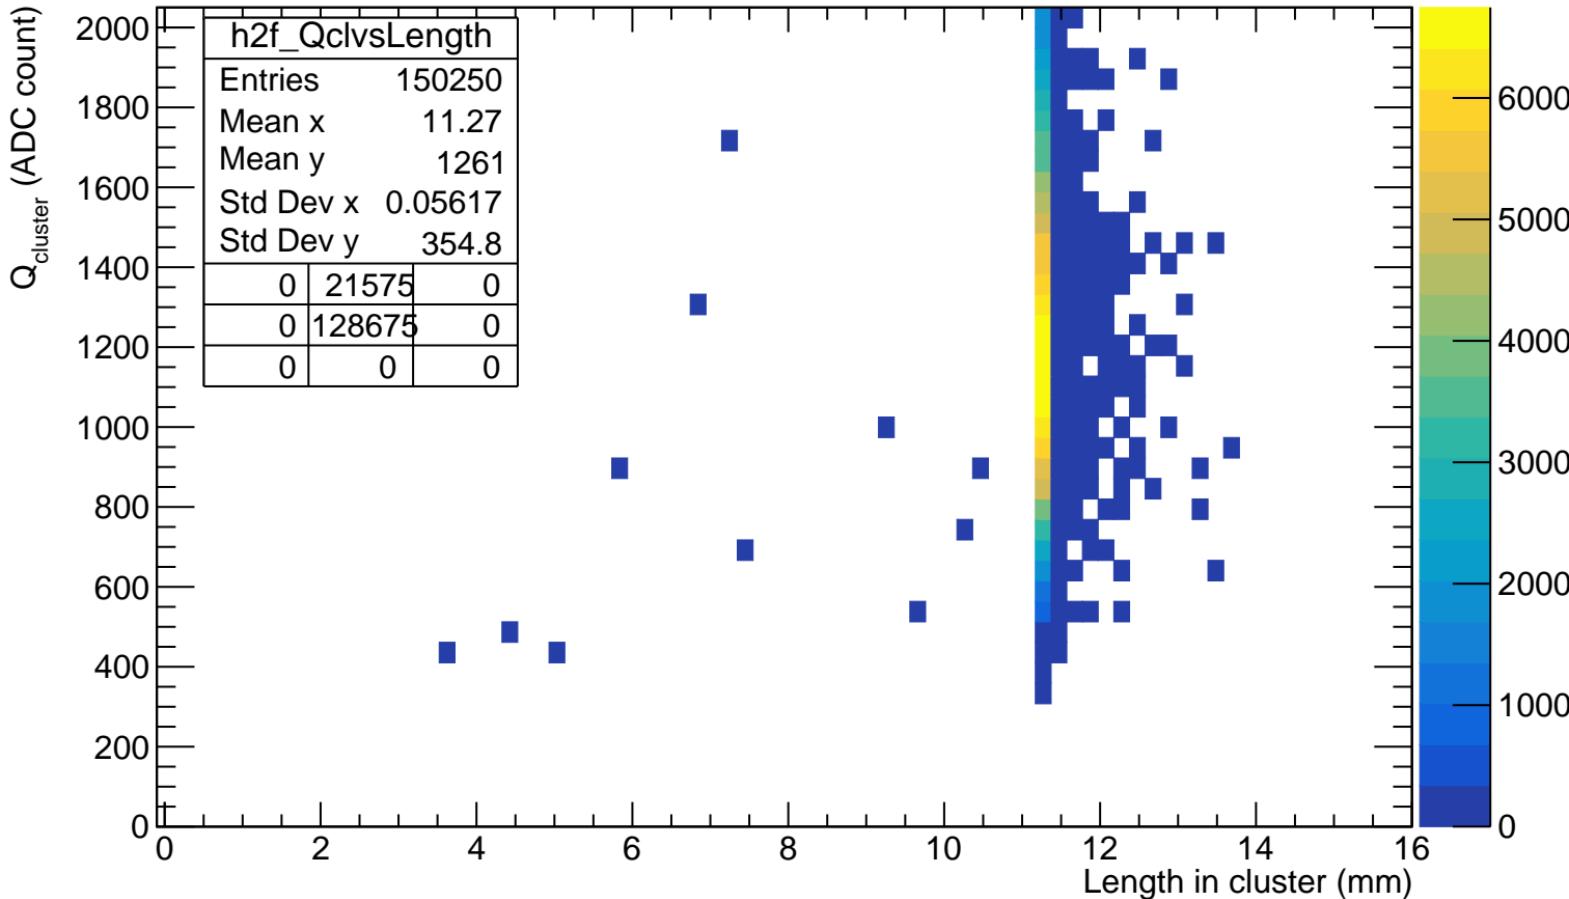


WF_{sum} VS length in cluster

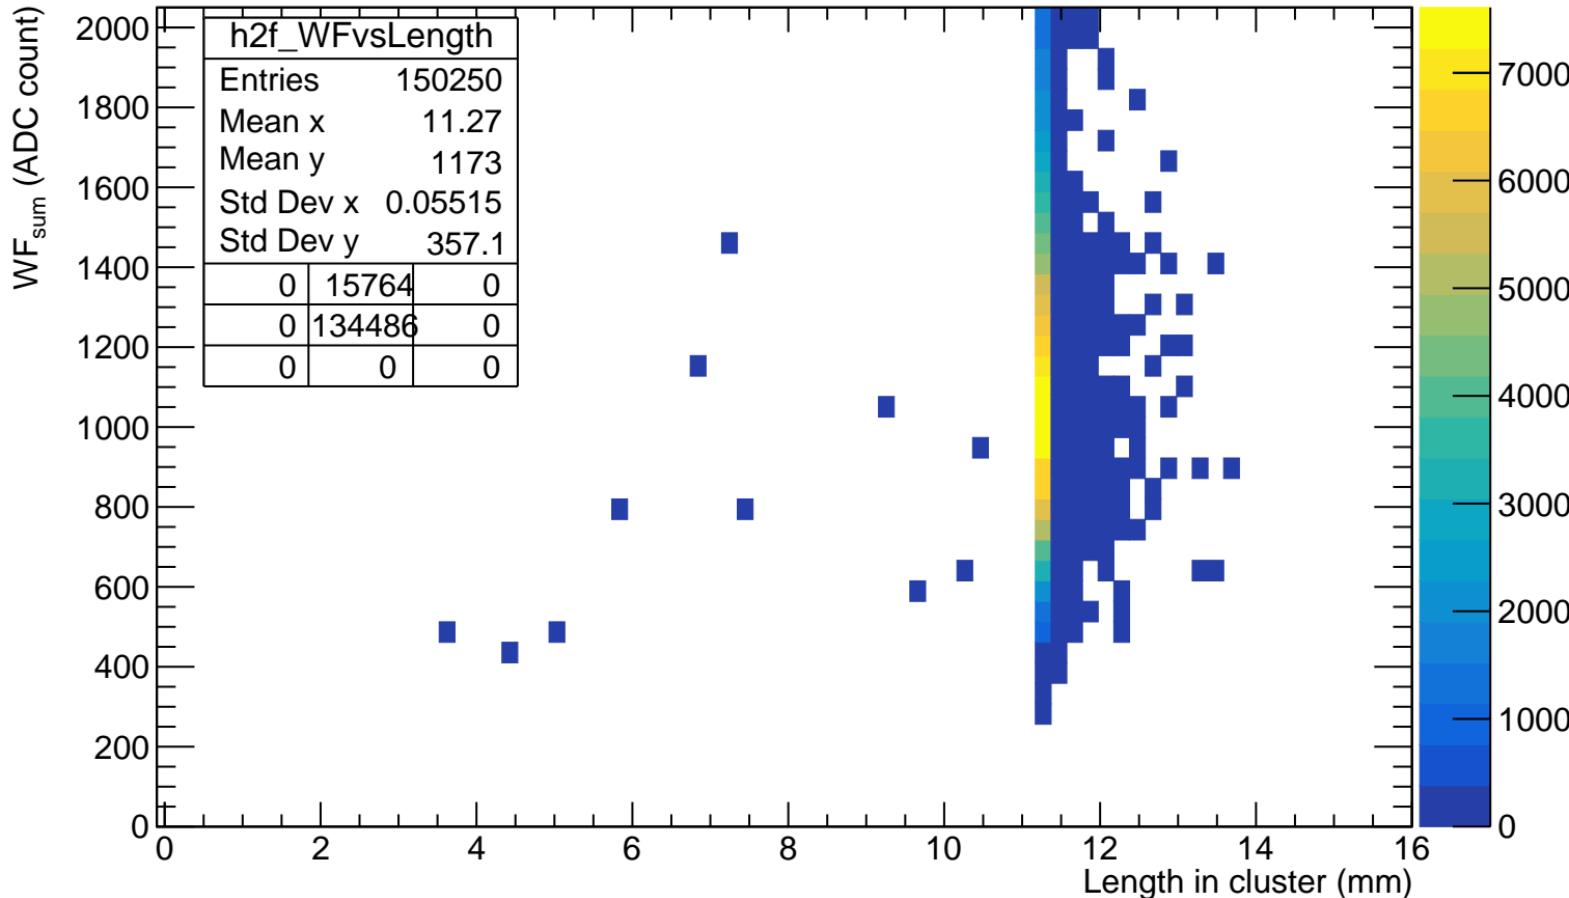


WF_{sum} truncated VS length in cluster

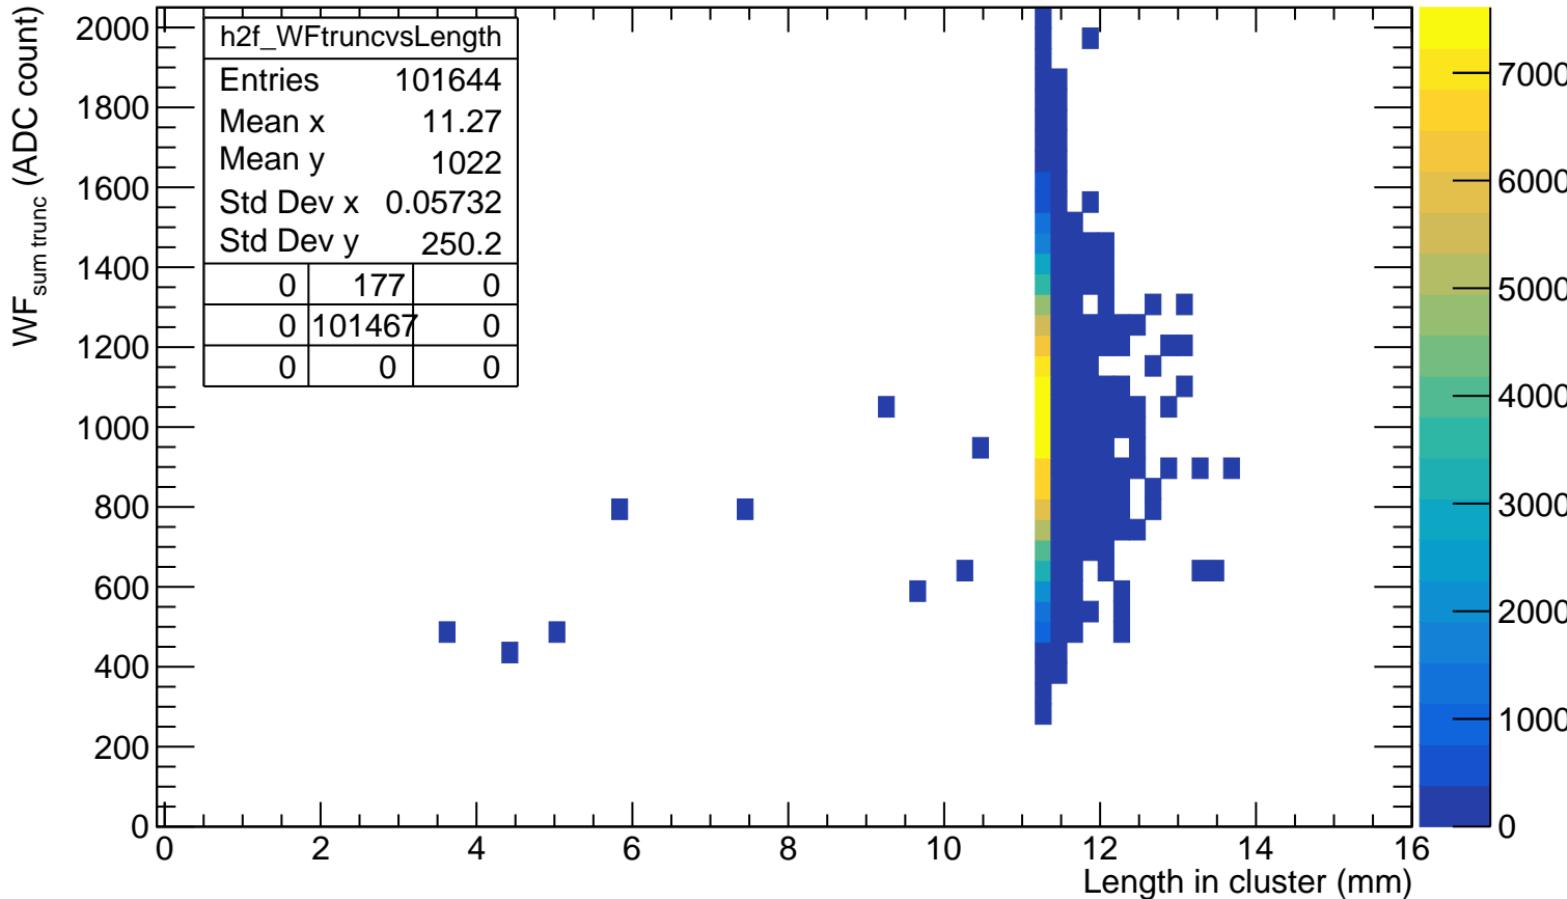


WF^{*}_{sum} VS length in cluster

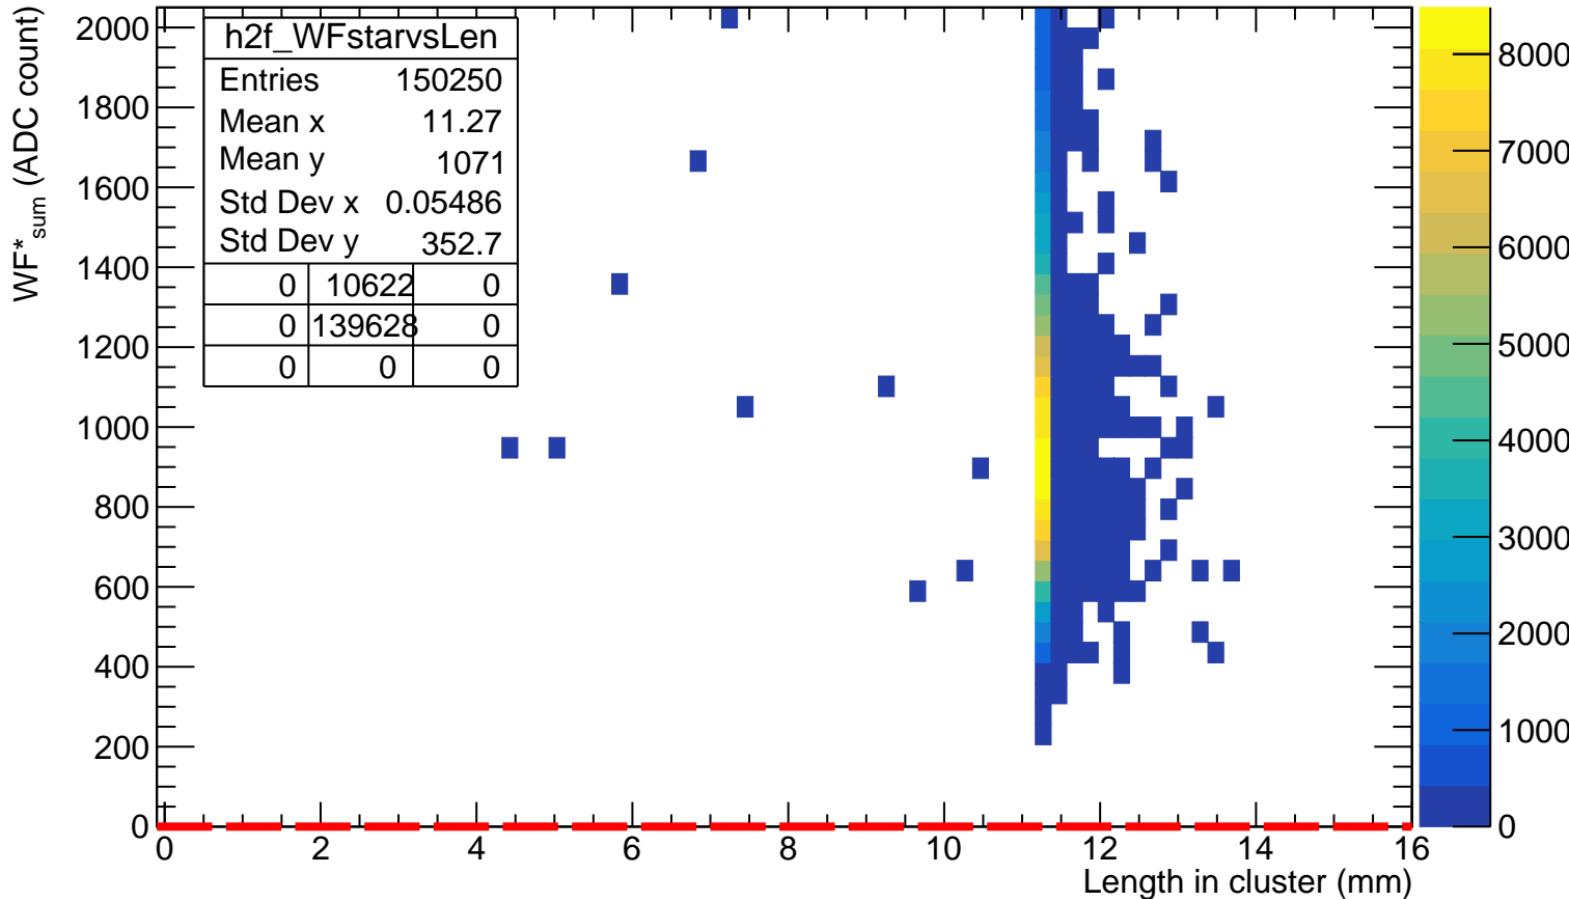

WF*_{sum truncated} VS length in cluster

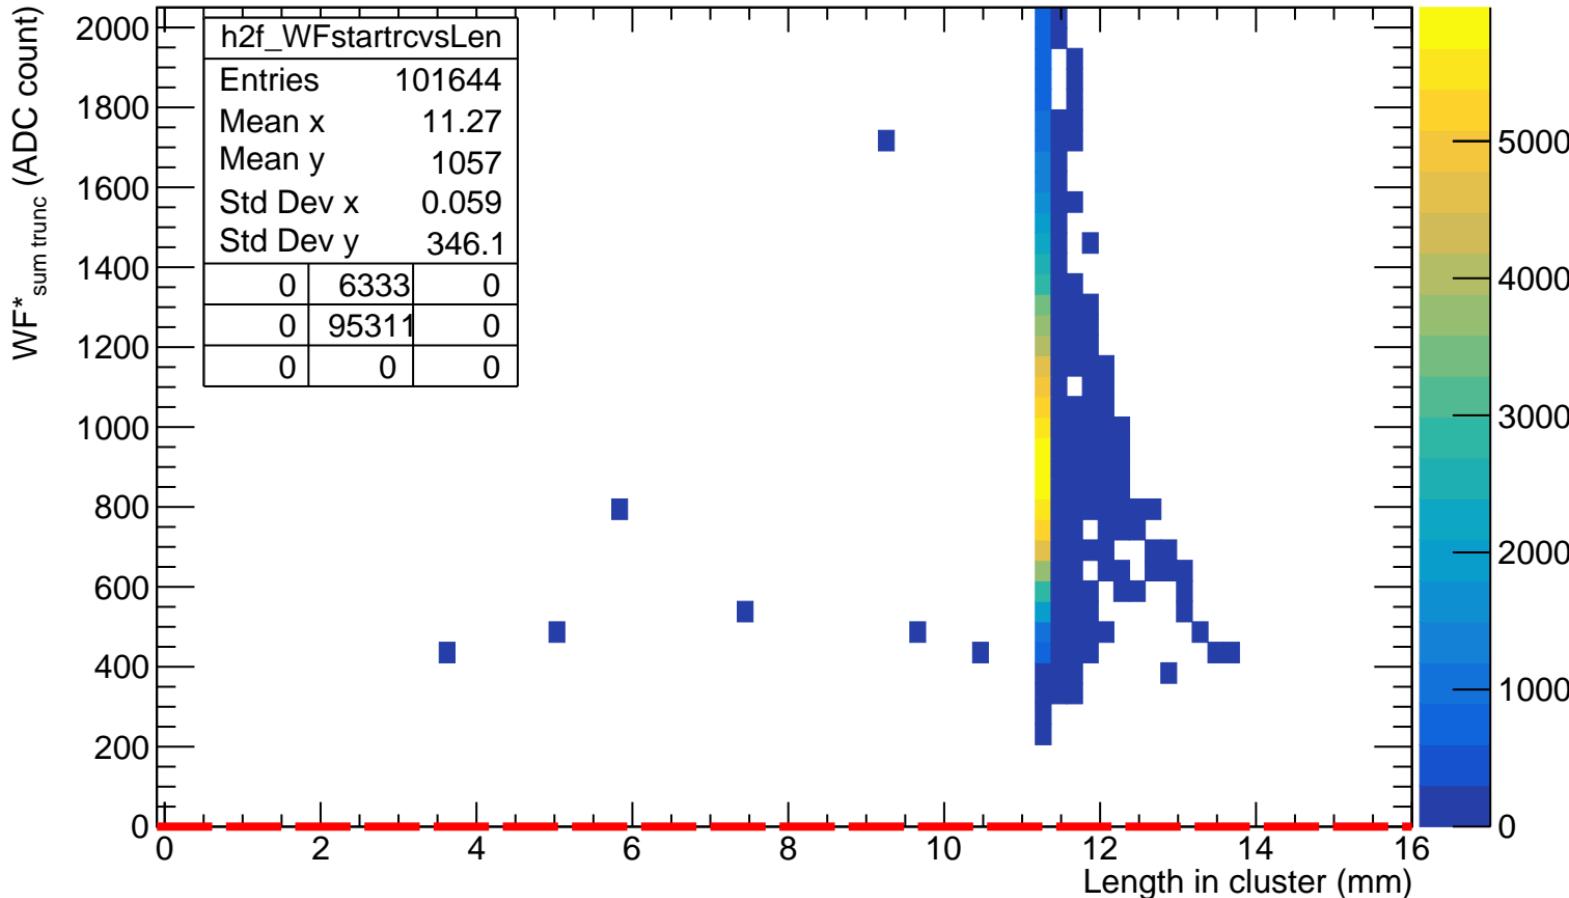

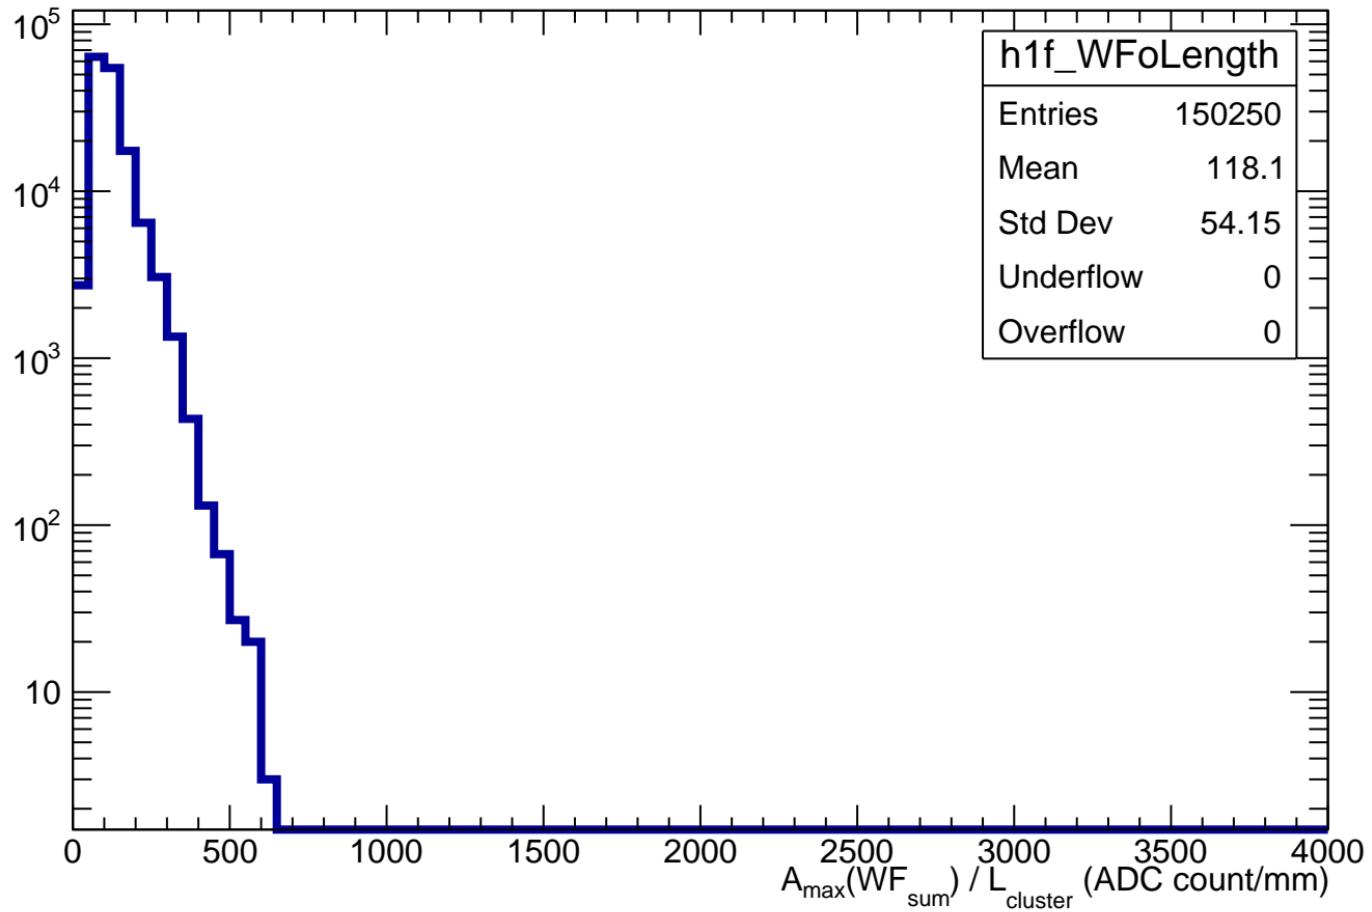$A_{\max}(WF_{\text{sum}}) / L_{\text{cluster}}$ 

impact parameter d vs length in pad

