



产品详情

Product details


型号	电压	电流	功率	扬程	流量	启动电压	防水等级
JT-DC3W-3	3V	0.12	0.36	0.35	80	1	IP68
JT-DC3W*4.5	4.5V	0.18	0.91	0.55	100	1	IP68

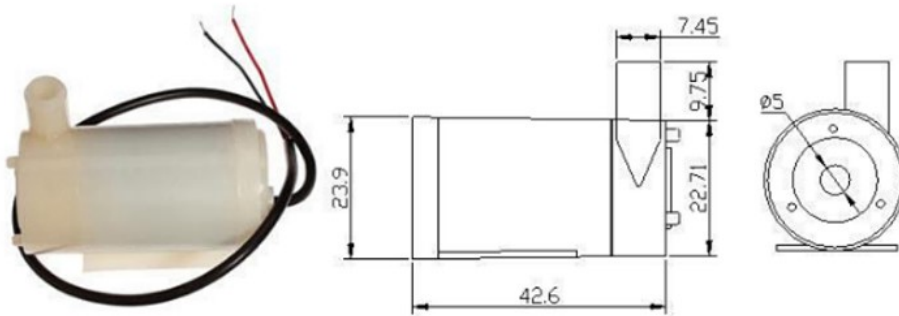

型号	电压	电流	功率	扬程	流量	启动电压	防水等级
JT-DC3L-3	3V	0.12	0.36	0.35	80	1	IP68
JT-DC3L-4.5	4.5V	0.18	0.91	0.55	100	1	IP68


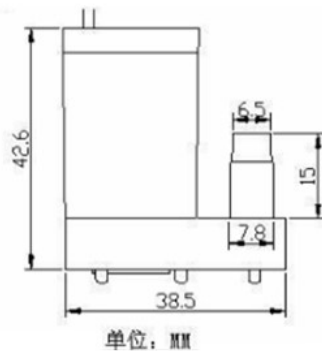


特性曲线图

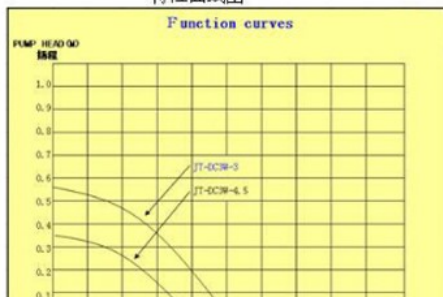

使用范围及材质说明

使用环境温度	零下20度到60度
使用环境湿度	90%RH以下
使用介质温度	零下20度到60度
使用介质	水、不腐蚀的液体及好的液体
使用场所 (operation place)	医疗、农业等
寿命 (lifetime)	≥200H (连续工作)
流量	100
噪音 (acoustic noise)	≤40dB
外壳壳体材质	ABS
泵壳壳体材质 (pump shell material)	ABS
电机材质	铁质体水泵
电机耐电压性	24VDC 耐温130度
壳体材质	ABS
电机材质	PVC



电机型号	140型 5500RPM/MIN

使用注意事项

1. 水泵为直流水泵。电压一定要为直流供电（如电池、将DC的直流电源、变压器），电压要在规定的电压范围内，方可使用，严禁超压使用！
2. 严禁长时间无水空转。
3. 严禁在酸性和碱性溶液使用。
4. 严禁在大于0.35MPa的杂质和颗粒的液体中使用。如水质过脏要及时清理水泵泵壳内的杂质。

1. The water pump is DC pump. DC voltage must be for DC power supply (e.g. battery, with DC power supply, transformer), voltage and within the prescribed voltage range, just can use.

2. It is strictly prohibited without water for a long time running.

3. It is strictly prohibited to use in acidic and alkaline solution.

4. It is strictly prohibited in the liquid separates and permeability is greater than 0.35 MPa particles, such as the water too dirty to clear in time the pump pump chamber of the particles.

接口说明

红线：电机正极

黑线：电机负极

适用水管：适用于内径6mm水管