




POWER: 12V > PTC > TVS > OR-ing > 3.3V LDO









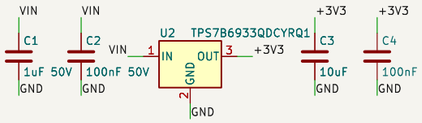




SENSE: VBAT / AUX_IN dividers 100k:10k (ADC full scale ~36V)






AUX_OUT: low-side switch, 30V MOSFET, flyback to VBATF

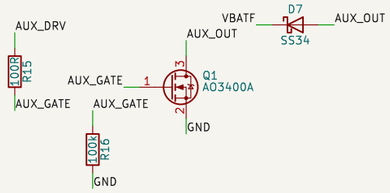


H1 M3


H2 M3

MCU: STM32G0B1 (2x FDCAN, USB FS crystal-less, 128K flash)




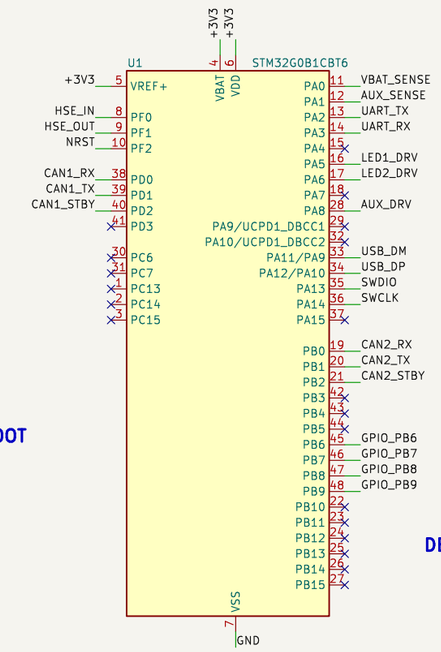


CLOCK / RESET / BOOT











STATUS LEDs




DEBUG + EXPANSION HEADERS (hand-solder)









CAN1 (FDCAN1 PD0/PD1) — default transceiver standby via R5 pull-up

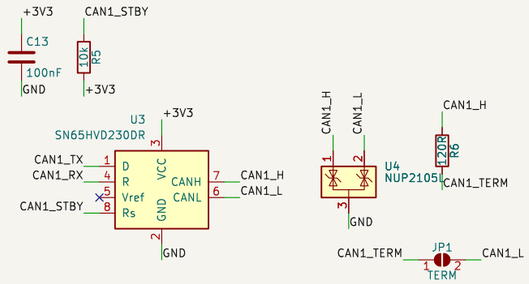

CAN2 (FDCAN2 PB0/PB1) — default transceiver standby via R7 pull-up

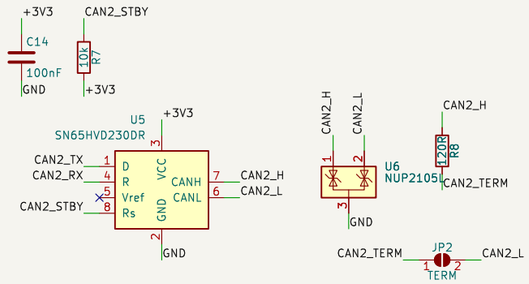

USB-C (device, 5.1k Rd on CC)

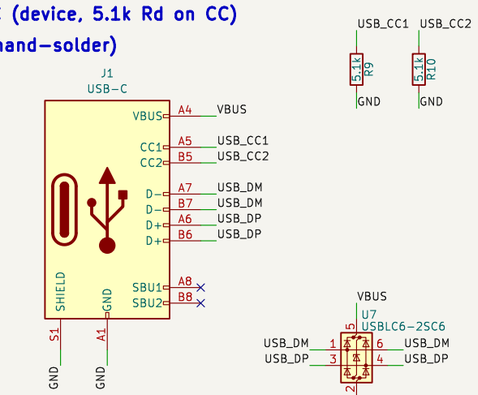

JLC Economic PCBA: all SMD top side; J2–J5 + JP1/JP2 hand-finished
Generated by gen_sch.py; nets are connected by local labels
prototype — review before ordering

Sheet: /
File: canode.kicad_sch

Title: CAN node — dual FDCAN vehicle interface

Size: A3	Date: 2026-11-09	**Rev: A**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1