


POWER: 12V > PTC > TVS > OR-ing > 3.3V LDO

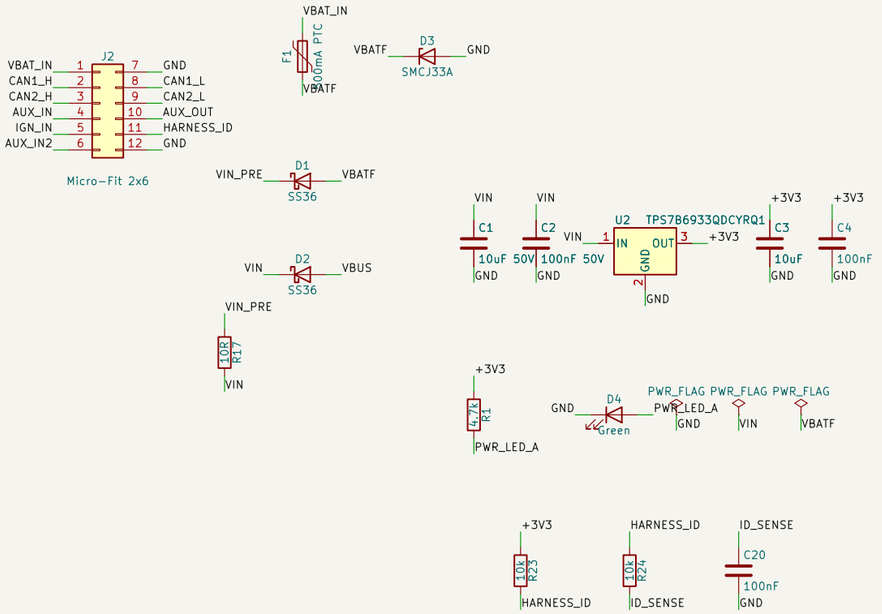


MCU: STM32G0B1 (2x FDCAN, USB FS crystal-less, 128K flash)

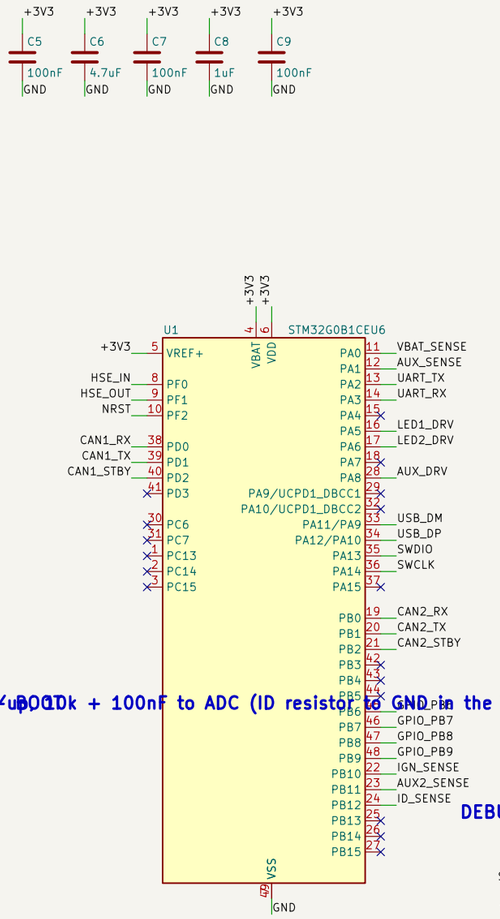


STATUS LEDs




CAN1 (FDCAN1 PD0/PD1) — default transceiver standby via R5 pull-up

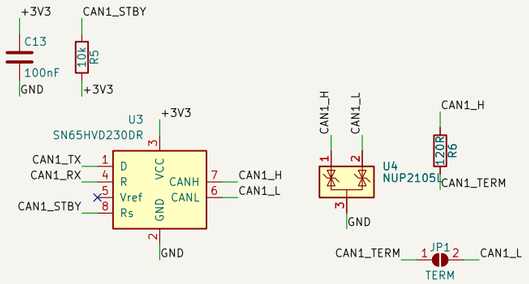


CAN2 (FDCAN2 PB0/PB1) — default transceiver standby via R7 pull-up

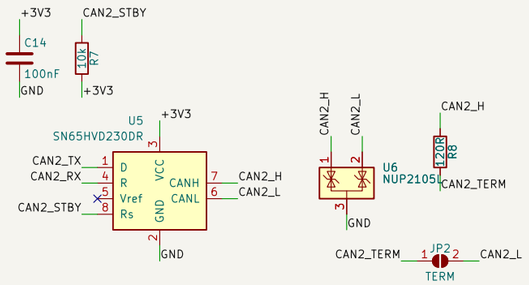


SENSE: VBAT / AUX_IN / IGN_IN / AUX_IN2 dividers 100k:10k (ADC full scale ~36V); HARNESS_ID: 10k pull-up + 100nF to ADC (ID resistor to GND in the T-harness)

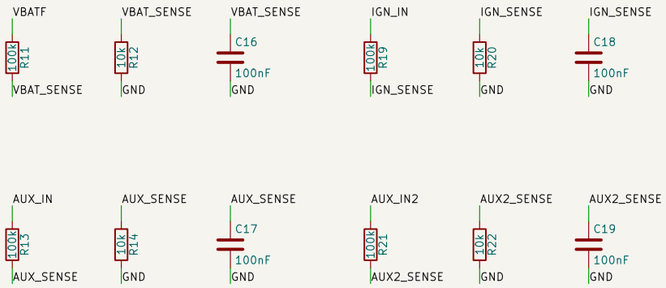


LSE: 12 MHz crystal + load caps




RESET / BOOT




AUX_OUT: low-side switch, 30V MOSFET, flyback to VBATF

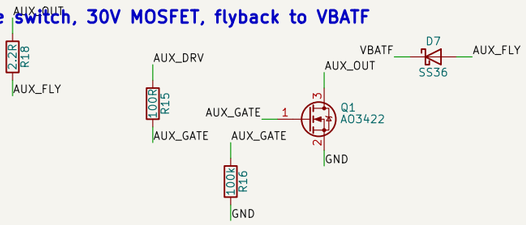

DEBUG + EXPANSION HEADERS (hand-solder)

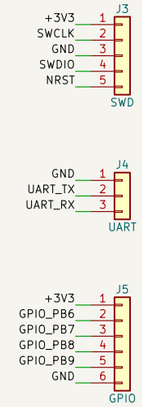

USB-C (device, 5.1k Rd on CC)

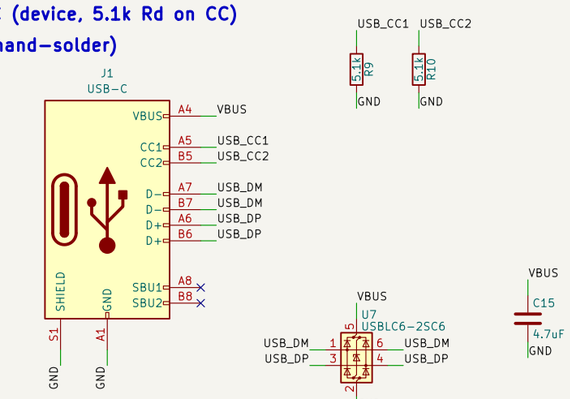

H1 M3

H2 M3

JLC Economic PCBA: all SMD top side; J2–J5 + JP1/JP2 hand-finished
Generated by gen_sch.py; nets are connected by local labels
prototype — review before ordering

Sheet: /
File: canode.kicad_sch

Title: CAN node — dual FDCAN vehicle interface

Size: A3	Date: 2026-11-09	**Rev: A**
KiCad E.D.A. 10.0.8		Id: 1/1