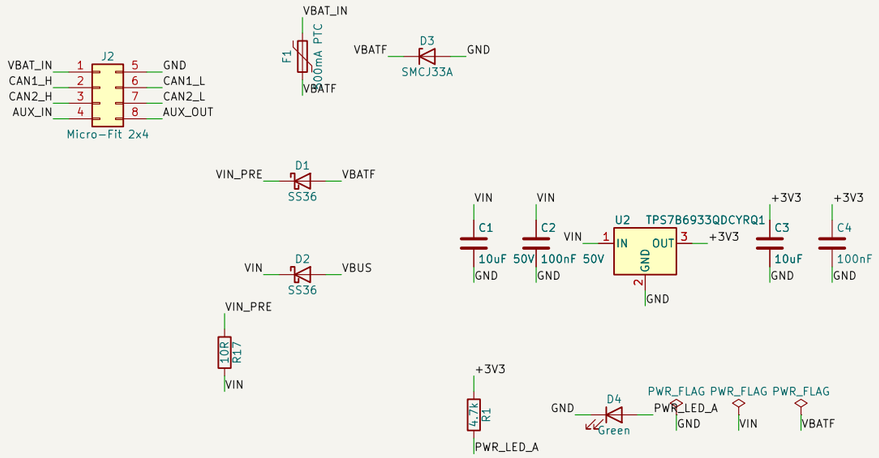

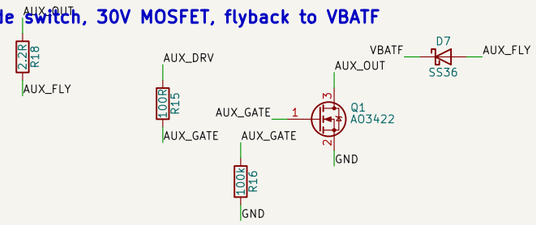
## POWER: 12V > PTC > TVS > OR-ing > 3.3V LDO




## SENSE: VBAT / AUX_IN dividers 100k:10k (ADC full scale ~36V)



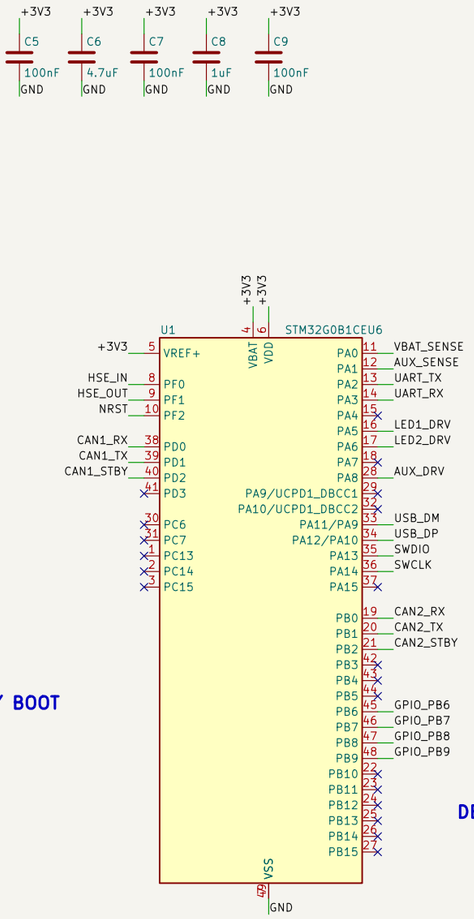

## AUX_OUT: low-side switch, 30V MOSFET, flyback to VBATF



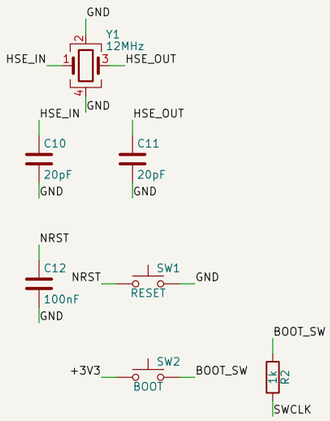

H1 M3

H2 M3

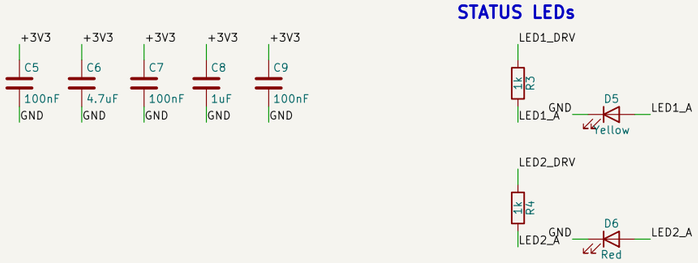
## MCU: STM32G0B1 (2x FDCAN, USB FS crystal-less, 128K flash)



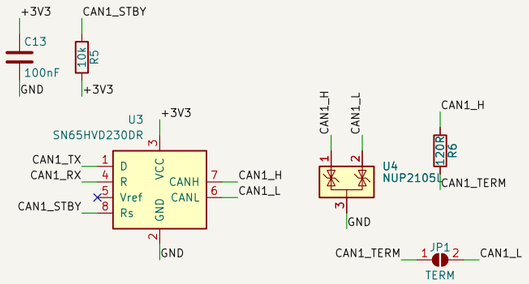

## CLOCK / RESET / BOOT



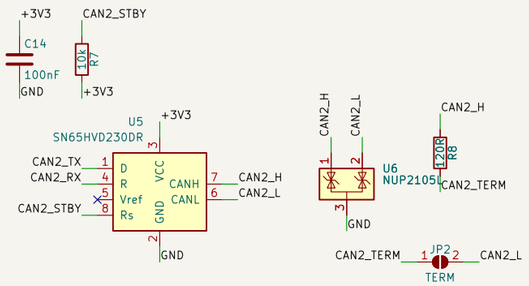

## STATUS LEDs



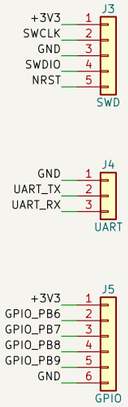

## CAN1 (FDCAN1 PD0/PD1) — default transceiver standby via R5 pull-up



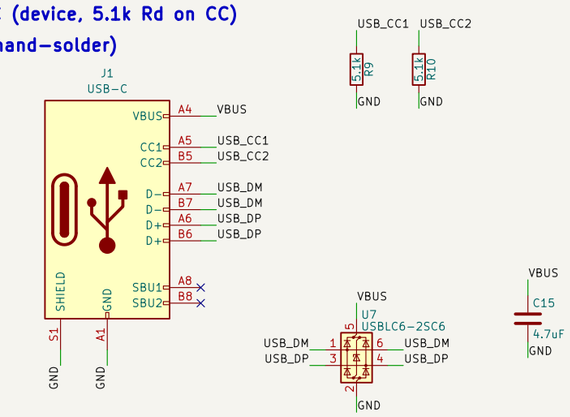

## CAN2 (FDCAN2 PB0/PB1) — default transceiver standby via R7 pull-up




## DEBUG + EXPANSION HEADERS (hand-solder)




## USB-C (device, 5.1k Rd on CC)




JLC Economic PCBA: all SMD top side; J2–J5 + JP1/JP2 hand-finished
Generated by gen_sch.py; nets are connected by local labels
**prototype — review before ordering**

Sheet: /
File: canode.kicad_sch

**Title: CAN node — dual FDCAN vehicle interface**

| Size: A3 | Date: 2026-11-09 | **Rev: A** |
|---|---|---|
| KiCad E.D.A. 10.0.8 | | Id: 1/1 |